

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Satellite Orbits . . . . .	3
1.2	Brouwer and the SGP4 Solution . . . . .	3
1.3	Motivation . . . . .	3
<b>2</b>	<b>Two-Body Problem</b>	<b>4</b>
2.1	Hamiltonian Formulation in Spherical Coordinates . . . . .	4
2.2	Canonical Transformations . . . . .	4
2.3	Hamilton-Jacobi Equation . . . . .	5
2.3.1	Separation of Variables . . . . .	5
2.3.2	Canonical Momenta . . . . .	6
2.3.3	Canonical Coordinates . . . . .	7
2.3.4	Hamiltonian Formulation with Zero Hamiltonian . . . . .	10
2.4	Delaunay Elements . . . . .	11
2.5	Useful Relations . . . . .	12
2.5.1	$\partial E / \partial e$ . . . . .	12
2.5.2	$\partial / \partial e (a/r)$ . . . . .	12
2.5.3	$\partial l / \partial f$ . . . . .	13
2.5.4	$\partial f / \partial e$ . . . . .	15
2.5.5	$\int \sigma_1 dl$ . . . . .	15
2.5.6	$\int \sigma_2 dl$ . . . . .	16
2.5.7	$(1 + e \cos f) \partial f / \partial e$ . . . . .	17
<b>3</b>	<b>Spherical Harmonics and the Perturbed Problem</b>	<b>18</b>
3.1	Spheroid Potential . . . . .	18
3.2	Disturbing Function . . . . .	19
3.2.1	The $J_2$ Harmonic . . . . .	20
3.2.2	The $J_4$ Harmonic . . . . .	21
3.2.3	The $J_3$ Harmonic . . . . .	21
3.2.4	The $J_5$ Harmonic . . . . .	22
3.3	Hamiltonian Formulation . . . . .	22
<b>4</b>	<b>Solution of the Problem</b>	<b>24</b>
4.1	Von Zeipel Method and Canonical Transformations . . . . .	24
4.1.1	Decomposition of the Hamiltonian . . . . .	24
4.1.2	First Transformation of the Hamiltonian . . . . .	25
4.1.3	Short-Period Terms . . . . .	27
4.1.4	Second-Order Terms . . . . .	30
4.1.5	Second Transformation of the Hamiltonian . . . . .	30
4.1.6	Long-Period Terms . . . . .	32
4.2	Explicit Solution for $J_2$ Harmonic . . . . .	35
4.2.1	Secular Terms . . . . .	35
4.2.2	Interpretation of the Secular Terms . . . . .	36

4.3	Elements and Orbit State Vectors . . . . .	37
<b>5</b>	<b>SGP4 Solution</b>	<b>38</b>
5.1	Approximation . . . . .	38
5.2	Coordinate Systems and Frames . . . . .	38
5.2.1	Mean-of-Date (MoD) . . . . .	38
5.2.2	True-of-Date (ToD) . . . . .	38
5.2.3	True-Equator, Mean-Equinox (TEME) . . . . .	38
5.2.4	Pseudo Earth-Fixed (PEF) . . . . .	38
5.3	Atmospheric Drag . . . . .	38
5.4	Two-Line Elements . . . . .	38
5.5	Kozai Mean Elements . . . . .	38

# **1 Introduction**

## **1.1 Satellite Orbits**

## **1.2 Brouwer and the SGP4 Solution**

## **1.3 Motivation**

## 2 Two-Body Problem

To discuss the solution presented in [1], we need to formulate the two-body problem in terms of Delaunay elements. Thus, this section is dedicated to canonical transformations and the Hamilton-Jacobi Equation. Starting from a Hamiltonian formulation in spherical polar coordinates (section 2.1), we will first use Hamilton-Jacobi equations to derive canonical coordinates corresponding to zero Hamiltonian (section 2.3) and then use a canonical transformation to derive a Hamiltonian formulation in terms of Delaunay Elements (section 2.4).

The discussion in this section is roughly based on sections 6 and 7 of the textbook [2].

### 2.1 Hamiltonian Formulation in Spherical Coordinates

Consider the problem of a point particle with mass  $m$  in a gravitational potential  $V$ , where the kinetic and potential energy can be expressed via the equations

$$T = \frac{m}{2}(\dot{r}^2 + r^2\dot{\theta}^2 + r^2 \cos^2 \theta \dot{\phi}) \quad (1)$$

$$V = -\frac{\mu m}{r} \quad (2)$$

in terms of spherical polar coordinates  $(r, \theta, \phi)$  and canonical momenta

$$p_r = \frac{\partial T}{\partial \dot{r}} = m\dot{r} \quad (3)$$

$$p_\theta = \frac{\partial T}{\partial \dot{\theta}} = mr^2\dot{\theta} \quad (4)$$

$$p_\phi = \frac{\partial T}{\partial \dot{\phi}} = mr^2 \cos^2 \theta \dot{\phi}. \quad (5)$$

Thus, the Hamiltonian (using the notation in [1]) can be expressed

$$F(r, \theta, \phi, p_r, p_\theta, p_\phi) = T + V = \frac{1}{2m} \left( p_r^2 + \frac{p_\theta^2}{r^2} + \frac{p_\phi^2}{r^2 \cos^2 \theta} \right) - \frac{\mu m}{r}. \quad (6)$$

In this section, we will use canonical transformations and the Hamilton-Jacobi equation to derive the Hamiltonian in terms of canonical coordinates and momenta called the **Delaunay Elements**.

### 2.2 Canonical Transformations

Suppose  $F^*$  is a Hamiltonian obtained from an another Hamiltonian  $F$  with a **generating function** (called **determining function** in [1])  $S$ . Then,

$$F^*(q', p') = F(q, p) + \frac{\partial S}{\partial t} \quad (7)$$

In this document, we only use generating functions of the type  $S = S(q, p')$ , which satisfy

$$p_i = \frac{\partial S}{\partial q_i}, \quad q'_i = \frac{\partial S}{\partial p'_i} \quad (8)$$

## 2.3 Hamilton-Jacobi Equation

With Hamilton-Jacobi equation, we can derive canonical coordinates, which do not appear explicitly in the transformed Hamiltonian. Then, each canonical coordinate and momentum is independent of time and the solution of the problem becomes trivial.

That is, for  $F = F(r, \theta, \phi, p_r, p_\theta, p_\phi)$  we wish find a generating function  $S$  such that

$$F \left( r, \theta, \phi, \frac{\partial S}{\partial r}, \frac{\partial S}{\partial \theta}, \frac{\partial S}{\partial \phi} \right) + \frac{\partial S}{\partial t} = 0. \quad (9)$$

Substitution to (6), yields

$$\frac{1}{2m} \left[ \left( \frac{\partial S}{\partial r} \right)^2 + \frac{1}{r^2} \left( \frac{\partial S}{\partial \theta} \right)^2 + \frac{1}{r^2 \cos^2 \theta} \left( \frac{\partial S}{\partial \phi} \right)^2 \right] + \frac{\partial S}{\partial t} - \frac{\mu m}{r} = 0. \quad (10)$$

### 2.3.1 Separation of Variables

We attempt to solve (10) via separation of variables

$$S(r, \theta, \phi, t) = S_r(r) + S_\theta(\theta) + S_\phi(\phi) + S_t(t). \quad (11)$$

This yields

$$\left( \frac{dS_r}{dr} \right)^2 + \frac{1}{r^2} \left( \frac{dS_\theta}{d\theta} \right)^2 + \frac{1}{r^2 \cos^2 \theta} \left( \frac{dS_\phi}{d\phi} \right)^2 = 2m \left( -\frac{dS_t}{dt} + \frac{\mu m}{r} \right). \quad (12)$$

The dependence w.r.t. variables  $\phi$  and  $t$  is limited to  $dS_\phi/d\phi$  and  $dS_t/dt$ . Thus, there exists  $\alpha_2$  and  $\alpha_1$  such that

$$\frac{dS_t}{dt} = -\alpha_1, \quad \frac{dS_\phi}{d\phi} = \alpha_2, \quad . \quad (13)$$

The equation (12) can be now written

$$\left( \frac{dS_r}{dr} \right)^2 + \underbrace{\frac{1}{r^2} \left( \frac{dS_\theta}{d\theta} \right)^2 + \frac{\alpha_2^2}{r^2 \cos^2 \theta}}_{\alpha_3/r^2} = 2m \left( \alpha_1 + \frac{\mu m}{r} \right) \quad (14)$$

and denoting the middle two terms with  $\alpha_1/r^2$  we obtain

$$\frac{dS_r}{dr} = \sqrt{2m \left( \alpha_1 + \frac{\mu m}{r} \right) - \frac{\alpha_3}{r^2}}. \quad (15)$$

Similarly for  $S_\theta$

$$\left( \frac{dS_\theta}{d\theta} \right)^2 = \underbrace{2mr^2 \left( \alpha_1 + \frac{\mu m}{r} \right) - r^2 \left( \frac{dS_r}{dr} \right)^2}_{\alpha_3^2} - \frac{\alpha_2^2}{\cos^2 \theta} = \alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta}. \quad (16)$$

or

$$\frac{dS_\theta}{d\theta} = \sqrt{\alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta}} \quad (17)$$

The generating function satisfying (9) can be thus written

$$S = -\alpha_1 t + \alpha_2 \phi + \int d\theta \sqrt{\alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta}} + \int dr \sqrt{2m \left( \alpha_1 + \frac{\mu m}{r} \right) - \frac{\alpha_1}{r^2}} \quad (18)$$

### 2.3.2 Canonical Momenta

We will select the canonical momenta

$$p'_1 := \alpha_1 = mh \quad (19)$$

$$p'_2 := \alpha_2 = m\sqrt{a\mu(1-e^2)} \cos I \quad (20)$$

$$p'_3 := \alpha_3 = m\sqrt{a\mu(1-e^2)} \quad (21)$$

To derive (19), we can compute

$$\alpha_1 = -\frac{\partial S}{\partial t} = F = T + V = mh, \quad (22)$$

where  $h = v^2/2 - \mu/r$  is the **energy integral**.

Derivation of (20) is somewhat more complicated. Note that in spherical polar coordinates

$$x = r \cos \theta \cos \phi$$

$$y = r \cos \theta \sin \phi$$

$$z = r \sin \theta$$

and

$$\dot{x} = \dot{r} \cos \theta \cos \phi - r\dot{\theta} \sin \theta \cos \phi - r\dot{\phi} \cos \theta \sin \phi \quad (23)$$

$$\dot{y} = \dot{r} \cos \theta \sin \phi - r\dot{\theta} \sin \theta \sin \phi + r\dot{\phi} \cos \theta \cos \phi$$

$$\dot{z} = \dot{r} \sin \theta + r\dot{\theta} \cos \theta$$

Now, we can note that the z-component of the angular momentum vector can be expanded in spherical polar coordinates

$$\begin{aligned} k_z = (\mathbf{r} \times \dot{\mathbf{r}}) \cdot \hat{\mathbf{z}} &= \begin{vmatrix} 0 & 0 & 1 \\ x & y & 0 \\ \dot{x} & \dot{y} & 0 \end{vmatrix} \\ &= x\dot{y} - y\dot{x} \\ &= r \cos \theta \cos \phi (\dot{r} \cos \theta \sin \phi - r\dot{\theta} \sin \theta \sin \phi + r\dot{\phi} \cos \theta \cos \phi) \\ &\quad - r \cos \theta \sin \phi (\dot{r} \cos \theta \cos \phi - r\dot{\theta} \sin \theta \cos \phi - r\dot{\phi} \cos \theta \sin \phi) \\ &= r\dot{r} \cos^2 \theta (\cos \phi \sin \phi - \cos \phi \sin \phi) \\ &\quad + r^2 \dot{\theta} \cos \phi \sin \phi (\sin \theta \cos \theta - \sin \theta \cos \theta) \\ &\quad + r^2 \dot{\phi} \cos^2 \theta (\cos^2 \phi + \sin^2 \phi) \\ &= r^2 \cos^2 \theta \dot{\phi}. \end{aligned} \quad (24)$$

On the other hand, for elliptic orbits

$$a = \frac{k^2}{\mu(1-e^2)}, \quad (25)$$

Thus,

$$\alpha_2 = \frac{\partial S}{\partial \phi} = p_\phi = mr^2 \cos^2 \theta \dot{\phi} = mk_z = m\sqrt{a\mu(1-e^2)} \cos I \quad (26)$$

To derive (21), we can compute

$$\begin{aligned} \alpha_3 &= \sqrt{\left(\frac{\partial S}{\partial \theta}\right)^2 + \frac{\alpha_2^2}{\cos^2 \theta}} \\ &= \sqrt{p_\theta^2 + \frac{p_\phi^2}{\cos^2 \theta}} \\ &= mr^2 \sqrt{\dot{\theta}^2 + \cos^2 \theta \dot{\phi}^2} = mr^2 \dot{f} = mk = m\sqrt{a\mu(1-e^2)}, \end{aligned} \quad (27)$$

where  $\dot{f} = \dot{\theta}^2 + \cos^2 \theta \dot{\phi}^2$  is the time derivative of the natural anomaly since the sum is the square of total scalar angular speed along a great circle.

### 2.3.3 Canonical Coordinates

The new canonical coordinates can be computed

$$\begin{aligned} q'_1 = \frac{\partial S}{\partial \alpha_1} &= -t + \frac{\partial}{\partial \alpha_1} \int dr \sqrt{2m \left( \alpha_1 + \frac{m\mu}{r} \right) - \frac{\alpha_3^2}{r^2}} \\ &= -t + \int m \left[ 2m \left( \alpha_1 + \frac{m\mu}{r} \right) - \frac{\alpha_3^2}{r^2} \right]^{-1/2} dr \\ &= -t + I_1 \end{aligned} \quad (28)$$

$$\begin{aligned} q'_2 = \frac{\partial S}{\partial \alpha_2} &= \phi + \frac{\partial}{\partial \alpha_2} \int d\theta \sqrt{\alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta}} \\ &= \phi - \int \frac{\alpha_2}{\cos^2 \theta} \left( \alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta} \right)^{-1/2} d\theta \\ &= \phi - I_2 \alpha_2 \end{aligned} \quad (29)$$

$$\begin{aligned} q'_3 = \frac{\partial S}{\partial \alpha_3} &= \frac{\partial}{\partial \alpha_3} \int \sqrt{\alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta}} d\theta + \frac{\partial}{\partial \alpha_3} \int \sqrt{2m \left( \alpha_1 + \frac{\mu m}{r} \right) - \frac{\alpha_3^2}{r^2}} dr \\ &= \alpha_3 \int \left( \alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta} \right)^{-1/2} d\theta - \frac{\alpha_3}{m} \int \frac{m}{r^2} \left[ 2m \left( \alpha_1 + \frac{\mu m}{r} \right) - \frac{\alpha_3^2}{r^2} \right]^{-1/2} dr \\ &= \alpha_3 I_4 - \frac{\alpha_3}{m} I_3. \end{aligned} \quad (30)$$

The evaluation of the integrals  $I_1, I_2, I_3, I_4$  is non-trivial and will be performed next.

For  $I_1$ , substituting (19), (21) and  $mh = -\mu m/2a$ , we obtain

$$\begin{aligned}
 I_1 &= m \int \left[ 2m \left( mh + \frac{m\mu}{r} \right) - \frac{m^2}{r^2} (a\mu(1-e^2)) \right]^{-1/2} dr \\
 &= \int m dr \left[ 2m \left( -\frac{\mu m}{2a} + \frac{\mu m}{r} - \frac{m^2 a\mu(1-e^2)}{r^2} \right) \right]^{-1/2} \\
 &= \frac{1}{\sqrt{\mu}} \int \frac{r dr}{\sqrt{-r^2/a + 2r - a(1-e^2)}}
 \end{aligned} \tag{31}$$

Substitute  $r = a(1 - e \cos E)$ , which leads to  $dr = ae \sin E dE$  and


$$\begin{aligned}
 I_1 &= \frac{1}{\sqrt{\mu}} \int \frac{a(1 - e \cos E) ae \sin E dE}{\sqrt{-a(1 - e \cos E)^2 + 2a(1 - e \cos E) - a(1 - e^2)}} \\
 &= \frac{a^{3/2}}{\sqrt{\mu}} \int (1 - e \cos E) dE \\
 &= \frac{a^{3/2}}{\sqrt{\mu}} (E - e \sin E)
 \end{aligned} \tag{32}$$

Application of Kepler's equation and Kepler's third law  $n = \sqrt{\mu/a^3}$ , we obtain the additive inverse for the time of perihelion

$$q'_1 = -t + \frac{M}{n} = -\tau. \tag{33}$$

For  $I_2$ , it follows from (20), (21) that  $\alpha_2/\alpha_3 = \cos I$

$$\alpha_2 I_2 = \int \frac{\alpha_2}{\cos^2 \theta \sqrt{\alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta}}} = \frac{\alpha_2}{\alpha_3} \int \frac{d\theta}{\cos^2 \theta \sqrt{1 - \frac{(\alpha_2/\alpha_3)^2}{\cos^2 \theta}}} = \int \frac{\cos I d\theta}{\cos^2 \theta \sqrt{1 - \frac{\cos^2 I}{\cos^2 \theta}}} \tag{34}$$



**Figure 1:** The relationship between the angles  $\eta, \theta$  and  $\chi$ .

Via application of Napier's rule to the angles in Figure 1, we obtain

$$\sin \chi = \cot(\pi/2 - \theta) \cot I = \tan \theta \cot I \tag{35}$$



and

$$\frac{d\theta}{\cos^2 \theta} = \tan i \cos \chi d\chi. \quad (36)$$

Thus,

$$\alpha_2 I_2 = \int \frac{\cos I \tan I \cos \chi d\chi}{\sqrt{1 - \cos^2 I (1 + \tan^2 I \sin^2 \chi)}} = \int \frac{\sin I \cos \chi d\chi}{\sqrt{\sin^2 I (1 - \sin^2 \chi)}} = \int d\chi = \chi. \quad (37)$$

and

$$q'_2 = \phi - \alpha_2 I_2 = \phi - \chi = \Omega. \quad (38)$$

For  $I_3$ ,

$$\begin{aligned} I_3 &= m \int \frac{1}{r^2} \left[ 2m \left( -\frac{\mu m}{2a} + \frac{\mu m}{r} \right) - m^2 \frac{a\mu(1 - e^2)}{r^2} \right]^{-1/2} dr \\ &= \frac{1}{\sqrt{\mu}} \int \frac{dr}{r \sqrt{-r^2/a + 2r - a(1 - e^2)}} \end{aligned} \quad (39)$$

Substitute  $r = a(1 - e \cos E)$ ,  $dr = ae \sin E dE$ , to obtain

$$\begin{aligned} I_3 &= \frac{1}{\sqrt{\mu}} \int \frac{ae \sin E dE}{a(1 - e \cos E) \sqrt{-a(1 - 2e \cos E + e^2 \cos^2 E) + 2a(1 - e \cos E) - a(1 - e^2)}} \\ &= \frac{1}{\sqrt{\mu}} \int \frac{e \sin E}{(1 - e \cos E) \sqrt{a(e^2 \sin^2 E)}} \\ &= \frac{1}{\sqrt{a\mu}} \int \frac{\sin E dE}{\sin E (1 - e \cos E)} \\ &= \frac{1}{\sqrt{a\mu(1 - e^2)}} \int \frac{\sqrt{1 - e^2} dE}{1 - e \cos E} \end{aligned} \quad (40)$$

Substituting  $\sin f = \sqrt{1 - e^2} \sin E / (1 - e \cos E)$  leads to


$$\cos f df = \sqrt{1 - e^2} \frac{\cos f}{1 - e \cos E} dE \quad (41)$$

Dividing by  $\cos f$  and substituting back, we obtain

$$I_3 = \frac{f}{\sqrt{a\mu(1 - e^2)}}. \quad (42)$$

For  $I_4$ , substituting (20), (21)

$$I_4 = \int \left( \alpha_3^2 - \frac{\alpha_2^2}{\cos^2 \theta} \right)^{-1/2} = \frac{1}{m \sqrt{a\mu(1 - e^2)}} \int \left( 1 - \frac{\cos^2 I}{\cos^2 \theta} \right)^{-1/2} d\theta \quad (43)$$

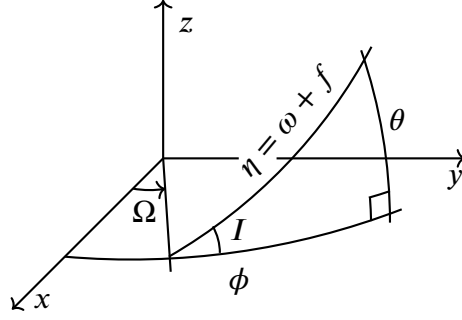

**Figure 2:** The relationship between the spherical polar coordinates and the Keplerian elements.

Multiplying with  $\alpha_3$  leads

$$\alpha_3 I_4 = \int \frac{\cos \theta d\theta}{\sqrt{\cos^2 \theta - \cos^2 I}} \quad (44)$$

From Figure 2, we obtain

$$\frac{\sin \theta}{\sin I} = \frac{\sin \eta}{\sin \pi/2} \quad (45)$$

which leads to

$$\cos^2 \theta = 1 - \sin^2 I \sin^2 \eta \quad (46)$$

$$\cos \theta d\theta = \sin i \cos \eta d\eta. \quad (47)$$

$$\alpha_3 I_4 = \int \frac{\sin I \cos \eta d\eta}{\sqrt{1 - \sin^2 I \sin^2 \eta - \cos^2 I}} = \int \frac{\sin I \cos \eta d\eta}{\sqrt{\sin^2 I \cos^2 \eta}} = \int d\eta = \eta. \quad (48)$$

Thus,

$$q'_3 = \alpha_3 I_4 - \frac{\alpha_3}{m} I_3 = \eta - \frac{m\sqrt{a\mu(1-e^2)}}{m} \frac{f}{\sqrt{a\mu(1-e^2)}} = \eta - f = \omega. \quad (49)$$

### 2.3.4 Hamiltonian Formulation with Zero Hamiltonian

We now have the new canonical coordinates and momenta

$$q'_1 = -\tau, \quad (50)$$

$$q'_2 = \Omega, \quad (51)$$

$$q'_3 = \omega, \quad (52)$$

$$p'_1 = mh, \quad (53)$$

$$p'_2 = m\sqrt{a\mu(1-e^2)} \cos I, \quad (54)$$

$$p'_3 = m\sqrt{a\mu(1-e^2)}, \quad (55)$$

as well as the new Hamiltonian

$$F' = 0. \quad (56)$$

The mass is typically left out leading to variables

$$q'_1 = -\tau, \quad (57)$$

$$q'_2 = \Omega, \quad (58)$$

$$q'_3 = \omega, \quad (59)$$

$$p'_1 = h, \quad (60)$$

$$p'_2 = \sqrt{a\mu(1-e^2)} \cos I, \quad (61)$$

$$p'_3 = \sqrt{a\mu(1-e^2)}, \quad (62)$$

Since none of the variables are present in the Hamiltonian  $F' = 0$ , all of the variables are constant.

## 2.4 Delaunay Elements

To obtain the Delaunay Elements used in [1] from (56) – (62), we seek the following variables

$$h = \Omega \quad (63)$$

$$g = \omega \quad (64)$$

$$l = n(t + q_1) \quad (65)$$

$$H = \sqrt{a\mu(1-e^2)} \cos I \quad (66)$$

$$G = \sqrt{a\mu(1-e^2)} \quad (67)$$

$$L = ? \quad (68)$$

These are found with the generating function

$$\begin{aligned} S &= \left( nL - \frac{3\mu}{2a} \right) (t + q'_1) + q'_2 H + q'_3 G \\ &= \left( nL - \frac{3\mu}{2a} \right) (t - \tau) + \Omega H + \omega G \end{aligned} \quad (69)$$

Now

$$p_1 = \frac{\partial S}{\partial q_1} = -\frac{\partial S}{\partial \tau} = -\frac{3\mu}{2a} + nL = h \quad (70)$$

from which by using  $h = -\mu/2a$  (for ellipses) and Kepler's third law  $n = \sqrt{\mu/a^3}$ , we can solve

$$L = \frac{1}{n} \left( h + \frac{3\mu}{2a} \right) = \frac{1}{n} \left( -\frac{\mu}{2a} + \frac{3\mu}{2a} \right) = \frac{\mu}{an} = \sqrt{a\mu} \quad (71)$$

The new Hamiltonian

$$F = 0 + \frac{\partial S}{\partial t} = nL - \frac{3\mu}{2a} = \sqrt{\mu/a^3} \sqrt{a\mu} - \frac{3\mu}{2a} = -\frac{\mu}{2a} = -\frac{\mu^2}{2L^2}. \quad (72)$$

Thus, we have the Hamiltonian formulation in terms of Delaunay variables

$$\boxed{\begin{aligned} l &= M, & L &= \sqrt{a\mu}, \\ g &= \omega, & G &= \sqrt{a\mu(1-e^2)}, & F &= -\frac{\mu^2}{2L^2} \\ h &= \Omega, & H &= \sqrt{a\mu(1-e^2)} \cos I, \end{aligned}} \quad (73)$$

Note that [1] uses different sign convention and the Hamiltonian will have different sign.

## 2.5 Useful Relations

In this section, we derive several relations used by Brouwer in [1] involving the Delaunay variables and Keplerian orbits.

We assume that the following equations for true anomaly are known [2]

$$\cos f = \frac{\cos E - e}{1 - e \cos E}, \quad (74)$$

$$\sin f = \sqrt{1 - e^2} \frac{\sin E}{1 - e \cos E}. \quad (75)$$

### 2.5.1 $\partial E / \partial e$

Consider Kepler's equation

$$M = E - e \sin E \quad (76)$$

as an equation relating the pairs  $(e', M)$  and  $(e, E)$ . Then, partial derivative of  $M$  w.r.t.  $e'$  must disappear. That is,

$$\begin{aligned} \frac{\partial M}{\partial e'} &= \frac{\partial M}{\partial e} \frac{\partial e}{\partial e'} + \frac{\partial M}{\partial E} \frac{\partial E}{\partial e'} \\ &= \frac{\partial}{\partial e}(E - e \sin E) + \frac{\partial E}{\partial e'} \frac{\partial}{\partial E}(E - e \sin E) \\ &= -\sin E + \frac{\partial E}{\partial e'}(1 - e \cos E) \\ &= 0. \end{aligned} \quad (77)$$

Thus,

$$\frac{\partial E}{\partial e} = \frac{\sin E}{1 - e \cos E}. \quad (78)$$

### 2.5.2 $\partial / \partial e(a/r)$

We wish to show that

$$\frac{\partial}{\partial e} \frac{a}{r} = \frac{a^2}{r^2} \cos f \quad (79)$$

To derive this, we can simply compute

$$\begin{aligned}
\frac{\partial}{\partial e'} \frac{a}{r} &= \frac{\partial}{\partial e} \frac{a}{r} + \frac{\sin E}{1 - e \cos E} \frac{\partial}{\partial E} \frac{a}{r} \\
&= \frac{\cos E}{(1 - e \cos E)^2} + \frac{\sin E}{1 - e \cos E} \frac{-e \sin E}{(1 - e \cos E)^2} \\
&= \frac{\cos E - e \cos^2 E - e \sin^2 E}{(1 - e \cos E)^3} \\
&= \frac{a^2}{r^2} \frac{\cos E - e}{1 - e \cos E} \\
&= \frac{a^2}{r^2} \cos f \quad \square
\end{aligned} \tag{80}$$

where we have used

$$\frac{\partial}{\partial e} \frac{a}{r} = \frac{\partial}{\partial e} \frac{1}{1 - e \cos E} = \frac{\cos E}{(1 - e \cos E)^2} \tag{81}$$

$$\frac{\partial}{\partial E} \frac{a}{r} = \frac{\partial}{\partial E} \frac{1}{1 - e \cos E} = \frac{-e \sin E}{(1 - e \cos E)^2} \tag{82}$$

### 2.5.3 $\partial l / \partial f$

We wish to show that

$$\frac{\partial l}{\partial f} = \frac{L}{G} \frac{r^2}{a^2}. \tag{83}$$

From (74), we obtain

$$f = \arccos \left( \frac{\cos E - e}{1 - e \cos E} \right) \tag{84}$$

Now by application of the chain rule

$$\frac{df}{dE} = \left( \frac{d}{dE} \frac{\cos E - e}{1 - e \cos E} \right) \left[ - \left( 1 - \left[ \frac{\cos E - e}{1 - e \cos E} \right]^2 \right)^{-1/2} \right]. \tag{85}$$

For the first part

$$\begin{aligned}
\frac{d}{dE} \frac{\cos E - e}{1 - e \cos E} &= \frac{(1 - e \cos E)(-\sin E) - (\cos E - e)(e \sin E)}{(1 - e \cos E)^2} \\
&= \frac{-\sin E + e \sin E \cos E - e \sin E \cos E + e^2 \sin E}{(1 - e \cos E)^2} \\
&= -\frac{\sin E(1 - e^2)}{(1 - e \cos E)^2}.
\end{aligned} \tag{86}$$

For the latter part

$$\begin{aligned}
\frac{-1}{\sqrt{1-[\cdot]^2}} &= - \left( \frac{1 - 2e \cos E + e^2 \cos^2 E - \cos^2 E + 2e \cos E - e^2}{(1 - e \cos E)^2} \right)^{-1/2} \\
&= - \left( \frac{(1 - e^2)(1 - \cos^2 E)}{(1 - e \cos E)^2} \right)^{-1/2} \\
&= - \frac{1 - e \cos E}{\sin E \sqrt{1 - e^2}}.
\end{aligned} \tag{87}$$

Thus

$$\frac{df}{dE} = \frac{\sin E(1 - e^2)}{(1 - e \cos E)^2} \cdot \frac{1 - e \cos E}{\sin E \sqrt{1 - e^2}} = \frac{\sqrt{1 - e^2}}{1 - e \cos E}. \tag{88}$$

Also from the Kepler equation  $M = -E - e \sin E$ , we obtain

$$\frac{dM}{dE} = 1 - e \cos E. \tag{89}$$

Thus,

$$\frac{dM}{df} = \frac{dM}{dE} \frac{dE}{df} = \frac{(1 - e \cos E)^2}{\sqrt{1 - e^2}} \tag{90}$$

From (74), we can also solve

$$\cos E = \frac{\cos f + e}{1 + e \cos f} \tag{91}$$

and

$$1 - e \cos E = \frac{1 + e \cos f - e \cos f - e^2}{1 + e \cos f} = \frac{1 - e^2}{1 + e \cos f}. \tag{92}$$

Substituting this back to (90), yields

$$\frac{dM}{df} = \frac{(1 - e^2)^{3/2}}{(1 + e \cos f)^2} \tag{93}$$

For elliptic orbits,

$$\frac{r^2}{a^2} = \left( \frac{1 - e^2}{1 + e \cos f} \right)^2 = \sqrt{1 - e^2} \frac{dM}{df} \tag{94}$$

Thus, we finally have

$$\frac{dM}{df} = \frac{1}{\sqrt{1 - e^2}} \frac{r^2}{a^2} = \frac{L}{G} \frac{r^2}{a^2}. \quad \square \tag{95}$$

### 2.5.4 $\partial f / \partial e$

We wish to show that

$$\frac{\partial f}{\partial e} = \left( \frac{a}{r} + \frac{L^2}{G^2} \right) \sin f \quad (96)$$

From (74), we obtain

$$\frac{df}{de} = \left( \frac{d}{de} \frac{\cos E - e}{1 - e \cos E} \right) \frac{-1}{\sqrt{1 - e^2}} \quad (97)$$

The latter part is obtained from (87). For the first part

$$\begin{aligned} \frac{d}{de} \frac{\cos E - e}{1 - e \cos E} &= \frac{(1 - e \cos E)(\partial E / \partial e (-\sin E) - 1) + (e - \cos E)(\partial E / \partial e e \sin E - \cos E)}{(1 - e \cos E)^2} \\ &= \frac{\cos^2 E - 1}{(1 - e \cos E)^2} + \frac{\partial E}{\partial e} \frac{\sin E (e^2 - 1)}{(1 - e \cos E)^2} \\ &= \frac{\cos^2 E - 1}{(1 - e \cos E)^2} + \frac{\sin^2 E (e^2 - 1)}{(1 - e \cos E)^3}, \end{aligned} \quad (98)$$

where we have used (78). Using (87), we can now compute

$$\begin{aligned} \frac{df}{de} &= -\frac{1 - e \cos E}{\sin E \sqrt{1 - e^2}} \left( \frac{\cos^2 E - 1}{(1 - e \cos E)^2} + \frac{\sin^2 E (e^2 - 1)}{(1 - e \cos E)^3} \right) \\ &= \frac{1}{\sqrt{1 - e^2}} \frac{\sin E}{1 - e \cos E} + \sqrt{1 - e^2} \frac{\sin E}{(1 - e \cos E)^2} \\ &= \frac{\sin f}{1 - e^2} + \frac{\sin f}{1 - e \cos E} \\ &= \left( \frac{1}{1 - e^2} + \frac{a}{r} \right) \sin f \\ &= \left( \frac{L^2}{G^2} + \frac{a}{r} \right) \sin f, \quad \square \end{aligned} \quad (99)$$

### 2.5.5 $\int \sigma_1 dl$

We wish to show that

$$\int \sigma_1 dl = \frac{L^3}{G^3} (f - l + e \sin f) \quad : \quad \sigma_1 = \frac{a^3}{r^3} - \frac{L^3}{G^3} \quad (100)$$

First note that using (83),

$$\frac{\partial}{\partial l} (f + e \sin f) = \frac{\partial f}{\partial l} + e \frac{\partial f}{\partial l} \cos f = (1 + e \cos f) \frac{\partial f}{\partial l} = (1 + e \cos f) \frac{a^2}{r^2} \sqrt{1 - e^2}. \quad (101)$$

Substituting

$$\frac{a}{r} = \frac{1 + e \cos f}{1 - e^2}, \quad (102)$$

we obtain

$$\frac{\partial}{\partial l}(f + e \sin f) = \frac{a^3}{r^3}(1 - e^2)^{3/2} \quad (103)$$

and

$$\frac{\partial}{\partial l} \frac{f + e \sin f}{(1 - e^2)^{3/2}} = \frac{a^3}{r^3} \quad (104)$$

Thus,

$$\int \left( \frac{a^3}{r^3} - \frac{L^3}{G^3} \right) dl = \frac{f + e \sin f}{(1 - e^2)^{3/2}} - \frac{L^3}{G^3} l = \frac{L^3}{G^3} (f - l + e \sin f). \quad \square \quad (105)$$

### 2.5.6 $\int \sigma_2 dl$

We wish to show that

$$\int \sigma_2 dl = \frac{1}{(1 - e^2)^{3/2}} \left[ \frac{1}{2} \sin(2g + 2f) + \frac{e}{2} \sin(2g + f) + \frac{e}{6} \sin(2g + 3f) \right] \quad (106)$$

where

$$\sigma_2 = \frac{a^3}{r^3} \cos(2g + 2f). \quad (107)$$

Differentiating the square brackets part of (106), we obtain

$$\frac{\partial}{\partial l} [\cdot] = \frac{\partial f}{\partial l} \left[ \cos(2g + 2f) + \frac{e}{2} \cos(2g + f) + \frac{e}{2} \cos(2g + 3f) \right] \quad (108)$$

With trigonometric summation formulas, we can compute

$$\cos(2g + f) = \cos(2g + 2f - f) = \cos(2g + 2f) \cos f + \sin(2g + 2f) \sin f \quad (109)$$

$$\cos(2g + 3f) = \cos(2g + 2f + f) = \cos(2g + 2f) \cos f - \sin(2g + 2f) \sin f. \quad (110)$$

Thus,

$$\begin{aligned} \frac{\partial}{\partial l} [\cdot] &= \frac{\partial f}{\partial l} [\cos(2g + 2f) + e \cos(2g + 2f) \cos f] \\ &= \frac{\partial f}{\partial l} [\cos(2g + 2f)(1 + e \cos f)] \\ &= \sqrt{1 - e^2} \frac{a^2}{r^2} (1 + e \cos f) \cos(2g + 2f). \\ &= \frac{a^3}{r^3} (1 - e^2)^{3/2} \cos(2g + 2f). \quad \square \end{aligned} \quad (111)$$



### 2.5.7 $(1 + e \cos f) \partial f / \partial e$

We wish to show that

$$(1 + e \cos f) \frac{\partial f}{\partial e} = \left( \frac{a^2}{r^2} \frac{G^2}{L^2} + \frac{a}{r} \right) \sin f \quad (112)$$

To start, note that

$$\begin{aligned} (1 + e \cos f) \frac{\partial f}{\partial e} &= (1 + e \cos f) \left( \frac{a}{r} + \frac{L^2}{G^2} \right) \sin f \\ &= \left( \frac{a}{r} + \frac{L^2}{G^2} \right) \sin f + \left( \frac{a}{r} + \frac{L^2}{G^2} \right) e \sin f \cos f \\ &= \frac{a}{r} (1 + e \cos f) \sin f + \frac{L^2}{G^2} (1 + e \cos f) \sin f \\ &= \left[ \frac{a}{r} + \frac{a}{r} e \cos f + \frac{L^2}{G^2} (1 + e \cos f) \right] \sin f \\ &= \left[ \frac{a}{r} + \frac{a}{r} (1 + e \cos f) \right] \sin f \\ &= \left[ \frac{a}{r} + \frac{a^2}{r^2} (1 - e^2) \right] \sin f. \quad \square \end{aligned} \quad (113)$$

### 3 Spherical Harmonics and the Perturbed Problem

#### 3.1 Spheroid Potential

The gravitational potential of an arbitrary distribution of mass can be expanded in terms of spherical harmonics

$$\begin{aligned} V(\mathbf{r}) &= -G \int \frac{\rho(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|} d^3\mathbf{r}' \\ &= -\frac{G}{r} \left( 1 - \sum_{n=1}^{\infty} \left( \frac{R}{r} \right)^n J_n P_n(\cos \theta) - \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} \left( \frac{R}{r} \right)^n P_n^m(\cos \theta) (c_{nm} \cos m\phi + s_{nm} \sin m\phi) \right) \end{aligned} \quad (114)$$

where  $\theta$  is the polar angle,  $G$  is the gravitational constant, and  $R$  is an arbitrary scaling factor. The Zonal and Tesseral harmonics can be written

$$J_n = -\frac{1}{MR^n} \int P_n(\cos \theta') r'^n \rho(\mathbf{r}') d^3\mathbf{r}', \quad (115)$$

$$c_{nm} = -2 \frac{(n-m)!}{(n+m)!} \frac{1}{MR^n} \int P_n^m(\cos \theta') \cos m\phi' r'^n \rho(\mathbf{r}') d^3\mathbf{r}' \quad (116)$$

$$s_{nm} = -2 \frac{(n-m)!}{(n+m)!} \frac{1}{MR^n} \int P_n^m(\cos \theta') \sin m\phi' r'^n \rho(\mathbf{r}') d^3\mathbf{r}', \quad (117)$$

where  $P_n$  is the Legendre polynomial of degree  $n$  and  $P_n^m$  is the Associated Legendre Polynomial of degree  $n$  and order  $m$ . If the body is axially symmetric w.r.t.  $z$  axis, the tesseral harmonics  $c_{nm}$  and  $s_{nm}$  disappear. If the body is symmetric w.r.t. the equatorial  $z = 0$  plane  $P_n(-x) = (-1)^n P_n(x)$  and  $J_n$  will disappear for odd-valued  $n$ .

Since the body of interest is a spheroid, the tesseral harmonics disappear, and we have an expansion in terms of only zonal harmonics

$$V(r, \theta) = -\frac{\mu}{r} \left( 1 - \sum_{n=2}^{\infty} \left( \frac{R}{r} \right)^n J_n P_n(\cos \theta) \right). \quad (118)$$

For SGP4, the zonal harmonics are obtained from WGS72[TODO] with the values

$$\begin{aligned} J_2 &= 1082.616 \cdot 10^{-6} \\ J_3 &= -2.53881 \cdot 10^{-6} \\ J_4 &= -1.65597 \cdot 10^{-6}. \end{aligned}$$

The first four Legendre polynomials can be written

$$P_1(\cos \theta) = \cos \theta \quad (119)$$

$$P_2(\cos \theta) = \frac{1}{2} (3 \cos^2 \theta - 1) \quad (120)$$

$$P_3(\cos \theta) = \frac{1}{2} (5 \cos^3 \theta - 3 \cos \theta) \quad (121)$$

$$P_4(\cos \theta) = \frac{1}{8} (35 \cos^4 \theta - 30 \cos^2 \theta + 3) \quad (122)$$

$$P_5(\cos \theta) = \frac{1}{8} (63 \cos^5 \theta - 70 \cos^3 \theta + 15 \cos \theta) \quad (123)$$

Substituting (120) – (122) back to (118), we obtain the potential

$$\begin{aligned}
V(r, \theta) = & -\frac{\mu}{r} \\
& + \frac{\mu J_2 R^2}{2r^3} (3 \cos^2 \theta - 1) \\
& + \frac{\mu J_3 R^3}{2r^4} (5 \cos^3 \theta - 3 \cos \theta) \\
& + \frac{\mu J_4 R^4}{8r^5} (35 \cos^4 \theta - 30 \cos^2 \theta + 3) \\
& + \frac{\mu J_5 R^5}{8r^6} (63 \cos^5 \theta - 70 \cos^3 \theta + 15 \cos \theta)
\end{aligned} \tag{124}$$

We use  $R = a_E$  to denote the equatorial radius of Earth and define

$$k_2 = \frac{J_2 a_E^2}{2}, \quad k_4 = -\frac{3J_4 a_E^4}{8}, \quad A_{3,0} = -J_3 a_E^3, \quad A_{5,0} = -J_5 a_E^5. \tag{125}$$

Thereafter, using  $\beta$  to denote the geocentric latitude, we obtain  $\cos \theta = \sin \beta$  and

$$\begin{aligned}
V(r, \theta) = & -\frac{\mu}{r} \\
& - \frac{\mu k_2}{r^3} (1 - 3 \sin^2 \beta) \\
& - \frac{\mu k_4}{r^5} \left( 1 - 10 \sin^2 \beta + \frac{35}{3} \sin^4 \beta \right) \\
& - \frac{\mu A_{3,0}}{r^4} \left( -\frac{3}{2} \sin \beta + \frac{5}{2} \sin^3 \beta \right) \\
& - \frac{\mu A_{5,0}}{r^5} \left( \frac{15}{8} \sin \beta - \frac{35}{4} \sin^3 \beta + \frac{63}{8} \sin^5 \beta \right).
\end{aligned} \tag{126}$$

Note that Brouwer calls the gravitational potential the force function and uses different sign [1]. That is,  $U = -V$ .

### 3.2 Disturbing Function

The first term in (126) corresponds to the unperturbed potential of a two-body problem, where the Keplerian elements are constants. The additional terms constitute a perturbing potential that leads to perturbations in the Keplerian elements. That is, instead of the Hamiltonian (73), we have

$$F = \frac{\mu^2}{2L^2} + R, \tag{127}$$

where  $R = R_2 + R_3 + R_4 + R_5$  is the **disturbing function** and  $R_k$  denote the part of  $R$  corresponding to  $k$ :th degree in (126). In this section, we will derive  $R$  in terms of Delaunay variables.

In perifocal frame, where the non-disturbed orbit is on the  $z = 0$  plane and positive  $x$  axis corresponds to the rising node, we can write the position vector as

$$r [\cos(g + f), \sin(g + f), 0]^T. \quad (128)$$

The position vector in an equatorial inertial frame with  $x$  axis corresponding to the rising node can be obtained via application of an anti-clockwise rotation w.r.t.  $x$  coordinate

$$\begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos I & -\sin I \\ 0 & \sin I & \cos I \end{bmatrix} \begin{bmatrix} \cos(g + f) \\ \sin(g + f) \\ 0 \end{bmatrix} = \begin{bmatrix} \cos(g + f) \\ \cos I \sin(g + f) \\ \sin I \sin(g + f) \end{bmatrix} \quad (129)$$

The  $z$ -coordinate can be related to the geocentric latitude  $\beta$  in (126) with the equation

$$\sin \beta = \sin I \sin(g + f). \quad (130)$$

Then, by using the relations

$$\begin{aligned} \sin^2(g + f) &= (1 - \cos(2g + 2f))/2, \\ \sin(g + f) \cos(2g + 2f) &= \frac{1}{2} \sin(3g + 3f) - \frac{1}{2} \sin(g + f), \\ \cos 2\theta &= 2 \cos^2 \theta - 1, \\ \sin(g + f) \cos(4g + 4f) &= \frac{1}{2} \sin(5g + 5f) - \frac{1}{2} \sin(3g + 3f), \end{aligned}$$

we obtain

$$\begin{aligned} \sin^2 \beta &= \frac{1}{2} \sin^2 I (1 - \cos(2g + 2f)), \\ \sin^3 \beta &= \sin^3 I \left( \frac{3}{4} \sin(g + f) - \frac{1}{4} \sin(3g + 3f) \right), \\ \sin^4 \beta &= \frac{1}{4} \sin^4 I (1 - 2 \cos(2g + 2f) + \cos^2(2g + 2f)) \\ &= \frac{1}{8} \sin^4 I (3 - 4 \cos(2g + 2f) + \cos(4g + 4f)) \\ \sin^5 \beta &= \frac{1}{16} [6 \sin(g + f) - 4 \sin(3g + 3f) + 4 \sin(g + f) + \sin(5g + 5f) - \sin(3g + 3f)] \\ &= \sin^5 I \left[ \frac{5}{8} \sin(g + f) - \frac{5}{16} \sin(3g + 3f) + \frac{1}{16} \sin(5g + 5f) \right]. \end{aligned} \quad (131)$$

### 3.2.1 The $J_2$ Harmonic

We can expand

$$1 - 3 \sin^2 \beta = 1 - \frac{3}{2} \sin^2 I (1 - \cos(2g + 2f)) \quad (132)$$

$$= 1 - \frac{3}{2} (1 - \cos(2g + 2f)) + \frac{3}{2} \cos^2 I (1 - \cos(2g + 2f)) \quad (133)$$

$$= \left( -\frac{1}{2} + \frac{3}{2} \cos^2 I \right) + \left( \frac{3}{2} - \frac{3}{2} \cos^2 I \right) \cos(2g + 2f) \quad (134)$$

to obtain the disturbing function  $R_2$  corresponding to the  $J_2$  harmonic

$$\begin{aligned}
R_2 &:= \frac{\mu k_2}{r^3} (1 - 3 \sin^2 \beta) \\
&= \frac{\mu k_2}{a^3} \left[ \left( -\frac{1}{2} + \frac{3}{2} \cos^2 I \right) \frac{a^3}{r^3} + \left( \frac{3}{2} - \frac{3}{2} \cos^2 I \right) \cos(2g + 2f) \frac{a^3}{r^3} \right] \\
&= \frac{\mu^4 k_2}{L^6} \left[ \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G^2} \right) \frac{a^3}{r^3} + \left( \frac{3}{2} - \frac{3}{2} \frac{H^2}{G^2} \right) \cos(2g + 2f) \frac{a^3}{r^3} \right].
\end{aligned} \tag{135}$$

### 3.2.2 The $J_4$ Harmonic

We can expand

$$\begin{aligned}
&1 - 10 \sin^2 \beta + \frac{35}{3} \sin^4 \beta \\
&= 1 - 5 \sin^2 I (1 - \cos(2g + 2f)) + \frac{35}{24} \sin^4 I (3 - 4 \cos(2g + 2f) + \cos(4g + 4f)) \\
&= \left[ 1 - 5(1 - \cos^2 I) + \frac{35}{8}(1 - \cos^2 I)^2 \right] + \left[ 5(1 - \cos^2 I) - \frac{35}{6}(1 - \cos^2 I)^2 \right] \cos(2g + 2f) \\
&+ \frac{35}{24}(1 - \cos^2 I)^2 \cos(4g + 4f) \\
&= \left( \frac{3}{8} - \frac{15}{4} \cos^2 I + \frac{35}{8} \cos^4 I \right) + \left( -\frac{5}{6} + \frac{20}{3} \cos^2 I - \frac{35}{6} \cos^4 I \right) \cos(2g + 2f) \\
&+ \left( \frac{35}{24} - \frac{35}{12} \cos^2 I + \frac{35}{24} \cos^4 I \right) \cos(4g + 4f).
\end{aligned} \tag{136}$$

to obtain the disturbing function  $R_4$  corresponding to the  $J_4$  harmonic

$$\begin{aligned}
R_4 &:= \frac{\mu k_4}{r^5} \left[ \left( \frac{3}{8} - \frac{15}{4} \cos^2 I + \frac{35}{8} \cos^4 I \right) \right. \\
&+ \left( -\frac{5}{6} + \frac{20}{3} \cos^2 I - \frac{35}{6} \cos^4 I \right) \cos(2g + 2f) \\
&+ \left. \left( \frac{35}{24} - \frac{35}{12} \cos^2 I + \frac{35}{24} \cos^4 I \right) \cos(4g + 4f) \right] \\
&= \frac{\mu^6 k_4}{L^{10}} \left[ \left( \frac{3}{8} - \frac{15}{4} \frac{H^2}{G^2} + \frac{35}{8} \frac{H^4}{G^4} \right) \frac{a^5}{r^5} \right. \\
&+ \left( -\frac{5}{6} + \frac{20}{3} \frac{H^2}{G^2} - \frac{35}{6} \frac{H^4}{G^4} \right) \frac{a^5}{r^5} \cos(2g + 2f) \\
&+ \left. \left( \frac{35}{24} - \frac{35}{12} \frac{H^2}{G^2} + \frac{35}{24} \frac{H^4}{G^4} \right) \frac{a^5}{r^5} \cos(4g + 4f) \right].
\end{aligned} \tag{137}$$

### 3.2.3 The $J_3$ Harmonic

We can expand

$$\begin{aligned}
-\frac{3}{2} \sin \beta + \frac{5}{2} \sin^3 \beta &= -\frac{3}{2} \sin I \sin(g + f) + \frac{5}{2} \sin^3 I \left( \frac{3}{4} \sin(g + f) - \frac{1}{4} \sin(3g + 3f) \right) \\
&= \left( -\frac{3}{2} \sin I + \frac{15}{8} \sin^3 I \right) \sin(g + f) - \frac{5}{8} \sin^3 I \sin(3g + 3f).
\end{aligned} \tag{138}$$

to obtain the disturbing function  $R_3$  corresponding to the  $J_3$  harmonic

$$\begin{aligned} R_3 &:= \frac{\mu A_{3,0}}{r^4} \left[ \left( -\frac{3}{2} \sin I + \frac{15}{8} \sin^3 I \right) \sin(g+f) - \frac{5}{8} \sin^3 I \sin(3g+3f) \right] \\ &= \frac{\mu A_{3,0}}{r^4} \sin I \left[ \left( -\frac{3}{2} + \frac{15}{8} \frac{H^2}{G^2} \right) \sin(g+f) - \frac{5}{8} \frac{H^2}{G^2} \sin(3g+3f) \right]. \end{aligned} \quad (139)$$

### 3.2.4 The $J_5$ Harmonic

We can expand

$$\begin{aligned} \frac{15}{8} \sin \beta &= \sin I \left[ \frac{15}{8} \sin(g+f) \right] \\ -\frac{35}{4} \sin^3 \beta &= \sin^3 I \left[ -\frac{105}{16} \sin(g+f) + \frac{35}{16} \sin(3g+3f) \right] \\ \frac{63}{8} \sin^5 \beta &= \sin^5 I \left[ \frac{315}{64} \sin(g+f) - \frac{315}{128} \sin(3g+3f) + \frac{63}{128} \sin(5g+5f) \right] \end{aligned} \quad (140)$$

to obtain the disturbing function  $R_5$  corresponding to the  $J_5$  harmonic

$$\begin{aligned} R_5 &:= \frac{\mu A_{5,0}}{r^6} \left[ \left( \frac{15}{8} \sin I - \frac{105}{16} \sin^3 I + \frac{315}{64} \sin^5 I \right) \sin(g+f) \right. \\ &\quad + \left( \frac{35}{16} \sin^3 I - \frac{315}{128} \sin^5 I \right) \sin(3g+3f) \\ &\quad \left. + \left( \frac{63}{128} \sin^5 I \right) \sin(5g+5f) \right] \end{aligned} \quad (141)$$

## 3.3 Hamiltonian Formulation

Combining the results from previous sections, we have the Delaunay variables

$$\boxed{\begin{aligned} l &= M, & L &= \sqrt{a\mu}, \\ g &= \omega, & G &= \sqrt{a\mu(1-e^2)}, \\ h &= \Omega, & H &= \sqrt{a\mu(1-e^2)} \cos I, \end{aligned}} \quad (142)$$

and the Hamiltonian

$$\boxed{F = \frac{\mu^2}{2L^2} + R_2 + R_3 + R_4 + R_5}. \quad (143)$$

Due to the sign convention used in [1], the Hamilton's equations obtain the form:

$$\boxed{\begin{aligned} \frac{dl}{dt} &= -\frac{\partial F}{\partial L}, & \frac{dg}{dt} &= -\frac{\partial F}{\partial G}, & \frac{dh}{dt} &= -\frac{\partial F}{\partial H}, \\ \frac{dL}{dt} &= \frac{\partial F}{\partial l}, & \frac{dG}{dt} &= \frac{\partial F}{\partial g}, & \frac{dH}{dt} &= \frac{\partial F}{\partial h}. \end{aligned}} \quad (144)$$

The parts of the disturbing function can be expanded:

$$R_2 := \frac{\mu^4 k_2}{L^6} \left[ \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G^2} \right) \frac{a^3}{r^3} + \left( \frac{3}{2} - \frac{3}{2} \frac{H^2}{G^2} \right) \cos(2g + 2f) \frac{a^3}{r^3} \right], \quad (145)$$

$$R_3 := \frac{\mu A_{3,0}}{r^4} \sin I \left[ \left( -\frac{3}{2} + \frac{15}{8} \frac{H^2}{G^2} \right) \sin(g + f) - \frac{5}{8} \frac{H^2}{G^2} \sin(3g + 3f) \right], \quad (146)$$

$$\begin{aligned} R_4 := & \frac{\mu^6 k_4}{L^{10}} \left[ \left( \frac{3}{8} - \frac{15}{4} \frac{H^2}{G^2} + \frac{35}{8} \frac{H^4}{G^4} \right) \frac{a^5}{r^5} \right. \\ & + \left( -\frac{5}{6} + \frac{20}{3} \frac{H^2}{G^2} - \frac{35}{6} \frac{H^4}{G^4} \right) \frac{a^5}{r^5} \cos(2g + 2f) \\ & \left. + \left( \frac{35}{24} - \frac{35}{12} \frac{H^2}{G^2} + \frac{35}{24} \frac{H^4}{G^4} \right) \frac{a^5}{r^5} \cos(4g + 4f) \right], \end{aligned} \quad (147)$$


$$\begin{aligned} R_5 := & \frac{\mu A_{5,0}}{r^6} \left[ \left( \frac{15}{8} \sin I - \frac{105}{16} \sin^3 I + \frac{315}{64} \sin^5 I \right) \sin(g + f) \right. \\ & + \left( \frac{35}{15} \sin^3 I - \frac{315}{128} \sin^5 I \right) \sin(3g + 3f) \\ & \left. + \left( \frac{63}{128} \sin^5 I \right) \sin(5g + 5f) \right] \end{aligned} \quad (148)$$

## 4 Solution of the Problem

### 4.1 Von Zeipel Method and Canonical Transformations

The basic idea of the Von Zeipel method is to perform successive canonical transformations so that each transformation gets rid of the dependence of the Hamiltonian on a single canonical coordinate. This is continued until the final Hamiltonian is independent of all canonical coordinates. The canonical momenta in the resulting Hamiltonian are then constants and canonical coordinates are linear functions of time. To obtain a solution to the original problem, the solution is then transformed back to the original coordinates, where each canonical transformation introduces periodics (trigonometric functions) w.r.t variable reintroduced to the Hamiltonian.

General overview of the approach can be found from [3].

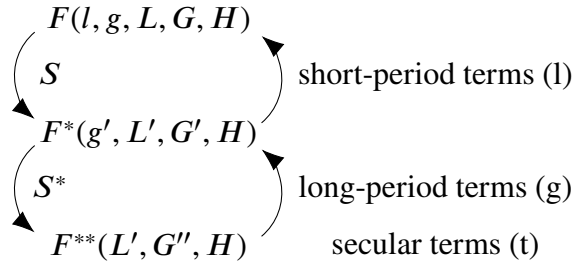

**Figure 3:** Canonical transformations in [1].

As shown in Figure 3, three systems will be used:

- The first system uses undotted variables  $(L, G, H, l, g, h)$  and the Hamiltonian  $F = F(L, G, H, l, g)$  explicitly dependent on both  $l$  and  $g$ .
- The second system uses singly dotted variables  $(L', G', H', l', g', h')$  and the Hamiltonian  $F^* = F^*(L', G', H', g')$  explicitly dependent on  $g$ .
- The third system uses double dotted variables  $(L'', G'', H'', l'', g'', h'')$  and the Hamiltonian  $F^{**} = F^{**}(L'', G'', H'')$  independent from all angle variables.

The generating functions  $S = S(L', G', H', l, g, h)$  and  $S^* = S^*(L'', G'', H'', l', g', h')$  are used for transformations  $F \mapsto F^*$  and  $F^* \mapsto F^{**}$ , respectively.

#### 4.1.1 Decomposition of the Hamiltonian

In order to derive each transformation, the Hamiltonians as well as the generating functions are expanded as Taylor series in powers of some parameter (e.g.  $k_2$  in [1]) and terms of equal order are equated. For example, for the problem involving only the  $J_2$  harmonic, we can divide  $F$  as follows:

$$F = F_0 + F_1 = \underbrace{\frac{\mu^2}{2L^2}}_{F_0} + \underbrace{\frac{\mu^4 k_2}{L^6} \left[ \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G^2} \right) \frac{a^3}{r^3} + \left( \frac{3}{2} - \frac{3}{2} \frac{H^2}{G^2} \right) \cos(2g + 2f) \frac{a^3}{r^3} \right]}_{F_1} \quad (149)$$



The first-order term  $F_1$  is further decomposed into periodic and secular parts. Define

$$A := -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G^2}, \quad B := \frac{3}{2} - \frac{3}{2} \frac{H^2}{G^2}, \quad \sigma_1 := \frac{a^3}{r^3} - \frac{L^3}{G^3}, \quad \sigma_2 := \frac{a^3}{r^3} \cos(2g + 2f). \quad (150)$$

Then,

$$\begin{aligned} F_1 &= \frac{k_2 \mu^4}{L^6} \left( A \frac{a^3}{r^3} + B \frac{a^3}{r^3} \cos(2g + 2f) \right) \\ &= \frac{k_2 \mu^4}{L^6} \left[ A \left( \sigma_1 + \frac{L^3}{G^3} \right) + B \sigma_2 \right] \\ &= \underbrace{\frac{k_2 \mu^4}{L^6} (A \sigma_1 + B \sigma_2)}_{F_{1p}} + \underbrace{\frac{k_2 \mu^4}{G^3 L^3} A}_{F_{1s}} =: F_{1p} + F_{1s}. \end{aligned} \quad (151)$$

The dependence on  $l$  is limited to the terms  $\sigma_1$  and  $\sigma_2$ .

#### 4.1.2 First Transformation of the Hamiltonian

We want the new Hamiltonian  $F^*$  to be equal so we require

$$F = F_0 + F_1 = F_0^* + F_1^* + F_2^* = F^*, \quad (152)$$

$$S = S_0 + S_1 + S_2, \quad (153)$$

where the Hamiltonians and the generating function have the following dependence on the variables

$$F = F(L, G, H, l, g, -) \quad (154)$$

$$F^* = F^*(L', G', H, -, g', -) \quad (155)$$

$$S = S(L', G', H', l, g, h) \quad (156)$$

We select

$$S_0 = L'l + G'g + H'h. \quad (157)$$

In  $F_1$ , the dependence on mean anomaly  $l$  is via true anomaly  $f$ . To derive the relationship between the original and transformed variables, we require

$$\begin{aligned} F_0(L) + F_1(L, G, H, l, g, -) &= F_0^* + F_1^*(L', G', H, -, g', -) \\ &+ F_2^*(L', G', H, -, g', -). \end{aligned} \quad (158)$$

From (8), we can substitute

$$L = \frac{\partial S}{\partial l} = \frac{\partial}{\partial l}(S_0 + S_1 + S_2) = L' + \frac{\partial S_1}{\partial l} + \frac{\partial S_2}{\partial l}, \quad (159)$$

$$G = \frac{\partial S}{\partial g} = \frac{\partial}{\partial g}(S_0 + S_1 + S_2) = G' + \frac{\partial S_1}{\partial g} + \frac{\partial S_2}{\partial g}, \quad (160)$$

$$H = \frac{\partial S}{\partial h} = \frac{\partial}{\partial h}(S_0 + S_1 + S_2) = H + \frac{\partial S_1}{\partial h} + \frac{\partial S_2}{\partial h}, \quad (161)$$

$$l' = \frac{\partial S}{\partial L'} = \frac{\partial}{\partial L'}(S_0 + S_1 + S_2) = l + \frac{\partial S_1}{\partial L'} + \frac{\partial S_2}{\partial L'}, \quad (162)$$

$$g' = \frac{\partial S}{\partial G'} = \frac{\partial}{\partial G'}(S_0 + S_1 + S_2) = g + \frac{\partial S_1}{\partial G'} + \frac{\partial S_2}{\partial G'}, \quad (163)$$

$$h' = \frac{\partial S}{\partial H'} = \frac{\partial}{\partial H'}(S_0 + S_1 + S_2) = h + \frac{\partial S_1}{\partial H'} + \frac{\partial S_2}{\partial H'}. \quad (164)$$

to obtain

$$\begin{aligned} & F_0 \left( L' + \frac{\partial S_1}{\partial l} + \frac{\partial S_2}{\partial l} \right) + F_1 \left( L' + \frac{\partial S_1}{\partial l} + \frac{\partial S_2}{\partial l}, G' + \frac{\partial S_1}{\partial g} + \frac{\partial S_2}{\partial g}, H', l, g, - \right) \\ &= F_0^*(L') + F_1^* \left( L', G', H', -, g + \frac{\partial S_1}{\partial G'} + \frac{\partial S_2}{\partial G'}, - \right) + F_2^* \left( L', G', H', -, g + \frac{\partial S_1}{\partial G'} + \frac{\partial S_2}{\partial G'}, - \right) \end{aligned} \quad (165)$$

We expand each as a Taylor series w.r.t.  $(L', G', H', l, g, h)$  to obtain

$$F_0(\cdot) \approx F_0(L') + \frac{\partial F_0}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_0}{\partial L'} \frac{\partial S_2}{\partial l} + \frac{1}{2} \frac{\partial^2 F_0}{\partial L'^2} \left( \frac{\partial S_1}{\partial l} + \frac{\partial S_2}{\partial l} \right)^2, \quad (166)$$

$$\begin{aligned} F_1(\cdot) &\approx F_1(L', G', H', l, g, -) + \frac{\partial F_1}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_1}{\partial L'} \frac{\partial S_2}{\partial l} + \frac{1}{2} \frac{\partial^2 F_1}{\partial L'^2} \left( \frac{\partial S_1}{\partial l} + \frac{\partial S_2}{\partial l} \right)^2 \\ &+ \frac{\partial F_1}{\partial G'} \frac{\partial S_1}{\partial g} + \frac{\partial F_1}{\partial G'} \frac{\partial S_2}{\partial g} + \frac{1}{2} \frac{\partial^2 F_1}{\partial G'^2} \left( \frac{\partial S_1}{\partial g} + \frac{\partial S_2}{\partial g} \right)^2, \end{aligned} \quad (167)$$

$$F_1^*(\cdot) \approx F_1^*(L', G', H', -, g, -) + \frac{\partial F_1^*}{\partial g} \frac{\partial S_1}{\partial G'} + \frac{\partial F_1^*}{\partial g} \frac{\partial S_2}{\partial G'} + \frac{1}{2} \frac{\partial^2 F_1^*}{\partial g^2} \left( \frac{\partial S_1}{\partial G'} + \frac{\partial S_2}{\partial G'} \right)^2, \quad (168)$$

$$F_2^*(\cdot) \approx F_2^*(L', G', H', -, g, -) + \frac{\partial F_2^*}{\partial g} \frac{\partial S_1}{\partial G'} + \frac{\partial F_2^*}{\partial g} \frac{\partial S_2}{\partial G'} + \frac{1}{2} \frac{\partial^2 F_2^*}{\partial g^2} \left( \frac{\partial S_1}{\partial G'} + \frac{\partial S_2}{\partial G'} \right)^2. \quad (169)$$

Here  $S_k$  and  $F_k$  will have order  $k$  w.r.t.  $k_2$ . We will only retain the terms that are at most of order 2. Thus,

$$F_0(\cdot) \approx F_0 + \frac{\partial F_0}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_0}{\partial L'} \frac{\partial S_2}{\partial l} + \frac{1}{2} \frac{\partial^2 F_0}{\partial L'^2} \left( \frac{\partial S_1}{\partial l} \right)^2 \quad (170)$$

$$F_1(\cdot) \approx F_1 + \frac{\partial F_1}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_1}{\partial G'} \frac{\partial S_1}{\partial g} \quad (171)$$

$$F_1^*(\cdot) \approx F_1^* + \frac{\partial F_1^*}{\partial g} \frac{\partial S_1}{\partial G'} \quad (172)$$

$$F_2^*(\cdot) \approx F_2^* \quad (173)$$

and (165) can be written

$$\begin{aligned}
F_0(L') &+ \frac{\partial F_0}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_0}{\partial L'} \frac{\partial S_2}{\partial l} + \frac{1}{2} \frac{\partial^2 F_0}{\partial L'^2} \left( \frac{\partial S_1}{\partial l} \right)^2 \\
&+ F_1(L', G', H', l, g) + \frac{\partial F_1}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_1}{\partial G'} \frac{\partial S_1}{\partial g} \\
&= F_0^*(L') + F_1^*(L', G', H', g) + \frac{\partial F_1^*}{\partial g} \frac{\partial S_1}{\partial G'} + F_2^*(L', G', H', g).
\end{aligned} \tag{174}$$

Equating terms of each order of  $k_2$ , we get the equations

$$F_0 = F_0^* \tag{175}$$

$$\frac{\partial F_0}{\partial L'} \frac{\partial S_1}{\partial l} + F_1 = F_1^* \tag{176}$$

$$\frac{\partial F_0}{\partial L'} \frac{\partial S_2}{\partial l} + \frac{1}{2} \frac{\partial^2 F_0}{\partial L'^2} \left( \frac{\partial S_1}{\partial l} \right)^2 + \frac{\partial F_1}{\partial L'} \frac{\partial S_1}{\partial l} + \frac{\partial F_1}{\partial G'} \frac{\partial S_1}{\partial g} = F_2^* + \frac{\partial F_1^*}{\partial g} \frac{\partial S_1}{\partial G'}.$$

for orders 0, 1 and 2, respectively. Thus

$$F_0^*(L') = \frac{\mu}{2L'^2} \tag{178}$$

The first-degree part (176) can be written as

$$-\frac{\mu^2}{L'^3} \frac{\partial S_1}{\partial l} + \frac{\mu^4 k_2}{L'^3 G'^3} A + \frac{\mu^4 k_2}{L'^6} (A\sigma_1 + B\sigma_2) = F_1^*, \tag{179}$$

and is satisfied if

$$F_1^* = \frac{\mu^4 k_2}{L'^3 G'^3} A, \tag{180}$$

$$\frac{\partial S_1}{\partial l} = \frac{\mu^2 k_2}{L'^3} (A\sigma_1 + B\sigma_2) \tag{181}$$

hold. Thus, we can solve

$$\begin{aligned}
S_1 &= \frac{\mu^2 k_2}{L'^3} \int (A\sigma_1 + B\sigma_2) dl \\
&= \frac{\mu^2 k_2}{L'^3} \left( A \int \sigma_1 dl + B \int \sigma_2 dl \right) \\
&= \frac{\mu^2 k_2}{G'^3} \left[ A(f - l + e \sin f) + B \left( \frac{1}{2} \sin(2g + 2f) + \frac{e}{2} \sin(2g + f) + \frac{e}{6} \sin(2g + 3f) \right) \right].
\end{aligned} \tag{182}$$

#### 4.1.3 Short-Period Terms

The term  $S_2$  is ignored so we finally have the complete generating function  $S = S_0 + S_1$  and the short-period terms (periodic w.r.t.  $l$ ) can be derived. The canonical momenta can be computed with (159) – (161). We will use the constant

$$\gamma_2 := \frac{\mu^2 k_2}{L'^4}. \tag{183}$$

The computation of  $L$  is simple using (181):

$$\begin{aligned}
L &= L' + \frac{\partial S_1}{\partial l} \\
&= L' [1 + \gamma_2(A\sigma_1 + B\sigma_2)] \\
&= L' \left\{ 1 + \gamma_2 \left[ \left( -\frac{1}{2} + \frac{3H^2}{2G'^2} \right) \left( \frac{a^3}{r^3} - \frac{L'^2}{G'^3} \right) + \left( \frac{3}{2} - \frac{3H^2}{2G'^2} \right) \frac{a^3}{r^3} \cos(2g + 2f) \right] \right\}.
\end{aligned} \tag{184}$$

Computation of  $G$  involves only the  $B$  part of (182):

$$\begin{aligned}
G &= G' + \frac{\partial S_1}{\partial g} \\
&= G' \left\{ 1 + \gamma_2 \frac{L'^4}{G'^4} \left[ \cos(2g + 2f) + e \cos(2g + f) + \frac{e}{3} \cos(2g + 3f) \right] \right\}
\end{aligned} \tag{185}$$

Since  $S_1$  is independent of  $h$ ,

$$H = H'. \tag{186}$$

The computation of the short-term periodics in the canonical coordinates is more complex. From (112), we obtain

$$\frac{\partial}{\partial e}(f - l + e \sin f) = (1 + e \cos f) \frac{\partial f}{\partial e} + \sin f = \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} + 1 \right) \sin f. \tag{187}$$

For the  $B$  part of (182), using (109) – (110) and (112), we obtain

$$\begin{aligned}
\frac{\partial}{\partial e}(\cdot)_B &= \frac{\partial}{\partial e} \left( \frac{1}{2} \sin(2g + 2f) + \frac{e}{2} \sin(2g + f) + \frac{e}{6} \sin(2g + 3f) \right) \\
&= \frac{\partial f}{\partial e} \left( \cos(2g + 2f) + \frac{e}{2} \cos(2g + f) + \frac{e}{2} \cos(2g + 3f) \right) + \frac{1}{2} \sin(2g + f) + \frac{1}{6} \sin(2g + 3f) \\
&= \cos(2g + 2f)(1 + e \cos f) \frac{\partial f}{\partial e} + \frac{1}{2} \sin(2g + f) + \frac{1}{6} \sin(2g + 3f). \\
&= \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} \right) \cos(2g + 2f) \sin f + \frac{1}{2} \sin(2g + f) + \frac{1}{6} \sin(2g + 3f).
\end{aligned} \tag{188}$$

Now application of standard trigonometric formulas yields

$$\begin{aligned}
\cos(2g + 2f) \sin f &= \sin(2g + 3f) - \sin(2g + 2f) \cos f \\
&= -\sin(2g + f) + \sin(2g + 2f) \cos f \\
&= \frac{1}{2} \sin(2g + 3f) - \frac{1}{2} \sin(2g + f).
\end{aligned} \tag{189}$$

Thus, substituting this back, yields

$$\begin{aligned}
\frac{\partial}{\partial e}(\cdot)_B &= \frac{1}{2} \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} \right) \sin(2g + 3f) + \frac{1}{6} \sin(2g + 3f) \\
&\quad - \frac{1}{2} \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} \right) \sin(2g + f) + \frac{1}{2} \sin(2g + f). \\
&= \frac{1}{2} \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} + \frac{1}{3} \right) \sin(2g + 3f) + \frac{1}{2} \left( -\frac{a^2 G'^2}{r^2 L'^2} - \frac{a}{r} + 1 \right) \sin(2g + f).
\end{aligned} \tag{190}$$

With (187) and (190), we can compute

$$\begin{aligned} \frac{\partial S_1}{\partial e} &= \frac{\mu^2 k_2}{G'^3} \left\{ A \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} + 1 \right) \sin f \right. \\ &\quad \left. + \frac{B}{2} \left[ \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} + \frac{1}{3} \right) \sin(2g + 3f) + \left( -\frac{a^2 G'^2}{r^2 L'^2} - \frac{a}{r} + 1 \right) \sin(2g + f) \right] \right\}. \end{aligned} \quad (191)$$

To compute the partial derivatives w.r.t.  $L'$  and  $G'$ , we first note that

$$e^2 = 1 - \frac{G^2}{L^2} \quad (192)$$

and suppose that  $\psi$  is a variable of  $e$ . Then

$$\frac{\partial \psi}{\partial L} = \frac{d\psi}{de} \frac{\partial e}{\partial L} = \frac{d\psi}{de} \frac{1}{2} \frac{2G^2}{eL^3} = \frac{G^2}{L^3} \frac{1}{e} \frac{d\psi}{de}, \quad (193)$$

$$\frac{\partial \psi}{\partial G} = \frac{d\psi}{de} \frac{\partial e}{\partial G} = -\frac{d\psi}{de} \frac{1}{2} \frac{2G}{eL^2} = -\frac{G}{L^2} \frac{1}{e} \frac{d\psi}{de}. \quad (194)$$

Applying this to  $S_1$ , we obtain

$$\frac{\partial S_1}{\partial L'} = \frac{G'^2}{L'^3} \frac{1}{e} \frac{\partial S_1}{\partial e}. \quad (195)$$

Using (162) – (164), we can compute the short-period terms. The momentum  $L'$  does not appear explicitly in  $S_1$  so the dependence is only via  $e$ . That is,

$$\begin{aligned} l &= l' - \frac{G'^2}{L'^3} \frac{1}{e} \frac{\partial S_1}{\partial e} \\ &= l' - \frac{\gamma_2 L'}{e G'} \left\{ \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G'^2} \right) \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} + 1 \right) \sin f \right. \\ &\quad \left. + \left( \frac{3}{4} - \frac{3}{4} \frac{H^2}{G'^2} \right) \left[ \left( \frac{a^2 G'^2}{r^2 L'^2} + \frac{a}{r} + \frac{1}{3} \right) \sin(2g + 3f) + \left( -\frac{a^2 G'^2}{r^2 L'^2} - \frac{a}{r} + 1 \right) \sin(2g + f) \right] \right\} \end{aligned} \quad (196)$$

Dependence of  $S_1$  on  $G'$  is via direct appearance in expression (182) and via dependence (194) on  $e$ . That is,

$$g = g' - \frac{\partial S_1}{\partial G'} - \frac{G'}{L'^2} \frac{1}{e} \frac{\partial S_1}{\partial e}. \quad (197)$$

The direct part can be computed

$$\begin{aligned} \frac{\partial S_1}{\partial G'} &= \frac{\mu^2 k_2}{G'^4} \left[ \left( +\frac{3}{2} - \frac{9}{2} \frac{H^2}{G'^2} \right) (\cdot) + \left( -\frac{9}{2} + \frac{9}{2} \frac{H^2}{G'^2} \right) (\cdot) \right] \\ &\quad + \frac{\mu^2 k_2}{G'^4} \left[ \left( -\frac{6}{2} \frac{H^2}{G'^2} \right) (\cdot) + \left( +\frac{6}{2} \frac{H^2}{G'^2} \right) (\cdot) \right] \\ &= -\gamma_2 \frac{L'^4}{G'^4} \left[ \left( -\frac{3}{2} + \frac{15}{2} \frac{H^2}{G'^2} \right) (\cdot) + \left( \frac{9}{2} - \frac{15}{2} \frac{H^2}{G'^2} \right) (\cdot) \right] \end{aligned} \quad (198)$$

The indirect part can be computed

$$\begin{aligned}
\frac{\partial S_1}{\partial e} \frac{\partial e}{\partial G'} &= -\frac{G'}{L'^2} \frac{1}{e} \frac{\partial S_1}{\partial e} \\
&= -\frac{G'}{L'^2} \frac{1}{e} \frac{\mu^2 k_2}{G'^3} \left\{ \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G'^2} \right) \left( \frac{a^2}{r^2} \frac{G'^2}{L'^2} + \frac{a}{r} + 1 \right) \sin f \right. \\
&\quad \left. + \left( \frac{3}{4} - \frac{3}{4} \frac{H^2}{G'^2} \right) \left[ \left( \frac{a^2}{r^2} \frac{G'^2}{L'^2} + \frac{a}{r} + \frac{1}{3} \right) \sin(2g + 3f) + \left( -\frac{a^2}{r^2} \frac{G'^2}{L'^2} - \frac{a}{r} + 1 \right) \sin(2g + f) \right] \right\}.
\end{aligned} \tag{199}$$

Thus, we obtain the lengthy expression

$$\begin{aligned}
g &= g' + \gamma_2 \frac{L'^4}{G'^4} \left[ \left( -\frac{3}{2} + \frac{15}{2} \frac{H^2}{G'^2} \right) (f - l + e \sin f) \right. \\
&\quad \left. + \left( \frac{9}{2} - \frac{15}{2} \frac{H^2}{G'^2} \right) \left( \frac{1}{2} \sin(2g + 2f) + \frac{e}{2} \sin(2g + f) + \frac{e}{6} \sin(2g + 3f) \right) \right] \\
&\quad + \frac{\gamma_2}{e} \frac{L'^2}{G'^2} \left\{ \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G'^2} \right) \left( \frac{a^2}{r^2} \frac{G'^2}{L'^2} + \frac{a}{r} + 1 \right) \sin f \right. \\
&\quad \left. + \left( \frac{3}{4} - \frac{3}{4} \frac{H^2}{G'^2} \right) \left[ \left( \frac{a^2}{r^2} \frac{G'^2}{L'^2} + \frac{a}{r} + \frac{1}{3} \right) \sin(2g + 3f) + \left( -\frac{a^2}{r^2} \frac{G'^2}{L'^2} - \frac{a}{r} + 1 \right) \sin(2g + f) \right] \right\}.
\end{aligned} \tag{200}$$

Finally, we can compute

$$\begin{aligned}
h &= h' - \frac{\partial S_1}{\partial H} \\
&= h' - \frac{\mu k_2}{G'^2} \left\{ 3 \frac{H}{G'^2} (f - l + e \sin f) - 3 \frac{H}{G'^2} \left[ \frac{1}{2} \sin(2g + 2f) + \frac{e}{2} \sin(2g + f) + \frac{e}{6} \sin(2g + 3f) \right] \right\} \\
&= h' - 3\gamma_2 \frac{L'^4}{G'^4} \frac{H}{G'} \left[ f - l + e \sin f - \frac{1}{2} \sin(2g + 2f) - \frac{e}{2} \sin(2g + 2) - \frac{e}{6} \sin(2g + 3f) \right].
\end{aligned} \tag{201}$$

#### 4.1.4 Second-Order Terms

Now the remaining part of the new Hamiltonian can be computed (TODO)

$$\begin{aligned}
F_2^* &= \frac{\mu^6 k_2^2}{L'^{10}} \left[ \frac{15}{32} \frac{L'^5}{G'^5} \left( 1 - \frac{18}{5} \frac{H^2}{G'^2} + \frac{H^4}{G'^4} \right) + \frac{3}{8} \frac{L'^6}{G'^6} \left( 1 - 6 \frac{H^2}{G'^2} + 9 \frac{H^4}{G'^4} \right) - \frac{15}{32} \frac{L'^7}{G'^7} \left( 1 - 2 \frac{H^2}{G'^2} - 7 \frac{H^4}{G'^4} \right) \right] \\
&\quad + \frac{\mu^6 k_2^2}{L'^{10}} \left[ -\frac{3}{16} \left( \frac{L'^5}{G'^5} - \frac{L'^7}{G'^7} \right) \left( 1 - 16 \frac{H^2}{G'^2} + 15 \frac{H^4}{G'^4} \right) \right] \cos 2g'.
\end{aligned} \tag{202}$$

#### 4.1.5 Second Transformation of the Hamiltonian

From (178) and (180),

$$F^* = F_0^* + F_1^* + F_2^* = \frac{\mu^2}{2L'^2} + \frac{\mu^4 k_2}{L'^3 G'^3} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G'^2} \right) + F_2^*, \tag{203}$$

where  $F_2^*$  is divided into secular and periodic parts

$$F_2^*(L', G', H, g) = F_{2s}^*(L', G', H) + F_{2p}^*(L', G', H, g'). \tag{204}$$

Define new determining function

$$S''^* := L''l' + G''g' + H''h' + S_1^*(L'', G'', H'', g') \quad (205)$$

and express the new Hamiltonian

$$F^{**} = F_0^{**} + F_1^{**} + F_2^{**} \quad (206)$$

We then note that

$$G' = \frac{\partial S^*}{\partial g'} = \frac{\partial}{\partial g'}(S_0^* + S_1^*) = G'' + \frac{\partial S_1^*}{\partial g'} \quad (207)$$

and require

$$\begin{aligned} & F_0^*(L') + F_1^* \left( L', G'' + \frac{\partial S_1^*}{\partial g'}, H, -, -, - \right) + F_2^* \left( L', G'' + \frac{\partial S_1^*}{\partial g'}, H, -, g', - \right) \\ &= F_0^{**}(L') + F_1^{**}(L', G'', H, -, -, -) \end{aligned} \quad (208)$$

The partial derivative in the  $F_2^*$  term would lead to order three term and is thus ignored. Expanding as Taylor series expansion w.r.t.  $(L', G'', H)$  and equating terms with the same order, we obtain

$$F_0^* = F_0^{**}, \quad (209)$$

$$F_1^* = F_1^{**}, \quad (210)$$

$$\frac{\partial F_1^*}{\partial G''} \frac{\partial S_1^*}{\partial g'} + F_{2p}^* = 0, \quad (211)$$

$$F_{2s}^* = F_2^{**}. \quad (212)$$

The first-order part  $S_1^*$  of the generating function can be solved from (211) by first computing

$$\begin{aligned} \frac{\partial F_1^*}{\partial G''} &= -\frac{\mu^4 k_2}{L'^3 G'^4} \left( -\frac{3}{2} + \frac{9}{2} \frac{H^2}{G'^2} \right) - \frac{\mu^4 k_2}{L'^3 G'^4} \frac{6}{2} \frac{H^2}{G'^2} \\ &= -\frac{\mu^4 k_2}{L'^3 G'^4} \left( -\frac{3}{2} + \frac{15}{2} \frac{H^2}{G'^2} \right) \\ &= \frac{2}{3} \frac{\mu^4 k_2}{L'^3 G'^4} \left( 1 - 5 \frac{H^2}{G'^2} \right) \end{aligned} \quad (213)$$

and then

$$\begin{aligned}
\frac{\partial S_1^*}{\partial g'} &= -F_{2p}^* \left( \frac{\partial F_1^*}{\partial G''} \right)^{-1} \\
&= \frac{\mu^6 k_2^2}{L'^{10}} \frac{L'^3 G''^4}{\mu^4 k_2} \left[ \frac{3}{16} \left( \frac{L'^5}{G''^5} - \frac{L'^7}{G''^7} \right) \left( 1 - 16 \frac{H^2}{G''^2} + 15 \frac{H^4}{G''^4} \right) \right] \cos 2g' \frac{2}{3} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \\
&= \frac{\mu^6 k_2^2}{L'^{10}} \frac{L'^3 G''^4}{\mu^4 k_2} \left[ \frac{1}{8} \left( \frac{L'^5}{G''^5} - \frac{L'^7}{G''^7} \right) \left( 1 - 16 \frac{H^2}{G''^2} + 15 \frac{H^4}{G''^4} \right) \right] \cos 2g' \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \\
&= \gamma_2 G'' \left[ \frac{1}{8} \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \left( 1 - 16 \frac{H^2}{G''^2} + 15 \frac{H^4}{G''^4} \right) \right] \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \cos 2g' \\
&= \gamma_2 G'' \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \frac{\frac{1}{8} \left( 1 - 11 \frac{H^2}{G''^2} \right) \left( 1 - 5 \frac{H^2}{G''^2} \right) - 5 \frac{H^4}{G''^4}}{\left( 1 - 5 \frac{H^2}{G''^2} \right)} \cos 2g' \\
&= \gamma_2 G'' \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \left[ \frac{1}{8} \left( 1 - 11 \frac{H^2}{G''^2} \right) - 5 \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \right] \cos 2g'.
\end{aligned} \tag{214}$$

Thus, we immediately obtain the first-order part of the generating function

$$S_1^* = \gamma_2 G'' \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \left[ \frac{1}{16} \left( 1 - 11 \frac{H^2}{G''^2} \right) - \frac{5}{2} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \right] \sin 2g''. \tag{215}$$

#### 4.1.6 Long-Period Terms

With (214) and (215) we can compute the long-period terms

$$\begin{aligned}
G' &= G'' + \frac{\partial S_1^*}{\partial g'} \\
&= G'' \left\{ 1 + \gamma_2 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \left[ \frac{1}{8} \left( 1 - 11 \frac{H^2}{G''^2} \right) - 5 \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \right] \cos 2g'' \right\}
\end{aligned} \tag{216}$$

To compute the long-period terms in the mean anomaly  $l'$ , note that

$$\frac{\partial \gamma_2}{\partial L'} = \frac{\partial}{\partial L'} \frac{\mu^2 k_2}{L'^4} = -4 \frac{\mu^2 k_2}{L'^5} = -4 \frac{\gamma_2}{L'}. \tag{217}$$

and

$$\frac{\partial}{\partial L'} \gamma_2 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) = \gamma_2 \left( -4 \frac{L'}{G''^2} + 4 \frac{L'^3}{G''^4} \right) + \gamma_2 \left( 2 \frac{L'}{G''^2} - 4 \frac{L'^3}{G''^4} \right) = -2 \gamma_2 \frac{L'}{G''^2} \tag{218}$$

Thus,

$$\begin{aligned}
l' &= l'' - \frac{\partial S_1^*}{\partial L'} \\
&= l'' + \gamma_2 \frac{L'}{G''} \left[ \frac{1}{8} \left( 1 - 11 \frac{H^2}{G''^2} \right) - 5 \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \right] \sin 2g''.
\end{aligned} \tag{219}$$



To derive long-period terms in  $g'$ , we perform differentiation of (215) in three parts:

$$S_1^* = \underbrace{\gamma_2 \left( \frac{L'^2}{G''} - \frac{L'^4}{G''^3} \right)}_{\text{Part 1}} \left[ \underbrace{\frac{1}{16} \left( 1 - 11 \frac{H^2}{G''^2} \right)}_{\text{Part 2}} \underbrace{- \frac{5}{2} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1}}_{\text{Part 3}} \right] \sin 2g''. \quad (220)$$

Part 1 (without the  $\sin 2g''$  term)

$$\begin{aligned} \frac{\partial}{\partial G'} \gamma_2 \left( \frac{L'^2}{G''} - \frac{L'^4}{G''^3} \right) [\cdot] \sin 2g'' &= -\gamma_2 \frac{L'^2}{G''^2} [\cdot] + 3\gamma_2 \frac{L'^4}{G''^4} [\cdot] \\ &= -\gamma_2 \frac{1}{16} \frac{L'^2}{G''^2} \left( 1 - 11 \frac{H^2}{G''^2} \right) + \gamma_2 \frac{3}{16} \frac{L'^4}{G''^4} \left( 1 - 11 \frac{H^2}{G''^2} \right) \\ &\quad + \gamma_2 \frac{5}{2} \frac{L'^2}{G''^2} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} - \gamma_2 \frac{15}{2} \frac{L'^4}{G''^4} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \end{aligned} \quad (221)$$

Part 2 (without the  $\sin 2g''$  term)

$$\gamma_2 \frac{1}{16} \left( \frac{L'^2}{G''} - \frac{L'^4}{G''^3} \right) \frac{\partial}{\partial G'} \left( 1 - 11 \frac{H^2}{G''^2} \right) = \gamma_2 \frac{11}{8} \frac{L'^2}{G''^2} \frac{H^2}{G''^2} - \gamma_2 \frac{11}{8} \frac{L'^4}{G''^4} \frac{H^2}{G''^2}. \quad (222)$$

Part 3 (without the  $\sin 2g''$  term)

$$\begin{aligned} &-\gamma_2 \frac{5}{2} \left( \frac{L'^2}{G''} - \frac{L'^4}{G''^3} \right) \frac{\partial}{\partial G'} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \\ &= -\gamma_2 \frac{5}{2} \left( \frac{L'^2}{G''} - \frac{L'^4}{G''^3} \right) \frac{(-4H^4/G''^5)(1 - 5H^2/G''^2) - (H^4/G''^4)(-10H^2/G''^3)}{(1 - 5H^2/G''^2)^2} \\ &= \gamma_2 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \left[ 10 \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} - 25 \frac{H^6}{G''^6} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-2} \right] \\ &= 10\gamma_2 \frac{L'^2}{G''^2} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} - 10\gamma_2 \frac{L'^4}{G''^4} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} \\ &\quad - 25\gamma_2 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \frac{H''^6}{G''^6} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-2} \end{aligned} \quad (223)$$

**The sign of the last term is inconsistent with [1].**

Collecting the parts according to the order of the inverse term and the order of  $L'^2/G''^2$  the last three parts

$$\begin{aligned} \frac{\partial S_1^*}{\partial G''} &= \gamma_2 \left[ -\frac{1}{16} \frac{L'^2}{G''^2} \left( 1 - 33 \frac{H^2}{G''^2} \right) + \frac{3}{16} \frac{L'^4}{G''^4} \left( 1 - \frac{55}{3} \frac{H^2}{G''^2} \right) \right. \\ &\quad \left. + \left( \frac{25}{2} \frac{L'^2}{G''^2} - \frac{35}{2} \frac{L'^4}{G''^4} \right) \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} - 25 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \frac{H''^6}{G''^6} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-2} \right] \end{aligned} \quad (224)$$

and we obtain

$$\begin{aligned}
g' &= g'' - \frac{\partial S_1^*}{\partial G''} \\
&= g'' + \gamma_2 \left[ \frac{1}{16} \frac{L'^2}{G''^2} \left( 1 - 33 \frac{H^2}{G''^2} \right) - \frac{3}{16} \frac{L'^4}{G''^4} \left( 1 - \frac{55}{3} \frac{H^2}{G''^2} \right) \right. \\
&\quad \left. - \left( \frac{25}{2} \frac{L'^2}{G''^2} - \frac{35}{2} \frac{L'^4}{G''^4} \right) \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} + 25 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \frac{H''^6}{G''^6} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-2} \right],
\end{aligned} \tag{225}$$

where the sign of the last term does not match [1]. In order to compute  $\partial S_1^*/H$ , we first compute

$$\frac{1}{16} \frac{\partial}{\partial H} \left( 1 - 11 \frac{H^2}{G''^2} \right) = -\frac{11}{8} \frac{H}{G''^2}, \tag{226}$$

$$\begin{aligned}
-\frac{5}{2} \frac{\partial}{\partial H} \frac{H^4}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} &= -\frac{5}{2} \frac{(4H^3/G''^4)(1 - 5H^2/G''^2) - (H^4/G''^4)(-10H/G''^2)}{(1 - 5H^2/G''^2)^2} \\
&= -10 \frac{H^3}{G''^4} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} - 25 \frac{H^5}{G''^6} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-2}.
\end{aligned} \tag{227}$$

Thus,

$$\begin{aligned}
h' &= h'' - \frac{\partial S^*}{\partial H} \\
&= h'' + \gamma_2 \left( \frac{L'^2}{G''^2} - \frac{L'^4}{G''^4} \right) \left[ \frac{11}{8} \frac{H}{G''} + 10 \frac{H^3}{G''^3} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-1} + 25 \frac{H^5}{G''^5} \left( 1 - 5 \frac{H^2}{G''^2} \right)^{-2} \right]
\end{aligned} \tag{228}$$

The Hamiltonian can be now expanded

$$\begin{aligned}
F^{**} &= F_0^{**} + F_1^{**} + F_2^{**} \\
&= \frac{\mu^4}{2L'^2} + \frac{\mu^4 k_2}{L'^3 G''^3} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G''^2} \right) + F_2^{**},
\end{aligned} \tag{229}$$

where from (202) and (212), we obtain

$$\begin{aligned}
F_2^{**} &= \frac{\mu^6 k_2^2}{L'^{10}} \left[ \frac{15}{32} \frac{L'^5}{G''^5} \left( 1 - \frac{18}{5} \frac{H^2}{G''^2} + \frac{H^4}{G''^4} \right) + \frac{3}{8} \frac{L'^6}{G''^6} \left( 1 - 6 \frac{H^2}{G''^2} + 9 \frac{H^4}{G''^4} \right) \right. \\
&\quad \left. - \frac{15}{32} \frac{L'^7}{G''^7} \left( 1 - 2 \frac{H^2}{G''^2} - 7 \frac{H^4}{G''^4} \right) \right].
\end{aligned} \tag{230}$$

## 4.2 Explicit Solution for $J_2$ Harmonic

### 4.2.1 Secular Terms

The Hamiltonian (229) does not explicitly contain any of the angle variables  $l''$ ,  $g''$  or  $h''$ . Then Hamilton's equations (144) imply for the canonical momentums

$$\frac{dL'}{dt} = \frac{\partial F^{**}}{\partial l''} = 0 \quad (231)$$

$$\frac{dG''}{dt} = \frac{\partial F^{**}}{\partial g''} = 0 \quad (232)$$

$$\frac{dH}{dt} = \frac{\partial F^{**}}{\partial h''} = 0 \quad (233)$$

Thus,  $L'$ ,  $G''$  and  $H$  are independent of time. To solve the time-derivatives of  $l''$ ,  $g''$ ,  $h''$ , we need to compute the derivatives

$$\frac{\partial F^{**}}{\partial L'} = -\frac{\mu^2}{L'^3} - 3\frac{\mu^4 k_2}{L'^4 G''^3} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G''^2} \right) \quad (234)$$

$$+ \frac{\mu^6 k_2^2}{L'^{11}} \begin{bmatrix} 1 & \frac{H^2}{G''^2} & \frac{H^4}{G''^4} \end{bmatrix} \begin{bmatrix} -5 \cdot \frac{15}{32} & -4 \cdot \frac{3}{8} & -3 \left( -\frac{15}{32} \right) \\ -5 \cdot \frac{15}{32} \left( -\frac{18}{5} \right) & -4 \cdot \frac{3}{8} (-6) & -3 \left( -\frac{15}{32} \right) (-2) \\ -5 \cdot \frac{15}{32} & -4 \cdot \frac{3}{8} \cdot 9 & -3 \left( -\frac{15}{32} \right) (-7) \end{bmatrix} \begin{bmatrix} \frac{L'^5}{G''^5} \\ \frac{L'^6}{G''^6} \\ \frac{L'^7}{G''^7} \end{bmatrix}$$

$$= -\frac{\mu^2}{L'^3} - 3\frac{\mu^4 k_2}{L'^4 G''^3} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G''^2} \right) + \frac{\mu^6 k_2^2}{L'^{11}} \begin{bmatrix} 1 & \frac{H^2}{G''^2} & \frac{H^4}{G''^4} \end{bmatrix} \begin{bmatrix} -\frac{75}{32} & -\frac{3}{2} & \frac{45}{32} \\ \frac{135}{16} & 9 & -\frac{45}{16} \\ -\frac{75}{32} & -\frac{27}{2} & -\frac{315}{32} \end{bmatrix} \begin{bmatrix} \frac{L'^5}{G''^5} \\ \frac{L'^6}{G''^6} \\ \frac{L'^7}{G''^7} \end{bmatrix}$$

$$\frac{\partial F^{**}}{\partial G''} = -3\frac{\mu^4 k_2}{L'^3 G''^4} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G''^2} \right) + \frac{\mu^4 k_2}{L'^3 G''^4} \left( -\frac{6}{2} \frac{H^2}{G''^2} \right) \quad (235)$$

$$+ \frac{\mu^6 k_2^2}{L'^{11}} \begin{bmatrix} 1 & \frac{H^2}{G''^2} & \frac{H^4}{G''^4} \end{bmatrix} \begin{bmatrix} -\frac{75}{32} & -\frac{9}{4} & \frac{105}{32} \\ \frac{-7 \cdot (-18) \cdot 15}{5 \cdot 32} & \frac{-8 \cdot 3 \cdot (-6)}{8} & \frac{-9 \cdot (-15) \cdot (-2)}{32} \\ \frac{-9 \cdot 15}{32} & \frac{-10 \cdot 3 \cdot 9}{8} & \frac{-11 \cdot (-15) \cdot (-7)}{32} \end{bmatrix} \begin{bmatrix} \frac{L'^5}{G''^5} \\ \frac{L'^6}{G''^6} \\ \frac{L'^7}{G''^7} \end{bmatrix}$$

$$= -3\frac{\mu^4 k_2}{L'^3 G''^4} \left( -\frac{1}{2} + \frac{5}{2} \frac{H^2}{G''^2} \right) + \frac{\mu^6 k_2^2}{L'^{11}} \begin{bmatrix} 1 & \frac{H^2}{G''^2} & \frac{H^4}{G''^4} \end{bmatrix} \begin{bmatrix} -\frac{75}{32} & -\frac{9}{4} & \frac{105}{32} \\ \frac{189}{16} & 18 & -\frac{135}{16} \\ -\frac{135}{32} & -\frac{135}{4} & -\frac{1155}{32} \end{bmatrix} \begin{bmatrix} \frac{L'^5}{G''^5} \\ \frac{L'^6}{G''^6} \\ \frac{L'^7}{G''^7} \end{bmatrix}$$

$$\begin{aligned}
\frac{\partial F^{**}}{\partial H} &= 3 \frac{\mu^4 k_2}{L'^7} \frac{L'^4}{G''^4} \frac{H}{G''} + \frac{\mu^6 k_2^2}{L'^{10}} \begin{bmatrix} \frac{H}{G''^2} & \frac{H^3}{G''^4} \end{bmatrix} \begin{bmatrix} \frac{2 \cdot 15 \cdot (-18)}{32 \cdot 5} & \frac{2 \cdot 3 \cdot (-6)}{8} & \frac{2 \cdot (-15) \cdot (-2)}{32} \\ \frac{4 \cdot 15}{32} & \frac{4 \cdot 3 \cdot 9}{8} & \frac{4 \cdot (-15) \cdot (-7)}{32} \end{bmatrix} \begin{bmatrix} \frac{L''^5}{G''^5} \\ \frac{L''^6}{G''^6} \\ \frac{L''^7}{G''^7} \end{bmatrix} \\
&= 3 \frac{\mu^4 k_2}{L'^7} \frac{L'^4}{G''^4} \frac{H}{G''} + \frac{\mu^6 k_2^2}{L'^{11}} \begin{bmatrix} \frac{H}{G''} & \frac{H^3}{G''^3} \end{bmatrix} \begin{bmatrix} \frac{-27}{8} & \frac{-9}{2} & \frac{15}{8} \\ \frac{15}{8} & \frac{27}{4} & \frac{105}{8} \end{bmatrix} \begin{bmatrix} \frac{L''^6}{G''^6} \\ \frac{L''^7}{G''^7} \\ \frac{L''^8}{G''^8} \end{bmatrix}
\end{aligned} \tag{236}$$

Let's denote

$$n_0 := \frac{\mu^2}{L'^3}, \tag{237}$$

which implies

$$n_0 \gamma_2 = \frac{\mu^4 k_2}{L'^7}, \quad n_0 \gamma_2^2 = \frac{\mu^6 k_2^2}{L'^{11}}. \tag{238}$$

Thereafter, we obtain from Hamilton's equations (144)

$$\frac{dl''}{dt} = -\frac{\partial L^{**}}{\partial L'} \tag{239}$$

$$\begin{aligned}
&= n_0 \left\{ 1 + 3\gamma_2 \frac{L'^3}{G''^3} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G''^2} \right) + \gamma_2^2 \begin{bmatrix} 1 & \frac{H^2}{G''^2} & \frac{H^4}{G''^4} \end{bmatrix} \begin{bmatrix} \frac{75}{32} & \frac{3}{2} & -\frac{45}{32} \\ -\frac{135}{16} & -9 & \frac{45}{16} \\ \frac{75}{32} & \frac{27}{2} & \frac{315}{32} \end{bmatrix} \begin{bmatrix} \frac{L'^5}{G''^5} \\ \frac{L'^6}{G''^6} \\ \frac{L'^7}{G''^7} \end{bmatrix} \right\}, \\
\frac{dg''}{dt} &= -\frac{\partial L^{**}}{\partial G''} \tag{240}
\end{aligned}$$

$$\begin{aligned}
&= n_0 \left\{ 3\gamma_2 \frac{L'^4}{G''^4} \left( -\frac{1}{2} + \frac{5}{2} \frac{H^2}{G''^2} \right) + \gamma_2^2 \begin{bmatrix} 1 & \frac{H^2}{G''^2} & \frac{H^4}{G''^4} \end{bmatrix} \begin{bmatrix} \frac{75}{32} & \frac{9}{4} & -\frac{105}{32} \\ -\frac{189}{16} & -18 & \frac{135}{16} \\ \frac{135}{32} & \frac{135}{4} & \frac{1155}{32} \end{bmatrix} \begin{bmatrix} \frac{L'^5}{G''^5} \\ \frac{L'^6}{G''^6} \\ \frac{L'^7}{G''^7} \end{bmatrix} \right\}, \\
\frac{dh''}{dt} &= -\frac{dL^{**}}{dH} = n_0 \left\{ -3\gamma_2 \frac{L'^4}{G''^4} \frac{H}{G''} + \gamma_2^2 \begin{bmatrix} \frac{H}{G''} & \frac{H^3}{G''^3} \end{bmatrix} \begin{bmatrix} \frac{27}{8} & \frac{9}{2} & -\frac{15}{8} \\ -\frac{15}{8} & -\frac{27}{4} & -\frac{105}{8} \end{bmatrix} \begin{bmatrix} \frac{L''^6}{G''^6} \\ \frac{L''^7}{G''^7} \\ \frac{L''^8}{G''^8} \end{bmatrix} \right\}. \tag{241}
\end{aligned}$$

#### 4.2.2 Interpretation of the Secular Terms

To interpret the secular terms, we consider the first-order part and perform the substitutions

$$L' = \sqrt{a\mu}, \quad \gamma_2 = \frac{\mu^2 k_2}{L'^4} = \frac{k_2}{a'^2} = \frac{J_2 a_E^2}{2a'^2}, \quad \frac{L'}{G''} = \frac{1}{\sqrt{1-e''^2}}, \quad \frac{H}{G''} = \cos I'', \quad n_0 = \sqrt{\mu a}^{-3/2}. \tag{242}$$

Thereafter, we obtain expressions of regression rates in terms of familiar “mean” mean orbital elements

$$\begin{aligned}\frac{dM''}{dt} = \frac{dl''}{dt} &= n_0 \left[ 1 + 3\gamma_2 \frac{L'^3}{G'^3} \left( -\frac{1}{2} + \frac{3}{2} \frac{H^2}{G'^2} \right) \right] \\ &= n_0 \left[ 1 + \frac{3}{4} J_2 \frac{a_E^2}{a'^2} \frac{(-1 + 3 \cos^2 I'')}{(1 - e''^2)^{3/2}} \right],\end{aligned}\quad (243)$$

$$\begin{aligned}\frac{d\omega''}{dt} = \frac{dg''}{dt} &= n_0 \left[ 3\gamma_2 \frac{L'^4}{G'^4} \left( -\frac{1}{2} + \frac{5}{2} \frac{H^2}{G'^2} \right) \right] \\ &= n_0 \left[ 3 \frac{J_2 a_E^2}{2a'^2} \frac{1}{(1 - e''^2)^2} \left( -\frac{1}{2} + \frac{5}{2} \cos^2 I'' \right) \right] \\ &= n_0 \left[ \frac{3}{4} J_2 \frac{a_E^2}{a'^2} \frac{(-1 + 5 \cos^2 I'')}{(1 - e''^2)^2} \right] \\ &= \frac{3}{4} J_2 \sqrt{\mu} a_E^2 a'^{-7/2} (4 - 5 \sin^2 I'') (1 - e'')^{-2},\end{aligned}\quad (244)$$

$$\begin{aligned}\frac{d\Omega''}{dt} = \frac{dh''}{dt} &= n_0 \left[ -3\gamma_2 \frac{L'^4}{G'^4} \frac{H}{G''} \right] \\ &= n_0 \left[ -\frac{3}{2} J_2 \frac{a_E^2}{a'^2} \frac{\cos I''}{(1 - e''^2)^2} \right] \\ &= -\frac{3}{2} J_2 \sqrt{\mu} a_E^2 a'^{-7/2} \cos I'' (1 - e'')^{-2},\end{aligned}\quad (245)$$


With substitutions  $\mu = 3.986 \cdot 10^5 \text{ km}^3/\text{s}^2$  and  $R_e = 6378.135 \text{ km}$ , we obtain

$$\dot{\omega} = 1.03235 \cdot 10^{14} \cdot a'^{-7/2} (4 - 5 \sin^2 I'') (1 - e'')^{-2} \quad (\text{expected } 1.03237 \cdot 10^{14}) \quad (246)$$

$$\dot{\Omega} = -2.06471 \cdot 10^{14} \cdot a'^{-7/2} \cos I'' (1 - e'')^{-2}, \quad (\text{expected } -2.06474 \cdot 10^{14}) \quad (247)$$

in units degrees/day, where  $a$  is in km. The expected values were taken from equations (3–1) and (3–2) in [4]. The results are further visualized in Figure 4 for a range of “mean” mean inclinations  $I''$ . The altitudes refer to semi-major axis values  $a' = 6371.15 \text{ km} + \text{altitude}$ . Note that for large values for eccentricity, referring to “altitude” is somewhat misleading. The values are consistent with figures 3.5 and 3.7 in [4].

### 4.3 Elements and Orbit State Vectors

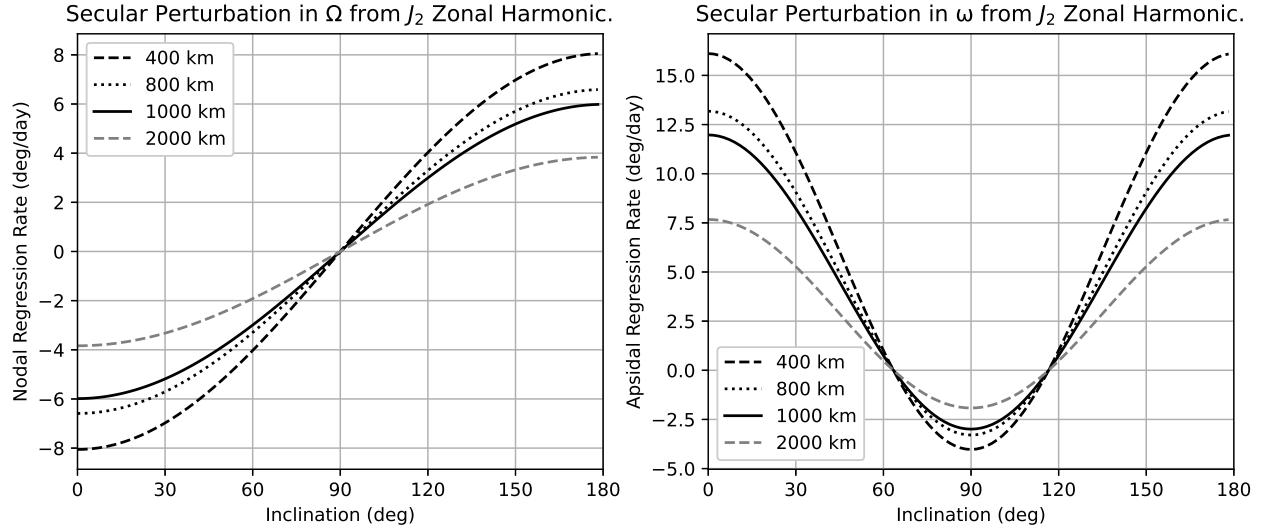

**Figure 4:** Secular perturbations in  $\Omega$  and  $\omega$  due to the  $J_2$  harmonic for several altitudes. The value  $e = 0.01$  is assumed for eccentricity.

## 5 SGP4 Solution

### 5.1 Approximation

### 5.2 Coordinate Systems and Frames

#### 5.2.1 Mean-of-Date (MoD)

#### 5.2.2 True-of-Date (ToD)

#### 5.2.3 True-Equator, Mean-Equinox (TEME)

#### 5.2.4 Pseudo Earth-Fixed (PEF)

### 5.3 Atmospheric Drag

### 5.4 Two-Line Elements

### 5.5 Kozai Mean Elements

## References

- [1] Brouwer - Solution of the Problem of Artificial Satellite Theory Without Drag, The Astronomical Journal, 64, No. 1274, 378-396, 1959 (<https://adsabs.harvard.edu/full/1959AJ.....64..378B>).
- [2] Karttunen - Johdatus Taivaanmekaniikkaan, Ursan julkaisuja 1982, Tähtitieteellinen yhdistys Urso, 2001.
- [3] Hutcheson - A Basic Approach to the Use of Canonical Variables and Von Zeipel's Method in Perturbation Theory, Memorandum RM-4074-PR, the RAND Corporation, 1964.

- [4] Bate, Mueller, White, Saylor, Fundamentals of Astrodynamics, 2ed, Dover, 2020
- [5] Vallado - Companion code for Fundamentals of Astrodynamics and Applications, 2013.
- [6] Hoots, Roehrich - Spacetrack Report No. 3, 1980 (<https://celestrak.org/NORAD/documentation/spacetrk>).
- [7] Lane, Hoots - General Perturbation Theories Derived from the 1965 Lane Drag Theory, Project Space Track, 1979 (<https://apps.dtic.mil/sti/citations/ADA081264>).
- [8] Hoots, Schumacher, Glover - History of Analytical Orbit Modeling in the U.S. Space Surveillance System, Journal of Guidance, Control and Dynamics, Vol 27, No.2. 174-185 March-April 2004 (<https://arc.aiaa.org/doi/10.2514/1.9161>).
- [9] Hujsak - A Restricted Four Body Solution for Resonating Satellites without Drag, Project Space Track, 1979 (<https://apps.dtic.mil/sti/citations/ADA081263>).
- [10] Vallado, Crawford, Hujsak - Revisiting Spacetrack Report No.3, American Institute of Aeronautics and Astronautics, AIAA 2006-6753, 2006 (<https://celestrak.org/publications/AIAA/2006-6753/AIAA-2006-6753.pdf>).