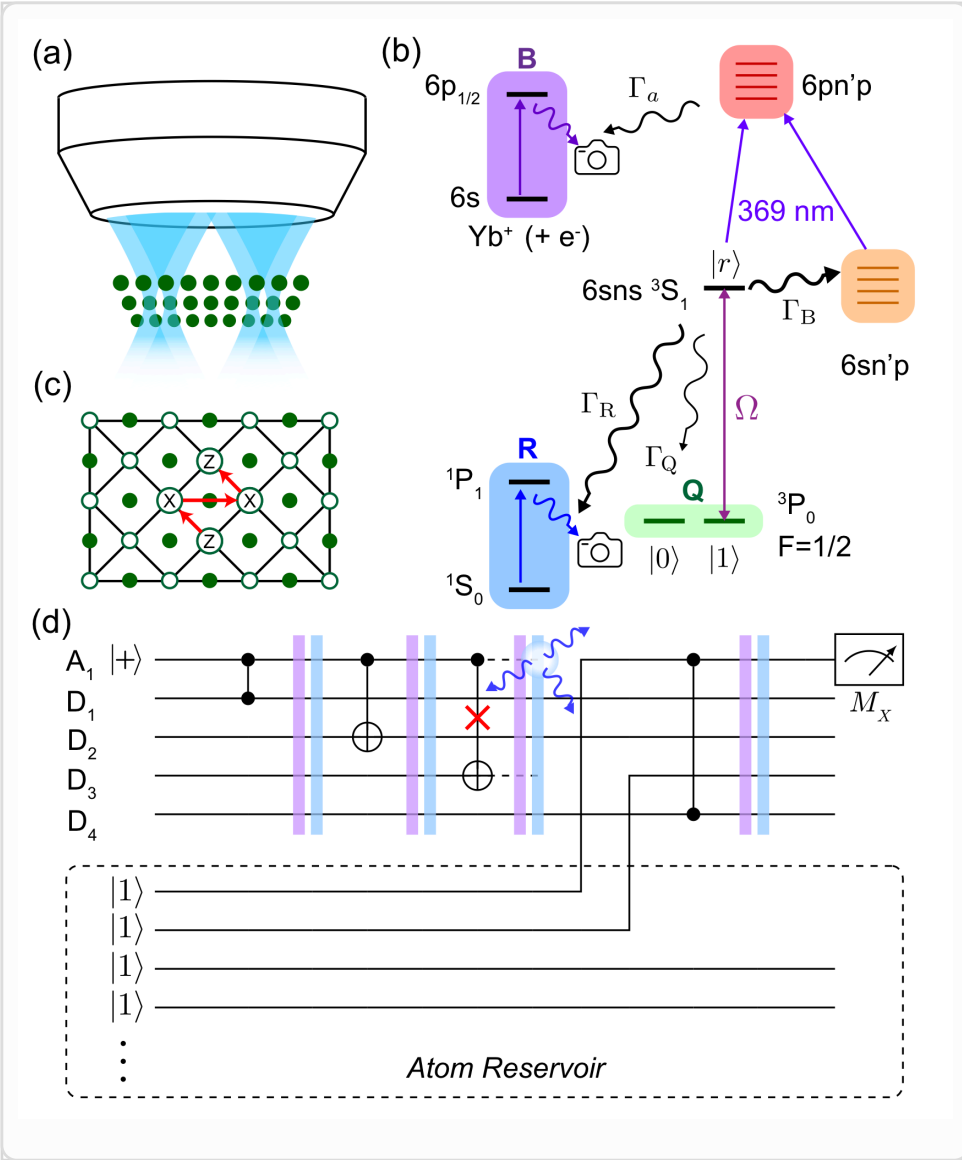

Fig. 1 (Wu et al.): encoding + detection + XZZX patch + circuit

Erasure conversion

for Fault-Tolerant Quantum Computing

Alkaline-earth(-like) Rydberg atom arrays (^{171}Yb)

Key mechanism

Detect leakage

fluorescence + autoionization

Conversion

$R_e \approx 0.98$

errors → erasures

QEC threshold

0.94% → 4.15%

surface code (XZZX)

Erasure conversion turns hard-to-locate faults into known-location erasures

0–3 min

Bottom line Encode qubits in a metastable manifold so that dominant Rydberg-decay faults produce **bright** signals that can be flagged as erasures.

Conversion

$R_e \approx 0.98$

most faults get flagged

Surface-code threshold

0.937% → 4.15%

XZZX + Union-Find

- **Decoder side-information** (erasure map) is as valuable as raw fidelity.

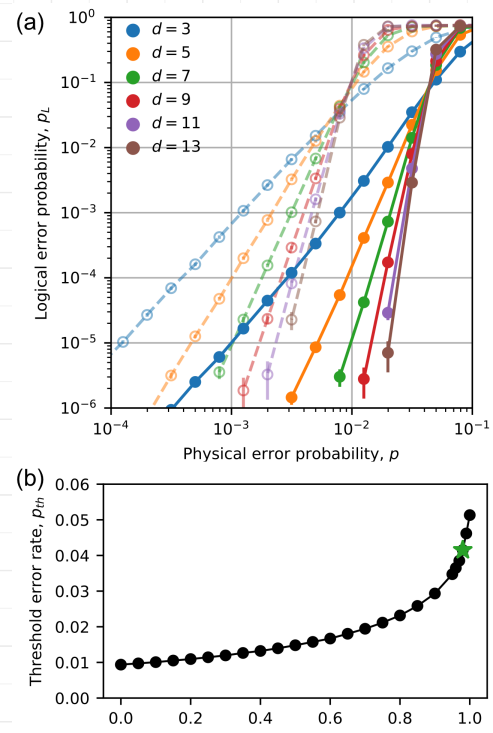

Circuit-level threshold vs erasure conversion (paper Fig. 3).

This talk builds the story from noise models to thresholds

0–3 min

Thesis If most gate faults become **detected erasures**, surface-code decoding becomes much easier.

- **Motivation:** why “known location” errors are special
- **Mechanism:** metastable encoding makes the qubit dark + errors bright
- **Protocol:** post-gate (R/B) monitoring → erasure map
- **QEC evidence:** XZZX surface-code simulations + Union-Find
- **Limitations:** what breaks R_e and what the hardware must do

Timing

- 0–10: motivation + definitions
- 10–30: encoding + gate physics + detection
- 30–48: QEC model + thresholds + scaling (ablations)
- 48–55: practicalities + limitations
- 55–60: takeaways + discussion

Motivation: make errors easier

Changing the *effective* noise model

~10 min

Fault tolerance works when the decoder can keep up with physical noise ~2 min

- Physical operations are noisy → faults accumulate over time.
- QEC measures **syndromes** to constrain which faults occurred.
- **Threshold theorem:** below a threshold, increasing code distance suppresses logical error.

Key move Don't only reduce fault rate—**add side information that localizes faults.**

Known-location erasures are far easier to decode than unknown Pauli faults ~3 min

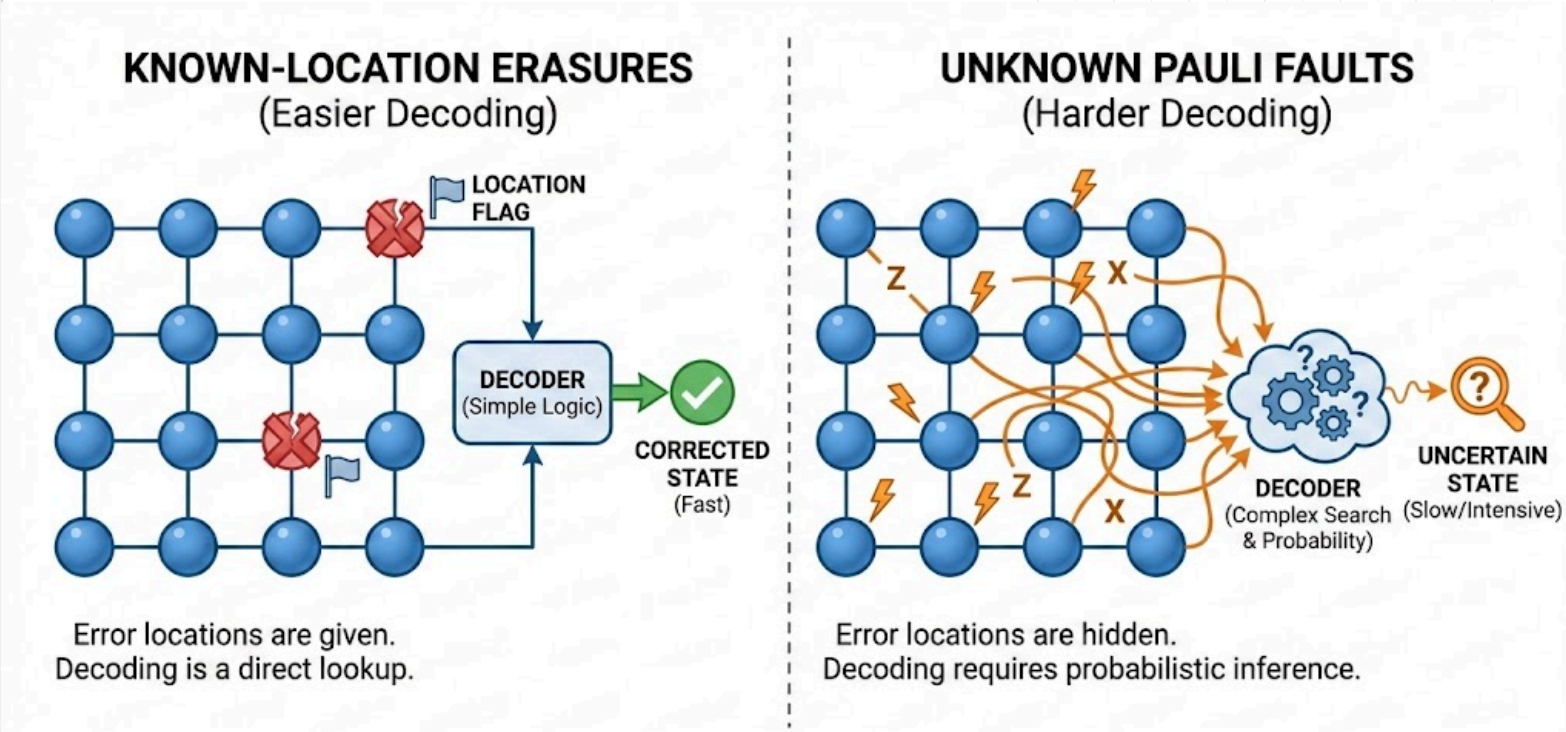

Figure 1: **Decoding Complexity Comparison.** Known-location erasures provide crucial side information, dramatically simplifying the correction process compared to blind Pauli faults.

Physical layer: why #super[171]Yb

Metastable encoding creates *dark* and *bright* manifolds

~20 min

Alkaline-earth(-like) atoms let us measure leakage via an “in Q?” test (without measuring the logical qubit) ~2 min

- What we want is a two-outcome check: “still in Q?” vs “not in Q?” (a projector test), **without** collapsing the logical state encoded **within** Q.
- **Why alkaline-earth(-like)/two-electron atoms matter:** they offer a long-lived **metastable clock state** for Q **and** a near-closed **strong cycling transition** in the ground manifold with **huge spectral separation**.

Selective fluorescence: Q is dark, $\frac{R}{B}$ are bright (large spectral separation)

[**Manifold**] [**Fluorescence (interpretation)**]

[Q] [Metastable qubit manifold ($^3P_0$): cycling light is far detuned (electronic line separation $\gg$ linewidth) $\longrightarrow$ **no clicks** (“in Q”), independent of the logical state within Q.]

[R] [Ground manifold ($^1S_0$): 399 nm cycling transition $\longrightarrow$ **bright** (“not in Q”).]

[B] [Ion manifold (Yb^+): 369 nm cycling transition $\longrightarrow$ **bright** (“not in Q”).]

- In ^{171}Yb, choose $Q = 6s6p\ ^3P_0$ ($\tau \approx 20$ s): long-lived storage, and detection light can be far detuned.
- If leaked to other manifolds, scatter many photons on fast cycles:
  - ground $6s^2\ ^1S_0 \longrightarrow$ 399 nm fluorescence
  - ion $Yb^+ \longrightarrow$ 369 nm fluorescence

- (Contrast) In alkali hyperfine ground-state qubits, the cycling transition typically **does** distinguish qubit states, so fluorescence tends to be a **qubit** readout, not a clean "in-Q?" test.

What is being measured? We measure the **electronic-manifold projector** Π_Q ("in Q") vs $I - \Pi_Q$ ("leaked"). The cycling light couples strongly to leaked manifolds but is

Operationally: click $\longrightarrow$ flag an erasure at a known location; no click $\longrightarrow$ keep the qubit.

far off-resonant for $^3P_0$, so “bright vs dark” reveals leakage **without resolving (or collapsing) the nuclear-spin logical basis stored inside Q**.

Encoding in a metastable manifold makes valid qubits optically dark ~3 min

- Encode qubit in 6s6p $^3P_0$ (metastable).
- Nuclear spin states form the qubit:
- $F = \frac{1}{2}, m_F = \pm\frac{1}{2}$.
- Metastable lifetime: $\tau \approx 20$ s.

Design principle Choose detection light that strongly scatters from error manifolds but is far-detuned from Q.

Energy-level cartoon

$^3P_0$ (Q)

$^1S_0$ (ground)

Large optical gap → state-selective fluorescence without addressing Q.

Gate physics: where errors come from

Rydberg blockade gates are fast—but decay is fundamental

~10 min

Rydberg-gate infidelity is fundamentally set by time spent in |r⟩ ~2 min

- Two-qubit entangling gates excite population to |r⟩.
- Any time spent in |r⟩ risks decay.

Rule of thumb $p_{\text{decay}} \approx \langle P_r \rangle \Gamma t_g$ with $\langle P_r \rangle \sim \frac{1}{2}$.

- Question: can we **detect** most of these decay events, at the time they occur?

Cartoon

|r⟩ (Rydberg)

|1⟩ (in Q)

↑ Ω

Decay during the pulse is the dominant intrinsic infidelity.

Atomic branching sends ~95% of Rydberg decays outside Q (making them detectable)

~3 min

Key atomic-physics fact For representative $n \sim 75$ states: 95% of decay pathways land **outside** the qubit manifold.

- Blackbody transitions → nearby Rydberg manifold (61%)
- Radiative decay → ground state (34%)
- Radiative decay → qubit manifold (5%)

Subtlety: some “back-to-Q” decays occur mid-gate, re-excite, and still get flagged at the end of the gate layer.

Flow diagram

BBR
61%
nearby Rydbergs

Radiative
34%
ground

Back to Q
5%
metastable (Q)

Protocol: erasure conversion

Measure *outside* Q after each gate layer

~15 min

Post-gate fluorescence converts leakage into an erasure map ~3 min

After each parallel 2Q-gate layer Run a short detection sequence that only clicks if the atom is **not** in Q.

- **R detection:** illuminate a cycling transition for ground manifold → site-resolved fluorescence.
- **B detection:** autoionize remaining Rydberg population → detect Yb^+ ion fluorescence.
- Qubit subspace is (ideally) dark → approximately QND.

Decision rule

No click state stays in Q → keep qubit

Click flag location as **erasure**

Decoder receives an **erasure map** alongside stabilizer syndromes.

A simple decision rule turns many physical outcomes into one decoder input ~2 min

- After a gate, each atom is in one of:
  - Q (still a qubit)
  - R (ground fluorescence)
  - B (ion fluorescence)

[**Two-atom outcome**
QQ, QR, QB, RR, RB, BB, …][**Mapping**
QQ → keep
otherwise → **erasure on involved qubit(s)**]

Corner case: BB (two ions) can be hard to resolve—expected to be rare ($p_f llp_e$).

The single parameter R_e summarizes how often faults become flagged erasures

~2 min

Define:

- p_e: probability an error is detected (erasure)
- p_p: probability an **undetected** error stays within Q (Pauli-type)
- $R_e = \frac{p_e}{p_e + p_p}$

Paper estimate

$$R_e \approx 0.98$$

dominant decay → erasures

Interpretation Most intrinsic gate faults are **flagged** with known location.

QEC layer: what does this buy you?

Surface-code threshold and scaling improve

~18 min

Circuit-level simulations quantify the value of erasure side-information ~2 min

- Code: planar **XZZX surface code**.
- Distance d: simulate d rounds of syndrome extraction on a $d \times d$ patch.
- Decoder: **weighted Union-Find** (fast; handles erasures well).

Input to decoder syndromes + erasure map (locations)

The simulated noise model mixes erasures with residual Pauli errors ~2 min

Each two-qubit gate:

- with probability $p_e = pR_e$: **erasure**
  - model: replace involved qubits with maximally mixed state
  - location provided to decoder
- with probability $p_p = p(1 - R_e)$: **Pauli error**
  - uniform over 15 non-identity two-qubit Paulis

Single-qubit and SPAM errors are discussed in the SI; main threshold story is set by 2Q-gate noise.

Erasure conversion boosts the circuit-level threshold by ~4.4× ~3 min

Headline With $R_e \approx 0.98$, the threshold rises from 0.937% to 4.15%.

Pauli baseline

0.937%

p_{th} (XZZX)

With conversion

4.15%

$R_e \approx 0.98$

- The figure also shows p_{th} increases smoothly with R_e.

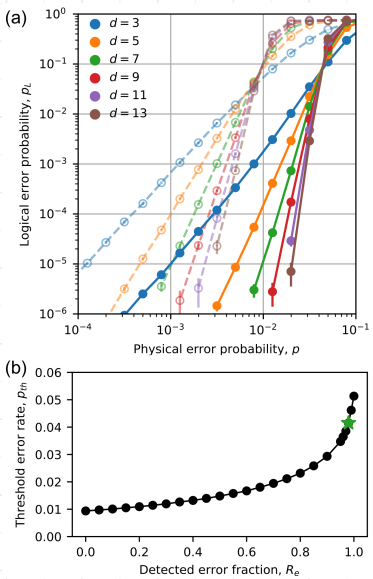

Logical failure rate crossing + threshold p_{th} vs R_e (paper Fig. 3).

Below threshold, erasures increase the effective exponent of logical suppression ~2 min

- Below threshold, logical error often fits $p_L \approx Ap^{\nu}$.
- For Pauli noise: effective exponent is roughly $\frac{d+1}{2}$.
- For erasures: exponent approaches d.

Meaning For fixed qubit count, you get **more** logical suppression—resource savings.

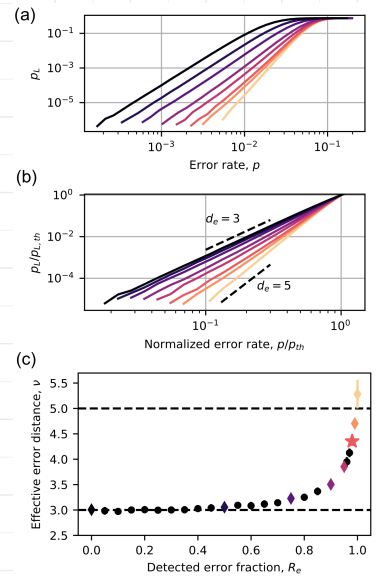

Exponent increases with R_e (paper figure).

Erasure conversion competes with bias-tailored QEC without bias-preserving gates ~1 min

- Alternative for Rydberg arrays: engineer highly **biased** noise + bias-preserving gates.
- Paper reports (for XZZX):
  - $p_{\text{th}} \approx 2.27\%$ for bias $\eta = 100$
  - $p_{\text{th}} \approx 3.69\%$ for $\eta \to \infty$

Takeaway Erasure conversion can be competitive/superior for $R_e \gtrsim 0.96$, without bias-preserving constraints.

Ablations show the benefit persists unless R_e drops substantially ~2 min

- The threshold increases smoothly with R_e.
- At $R_e = 1$, the paper reports $p_{\text{th}} \approx 5.13\%$.
- At $R_e \approx 0.98$ (estimated for ^{171}Yb), $p_{\text{th}} \approx 4.15\%$.

Practical interpretation You do not need perfect conversion; you need R_e high enough that residual Pauli noise is a small fraction.

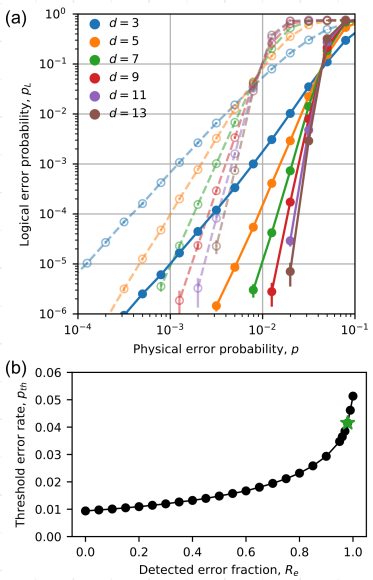

Same figure; right panel highlights threshold p_{th} vs R_e.

Practicalities and limitations

What must work—and what could break R_e?

~10 min

Fast, high-fidelity detection is the central experimental requirement ~2 min

- Need site-resolved detection of:
  - ground-state atoms via a cycling transition (fluorescence)
  - ions after autoionization (ion fluorescence)
- Paper argues 10 μs imaging can reach:
  - neutral-atom detection fidelity > 0.999
  - ion detection fidelity > 0.99

Why it matters Missed erasures become Pauli-like noise; false positives create unnecessary holes.

Once detected, erasures can be contained instead of propagating across cycles ~2 min

- Flag the location(s) for the decoder.
- Hardware option: replace the atom from a reservoir using a movable tweezer.
- Modeling option: treat erased sites as maximally mixed and skip gates on them.

Operational benefit Leakage becomes **contained** instead of propagating through future cycles.

Workflow

1. Gate layer
2. Detect (R/B) → erasure map
3. Decode with erasures
4. (Optional) replace / reinitialize

R_e degrades when technical noise dominates over detectable decay ~2 min

- Technical noise that creates **in-subspace** errors without leakage:
  - laser phase/amplitude noise
  - Doppler / motion, imperfect blockade
  - crosstalk from detection beams
- Imperfect detection:
  - missed clicks (erasure $\longrightarrow$ hidden error)
  - false clicks (unnecessary erasure)

Practical message The scheme is strongest when **intrinsic** decay dominates the gate error budget.

Undetectable channels exist but are engineered to be rare ~2 min

- Most decay channels land in R (ground) or B (ion), which are detectable.
- Two main "bad" cases:
  - **Return to Q** without later being flagged → residual Pauli faults (p_p).
  - **BB** (two ions) can be hard to resolve → undetected leakage (p_f).

Paper claim p_f is strongly suppressed by blockade; p_p is 50× smaller than p_e in gate simulations.

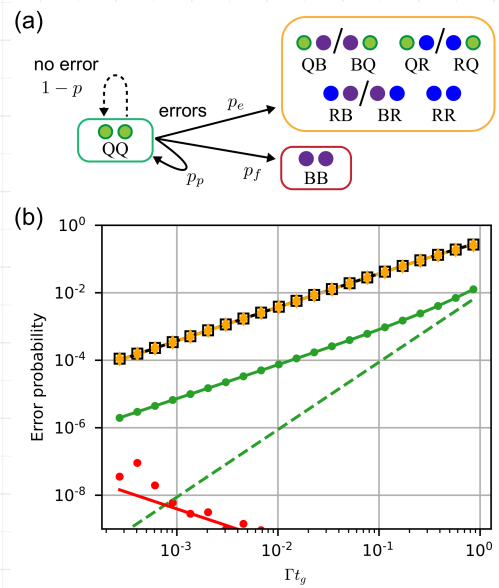

Gate infidelity decomposes into detectable vs undetectable channels (paper Fig. 2).

Erasures can reduce distillation overhead by enabling rejection of flagged faults ~2 min

- Many distillation routines can **discard** states when a fault is flagged.
- With erasures, you can reject bad inputs instead of “purifying through” unknown faults.

Result (qualitative) Higher acceptance of reliable states + improved output scaling at fixed hardware error.

Scaling cartoon

Unknown (Pauli) faults propagate → higher-order suppression only after many rounds.

Flagged erasures can be **post-selected away** early.

Wrap-up

Key numbers + what to remember

~5 min

Erasure conversion makes detectability a first-class resource ~1 min

Physical trick

Metastable Q

Q is dark; errors go bright

Conversion

R_e ≈ 0.98

dominant decay ⟶ flagged

QEC outcome

$p_{\mathrm{th}} \approx 4.15\%$

baseline 0.937%

Message: detectability can be as valuable as fidelity.

Discussion prompts ~3–5 min

- What are the hardest experimental pieces? (ion detection? crosstalk? QND-ness?)
- How robust is R_e to technical noise and imperfect blockade?
- What if erasure flags are imperfect (missed / false positives)?
- Could we tailor codes/decoders further to mixed erasure+Pauli noise?

Backup: CZ pulse sequence + populations (SI)

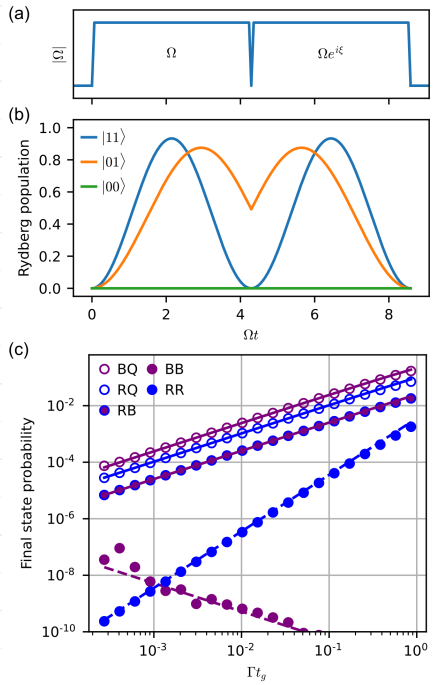

Levine–Pichler CZ sequence and per-channel probabilities (SI figure).

Backup: transition flow during gate (SI)

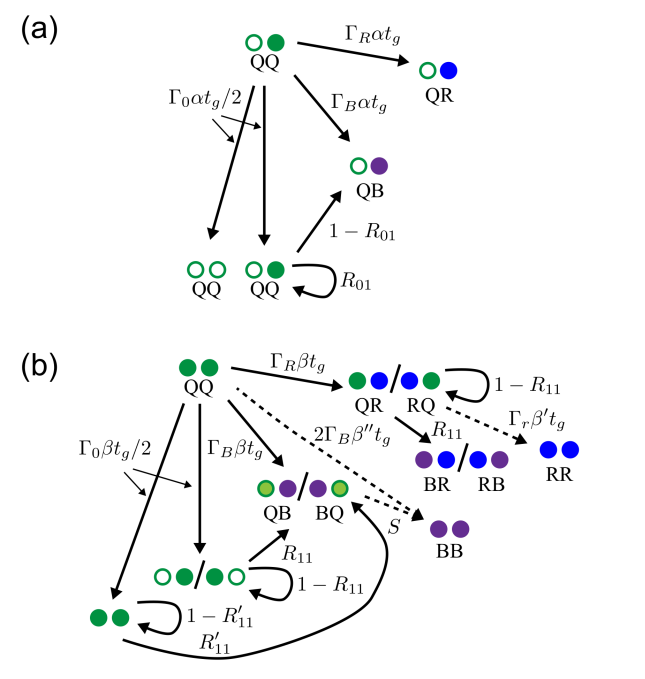

Channel flow for |10⟩ and |11⟩ initial states (SI figure).

Backup: branching calculation (SI)

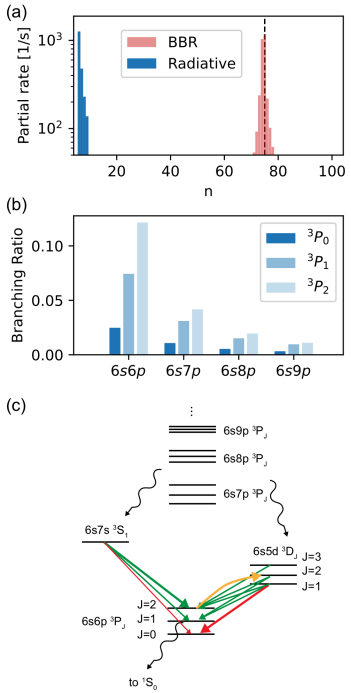

Partial rates and branching into manifolds (SI figure).