UNTOLD EDUCATION

Untold skills for modern jobs

HTML
Complete Notes

From basics to real-world web structure

Created by: Pawan Soni

Computer Teacher

Rewari, Haryana

UNTOLD EDUCATION

Untold skills for modern jobs

HTML Complete Notes

From basics to real-world web structure

Contents

HTML Kya Hai? (What is HTML?) 4

HTML ka Itihaas aur Versions (History & Versions) 5

Web Development mein HTML ki Role (HTML + CSS + JS) 6

Basic Structure of HTML Document 7

1. Tag Kya Hai? 11

2. Element Kya Hai? 11

3. Attribute Kya Hai? 12

HTML Headings (<h1> to <h6>) 15

HTML Paragraph Tag (<p>) 16

HTML Text Formatting & Basic Tags 17

style Attribute – Basic Example (Inline Css) 20

Internal CSS 21

External CSS 22

 Tag 25

 Tag 25

Block Level Tags 26

Inline Level Tags 27

HTML id Attribute 27

HTML class Attribute 28

HTML <img> Tag 29

HTML <a> (Anchor) Tag 32

HTML Lists 34

1 Unordered List (<ul>) 34

2 Ordered List (<ol>) 35

3 Description List (<dl>) 36

HTML Table 37

HTML TABLE Styling (CSS) 44

Created by: Pawan Soni

Computer Teacher

Rewari, Haryana

HTML <form> Tag 46
HTML FORM – Attributes Table 50
◆ INPUT ELEMENT ATTRIBUTES 50
◆ TEXTAREA ATTRIBUTES 51
◆ SELECT & OPTION ATTRIBUTES 51
◆ pattern Attribute (HTML Forms) 51
◆ COMPLETE FORM EXAMPLE 1 53
Example 2 54
HTML <marquee> Tag 55
HTML <iframe> Tag 58
HTML <audio> Tag 60
HTML <video> Tag 61
HTML Layout (Page Structure) 63
Basic site 68

UNTOLD EDUCATION
Untold skills for modern jobs

HTML Complete Notes

From basics to real-world web structure

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

HTML Kya Hai? (What is HTML?)

HTML ka full form hai → **HyperText Markup Language** (HyperText = links ke through ek page se dusre page jana, Markup = tags se structure banana, Language = rules ki bhasha)

- Bahut simple words mein: HTML web page ka **basic structure** ya **kankal** banati hai.
- Ye koi programming language nahi hai, balki **markup language** hai.
- Browser ko batati hai ki page par kya hai → heading, paragraph, photo, button, list, video, form etc.
- Jaise ghar banate waqt pehle pillar, diwar aur chhat ka structure banta hai, waise hi HTML website ka skeleton banati hai.

Chhota example dekho:

```html
<h1>Ye mera pehla heading hai</h1>
<p>Ye ek paragraph hai. Yahan kuch text likha hai.</p>
<img src="photo.jpg" alt="meri photo">
```

Ye code browser mein dikhega: ek bada title, ek chhota paragraph aur ek photo.

(Uppar wala image HTML5 ka official logo hai – orange shield jaisa)

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

HTML ka Itihaas aur Versions (History & Versions)

HTML ki shuruaat 1989-1991 mein hui jab **Tim Berners-Lee** ne World Wide Web (www) invent kiya. Unhone hi pehli baar HTML banaya taaki scientists apne documents ek computer se dusre mein easily dekh sakein.

HTML ke main versions aise rahe hain:

- **HTML 1.0** (1991) → Bahut basic, sirf text aur links
- **HTML 2.0** (1995) → Thoda better, forms aaye
- **HTML 3.2** (1997) → Tables, images better support
- **HTML 4.01** (1999) → Sabse zyada use hua version us time, CSS ke saath acha kaam karta tha
- **XHTML** (2000) → Strict rules wala version (XML jaisa)
- **HTML5** (2014 official release) → Ab tak ka sabse modern aur powerful version

HTML5 mein bahut nayi cheezein aayi:

- Video aur audio directly tag se (<video>, <audio>)
- Canvas se drawing
- New tags jaise , , ,
- Mobile friendly (responsive design easy)
- Local storage, geolocation, drag & drop etc.

Aaj kal sab websites **HTML5** use karti hain.

(Ye bhi HTML5 ka popular logo hai)

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

Web Development mein HTML ki Role (HTML + CSS + JS)

Web page banane ke liye teen main cheezein chahiye:

1. **HTML** → Structure (kya hai page par – heading, photo, button etc.)
2. **CSS** → Design / Look (rang, size, position, font, animation etc.)
3. **JavaScript** → Behavior / Intelligence (click karne par kya ho, form check kare, page change ho etc.)

In teeno ko milakar hi ek complete, sundar aur interactive website banti hai.
Jaise:

- HTML = ghar ka structure (diwar, darwaze, khidkiyan)
- CSS = ghar ki paint, decoration, furniture look
- JS = ghar mein lights on-off, fan chalana, darwaza khud khulna

In teeno ka best combination hota hai modern websites ka.

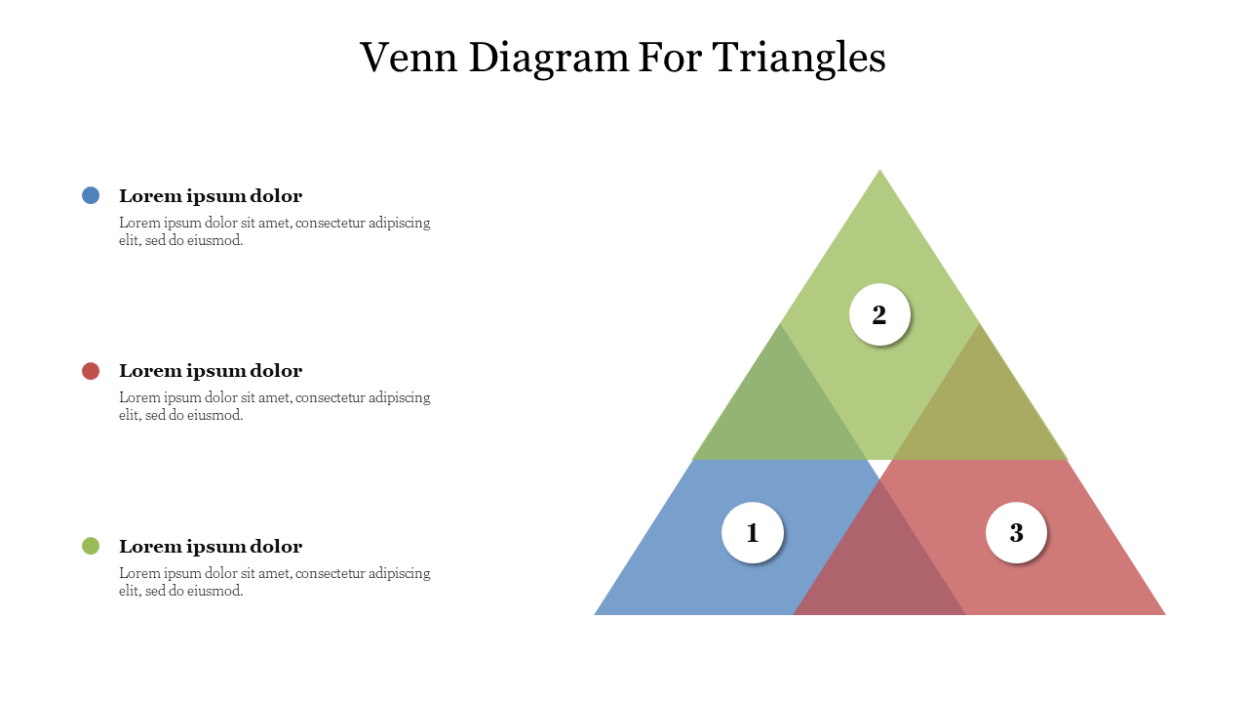

(Uppar wala triangle diagram dikha raha hai ki HTML, CSS, JS ek dusre ke saath kaise kaam karte hain – center mein overlap hota hai perfect web page ke liye)

Basic Structure of HTML Document

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

Basic Structure of HTML Document

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Mera Pehla Web Page</title>
</head>
<body>
  <!-- Yahan tumhara visible content aayega -->
  <h1>Hello, World!</h1>
  <p>Ye mera first paragraph hai.</p>
</body>
</html>
```

Ab har line ko detail mein samjhte hain:

1. <!DOCTYPE html>

- Ye sabse pehli line hoti hai (koi tag nahi, declaration hai).
- Browser ko batati hai: "Ye document **HTML5** version ka hai".
- Agar ye miss kar do to browser **quirks mode** mein chal sakta hai (purane rules use karega, layout kharab ho sakta hai).
- Simple yaad rakho: **Har HTML file ki pehli line ye hi honi chahiye** –

2. <html>, <head>, <body>

Ye teen main parts hain:

- **<html>** → Pura document ka root element (sab kuch iske andar hota hai). Aam taur par aise likhte hain: <html lang="en"> ya <html lang="hi"> (language batane ke liye – screen readers aur SEO ke liye helpful).
- **<head>** → Ye browser ke liye information deta hai (visible nahi hota user ko). Isme aate hain:
  - Page ka title
  - Meta tags (charset, viewport etc.)
  - CSS link
  - JavaScript link
  - Favicon etc.
- **<body>** → Ye woh part hai jo **browser mein dikhta hai** (user jo padhta ya dekhta hai – text, images, buttons sab yahan).

Tree structure jaise samjho (jaise family tree):

<html> ├── <head> (background info) └── <body> (visible content)

Yahan kuch images hain jo is tree structure ko achhe se dikhati hain:

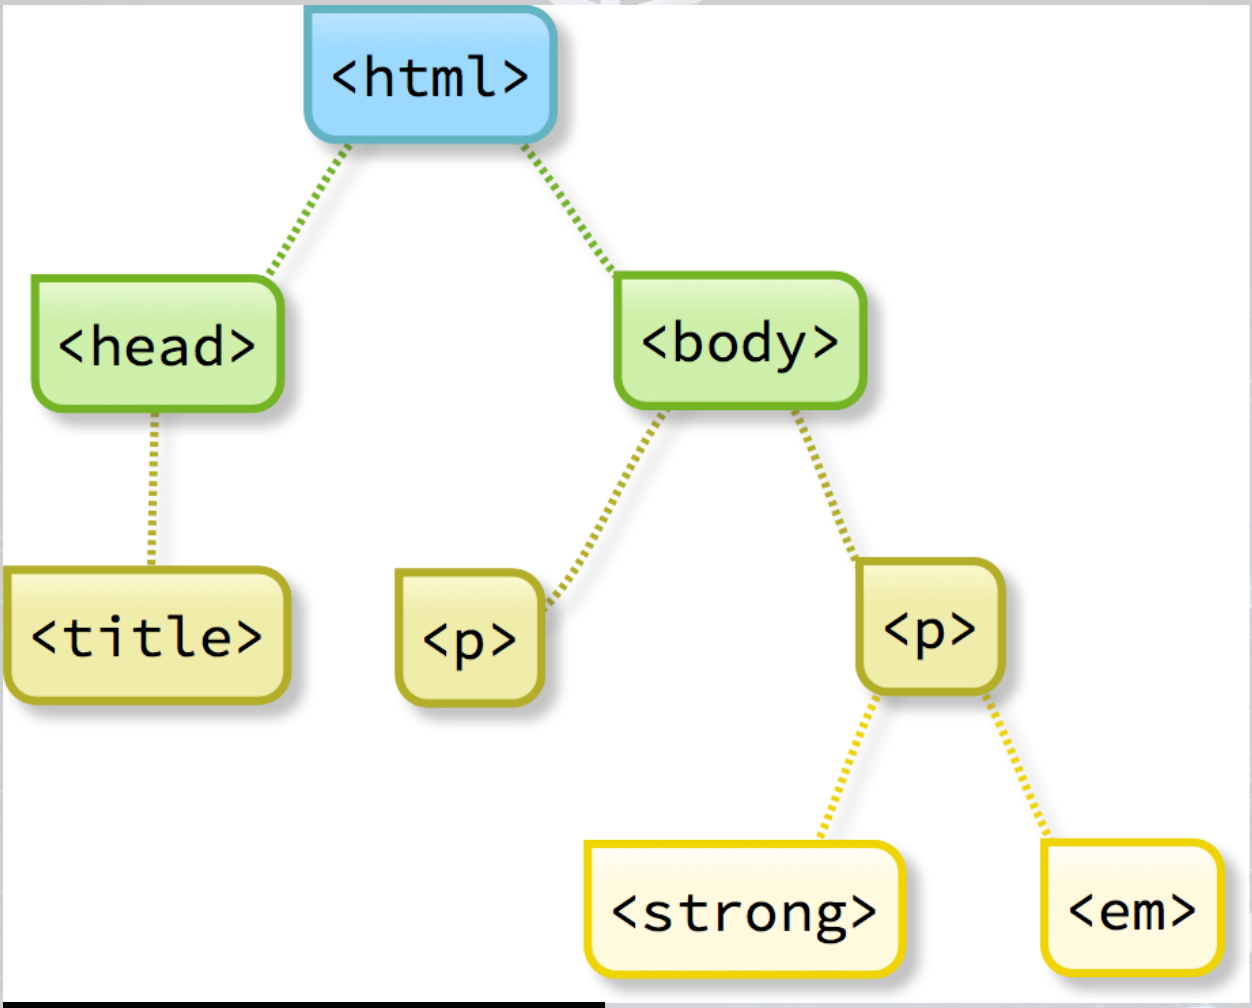

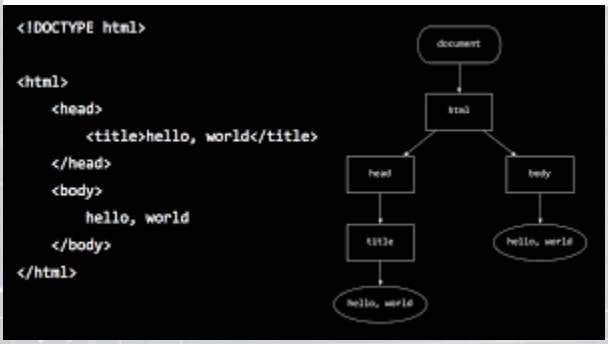

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

HTML Page Structure

```
<!DOCTYPE html>          ← Tells version of HTML
<html>                   ← HTML Root Element

<head>                   ← Used to contain page HTML metadata
  <title>Page Title</title>   ← Title of HTML page
</head>

<body>                   ← Hold content of HTML
  <h2>Heading Content</h2>    ← HTML headling tag
  <p>Paragraph Content</p>    ← HTML paragraph tag
</body>

</html>
```

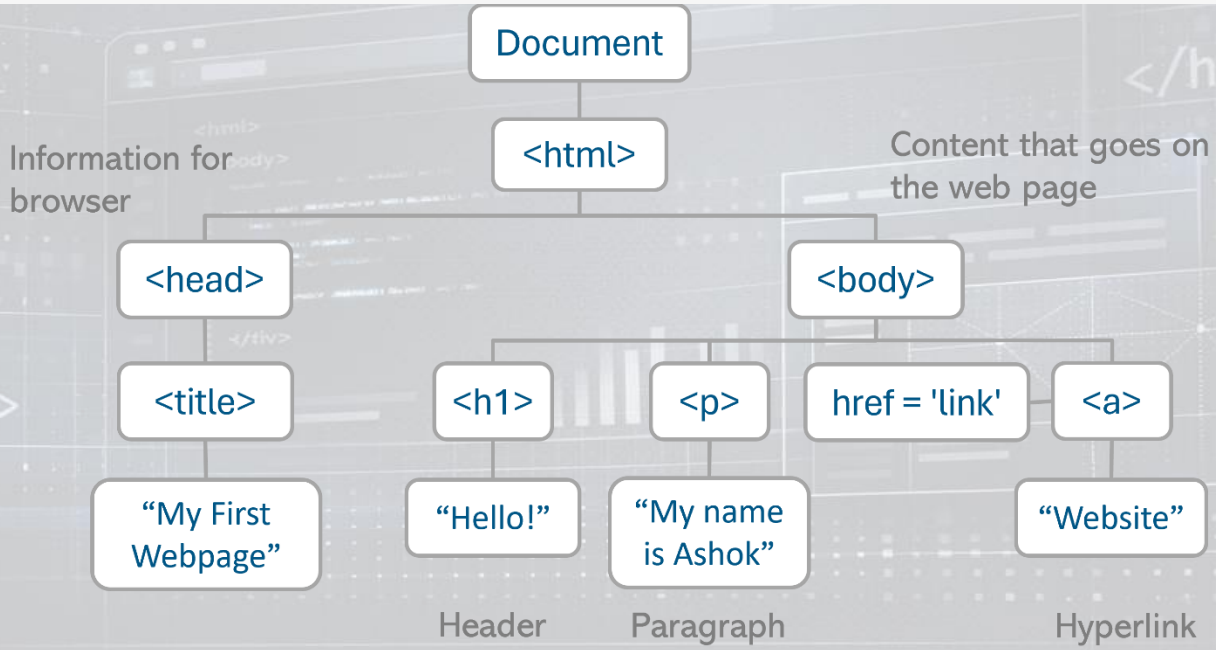

3. Character Encoding: <meta charset="UTF-8">

- Ye <head> ke andar pehla meta tag hota hai.
- Batata hai browser ko: "Is page ke characters ko **UTF-8** encoding se padho".
- UTF-8 sabse common hai kyunki ye Hindi, English, emoji, special symbols sab support karta hai.

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

- Agar ye miss kar do to Hindi text mein ???? ya boxes dikh sakte hain.

Example: <meta charset="UTF-8">

4. Viewport Meta Tag: <meta name="viewport" content="width=device-width, initial-scale=1.0">

- Ye mobile devices ke liye bahut zaroori hai.
- Bina iske mobile browser page ko desktop jaisa zoom karke dikhaata hai (bahut chhota text).
- Is tag se browser samajhta hai: "Page ko device ki width ke hisab se fit karo, aur initial zoom 100% rakho".

Sabse common line: <meta name="viewport" content="width=device-width, initial-scale=1.0">

Yahan before aur after ka visual example hai:

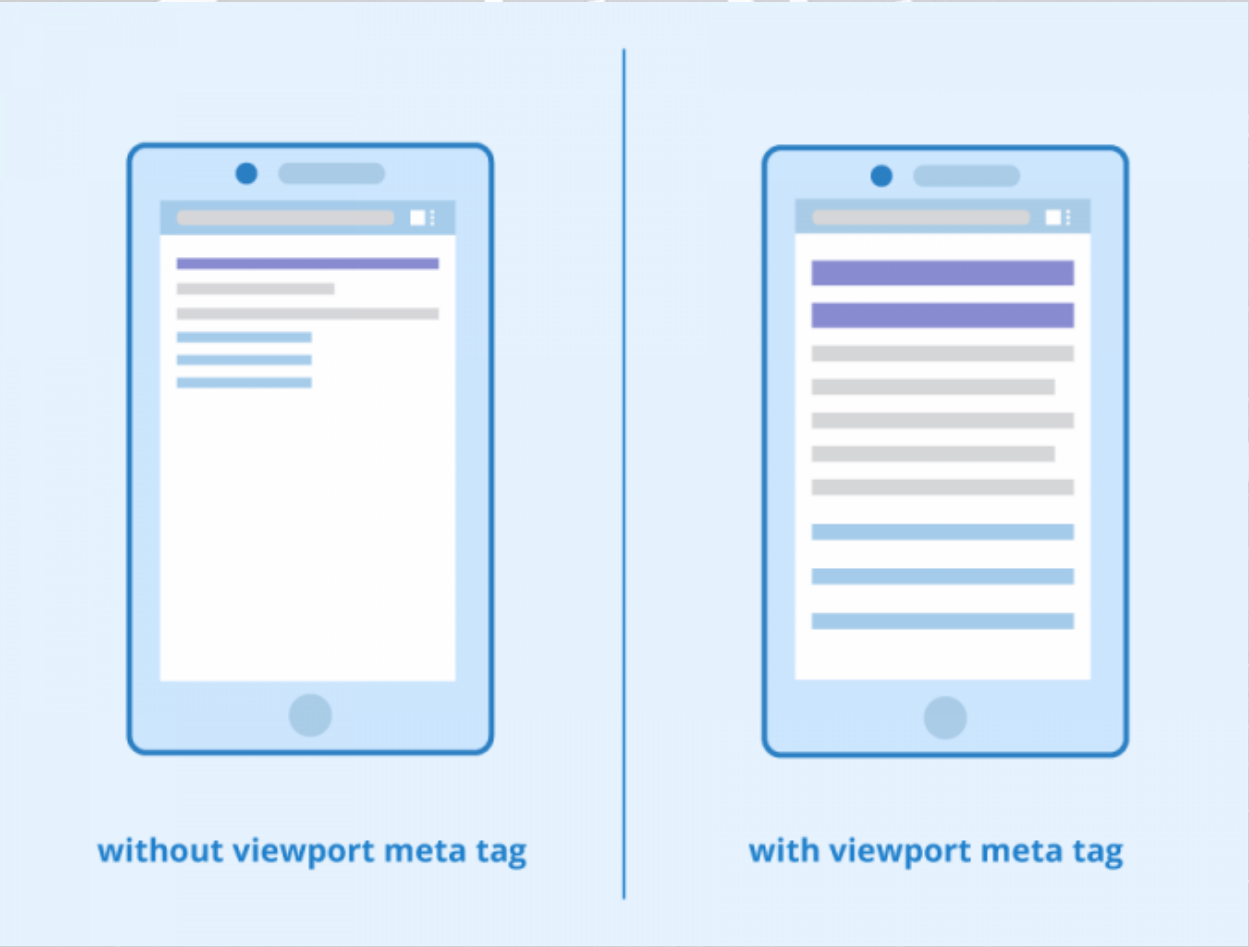

A Beginner's Guide to Viewport Meta Tags

(Left side: bina viewport tag ke mobile pe zoomed out dikhega, right side: sahi se fit hoga)

Complete Basic Boilerplate

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document Title Yahan Likho</title>
  <!-- Yahan CSS link kar sakte ho -->
  <!-- <link rel="stylesheet" href="style.css"> -->
</head>
<body>
  <!-- Yahan sab visible cheezein likho -->
  <h1>Welcome to My Website</h1>
  <p>Ye basic HTML structure hai.</p>
</body>
</html>
```

Ye boilerplate har naye project mein use karo – ye perfect starting point hai.

1. Tag Kya Hai?

- Tag woh chhota sa code hota hai jo <> ke andar likha jata hai.
- Do tarah ke tags hote hain:
  - **Opening tag** → <tagname>
  - **Closing tag** → </tagname> (slash ke saath)
- Kuch tags khud band ho jate hain (self-closing), jaise [image],
  , – inme closing tag nahi likhna padta.

2. Element Kya Hai?

- Element = **Opening tag + Content + Closing tag** (pura package).
- Jaise:

Ye mera paragraph hai
→ ye pura ek **paragraph element** hai.

- Opening tag aur closing tag element ko define karte hain, aur beech mein content hota hai.
- Kuch elements khali hote hain (jaise [image] ya), inme content nahi hota.

Yahan visual samajhne ke liye diagram hai:

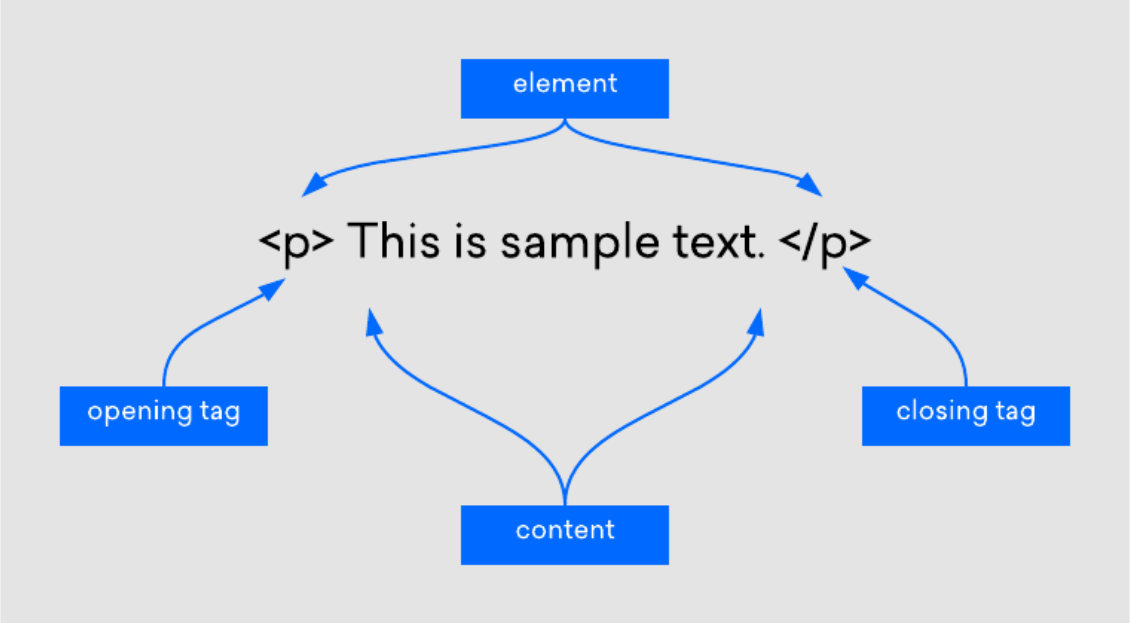

(Ye dikhata hai ki opening tag + content + closing tag = pura element)

3. Attribute Kya Hai?

- Attribute opening tag ke andar likha jata hai.
- Ye element ko **extra information** deta hai, jaise rang, size, link, source etc.
- Format: attribute-name="value"
- Multiple attributes bhi likh sakte ho, space se separate.

Yahan achha visual hai jo tag, element, attribute ko dikhata hai:

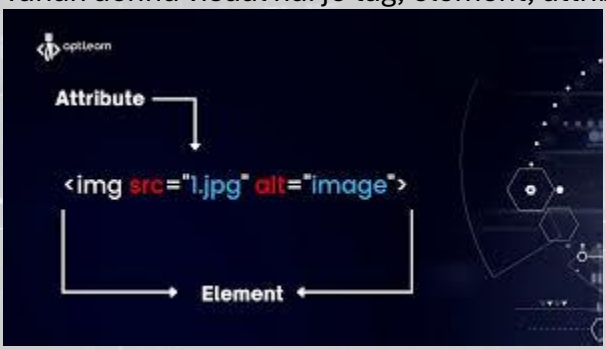

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

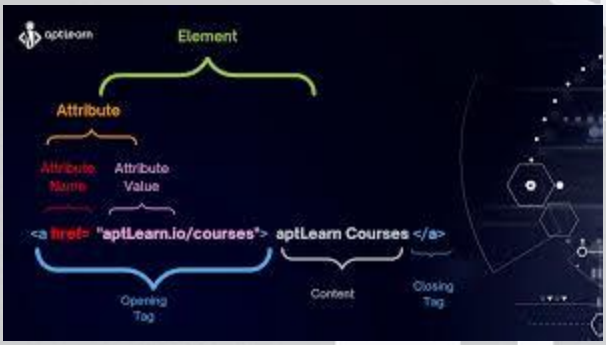

Ab real examples dekhte hain (har ek mein input code + output description + explanation):

Example 1: Simple Paragraph Element

Input Code:

HTML

```
<p>Ye ek normal paragraph hai.</p>
```

Output (Browser mein dikhega): Ye ek normal paragraph hai. (Normal text line, new line ke saath shuru hota hai)

Explanation:

- → opening tag
- → closing tag
- Pura

...

→ paragraph element

- Koi attribute nahi hai isme.

Example 2: Anchor (Link) Element with Attribute

Input Code:

HTML

```
<a href="https://www.google.com">Google kholo</a>
```

Output (Browser mein dikhega): Google kholo (blue colored text, click karne par Google.com khulega)

Explanation:

- → opening tag
- → closing tag
- Pura ... → anchor element (link banata hai)
- **href** = attribute (hypertext reference)
- Value = "https://www.google.com" (link ka address)

Example 3: Image Element with Attributes (Self-closing tag)

Input Code:

HTML

```
<img src="photo.jpg" alt="Meri sundar photo" width="300">
```

Output (Browser mein dikhega): Ek 300px wide photo dikhegi (agar photo.jpg file available hai), agar nahi to alt text "Meri sundar photo" dikhega.

Explanation:

- [image] → self-closing tag (koi closing tag nahi)
- Ye pura ek image element hai.

- Attributes:
  - **src** = source (photo ka path ya URL)
  - **alt** = alternative text (accessibility ke liye, agar image na load ho)
  - **width** = size control karta hai

Example 4: Input Element with Multiple Attributes (Form ke liye)

Input Code:

HTML

```
<input type="text" name="username" placeholder="Apna naam likho" required>
```

Output (Browser mein dikhega): Ek text box dikhega jisme placeholder text "Apna naam likho" likha hoga. Required hone se empty submit nahi kar sakte.

Explanation:

- → self-closing tag
- Ye input element hai (form mein user se data lene ke liye).
- Attributes:
  - **type="text"** → normal text input
  - **name="username"** → server ko batata hai ye field ka naam kya hai
  - **placeholder** → light gray hint text
  - **required** → field khali nahi chhod sakte (boolean attribute, value nahi likhte)

Yahan input tag ke visual example hai:

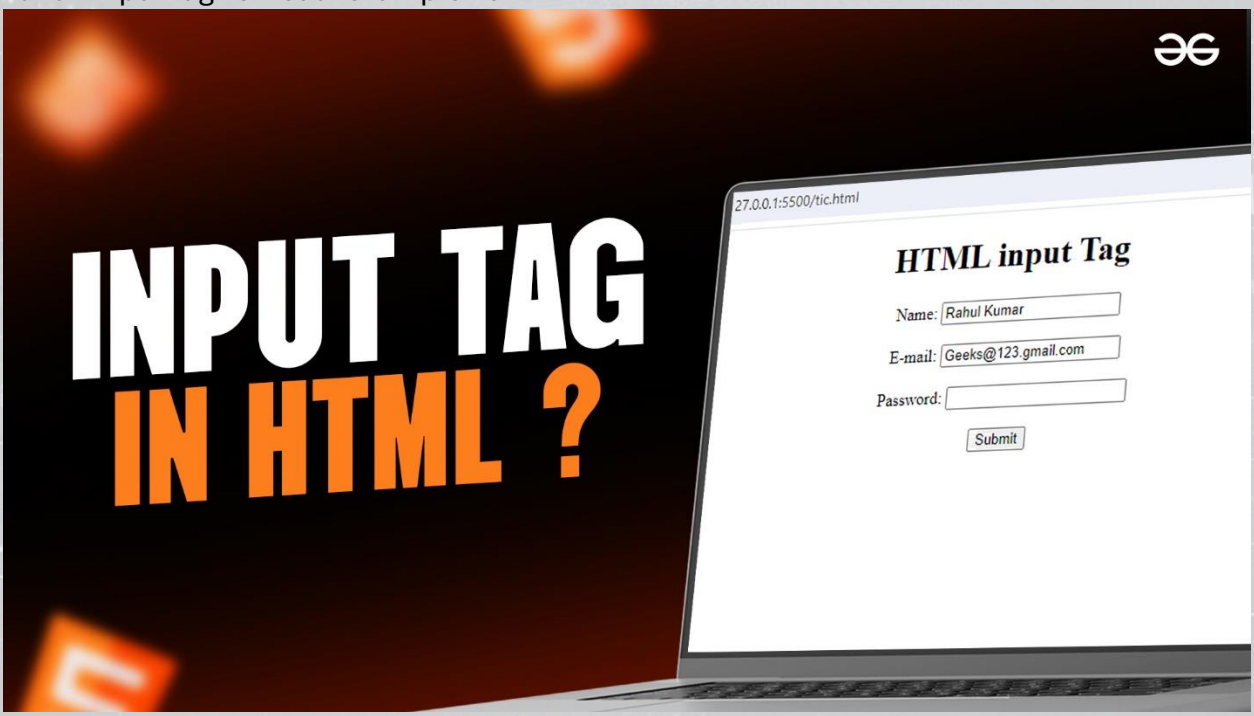

HTML input Tag

(Aur attributes ke common types ka overview:

Quick Summary Table

Cheez	Kya Hai?	Example
Tag	<> wala code (opening/closing)	’, [image]
Element	Tag + content (pura box)	Hello
Attribute	Extra info opening tag mein	href="link", src="image.jpg"

Yaad rakho:

- Har element mein tag hota hai.
- Attribute sirf opening tag (ya self-closing) mein likhte hain.
- Quotes "" mein value likhna best practice hai.

HTML Headings (<h1> to <h6>)

HTML me **heading ka use title / heading likhne ke liye** hota hai.
Total **6 heading tags** hote hain.

🔷 **<h1> Tag**

👉 **Sabse badi aur main heading**

```
<h1>Main Heading</h1>
```

✓ Page ka **main title**

✓ Ek page me **sirf 1 h1** use karna best practice hota hai

✓ SEO ke liye sabse important

🔷 **<h2> Tag**

👉 **Sub heading (h1 ke niche)**

```
<h2>Sub Heading</h2>
```

✓ h1 ka part hota hai

✓ Chapter / section title

🔷 **<h3> Tag**

👉 **h2 ke andar chhoti heading**

```
<h3>Section Heading</h3>
```

✓ Topic ke andar sub-topic

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes
From basics to real-world web structure
Computer Teacher
Rewari, Haryana

🔷 **<h4> Tag**

👉 **Aur chhoti heading**

```
<h4>Small Heading</h4>
```

✓ Notes, points, categories ke liye

🔷 **<h5> Tag**

👉 **Very small heading**

```
<h5>Very Small Heading</h5>
```

✓ Rarely use hota hai

🔷 **<h6> Tag**

👉 **Sabse chhoti heading**

```
<h6>Smallest Heading</h6>
```

✓ Least important heading

📊 **Heading Size Order (Big → Small)**

```
h1  → Sabse bada
h2
h3
h4
h5
h6  → Sabse chhota
```

HTML Paragraph Tag (<p>)

👉 **Paragraph likhne ke liye <p> tag ka use hota hai.**

🔷 **<p> Tag – Basic Use**

```
<p>This is a paragraph.</p>
```

✓ Normal text likhne ke liye

✓ Browser automatically **new line** deta hai

✓ Paragraph ke upar–neeche **space (margin)** hota hai

🔷 **Multiple Paragraph Example**

```
<p>This is first paragraph.</p>
<p>This is second paragraph.</p>
```

👉 Dono paragraph alag-alag line me show honge.

🔷 **Paragraph + Line Break (<br>)**

UNTOLD EDUCATION
Untold skills for modern jobs

```
<p>
This is first line<br>
This is second line
</p>
```

👉 Same paragraph ke andar line break.

🔷 **Paragraph me Extra Space ka Behaviour**

```
<p>
Hello      World
</p>
```

❌ Browser **extra spaces ignore** kar deta hai.

✓ Agar space chahiye ho:

```
Hello   World
```

HTML Text Formatting & Basic Tags

🔷 **1. <b> Tag**

Text ko bold karne ke liye (non-semantic)

```
<b>This is bold text</b>
```

🔷 **2. <i> Tag**

Text ko italic karne ke liye

```
<i>This is italic text</i>
```

🔷 **3. <u> Tag**

Text ko underline karne ke liye

```
<u>This is underlined text</u>
```

🔷 **4. <s> Tag**

Strike through (cut hua text) ke liye

```
<s>This text is removed</s>
```

🔷 **5.
 Tag**

Line break (next line) ke liye

```
Hello<br>World
```

🔷 **6. <pre> Tag**

Text ko same-to-same format me dikhane ke liye (code editor jaisa)

```
<pre>
Name   Age
Ram    20
Shyam  22
```

```
</pre>
```

🔷 **7. <hr> Tag**

Horizontal line banane ke liye

```
<hr>
```

🔶 **hr Tag Attributes**

Size attribute

```
<hr size="5">
```

Color attribute

```
<hr color="red">
```

Width attribute

```
<hr width="50%">
```

🔷 **8. **

Extra white space dene ke liye

```
Hello   World
```

🔷 **9. Tag**

Important bold text (semantic tag)

```
<strong>Important text</strong>
```

👉 SEO + screen reader ke liye better hota hai.

🔷 **10. Tag**

Emphasized (italic) text ke liye

```
<em>Important italic text</em>
```

🔷 **11. <mark> Tag**

Text highlight karne ke liye

```
<mark>Highlighted text</mark>
```

🔷 **12. <small> Tag**

Small size text ke liye

```
<small>This is small text</small>
```

🔷 **13. <del> Tag**

Deleted / cut text ke liye

```
<del>Old Price</del>
```

🔷 **14. <ins> Tag**

Inserted / underline text ke liye

```
<ins>New Text</ins>
```

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes
Created by: Pawan Soni
Rewari, Haryana

🔷 15. Tag
Text ko center align karne ke liye (obsolete)

```
<center>Center Text</center>
```

⚠️ Aaj-kal CSS use hota hai, par exam me puchte hain.

🔷 16. <sub> Tag
Subscript text ke liye

```
H<sub>2</sub>O
```

🔷 17. <sup> Tag
Superscript text ke liye

```
10<sup>2</sup>
```

🔷 18. <q> Tag
Double inverted commas me text dikhane ke liye

```
<q>This is a quote</q>
```

🔷 19. <abbr> Tag
Short form ki full form dikhane ke liye

```
<abbr title="Hyper Text Markup Language">HTML</abbr>
```

🔷 20. <address> Tag
Address / contact information ke liye

```
<address>
Delhi, India
</address>
```

🔷 21. <cite> Tag
Book / city / work ka reference dene ke liye

```
<cite>New Delhi</cite>
```

🔷 22. <bdo> Tag
Text direction reverse karne ke liye

```
<bdo dir="rtl">1234</bdo>
```

👉 Output: **4321**

🔷 HTML style Attribute

👉 **style attribute ka use inline CSS likhne ke liye hota hai.**

<tag style="property:value;">

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

style Attribute – Basic Example (Inline Css)

```
<p style="color:red;">This is red text</p>
```

🔷 **style Attribute ke 2–3 Common Use**

1️⃣ **<p> ke saath**

```
<p style="color:blue;">Blue paragraph</p>
```

2️⃣ **<h1> ke saath**

```
<h1 style="text-align:center;">Heading Center</h1>
```

3️⃣ ** ke saath**

```
<div style="background-color:yellow;">Box</div>
```

🔷 **Common CSS Properties (5–6 Important)**

🔷 **1. color**

👉 **Text color change karne ke liye**

```
<p style="color:red;">Red text</p>
```

🔷 **2. background-color**

👉 **Background color ke liye**

```
<p style="background-color:yellow;">Yellow background</p>
```

🔷 **3. text-align**

👉 **Text alignment ke liye**

```
<p style="text-align:center;">Center text</p>
```

Values: left | right | center | justify

🔷 **4. font-size**

👉 **Text ka size change karne ke liye**

```
<p style="font-size:20px;">Big text</p>
```

🔷 **5. font-family**

👉 **Font style change karne ke liye**

```
<p style="font-family:Arial;">Arial font</p>
```

🔷 **6. font-weight**

👉 **Text ko bold karne ke liye**

```
<p style="font-weight:bold;">Bold text</p>
```

🔷 **Multiple Properties ek saath**

```
<p style="color:white; background-color:black; text-align:center;">
Styled Paragraph
```

```
</p>
```

Internal CSS

👉 **Internal CSS tab use hoti hai jab ek hi HTML page ko style dena ho.**

- CSS code *<style>* **tag** ke andar likhte hain
- <style> tag *<head>* **section** me hota hai

🔷 **Internal CSS ka Syntax**

```
<style>
selector {
 property: value;
}
</style>
```

🔶 **Meaning**

- **selector** → kis HTML tag ko style dena hai (p, h1, div)
- **property** → kya change karna hai (color, font-size)
- **value** → kitna / kaise change karna hai (red, 20px)

🔷 **Example 1: Paragraph ka color change**

```
<html>
<head>
<style>
p {
 color: red;
}
</style>
</head>

<body>
<p>This is red paragraph</p>
</body>
</html>
```

👉

- Selector: p
- Property: color
- Value: red

🔷 **Example 2: Heading center + blue**

```
<html>
<head>
<style>
h1 {
```

```
 color: blue;
 text-align: center;
}
</style>
</head>

<body>
<h1>Welcome</h1>
</body>
</html>
```

👉

- Property: color → blue
- Property: text-align → center

🔷 **Example 3: Div ka background**

```
<html>
<head>
<style>
div {
 background-color: yellow;
 font-size: 18px;
}
</style>
</head>

<body>
<div>This is a box</div>
</body>
</html>
```

🧠 **Important Exam Points**

- Internal CSS **<style> tag me likhi jati hai**
- <style> tag **<head> me hota hai**
- Ek page ke **multiple elements** ko style de sakte hain
- Inline CSS se **better** hoti hai

External CSS

👉 **External CSS me CSS code alag file me likhte hain**
aur us file ko **HTML page se connect (link)** karte hain.

🔷 **External CSS use kyon karte hain?**

- Multiple HTML pages ko **same design** dene ke liye

- Website ko **professional & clean** banane ke liye
- Code **short, reusable & easy to manage**

🔷 **External CSS ka Structure**

1️⃣ **HTML File**

👉 index.html

2️⃣ **CSS File**

👉 style.css

🔷 **External CSS Connect karne ka Syntax**

```
<link rel="stylesheet" href="style.css">
```

📌 Ye line **HTML ke <head> section** me likhi jati hai.

🔷 **Example 1: Simple Connection**

🔶 **index.html**

```
<html>
<head>
<link rel="stylesheet" href="style.css">
</head>

<body>
<p>Hello World</p>
</body>
</html>
```

🔶 **style.css**

```
p {
  color: red;
}
```

👉 Output: Paragraph **red color** me dikhega.

🔷 **Example 2: Heading + Paragraph Style**

🔶 **index.html**

```
<html>
<head>
<link rel="stylesheet" href="style.css">
</head>

<body>
<h1>Welcome</h1>
<p>This is paragraph</p>
</body>
</html>
```

🔶 **style.css**

```
h1 {
  text-align: center;
  color: blue;
}

p {
  font-size: 18px;
}
```

🔷 **Example 3: Multiple Properties**

🔶 **style.css**

```
div {
  background-color: yellow;
  padding: 10px;
  font-size: 20px;
}
```

🔶 **HTML**

```
<div>Box Content</div>
```

🔷 **Example 4: Same CSS for Multiple Pages**

🔶 **page1.html**

```
<link rel="stylesheet" href="style.css">
<h2>Page One</h2>
```

🔶 **page2.html**

```
<link rel="stylesheet" href="style.css">
<h2>Page Two</h2>
```

🔶 **style.css**

```
h2 {
  color: green;
}
```

👉 Dono pages me same style apply hoga ✅

🔷 **Property & Value (Simple Explanation)**

```
p {
  color: red;
}
```

- **Selector** → p
- **Property** → color
- **Value** → red

🧠 **Important Exam Points**

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

- External CSS ko **.css file** me likhte hain
- HTML se connect karne ke liye **<link> tag** use hota hai
- <link> tag **<head> section** me hota hai
- External CSS **sabse best method** mana jata hai

Tag

👉 ** ek block-level element hai.**

📌 **Kaam:**

- Page ko **sections / boxes** me divide karna
- Layout banana (header, footer, sidebar, content)

🔷 **Example**

```
<div style="background-color:lightblue;">
 This is a div
</div>
```

👉 Output:

- **Puri line cover** karega
- Next content **new line** se start hoga

🔷 ** ke Uses**

- Website layout banana
- Group of elements ko ek saath style dena
- Header, footer, content box banana

Tag

👉 ** ek inline element hai.**

📌 **Kaam:**

- **Line ke andar** kisi chhote text ko style karna
- Paragraph ke beech color / style dena

🔷 **Example**

```
<p>
This is <span style="color:red;">red</span> text
</p>
```

👉 Output:

- Sirf **red word** change hoga
- Line break **nahi** aayega

🔷 ** ke Uses**

- Single word ya small text style karna
- Inline color, size change
- Highlight words

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

🔷 Main Difference

Point		
Type	Block-level	Inline
New line	Hamesha	Nahi
Width	Full width	Content jitna
Use	Layout / sections	Small text styling
Example	Box	Word

🔷 Same Example

```
<div style="color:red;">Hello</div>
<div>World</div>
```

👉 Output:
Hello
World

```
<span style="color:red;">Hello</span>
<span>World</span>
```

👉 Output:
HelloWorld

🧠 Exam Ready Points

- **block-level element** hai
- **inline element** hai
- layout ke liye use hota hai
- text styling ke liye use hota hai
- Dono **non-semantic tags** hain
- 17.Block level tags Ye tags upar niche aate hai.

Block Level Tags

👉 **Ye tags hamesha upar–neeche (new line) me aate hain**

👉 **Full width lete hain**

<address>	<dt>	<hr>	<section>
<article>	<fieldset>	<li>	<table>
<aside>	<figcaption>	<main>	<tfoot>
<blockquote>	<figure>	<nav>	<ul>
<canvas>	<footer>	<noscript>	<video>
<dd>	<form>	<ol>	
	<h1> to <h6>	<p>	
<dl>	<header>	<pre>	

🔷 **Block Level Tags – Short Points (Exam)**

- Ye tags **new line se start** hote hain
- **Puri width** cover karte hain
- Page ka **layout / structure** banane me use hote hain
- Example: , <p>, <h1>, <section>

Inline Level Tags

👉 **Ye tags same line me aate hain**

👉 **Sirf content jitni space lete hain**

<a>	<code>	<map>	
<abbr>	<dfn>	<object>	
<acronym>		<output>	<sub>
<b>	<i>	<q>	<sup>
<bdo>	<img>	<samp>	<textarea>
 	<input>	<script>	<time>
<button>	<kbd>	<select>	<tt>
<cite>	<label>	<small>	<var>

🔷 **Inline Level Tags – Short Points**

- Ye tags **line break nahi karte**
- Text ke **andar use** hote hain
- Styling, link, image, input ke liye use
- Example: , <a>, <b>, <img>

🔥 **Block vs Inline**

Block Level	Inline Level
New line se start	Same line me
Full width	Content width
Layout ke liye	Text styling ke liye

HTML id Attribute

📌 **Definition (Exam Ready)**

id attribute kisi ek single HTML element ko uniquely identify karne ke liye use hota hai.

🔷 **id ki Important Rules**

- **Unique hota hai** → ek page me same id dobara use nahi hota
- Sirf **ek element** ke liye

- CSS aur JavaScript dono me use hota hai
- # symbol se access kiya jata hai (CSS me)

🔷 **id ka Syntax**

```
<tag id="uniqueName">
```

🔷 **id Example**

HTML

```
<h1 id="mainHeading">Welcome</h1>
```

CSS

```
#mainHeading {
  color: blue;
  text-align: center;
}
```

🔷 **id ka Use Kab Kare?**

- Jab **sirf ek element** ko style karna ho
- Page ke **special part** (header, main title) ke liye
- JavaScript se direct control ke liye

HTML class Attribute

📌 **Definition (Exam Ready)**

class attribute ek jaise multiple elements ko group karke style dene ke liye use hota hai.

🔷 **class ki Important Rules**

- **Multiple elements** me same class ho sakti hai
- Ek element me **multiple classes** bhi ho sakti hain
- CSS me . (dot) se access hoti hai

🔷 **class ka Syntax**

```
<tag class="className">
```

🔷 **class Example**

HTML

```
<p class="text">Paragraph One</p>
<p class="text">Paragraph Two</p>
```

CSS

```
.text {
  color: green;
  font-size: 18px;
```

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
From basics to real-world web structure
Created by: Pawan Soni

}

🔷 Multiple Classes Example

```
<p class="text highlight">Important Text</p>
.text {
  font-size: 18px;
}

.highlight {
  background-color: yellow;
}
```

🔥 id vs class (MOST IMPORTANT)

Point	id	class
Unique	Yes	No
Multiple use	❌	✅
CSS symbol	#	.
JavaScript use	Direct	Group
Best for	One element	Many elements

🔷 Same Example (Clear Difference)

```
<p id="one">Hello</p>
<p class="many">Hello</p>
<p class="many">Hello</p>
```

🧠 Exam Ready Points

- Ek page me **same id repeat nahi hoti**
- Class repeat ho sakti hai
- id ka priority **class se zyada** hota hai
- Dono global attributes hain

📌 Short Definitions (Exam)

ID:
id attribute is used to uniquely identify an element.
Class:
class attribute is used to apply same style to multiple elements.

HTML <img> Tag

📌 Definition

UNTOLD EDUCATION
Untold skills for modern jobs
Complete Notes
From basics to real-world web structure
Computer Teacher
Rewari, Haryana

<img> tag HTML me image display karne ke liye use hota hai.
Ye ek **inline element** hai aur **closing tag nahi hota** (empty tag).

🔷 Basic Syntax

```
<img src="image.jpg" alt="Image description">
```

🔷 <img> Tag ke Attributes (Important)

Neeche **common + exam-important attributes** unki **values ke saath** diye gaye hain:

🔷 1. src (Source)

👉 Image ka path / location batata hai
Ye attribute compulsory hai
Values:

- image.jpg
- images/photo.png
- https://example.com/pic.jpg

```
<img src="photo.jpg">
```

🔷 2. alt (Alternative Text)

👉 Image load na ho to text show hota hai
👉 SEO + screen reader ke liye important
Values:

- Image ka short description

```
<img src="car.jpg" alt="Red car image">
```

🔷 3. width

👉 Image ki width set karta hai
Values:

- 100
- 300
- 50%

```
<img src="img.png" width="200">
```

🔷 4. height

👉 Image ki height set karta hai
Values:

- 100
- 250
- 50%

```
<img src="img.png" height="150">
```

🔷 5. title

👉 **Image par mouse le jaane par text show hota hai**

Values:

- Tooltip text

```
<img src="logo.png" title="Company Logo">
```

🔷 **6. border (Old / Exam Use)**

👉 **Image ke around border deta hai**

Values:

- 0
- 1
- 2

```
<img src="pic.jpg" border="2">
```

⚠️ Real websites me CSS use hoti hai.

🔷 **7. align (Old / Exam Use)**

👉 **Image alignment set karta hai**

Values:

- left
- right
- center

```
<img src="pic.jpg" align="left">
```

🔷 **<img> Tag ke Important Points**

- <img> **self-closing tag** hai
- Inline element hota hai
- src aur alt **most important** attributes
- Image ka size CSS se bhi control ho sakta hai

🔷 **Examples (3–4 Clear Examples)**

✅ **Example 1: Simple Image**

```
<img src="photo.jpg" alt="My Photo">
```

✅ **Example 2: Image with Size**

```
<img src="car.png" width="300" height="200" alt="Car Image">
```

✅ **Example 3: Image with Title & Border**

```
<img src="logo.png" title="Company Logo" border="1">
```

✅ **Example 4: Image with Alignment**

```
<img src="pic.jpg" align="right" alt="Side Image">
```

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes
real-world web structure
Created by: Pawan Soni
Rewari, Haryana

HTML <a> (Anchor) Tag

📌 **Definition**

<a> tag HTML me hyperlink banane ke liye use hota hai.

Isse hum **ek page se dusre page**, **website**, **email**, ya **same page ke section** par ja sakte hain.

🔷 **Basic Syntax**

```
<a href="url">Link Text</a>
```

🔷 **<a> Tag ke Attributes (Important)**

Neeche **sabhi common + exam-important attributes** unki **values ke saath** diye gaye hain:

🔷 **1. href (Hyperlink Reference)**

👉 **Link ka address batata hai**

Ye attribute compulsory hai

Values:

- page.html
- https://google.com
- #section1
- mailto:abc@gmail.com

```
<a href="https://google.com">Google</a>
```

🔷 **2. target**

👉 **Link kaha open hoga ye batata hai**

Values:

- _self → same tab (default)
- _blank → new tab
- _parent
- _top

```
<a href="https://google.com" target="_blank">Open Google</a>
```

🔷 **3. title**

👉 **Mouse le jaane par tooltip text show hota hai**

Values:

- Short description text

```
<a href="home.html" title="Go to Home Page">Home</a>
```

🔷 **4. download**

👉 **Link click karte hi file download hoti hai**

Values:

- File name (optional)

UNTOLD EDUCATION
Untold skills for modern jobs
HTML Complete Notes
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

```
<a href="notes.pdf" download>Download Notes</a>
```

🔷 5. name (Old / Exam Use)

👉 Page ke andar bookmark banane ke liye

Values:

- Bookmark name

```
<a name="top"></a>
```

⚠️ Aaj-kal id use hota hai, par **exam me puchte hain**.

🔷 6. id (Modern Use)

👉 Same page navigation ke liye

Values:

- Any unique name

```
<a href="#about">Go to About</a>
<h2 id="about">About Section</h2>
```

🔷 <a> Tag ke Uses

- Website link karna
- Page ke andar jump karna
- Email open karna
- File download karna

🔷 Examples

✅ Example 1: Simple Website Link

```
<a href="https://google.com">Google</a>
```

✅ Example 2: New Tab me Open

```
<a href="https://youtube.com" target="_blank">
YouTube
</a>
```

✅ Example 3: Same Page Link

```
<a href="#contact">Go to Contact</a>

<h2 id="contact">Contact Us</h2>
```

✅ Example 4: Download Link

```
<a href="html_notes.pdf" download>
Download HTML Notes
</a>
```

🧠 **Important Exam Points**

- <a> ek **inline element** hai
- href attribute **must** hota hai
- Link ka text clickable hota hai
- Default link color:
  - Blue → normal
  - Purple → visited

HTML Lists

👉 **HTML me list ka use items ko proper order / points me dikhane ke liye hota hai.**

🔶 **HTML Lists ke Types (3 Types)**

1️⃣ **Unordered List** (<ul>)
2️⃣ **Ordered List** (<ol>)
3️⃣ **Description List** (<dl>)

1️⃣ Unordered List (<ul>)

📌 **Definition**

Unordered list me items bullet points ke sath dikhte hain.

🔷 **Syntax**

```
<ul>
 <li>Item</li>
</ul>
```

🔷 **Attributes of <ul>**

🔶 **1. type**

Values:

- disc (●) → default
- circle (○)
- square (■)

```
<ul type="square">
 <li>HTML</li>
 <li>CSS</li>
</ul>
```

🔷 **Examples (2–3)**

✅ **Example 1: Default List**

```
<ul>
 <li>Apple</li>
```

```
  <li>Banana</li>
</ul>
```

✅ **Example 2: Circle Type**

```
<ul type="circle">
  <li>Red</li>
  <li>Blue</li>
</ul>
```

✅ **Example 3: Square Type**

```
<ul type="square">
  <li>Pen</li>
  <li>Pencil</li>
</ul>
```

---

2 Ordered List (<ol>)

📌 **Definition**

Ordered list me items numbering ya letters ke order me hote hain.

🔷 **Syntax**

```
<ol>
  <li>Item</li>
</ol>
```

🔷 **Attributes of <ol>**

🔶 **1. type**

Values:

- 1 → Numbers (default)
- A → Capital letters
- a → Small letters
- I → Roman capital
- i → Roman small

```
<ol type="A">
```

🔶 **2. start**

Values:

- Any number (1, 5, 10...)

```
<ol start="5">
```

🔶 **3. reversed**

Value:

- reversed (no value)

```
<ol reversed>
```

Complete Notes
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

🔷 **Examples**

✅ **Example 1: Number List**

```
<ol>
 <li>HTML</li>
 <li>CSS</li>
</ol>
```

✅ **Example 2: Alphabet List**

```
<ol type="A">
 <li>First</li>
 <li>Second</li>
</ol>
```

✅ **Example 3: Start from 5**

```
<ol start="5">
 <li>Item</li>
 <li>Item</li>
</ol>
```

---

3 Description List (<dl>)

📌 **Definition**

Description list me term aur uski description hoti hai.

🔷 **Tags Used**

- <dl> → Description list
- <dt> → Description term
- <dd> → Description detail

🔷 **Syntax**

```
<dl>
 <dt>HTML</dt>
 <dd>Hyper Text Markup Language</dd>
</dl>
```

🔷 **Attributes**

👉 **<dl>, <dt>, <dd> me koi special attribute nahi hota (exam point)**

🔷 **Examples**

✅ **Example 1: Simple Description List**

```
<dl>
 <dt>HTML</dt>
```

```
  <dd>Web page structure</dd>
</dl>
```

✅ **Example 2: Multiple Terms**

```
<dl>
  <dt>HTML</dt>
  <dd>Structure</dd>
  <dt>CSS</dt>
  <dd>Design</dd>
</dl>
```

🔥 **List Tags Summary**

List Type	Tag	Item Tag
Unordered	<ul>	<li>
Ordered	<ol>	<li>
Description	<dl>	<dt>, <dd>

📌 **Short Exam Definitions**

- **UL:** Used for bullet lists
- **OL:** Used for numbered lists
- **DL:** Used for term–description lists

🧠 **Important Exam Points**

- <li> sirf <ul> aur <ol> ke andar aata hai
- Ordered list me **type, start, reversed** attributes hote hain
- Unordered list me **type** attribute hota hai
- Description list me **koi attribute nahi hota**

HTML Table

📌 **Definition (Exam Ready)**

HTML table ka use data ko rows aur columns ke form me show karne ke liye hota hai.
Jaise:
Student list, marksheet, product table, report, record etc.

🔷 **Table ka Basic Structure**

```
<table>
  <tr>
    <td>Data</td>
  </tr>
</table>
```

🔷 HTML Table ke Elements

🔷 1. <table>

👉 **Table banane ke liye main tag**

```
<table></table>
```

🔷 2. <tr> (Table Row)

👉 **Table ki row banane ke liye**

```
<tr></tr>
```

🔷 3. <td> (Table Data)

👉 **Table ka normal cell / data**

```
<td>Ram</td>
```

🔷 4. <th> (Table Heading)

👉 **Table ka heading cell**

✓ Auto **bold**

✓ Auto **center**

```
<th>Name</th>
```

🔷 5. <caption>

👉 **Table ka title / heading**

<caption>Student Table</caption>

🔷 6. <thead>

👉 **Table ka header part**

```
<thead></thead>
```

🔷 7. <tbody>

👉 **Table ka main data part**

```
<tbody></tbody>
```

🔷 8. <tfoot>

👉 **Table ka last / total part**

```
<tfoot></tfoot>
```

🔷 Table Attributes (Exam + Practical)

🔷 1. border

👉 **Table ke around border ke liye**

Values:

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

- 0
- 1
- 2

```
<table border="1">
```

🔷 **2. cellpadding**

👉 **Cell ke andar space ke liye**

Values:

- Any number (5, 10)

```
<table cellpadding="10">
```

🔷 **3. cellspacing**

👉 **Cells ke beech space ke liye**

Values:

- Any number (5, 10)

```
<table cellspacing="5">
```

🔷 **4. width**

👉 **Table ki width set karne ke liye**

Values:

- 300
- 80%

```
<table width="80%">
```

🔷 **5. height**

👉 **Table ki height set karne ke liye**

```
<table height="200">
```

🔷 **6. align (Old / Exam)**

👉 **Table alignment**

Values:

- left
- center
- right

```
<table align="center">
```

🔷 **7. bgcolor (Old / Exam)**

👉 **Table ka background color**

Values:

- red
- yellow
- #ff0000

UNTOLD EDUCATION
HTML Complete Notes
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

```
<table bgcolor="lightblue">
```

🔷 Cell Attributes (td / th)

🔷 1. rowspan

👉 Cell ko multiple rows me merge karne ke liye

Value:

- Any number (2, 3)

```
<td rowspan="2">A</td>
```

🔷 2. colspan

👉 Cell ko multiple columns me merge karne ke liye

```
<td colspan="2">Total</td>
```

🔷 3. align

👉 Cell text alignment

```
<td align="center">Text</td>
```

🔷 4. valign (Old)

👉 Vertical alignment

Values:

- top
- middle
- bottom

```
<td valign="top">
```

🔷 Complete Table Example (MOST IMPORTANT)

```
<table border="1" cellpadding="10" cellspacing="0" width="60%" align="center">

<caption>Student Marks Table</caption>

<thead>
<tr>
  <th>Name</th>
  <th>Class</th>
  <th>Marks</th>
</tr>
</thead>

<tbody>
<tr>
  <td>Ram</td>
  <td>10</td>
```

```
  <td>85</td>
</tr>

<tr>
  <td>Shyam</td>
  <td>10</td>
  <td>90</td>
</tr>
</tbody>

<tfoot>
<tr>
  <td colspan="2">Average</td>
  <td>87.5</td>
</tr>
</tfoot>

</table>
```

🔷 Rowspan Example

```
<table border="1">
<tr>
  <td rowspan="2">A</td>
  <td>B</td>
</tr>
<tr>
  <td>C</td>
</tr>
</table>
```

🔷 Colspan Example

```
<table border="1">
<tr>
  <th colspan="2">Student Info</th>
</tr>
<tr>
  <td>Name</td>
  <td>Ram</td>
</tr>
</table>
```

🧠 Important Exam Points (VERY IMPORTANT)

- <table> → table banata hai

- <tr> → row
- <td> → data cell
- <th> → heading cell
- rowspan → row merge
- colspan → column merge
- <caption> → table title
- Border, cellpadding, cellspacing **old but exam important**

📌 **Short Definitions (Exam)**

- **Table:** Used to display data in rows and columns
- **Rowspan:** Merge rows
- **Colspan:** Merge columns

🔷 **rules Attribute**

📌 **Definition (Simple)**

rules attribute table ke ANDAR wali border lines ko control karta hai.

Ye decide karta hai ki **rows ke beech**, **columns ke beech**, ya **sab jagah** line dikhe.

👉 **Note:**

border = outer + inner line

rules = **sirf inner line**

🔷 **Syntax**

```
<table border="1" rules="value">
```

🔷 **rules Attribute ki Values (IMPORTANT)**

Value	Matlab
all	Rows + columns dono ke beech line
rows	Sirf rows ke beech horizontal line
cols	Sirf columns ke beech vertical line
none	Andar koi line nahi

🔷 **Example 1: rules="all"**

```
<table border="1" rules="all">
  <tr>
    <td>Ram</td>
    <td>85</td>
  </tr>
  <tr>
    <td>Shyam</td>
    <td>90</td>
  </tr>
</table>
```

UNTOLD EDUCATION
Untold skills for modern jobs

👉 Output:
✓Rows ke beech bhi
✓Columns ke beech bhi
sab jagah lines

🔷 Example 2: rules="rows"

```
<table border="1" rules="rows">
 <tr>
  <td>Ram</td>
  <td>85</td>
 </tr>
 <tr>
  <td>Shyam</td>
  <td>90</td>
 </tr>
</table>
```

👉 Output:
✓ Sirf **horizontal lines** (row lines)
❌ Column ke beech line nahi

🔷 Example 3: rules="cols"

```
<table border="1" rules="cols">
 <tr>
  <td>Ram</td>
  <td>85</td>
 </tr>
 <tr>
  <td>Shyam</td>
  <td>90</td>
 </tr>
</table>
```

👉 Output:
✓ Sirf **vertical lines** (column lines)
❌ Row ke beech line nahi

🔷 Bonus: rules="none"

<table border="1" rules="none">
👉 Sirf outer border dikhega, andar nahi.

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

🧠 Exam Memory Trick 🧠

- **border** → bahar + andar
- **rules** → andar ka control

- **rows** → horizontal
- **cols** → vertical

HTML TABLE Styling (CSS)

👉 Table ko **CSS se style** karna modern aur correct way hai.
HTML attributes (border, rules) old ho gaye, par CSS **real-world use** hai.

🔷 1. border-color

👉 **Border ka color set karta hai**

```
table {
  border-color: red;
}
```

Common values:

- red
- blue
- black
- #000
- rgb(255,0,0)

🔷 2. border-style (ALL BORDER STYLES)

👉 **Border ki style batata hai**

```
table {
  border-style: solid;
}
```

Values (IMPORTANT):

Value	Matlab
solid	Normal line
dotted	Bindu wali line
dashed	Tooti line
double	Double line
groove	3D groove
ridge	3D ridge
inset	Andar dabbi
outset	Bahar nikli

🔷 3. border-width

👉 **Border ki motai (thickness)**

```
table {
  border-width: 3px;
```

```
}
```

Values:

- 1px
- 2px
- 5px
- thin, medium, thick

🔷 4. border (ONE LINE PROPERTY)

👉 Color + width + style ek hi line me

```
table {
  border: 2px solid blue;
}
```

📌 Order:
border-width border-style border-color

🔷 5. border-collapse

👉 Cell borders ko merge ya separate karta hai

```
table {
  border-collapse: collapse;
}
```

Values:

Value	Matlab
collapse	Single line border
separate	Double border (default)

🔶 Example Difference

```
table {
  border-collapse: collapse;
}
✓Clean single lines
table {
  border-collapse: separate;
}
```

❌ Double lines

🔷 6. border-radius

👉 Border ke corners ko round karta hai

```
table {
  border-radius: 10px;
}
```

Values:

- 5px

UNTOLD EDUCATION
Untold skills for modern jobs
HTML Complete Notes
From basics to real-world web structure
Rewari, Haryana

- 10px
- 50% (circle – box ke liye)

🔷 COMPLETE TABLE CSS EXAMPLE (BEST 🔥)

HTML

```
<table class="mytable">
  <tr>
    <th>Name</th>
    <th>Marks</th>
  </tr>
  <tr>
    <td>Ram</td>
    <td>85</td>
  </tr>
</table>
CSS
.mytable {
  border: 2px solid black;
  border-collapse: collapse;
  border-radius: 8px;
}

.mytable th, .mytable td {
  border: 1px solid gray;
  padding: 8px;
}
```

🧠 Exam + Viva Points

- border = shortcut property
- border-collapse = table ke liye important
- border-radius = rounded corners
- CSS border > HTML border attribute

📌 Short Definitions

- **border**: Sets border width, style, color
- **border-collapse**: Merges table cell borders
- **border-radius**: Makes rounded corners

HTML <form> Tag

📌 Definition

<form> tag user se input lene ke liye use hota hai aur data ko server tak bhejne ka kaam karta hai.

UNTOLD EDUCATION
Untold skills for modern jobs
Created by: Pawan Soni
Rewari, Haryana

UNTOLD EDUCATION
Untold skills for modern jobs

Form ka use:

- Login page
- Registration form
- Contact form
- Feedback form

🔷 <form> Tag ka Basic Syntax

```
<form>
 form elements
</form>
```

🔷 <form> Tag ke Attributes (VERY IMPORTANT)

🔷 1. action

👉 Data kaha send hoga (server file / URL)

Values:

- submit.php
- process.html
- https://example.com

```
<form action="submit.php">
```

🔷 2. method

👉 Data kaise send hoga

Values:

Value	Meaning
get	URL me data dikhta hai
post	Secure, data hidden

```
<form method="post">
```

🔷 3. name

👉 Form ka name set karta hai

```
<form name="loginForm">
```

🔷 4. target

👉 Result kaha open hoga

Values:

- _self
- _blank

```
<form target="_blank">
```

🔷 5. autocomplete

👉 Browser auto-fill kare ya nahi

Complete Notes
From basics to real-world web structure
Computer Teacher
Rewari, Haryana

Values:

- on
- off

```
<form autocomplete="off">
```

🔷 6. enctype

👉 **Data ka encoding type**

Values:

- application/x-www-form-urlencoded (default)
- multipart/form-data (file upload)
- text/plain

```
<form enctype="multipart/form-data">
```

🔷 FORM ELEMENTS (INPUT CONTROLS)

🔷 1. <input> Tag

👉 **Sabse important form element**

```
<input type="text">
```

🔶 <input> ke Types (MOST IMPORTANT)

Type	Use
text	Normal text
password	Hidden text
email	Email
number	Numbers
radio	One select
checkbox	Multiple select
file	File upload
submit	Submit button
reset	Clear form
button	Button
date	Date
hidden	Hidden value

🔷 2. <label> Tag

👉 **Input ka naam batane ke liye**

```
<label>Username</label>
```

🔷 3. <textarea>

👉 **Large text ke liye**

```
<textarea rows="4" cols="30"></textarea>
```

Attributes:

- rows
- cols
- placeholder
- name

🔷 4. <select> Tag (Dropdown)

```
<select>
  <option>India</option>
</select>
```

Attributes:

- name
- multiple
- required

<option> Attributes:

- value
- selected

🔷 5. <button> Tag

```
<button type="submit">Send</button>
```

Types:

- submit
- reset
- button

🔷 6. <fieldset>

👉 **Form ko group karta hai**

```
<fieldset>
```

🔷 7. <legend>

👉 **Fieldset ka title**

```
<legend>Login</legend>
```

🔷 8. <datalist>

👉 **Auto-suggestion list**

```
<datalist id="city">
```

🔷 9. <output>

👉 **Result show karne ke liye**

Untold skills for modern jobs
HTML
Complete Notes
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

<output></output>

HTML FORM – Attributes Table

Attribute	Use (Kya kaam karta hai)	Kis Element / Input Type me Use hota hai
action	Form ka data kaha send hoga (URL / file)	<form> tag
method	Data bhejne ka method decide karta hai	<form> (get, post)
name	Form ya input ko identify karta hai	<form>, <input>, <select>, <textarea>
target	Result kaha open hoga	<form> (_self, _blank)
autocomplete	Browser auto-fill kare ya nahi	<form>, <input>
enctype	Data encoding type (file upload)	<form> (file upload ke liye)
accept-charset	Character encoding define karta hai	<form>
novalidate	Form validation disable karta hai	<form>

◈ INPUT ELEMENT ATTRIBUTES

Attribute	Use	Kis Input / Element me
type	Input ka type batata hai	<input> (text, password, email...)
value	Default value set karta hai	<input>, <option>
placeholder	Hint text dikhata hai	<input>, <textarea>
required	Field mandatory banata hai	<input>, <select>, <textarea>
readonly	Value change nahi kar sakte	<input>, <textarea>
disabled	Field disable karta hai	Sab form elements
maxlength	Max characters limit	<input>, <textarea>
minlength	Minimum characters	<input>, <textarea>
checked	Radio / checkbox pre-select	<input type="radio">, <input type="checkbox">
selected	Dropdown option pre-select	<option>
multiple	Multiple values select	<select>, <input type="file">
size	Input box ka size	<input>, <select>
pattern	Validation pattern (regex)	<input>
autofocus	Page load par cursor yahin aaye	<input>, <textarea>
step	Number increment gap	<input type="number">

Attribute	Use	Kis Input / Element me
min	Minimum value	<input type="number">, <input type="date">>
max	Maximum value	<input type="number">, <input type="date">>
accept	Kaun si file allow hogi	<input type="file">>

◈ TEXTAREA ATTRIBUTES

Attribute	Use	Element
rows	Kitni rows dikhe	<textarea>
cols	Kitne columns dikhen	<textarea>
placeholder	Hint text	<textarea>
required	Mandatory	<textarea>

◈ SELECT & OPTION ATTRIBUTES

Attribute	Use	Element
name	Data identify	<select>
multiple	Multiple select	<select>
value	Actual value send hoti hai	<option>
selected	Default select	<option>

🧠 **EXAM MEMORY LINE (IMPORTANT)**

- **Form ke attributes** → <form>
- **Input ke attributes** → <input>
- **Dropdown ke attributes** → <select> + <option>
- **Text area ke attributes** → <textarea>

📌 **ONE-LINE EXAM DEFINITIONS**

- **action** → data destination
- **method** → data transfer type
- **required** → compulsory field
- **checked** → radio/checkbox default
- **selected** → dropdown default
-

◈ pattern Attribute (HTML Forms)

📌 **Definition (Simple + Exam Ready)**

pattern attribute input ke liye rule set karta hai ki user **kis format** me data enter kare.
Ye **regular expression (regex)** par based hota hai.

👉 Galat format hoga to **form submit nahi hoga**.

🔷 **Kahan use hota hai?**

- Mostly: <input>
- Common types: text, email, password, tel, search

```
<input type="text" pattern="...">
```

🔷 **pattern ka kaam kaise karta hai?**

- User ka input **pattern se match** hona chahiye
- Match nahi hua → browser error dikhata hai
- Usually required ke saath use hota hai

🔷 **Common Regex Symbols (Yaad rakhne layak)**

Symbol	Matlab
[A-Z]	Capital letters
[a-z]	Small letters
[0-9]	Numbers
{n}	Exact n times
{n,m}	n se m times
+	1 ya zyada
*	0 ya zyada
.	Any single character
@	@ symbol

🔷 **Examples (5–10 Clear Examples)**

✅ **Example 1: Sirf Numbers (Mobile ka part)**

```
<input type="text" pattern="[0-9]{10}" required>
```

✓ Sirf **10 digits** allowed

✅ **Example 2: Sirf Alphabets (Name)**

```
<input type="text" pattern="[A-Za-z]+" required>
```

✓ Sirf letters allowed

❌ Numbers not allowed

✅ **Example 3: Username (letters + numbers)**

```
<input type="text" pattern="[A-Za-z0-9]{5,10}">
```

✓ 5–10 characters

✓ Letters + numbers

UNTOLD EDUCATION
Untold skills for modern jobs
HTML Complete Notes
from basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

✅ **Example 4: PIN Code (India – 6 digits)**

```
<input type="text" pattern="[0-9]{6}" required>
```

✓ Exactly 6 digits

✅ **Example 5: Password (min 8 chars)**

```
<input type="password" pattern=".{8,}" required>
```

✓ Minimum 8 characters

✅ **Example 6: Strong Password (letter + number)**

```
<input type="password" pattern="(?=.*[A-Za-z])(?=.*[0-9]).{8,}">
```

✓ At least 1 letter
✓ At least 1 number
✓ Min 8 length

✅ **Example 7: Email (basic pattern)**

```
<input type="email" pattern=".+@.+\..+">
```

✓ Email format required

✅ **Example 8: Date (DD-MM-YYYY)**

```
<input type="text" pattern="[0-9]{2}-[0-9]{2}-[0-9]{4}">
```

✓ Format: 12-05-2026

✅ **Example 9: Aadhaar Number (12 digits)**

```
<input type="text" pattern="[0-9]{12}">
```

✓ Exactly 12 digits

✅ **Example 10: Capital Letters Only**

```
<input type="text" pattern="[A-Z]+">
```

✓ Sirf CAPITAL letters

🧠 **Important Exam Points**

- pattern **regex use karta hai**
- Mostly <input> ke saath
- required ke saath best kaam karta hai
- Browser validation hoti hai (JS ki zarurat nahi)

◈ COMPLETE FORM EXAMPLE 1

```
<form action="submit.php" method="post" autocomplete="off">

<label>Name:</label>
```

```
<input type="text" name="name" placeholder="Enter name" required>

<br><br>

<label>Password:</label>
<input type="password" name="pass" required>

<br><br>

<label>Gender:</label>
<input type="radio" name="gender"> Male
<input type="radio" name="gender"> Female

<br><br>

<label>Course:</label>
<select name="course">
  <option>HTML</option>
  <option>CSS</option>
</select>

<br><br>

<label>Message:</label>
<textarea rows="4" cols="30"></textarea>

<br><br>

<input type="submit" value="Submit">
<input type="reset" value="Clear">

</form>
```

Example 2

```
<!DOCTYPE html>
<html>
<head>
  <title>Login Form</title>
</head>
<body>

<h2>Login Form</h2>
```

```
<form action="login.php" method="post">

  <label>Username:</label><br>
  <input type="text" name="username" placeholder="Enter username" required>
  <br><br>

  <label>Password:</label><br>
  <input type="password" name="password" placeholder="Enter password" required>
  <br><br>

  <input type="submit" value="Login">
  <input type="reset" value="Clear">

</form>

</body>
</html>
```

HTML <marquee> Tag

📌 **Definition**

<marquee> tag HTML me moving / scrolling text ya image dikhane ke liye use hota hai.

👉 Text **left, right, up, down** move kar sakta hai.

⚠️ **Note (Exam Point):**

<marquee> **deprecated tag** hai (HTML5 me recommended nahi),
lekin **EXAM / PRACTICAL me valid** hai.

🔷 **Basic Syntax**

```
<marquee>Moving Text</marquee>
```

🔷 **<marquee> ke ALL ATTRIBUTES**

1️⃣ **direction**

👉 **Text kis direction me move kare**

Values:

- left (default)
- right
- up
- down

Example

```
<marquee direction="right">Moving Right</marquee>
```

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

UNTOLD EDUCATION
Untold skills for modern jobs

2 **behavior**

👉 **Movement ka style**

Values:

- scroll (default)
- slide
- alternate

Example

```
<marquee behavior="alternate">Bounce Text</marquee>
```

---

3 **scrollamount**

👉 **Speed control karta hai (kitna fast move kare)**

Values:

- Numbers: 1 to 20

Example

```
<marquee scrollamount="10">Fast Text</marquee>
```

---

4 **scrolldelay**

👉 **Movement me delay (milliseconds)**

Values:

- Numbers (ms): 50, 100, 200

Example

```
<marquee scrolldelay="200">Slow Movement</marquee>
```

---

5 **loop**

👉 **Kitni baar marquee chale**

Values:

- 1, 2, 5
- infinite

Example

```
<marquee loop="3">Runs 3 Times</marquee>
```

---

6 **bgcolor**

👉 **Background color set karta hai**

Values:

- red
- yellow
- #cccccc

Example

```
<marquee bgcolor="lightblue">Colored Background</marquee>
```

---

7 **width**

👉 **Marquee ki width**

HTML Complete Notes
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

UNTOLD EDUCATION
Untold skills for modern jobs

Values:

- 300
- 50%
- 100%

Example

```
<marquee width="50%">Half Width</marquee>
```

8️⃣ height

👉 **Marquee ki height**

Values:

- 50
- 100

Example

```
<marquee height="50">Fixed Height</marquee>
```

9️⃣ hspace

👉 **Left & right side space**

Values:

- Numbers: 10, 20

Example

```
<marquee hspace="20">Horizontal Space</marquee>
```

🔟 vspace

👉 **Top & bottom space**

Values:

- Numbers: 10, 20

Example

```
<marquee vspace="20">Vertical Space</marquee>
```

1️⃣1️⃣ align

👉 **Marquee alignment**

Values:

- top
- middle
- bottom

Example

```
<marquee align="middle">Aligned Text</marquee>
```

🔷 Combined Example (EXAM FAVORITE 🔥)

```
<marquee
 direction="left"
 behavior="alternate"
 scrollamount="5"
```

```
 bgcolor="yellow"
 width="100%">
 Welcome to HTML
</marquee>
```

🧠 **Important**

- <marquee> **container tag** hai
- Closing tag compulsory: </marquee>
- Text + image dono move ho sakte hain
- Deprecated hai, par **exam me valid**

HTML <iframe> Tag

📌 **Definition**

<iframe> tag HTML me kisi dusre web page, video, ya document ko apne page ke andar show karne ke liye use hota hai.

👉 iframe = **page ke andar page**

🔷 **Basic Syntax**

```
<iframe src="url"></iframe>
```

🔷 **<iframe> ke Attribute**

🔷 **1. src**

👉 **Kaunsa page / file show karni hai**

Values:

- page.html
- https://example.com
- YouTube link

```
<iframe src="page.html"></iframe>
```

🔷 **2. width**

👉 **iframe ki width**

Values:

- 300
- 600
- 100%

```
<iframe width="400"></iframe>
```

🔷 **3. height**

👉 **iframe ki height**

Values:

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

- 200
- 400

<iframe height="300"></iframe>

🔷 4. title (HTML5 – Important)

👉 iframe ka description (accessibility ke liye)

```
<iframe title="Map"></iframe>
```

🔷 5. frameborder (Old / Exam)

👉 Border show ya hide

Values:

- 0 → no border
- 1 → border show

```
<iframe frameborder="0"></iframe>
```

🔷 6. scrolling (Old / Exam)

👉 Scroll bar aaye ya nahi

Values:

- yes
- no
- auto

```
<iframe scrolling="no"></iframe>
```

🔷 7. allowfullscreen

👉 Full screen allow karta hai (video ke liye)

```
<iframe allowfullscreen></iframe>
```

🔷 8. loading (Modern)

👉 iframe kab load ho

Values:

- lazy
- eager

```
<iframe loading="lazy"></iframe>
```

🔷 9. name

👉 iframe ko name dena (link target ke liye)

```
<iframe name="myframe"></iframe>
```

🔷 <iframe> ke RULES

- <iframe> **container tag** hai (closing tag hota hai)
- Dusra HTML page ya website embed hoti hai
- <iframe> block-level jaisa behave karta hai

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes
Created by: Pawan Soni

- Sab websites iframe allow nahi karti (security reason)

🔷 **Examples**

✅ **Example 1: HTML Page ke andar Page**

```
<iframe src="about.html" width="500" height="300"></iframe>
```

✅ **Example 2: YouTube Video**

```
<iframe
 src="https://www.youtube.com/embed/dQw4w9WgXcQ"
 width="560"
 height="315"
 frameborder="0"
 allowfullscreen>
</iframe>
```

✅ **Example 3: Link se iframe me page open karna**

```
<a href="page1.html" target="myframe">Open Page</a>

<br><br>

<iframe name="myframe" width="400" height="250"></iframe>
```

HTML <audio> Tag

📌 **Definition (Exam Ready)**

<audio> tag HTML me audio file (song, voice, sound) play karne ke liye use hota hai.

🔷 **Basic Syntax**

```
<audio src="song.mp3" controls></audio>
```

🔷 **<audio> Tag ke Attributes**

1️⃣ **src**

👉 Audio file ka path

Values:

- song.mp3
- audio/music.wav

```
<audio src="song.mp3"></audio>
```

2️⃣ **controls**

👉 Play / pause / volume controls dikhata hai

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

```
<audio controls></audio>
```

3 **autoplay**

👉 Page load hote hi audio start ho jaye

```
<audio autoplay></audio>
```

⚠️ Browser kabhi-kabhi block karta hai

4 **loop**

👉 Audio repeat me chale

```
<audio loop></audio>
```

5 **muted**

👉 Audio mute rahe

```
<audio muted></audio>
```

6 **preload**

👉 Audio kab load ho

Values:

- auto
- metadata
- none

```
<audio preload="auto"></audio>
```

🔷 **<audio> Example**

```
<audio controls loop>
  <source src="song.mp3" type="audio/mpeg">
</audio>
```

HTML <video> Tag

📌 **Definition (Exam Ready)**

<video> tag HTML me video file play karne ke liye use hota hai.

🔷 **Basic Syntax**

```
<video src="movie.mp4" controls></video>
```

🔷 **<video> Tag ke Attributes**

1 **src**

👉 Video file ka path

```
<video src="video.mp4"></video>
```

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes
From basics to real-world web structure
Created by: Pawan Soni
Computer Teacher

UNTOLD EDUCATION
Untold skills for modern jobs
HTML
Complete Notes

2 controls

👉 Play / pause / volume controls

```
<video controls></video>
```

3 width / height

👉 Video ka size

```
<video width="400" height="300"></video>
```

4 autoplay

👉 Video automatically play ho

```
<video autoplay></video>
```

5 loop

👉 Video repeat me chale

```
<video loop></video>
```

6 muted

👉 Video mute rahe

```
<video muted></video>
```

7 poster

👉 Video load hone se pehle image show ho

```
<video poster="thumb.jpg"></video>
```

8 preload

Values:

- auto
- metadata
- none

```
<video preload="metadata"></video>
```

🔷 <video> Example

```
<video width="500" controls poster="image.jpg">
  <source src="movie.mp4" type="video/mp4">
</video>
```

🔥 <audio> vs <video> (Exam Important)

Point	Audio	Video
Use	Sound play	Video play
Visual	❌	✓

Pawan Soni
Computer Teacher
Rewari, Haryana

Point	Audio	Video
Poster	❌	✓
Width/Height	❌	✓
Controls	✓	✓

🧠 **Important Exam Points**

- Dono **HTML5 tags** hain
- controls ke bina user play nahi kar sakta
- <source> tag se multiple formats add kar sakte hain
- Closing tag compulsory hai

HTML Layout (Page Structure)

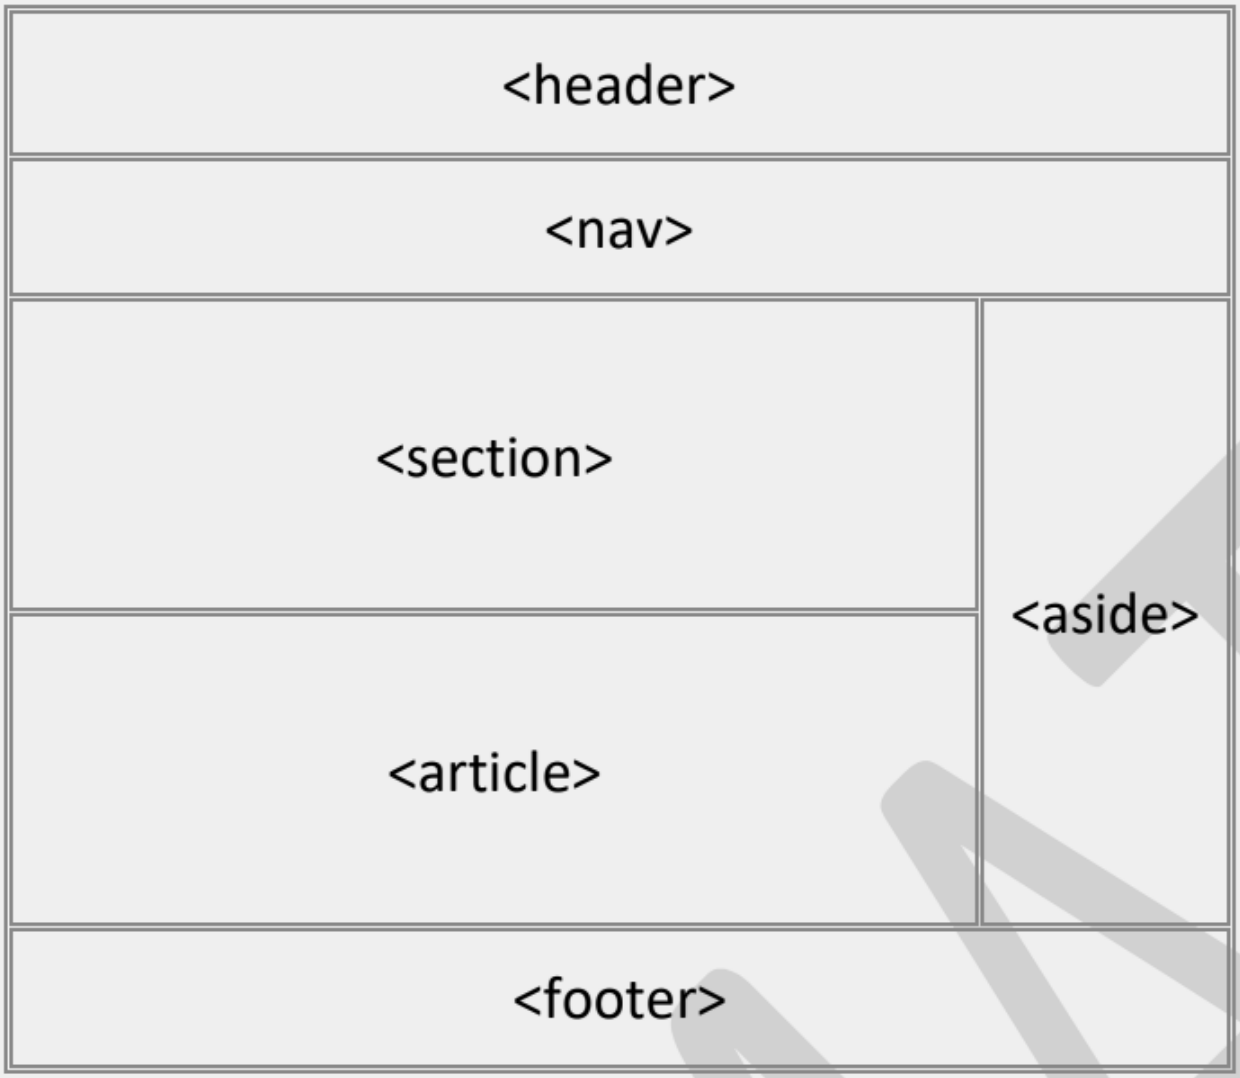

📌 **HTML Layout kya hota hai?**

UNTOLD EDUCATION
Untold skills for modern jobs
Rewari, Haryana

HTML layout webpage ka structure hota hai
yaani page kaun-kaun se parts me divided hoga aur wo parts kahan honge.
Simple language me:
👉 **page ka design skeleton**

🔷 **Common HTML Layout Parts**
Ek normal website me ye sections hote hain:

1. **Header**
2. **Navigation (Menu)**
3. **Main Content**
4. **Sidebar**
5. **Footer**

🔷 **OLD WAY (Using only) – Exam Friendly**
Pehle HTML me layout **sirf tag** se banaya jata tha.

```
<div id="header">Header</div>
<div id="nav">Menu</div>
<div id="content">Content</div>
<div id="footer">Footer</div>
```

👉 Kaam karta hai,
❌ par structure samajhna mushkil hota hai.

🔷 **MODERN HTML5 LAYOUT TAGS (IMPORTANT 🔥)**
HTML5 ne **special semantic layout tags** diye jo page ko readable banate hain.

1️⃣ **<header>**
👉 **Page ya section ka top part**
Use:

- Logo
- Website title
- Intro text

```
<header>
  <h1>My Website</h1>
</header>
```

2️⃣ **<nav>**
👉 **Navigation menu ke liye**
Use:

- Home
- About
- Contact links

```
<nav>
  <a href="#">Home</a> |
```

UNTOLD EDUCATION
Untold skills for modern jobs
HTML Complete Notes
Created by: Pawan Soni
Computer Teacher

```
 <a href="#">About</a>
</nav>
```

---

3 <main>

👉 **Page ka main content**

Rule:

- Page me **sirf ek <main>**

```
<main>
 Main Content
</main>
```

---

4 <section>

👉 **Related content ka group**

Use:

- Chapters
- Topics
- Parts

```
<section>
 <h2>About Us</h2>
 <p>Info here</p>
</section>
```

---

5 <article>

👉 **Independent content**

Use:

- Blog post
- News article

```
<article>
 <h2>Blog Post</h2>
 <p>Post content</p>
</article>
```

---

6 <aside>

👉 **Side content / sidebar**

Use:

- Ads
- Related links

```
<aside>
 Related Links
</aside>
```

---

7 <footer>

👉 **Page ka bottom part**

Untold skills for modern jobs
Complete Notes
From basics to real-world web structure
Computer Teacher
Rewari, Haryana

Use:

- Copyright
- Contact info

```
<footer>
 © 2026 My Site
</footer>
```

🔷 COMPLETE HTML LAYOUT STRUCTURE (MOST IMPORTANT)

```
<!DOCTYPE html>
<html>
<head>
 <title>HTML Layout</title>
</head>
<body>

<header>
 <h1>My Website</h1>
</header>

<nav>
 Home | About | Contact
</nav>

<main>

 <section>
  <h2>Main Section</h2>
  <article>
   <h3>Article Title</h3>
   <p>This is article content.</p>
  </article>
 </section>

 <aside>
  Sidebar Content
 </aside>

</main>

<footer>
 © 2026 My Website
</footer>

</body>
```

🔥 vs HTML5 Layout Tags

Point		HTML5 Layout Tags
Meaning	No meaning	Clear meaning
Readability	Low	High
SEO	Weak	Better
Exam importance	Medium	High

UNTOLD EDUCATION
untold skills for modern jobs

HTML Complete Notes

From basics to real-world web structure

Created by: Pawan Soni
Computer Teacher
Rewari, Haryana

Basic site

```
<!DOCTYPE html>
<html>
<head>
 <title>HTML Complete Demo</title>

 <!-- INTERNAL CSS -->
 <style>
  body {
   font-family: Arial;
   background-color: #f4f4f4;
   margin: 20px;
  }

  h1 {
   color: darkblue;
   text-align: center;
  }

  h2 {
   color: brown;
   border-bottom: 2px solid black;
  }

  p {
   color: #333;
   font-size: 16px;
  }

  .box {
   background-color: white;
   border: 2px solid black;
   padding: 15px;
   margin-bottom: 20px;
   border-radius: 8px;
  }

  table {
   width: 100%;
   border-collapse: collapse;
   margin-top: 10px;
```

```
  }

  table, th, td {
    border: 1px solid black;
  }

  th {
    background-color: #ddd;
  }

  th, td {
    padding: 8px;
    text-align: center;
  }

  input, select, textarea {
    padding: 5px;
    margin: 5px 0;
    width: 100%;
  }

  input[type=submit] {
    background-color: green;
    color: white;
    border: none;
    padding: 8px;
  }

  a {
    color: blue;
    text-decoration: none;
  }

  a:hover {
    text-decoration: underline;
  }
 </style>
</head>

<body>

<h1>HTML COMPLETE DEMO WEBSITE</h1>

<!-- TEXT FORMATTING -->
```

```
<div class="box">
  <h2>Text Formatting</h2>
  <p>This is <b>bold</b>, <i>italic</i>, <u>underline</u>, <mark>highlight</mark>,
  <del>deleted</del>, <ins>inserted</ins> text.</p>

  <p>H<sub>2</sub>O and 10<sup>2</sup></p>
</div>

<!-- LISTS -->
<div class="box">
  <h2>HTML Lists</h2>

  <h3>Unordered List</h3>
  <ul type="square">
    <li>HTML</li>
    <li>CSS</li>
  </ul>

  <h3>Ordered List</h3>
  <ol type="A">
    <li>Login</li>
    <li>Register</li>
  </ol>

  <h3>Description List</h3>
  <dl>
    <dt>HTML</dt>
    <dd>Structure of webpage</dd>
  </dl>
</div>

<!-- TABLE -->
<div class="box">
  <h2>HTML Table</h2>

  <table>
    <tr>
      <th>Name</th>
      <th>Class</th>
      <th>Marks</th>
    </tr>
    <tr>
      <td>Ram</td>
      <td>10</td>
```

```
    <td>85</td>
   </tr>
   <tr>
    <td>Shyam</td>
    <td>10</td>
    <td>90</td>
   </tr>
  </table>
</div>

<!-- LINK & IMAGE -->
<div class="box">
  <h2>Link & Image</h2>

  <a href="https://google.com" target="_blank">Go to Google</a>
  <br><br>

  <img src="https://via.placeholder.com/150" alt="Sample Image">
</div>

<!-- FORM -->
<div class="box">
  <h2>Login Form</h2>

  <form>
   <label>Username:</label>
   <input type="text" placeholder="Enter name" required>

   <label>Password:</label>
   <input type="password" required>

   <label>Gender:</label>
   <input type="radio" name="g"> Male
   <input type="radio" name="g"> Female

   <br><br>

   <label>Course:</label>
   <select>
    <option>HTML</option>
    <option>CSS</option>
   </select>

   <label>Message:</label>
```

```
    <textarea rows="3"></textarea>

    <input type="submit" value="Login">
  </form>
</div>

<!-- MARQUEE -->
<div class="box">
  <h2>Marquee</h2>

  <marquee behavior="alternate" scrollamount="5">
    Welcome to HTML Demo Website
  </marquee>
</div>

<!-- IFRAME -->
<div class="box">
  <h2>Iframe</h2>

  <iframe src="https://example.com" width="100%" height="150"></iframe>
</div>

<!-- AUDIO -->
<div class="box">
  <h2>Audio</h2>

  <audio controls>
    <source src="sample.mp3" type="audio/mpeg">
  </audio>
</div>

<!-- VIDEO -->
<div class="box">
  <h2>Video</h2>

  <video controls width="300">
    <source src="sample.mp4" type="video/mp4">
  </video>
</div>

</body>
</html>
```