

HTTP protocol of intelligent network camera V1.13

catalog
目录

1. Overview	6
2. Interface principles	6
2.1. Method of request	6
2.2. Data types and formats	6
2.3. Grammar	6
2.4. Authentication	7
3. Specific functions interfaces	8
3.1. Addition and modification of the list	8
3.1.1. Add multiple lists	8
3.1.2. Batch adding or modifying list	12
3.1.3. Add or modify single list	13
3.2. List deletions	14
3.2.1. Single or multiple list deletions	14
3.2.2. Delete all personnel lists	16
3.3. Data subscription	17
3.3.1. Push messages without authentication	20
3.3.2. Provide username and password when subscribing, and authentication is required for submission.	21
3.3.3. Push stranger capture	22
3.3.4. Push certification results	23
3.3.5. Query subscribed information	26
3.3.6. Upload Intelligent violation alarm capture record	26

3.3.7. Upload throwing objects from height event capture record	27
3.3.8. Upload thermal imaging alarm capture record	29
3.3.9. Upload personnel and vehicular capture record	31
3.3.10. Upload behavioural analysis capture record	32
3.3.11. Upload licence plate recognition capture record	34
3.3.12. Upload regional headcount	36
3.3.13. Upload vehicle attributes	37
3.3.14. Uploading of the vehicle flushing information	41
3.3.15. Upload helmet and reflective clothing not wore capture record	43
3.3.16. Upload pyrotechnic event capture record	45
3.3.17. Uploading safe riding incidents	46
3.3.18. Electric spark high temperature event upload	47
3.4. Cancel subscription	48
3.5. The heartbeat of subscription	50
3.6. Search and enquiry lists	51
3.6.1. Query single personnel list	51
3.6.2. Query total number of list	54
3.6.3. Query multi-person list	55
3.7. Restore the device to factory settings	59
3.8. Restart the device	60
3.9. Upgrade device	61
3.9.1. Upgrade device interface 1	62
3.10. MQTT Parameters	63

3.10.1. Get MQTT parameters	65
3.10.2. Set MQTT parameters	65
3.11. System information	66
3.11.1. Get system information	67
3.11.2. Set system information	67
3.12. Device information	68
3.12.1. Get device information	69
3.13. Handshake Protocol Data	69
3.13.1. Get Handshake Protocol Data	69
3.13.2. Set Handshake Protocol Data	70
3.14. Get body/vehicle counts	70
3.15. Manually push and report personnel identification records	72
3.16. Manually push and report stranger capture record	73
4. Appendix A: Revision History	76
B.1 Authentication failure	77
B.2 Set message replies	77
6. Appendix C: Function-specific	78
C. 1General error code	78
C.10 Add / modify the List	78
C.10.1 Add single list	78
C.10.2 Add multiple list	81
C.10.3 Edit and modify the list	83
C.10.4 Batch adding or modifying list	84
C.10.4.1 Return codes for batch adding or modifying list	85

C.10.4.2 Error codes for batch adding or modifying list	85
C.10.5 Error codes for adding or modifying single list	86
C.11 Delete personnel list	86
C.11.1 Error codes for add or modify single list	87
C.11.2 Error codes for delete all personnel lists	87
C.12 Data subscription	89
C.12.1 Push messages without authentication	89
C.12.2 Username and password provided for subscription, authentication required for submission	90
C.12.3 Push stranger capture	91
C.12.4 Push personnel identification record	92
C.12.4.1 Use disconnected server reply packets	93
C.12.5 Query subscribed messages	94
C.13 Unsubscribe	95
C.13.1 Error codes for unsubscribe	95
C.14 Subscribed Heartbeats	96
C.15 Query list	97
C.15.1 Query single list	97
C.15.1.1 Error codes for query single personnel list	97
C.15.2 Query total number of lists	98
C.15.3 Query multiple list	100
C.16 Version upgrade	101
C.16.1 Error codes for version upgrade	101
C.17.1 Error codes for get body/vehicle counts	102
C.18 Manual push control / capture record	102
C.18.1 Error codes for manual push control / capture record	102

1. Overview

This document is a network camera HTTP method of docking, the main reference to the "HTTP protocol V1.38 for face recognition machine.pdf", applicable to system development and maintenance personnel.

2. Interface principles

This data interface specification uses the standard HTTP protocol for communication with the following requirements:

2.1. Method of request

The request method uses the POST method, and the data for downloading and uploading is placed in the message body (entity-body).

2.2. Data types and formats

All strings shall be encoded in the UTF-8 character set.

The data exchanged between the two parties are uniformly packaged in JSON format, with the following basic format:

```
{  
    "operator": "<Operator>",  
    "info": {<Info>},  
    .....  
}
```

For more details, please check [3. Specific functional interfaces](#) The specific data format of each interface.

Use base64 encoding or image URIs for all image data.

All HTTP interactions must contain either **Content-Length** or **Transfer-Encoding** in the header, case sensitive.

2.3. Grammar

Request URI format: `http://<server ipaddr>:port/action/<Operator>`. Where <server ipaddr>: the ip address of the requested network camera; port:8080; <Operator>: the content


of the action, please check the details of the [3. Specific function interfaces](#) .

2.4. Authentication

In order to ensure the security of data transmission, the authentication is performed during the formal data transmission, and the basic method is used for the time being. Typical data in the authorisation header is "Authorization: Basic jdhaHY0=", where Basic means basic authentication, and jdhaHY0= is the base64-encoded " user:passwd" string. For example, if the user name of the machine is "admin" and the password is "admin", then the base64 encoding of "admin:admin" in the header of the sent data is "admin:admin", and the base64 encoding of "admin:admin" is "admin:admin", and the base64 encoding is "admin:admin". base64 encoding is "YWRtaW46YWRtaW4=", send data ID authentication as follows.

```
1 POST /action/AddPerson HTTP/1.1
2 Host: 172.168.2.96
3 Authorization: Basic YWRtaW46YWRtaW4=
4 Content-Type: text/plain
5
6 {
7   "operator": "AddPerson",
8   "info": {
9     "DeviceID": "1305433",
10    "PersonType": 0,
11    "Name": "XX" ,
12    "Gender": 0,
13    "Nation": 0,
14    "CardType": 0,
15    "IdCard": "430923199011044411",
16    "Birthday": "1990-11-04",
17    "Telnum": "18888888888",
18    "Native": "guangdong",
19    "Address": "Bao'an Shenzhen",
20    "Notes": "note",
21    "MjCardFrom": 2,
22    "WiegandType": 7,
```

If it is postman as an example of debugging interface, under Authorisation, select Basic Auth, enter the user name, password, click Update Request, postman will automatically encrypt the user name and password to add Headers, as shown:

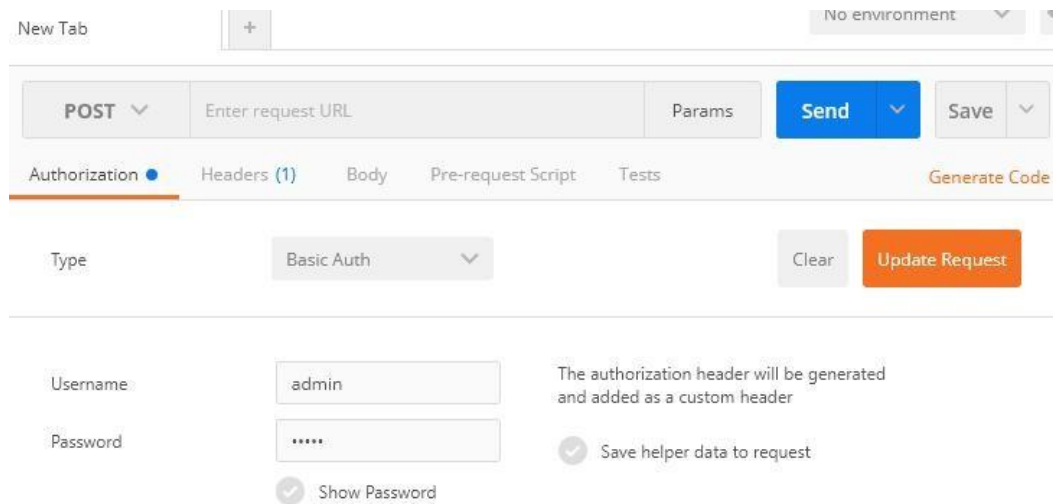

The screenshot shows the Postman interface with the 'Authorization' tab selected. The 'Type' is set to 'Basic Auth'. The 'Username' field contains 'admin' and the 'Password' field contains '*****'. The 'Update Request' button is highlighted. A note states: 'The authorization header will be generated and added as a custom header'. There are also checkboxes for 'Save helper data to request' and 'Show Password'.

After setting up, select the POST request method, enter the corresponding function interface URL, and click Send.

3. Specific functions interfaces

3.1. Addition and modification of the list

Addition and modification of the list correspond to the provision of personnel list images. The image data can be provided as base64 encoded data with the key value 'picinfo', or as a URI address with the key value 'picURI', which allows the network camera to obtain the corresponding image data. **These two options are mutually exclusive**, and when both 'picinfo' and 'picURI' are provided, the data from 'picinfo' will be obtained by default. Moreover, 'CustomizeID' and 'PersonUUID' have the same storage format in the database, but they differ in parameter type in the protocol;

3.1.1. Add multiple lists

This interface only supports adding personnel information, and adding the maximum number of people sent in a single time through base64

32, and the maximum number of people added by URI is 1000. Return code and the error code

See the Appendix, Section [C.10.4.1 Return codes for batch adding or modifying list](#) and [C.10.4.2 Error codes for batch adding or modifying list](#).

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	AddPersons	AddPersons: Adds a list to the list database.
info	json object		concrete content
DeviceID	char (computing)		The device ID number of the device to be operated.
IdType	int	0~2	The type of ID to be operated on, the 0:CustomizeID, 1:LibID, (discarded) 2:PersonUUID
CustomizeID	unsigned int (optional)		User-defined person ID number, you can Use this ID number The corresponding personnel information. Note: No Add people to reuse the same ID Member, otherwise it will lead to modify, delete and other exercises Make a mistake. IdType=0
PersonUUID	char (computing) (optional)		User-defined UUID Required if IdType=2 Maximum length is 48 characters long (including terminator)
PersonType	int (optional)	0 to 1	Type of list 0: Allow list 1: Block lists
Name	char (computing) (optional)		Name, maximum length 32 character length (including terminator)
Gender	int (optional)	0~1	distinguishing between the sexes 0: Male 1: Female

IdCard	char (computing) (optional)		ID number, maximum length 32 character length (including terminator)
Birthday	char (computing) (optional)	YYYYYY-MM-DD	Birthday, e.g., 2018-1-1
Telnum	char (computing) (optional)		Phone number with a maximum length of 32 characters (including terminator)
Address	char (computing) (optional)		Address, maximum length 72 character length (including terminator)
picinfo	char (computing) picinfo char (computing) use either picinfo or picURI.		Base64 encoded data of face images (not more than 1M)
picURI	char (computing) picURI char (computing) use either picinfo or picURI.	https://btngps.oss-cn-beijing.aliyuncs.com/image/xxx.jpg	Cloud URI address for face image data
tempValid	Int	List type	0: Permanent list 1: Temporary list
validBegin	String	The provisional list takes effect Date and time	YYYY-MM-DD hh:mm:ss
validEnd	String	Temporary list expiration date And time	YYYY-MM-DD hh:mm:ss
effectNumber	Int	Number of temporary list	1: Infinite times, finite times of the range of values: 1~10000

Operator: AddPersons

URI: <http://<server ipaddr>/action/AddPersons>

e.g.

<http://192.168.2.10/action/AddPersons>

Issued by body

```
{
  "operator": "AddPersons",
```

```

    "DeviceID": "005a213b000b93cc",
    "Total": 3,
    "Personinfo_0": { "PersonType": 0, "Name": "test",
                      "Gender": 0,
                      "IdCard": "430923199011044411",
                      "Birthday": "1990-11-04",
                      "Telnum": "18888888888",
                      "Native": "Guangdong (Province)",
                      "Address": "Shenzhen baoan",
                      "CustomizeID": 120,
                      "tempValid": 1,
                      "validBegin": "2023-11-10 00:00:00",
                      "validEnd": "2023-12-10 00:00:00",
                      "effectNumber": 10,
                      "picinfo": "data:image/jpeg;base64,/9j/4AAQSAAB..... "
    },
    "Personinfo_1": {
      .....
    }
    .....
  }
  Or
  {
    "operator": "AddPersons",
    "DeviceID": "005a213b000b93cc",
    "Total": 3,
    "Personinfo_0": { "PersonType": 0, "Name": "test",
                      "Gender": 0,
                      "IdCard": "430923199011044411",
                      "Birthday": "1990-11-04",
                      "Telnum": "18888888888",
                      "Address": "Shenzhen baoan",
                      "CustomizeID": 120,
                      "tempValid": 1,
                      "validBegin": "2023-11-10 00:00:00",
                      "validEnd": "2023-12-10 00:00:00",
                      "effectNumber": 10,
                      "picURI": "https://btngps.oss-cn-beijing.aliyuncs.com/image/xxx.jpg"
    },
  },

```

```

"Personinfo_1":{
    .....
}
.....
}
  
```

3.1.2. Batch adding or modifying list

The interface is added or modified in the list. The maximum number of single personnel pictures through base64 is 32, and the maximum number of single personnel pictures through URI is 1000. Return codes and error codes are provided in the Appendix section [C.10.4.1 Return codes for batch adding or modifying list](#) and [C.10.4.2 Error codes for batch adding or modifying list](#)

URI:http://<server ipaddr>/action/EditPersonsNew

e.g.,

http://192.168.2.10/action/EditPerson sNew

Issued body

```

{
"operator": "EditPersonsNew",
"DeviceID": "005a213b000b93cc",
"IdType": 0, //0: add CustomizeID
"Total":2, //Total number of persons added or modified
"info": [{
"CustomizeID":123,
  "PersonType": 0,
  "Name": "test1",
  "Gender":0,
  "IdCard": "430923199011044411",
  "Birthday": "1999-11-04",
  "Telnum": "199999999999",
  "Address": "Bao'an, Shenzhen",
  "tempValid": 1,
  "validBegin": "2023-11-10 00:00:00",
  "validEnd": "2023-12-10 00:00:00",
  "effectNumber": 10,
  "picURI":
"leopard.oss-cn-shenzhen.aliyuncs.com/faceTest/f3c0bb1e-c703-48b1-a79f-a9c2efe2a703.jpg"
},
{
  
```

```
"CustomizeID":456,
  "PersonType": 0,
  "Name": "test2",
  "Gender":0,
  "IdCard": "430923199011044412",
  "Birthday": "1999-11-05".
  "Telnum": "18888888888888",
  "Address": "Ningde City",
  "tempValid": 1,
  "validBegin": "2023-11-10 00:00:00",
  "validEnd": "2023-12-10 00:00:00",
  "effectNumber": 10,
  "picURI":
"leopard.oss-cn-shenzhen.aliyuncs.com/faceTest/f3c0bb1e-c703-48b1-a79f-a9c2efe2a703.jpg"
}]
}
```

3.1.3.Add or modify single list

The addition and modification of a single list shall be edited and modified to the list according to CustomizeID or PersonUUID. The parameters to be modified are optional. If not modification, the corresponding Key should not appear in the distributed data, and if the list does not exist. Return codes and error codes are provided in Appendix section [C.10.5 Error codes for adding or modifying single list](#)

Operator: EditPersonNew

URI:http://<server ipaddr>/action/EditPersonNew

e.g.,

http://192.168.2.10/action/EditPerson

Issued by body

```
{
  "operator": "EditPersonNew",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "IdType":0,
    "CustomizeID":123,
    "PersonType": 0,
    "Name": "hahaha".
    "IdCard": "430923199011044411",
    "Birthday": "1999-11-04".
```

```

    "Telnum": "1999999999999",
    "Address": "Shenzhen Bao'an"
    "tempValid": 1,
    "validBegin": "2023-11-10 00:00:00",
    "validEnd": "2023-12-10 00:00:00",
    "effectNumber": 10
  },
  "picinfo": "data:image/jpeg;base64,/9j/4AAQSkZJRgABAQEBAgFeAABD....."
}

Or (no image modification, only list information is modified, without passing in the keys
"picURI" and "picinfo")
{
  "operator": "EditPersonNew",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "IdType": 0,
    "CustomizeID": 123,
    "PersonType": 0,
    "Name": "Chen Wending",
    "IdCard": "430923199011044411",
    "Birthday": "1999-11-04",
    "Telnum": "1999999999999",
    "Address": "Shenzhen Bao'an"
    "tempValid": 1,
    "validBegin": "2023-11-10 00:00:00",
    "validEnd": "2023-12-10 00:00:00",
    "effectNumber": 10
  }
}

```

3.2. List deletions

Delete the personnel list interface at the same time will delete the corresponding personnel list of **control records (authentication records) and can not be restored**, careful operation; if the call to delete all the personnel list success, the network camera will **automatically reboot**.

3.2.1. Single or multiple list deletions

Deletion of the list provides customID or PersonUUID deletion method, customID cannot be 0.

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	DeletePerson or DeleteAllPerson	DeletePerson: Deletes the person information in the list database. DeleteAllPerson: Delete all personnel list information
info	json object		concrete content
DeviceID	char (computing)		The device ID number of the device to be operated can be obtained by the Get device information The device ID number of the device to be operated can be obtained through 3.9 Device Information Acquisition.
TotalNum	int	1~256	How many people need to be deleted for this operation
IdType	int	0	0:User-defined CustomizeID 1:Database LibID (deprecated). 2: PersonUUID
CustomizeID	json array (optional)		A collection of single or multiple CustomizeIDs of type int in the form of a Json array of CustomizeIDs. Required if IdType=0
PersonUUID	json array (optional)		A collection of single or multiple UUIDs, the UUIDs are char-type strings of no more than 48 bytes, formatted as Json arrays of UUIDs Required if IdType=2
DeleteAllPers onCheck	json array	1	Required if operator is DeleteAllPerson.

Operator: **DeletePerson**

URI:<http://<server ipaddr>/action/DeletePerson>

e.g.,

<http://192.168.2.10/action/DeletePerson>

Issuance of body

```
{
  "operator": "DeletePerson".
  "info": {
    "DeviceID": "005a213b000b93cc",
    "TotalNum": N,
    "IdType": 0,
    "CustomizeID": [1, 2, 3,..... ]
  }
}
```

Return parameter information(Note: the field not marked optional is required):

operator	char	DeletePerson	DeletePerson:Deletes the person information in the list database.
code	int		Instruction execution error code: 200-Success, see elsewhere C.11.1 Error codes for add or modify single list
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "DeletePerson",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.2.2.Delete all personnel lists

Deletion of all personnel lists will delete the control records (authentication records) of all personnel lists at the same time and cannot be recovered, so operate with caution;

Parameter information(Note: the field not marked optional is required)

Key	Type	Values	Description
operator	char	DeleteAllPerson	DeleteAllPerson:Delete all personnel lists
info	json object		concrete content
DeleteAllPersonC	int		This option is required when

heck			the operator is the DeleteAllPerson
------	--	--	-------------------------------------

Operator: **DeleteAllPerson**

URI: **http://<server ipaddr>/action/DeleteAllPerson**

e.g.,

http://192.168.2.10/action/DeleteAllPerson

Issuance of body

```
{
  "operator": "DeleteAllPerson",
  "info": {
    "DeleteAllPersonCheck": 1
  }
}
```

Return parameter information(Note: the field not marked optional is required):

operator	char	DeleteAllPerson	DeleteAllPerson>Delete all personnel lists
code	int		Instruction execution error code: 200-success, see C.11.2 Error codes for delete all personnel lists
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "DeleteAllPerson",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.3. Data subscription

Types of data subscription include: subscription of authentication result information, stranger capture subscription and so on. Turn on the the continuous transmission function, then

push the stranger capture and personnel identification record need to be returned by the server, data packet capture see [C.12.4.1 Use disconnected server reply packets](#) .

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	Subscribe	News Subscription
info	json object		concrete content
DeviceID	char (computing)		The device ID number of the device to be operated can be obtained by the Get device information The device ID number of the device to be operated can be obtained through 3.9 Device Information Acquisition.
Num	int	1~3	How many types of information to subscribe to
Topics	json array	"Snap". "VerifyWithSnap". "VerifyNoPic"	A collection of single or multiple subscription message types (not exceeding 128 bytes), such as: ["Snap"] : subscribe to real-time snap reporting maybe ["VerifyWithSnap"] : subscribe to authentication results reporting (with snapshot) maybe ["VerifyNoPic"] : subscribe to authentication results reporting (without pictures)
SubscribeAddr	char (computing)	http://< Subscribe server ip>:port	Subscription address, including ip and port, e.g.,http://192.168.2.11:8080
SubscribeUrl	json object		A collection of single or multiple reported URLs, including captures, authentication results, and heartbeats. e.g., { "Snap": "/Subscribe/Snap", "Verify": "/Subscribe/Verify", "HeartBeat": "/Subscribe/heartbeat"
BeatInterval	int(optional)		Heartbeat interval in seconds, if not set, default 30 seconds
Auth	char	"none" or	Post Whether or not to authenticate when

	(computing) (optional)	"Basic"	submitting escalation information none : Authentication processing is not required Basic : post basic authentication
User	char (computing) (optional)		User name, maximum length 64 character length (including terminator) Required if Auth=Basic
Pwd	char (computing) (optional)		Password, maximum length 64 character length (including terminator) Required if Auth=Basic
ResumeFrom Breakpoint	int	0~1	Whether to enable continuous transmission after network interruption (in stranger capture subscription or authentication subscription mode), 0: Not enabled 1: Enabled. If you don't enable the function of continuous transmission, it only guarantees to push the record and doesn't need to be replied by the platform. If enable the function, the following json packets are required to be returned by the server for the stranger capture and authentication information pushed. <pre>{ "code": 200, "desc": "OK", }</pre> After 10 seconds the network camera does not receive the correct confirmation message from the server, it continues to push the same record.
BeginTime	char (computing) (optional)	YYYY-MM-DD Thh:mm:ss	The default start time of resume upload, you can leave it blank. Default time is the time when enable the stranger capture subscription or authentication subscription and enable the continuous transmission function. If the stranger capture and personnel identification record before the breakpoint is pushed completed, this time will become to the time when complete the record push. e.g., 2018-03-12T09:10:00

Return parameter information(Note: the field not marked optional is required):

operator	char	Subscribe	Message subscription
code	int		Instruction execution error code: 200-Success, see elsewhere C.13.1 Error codes for unsubscribe
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

3.3.1. Push messages without authentication

Operator: **Subscribe**

URI:<http://<server ipaddr>/action/Subscribe>

e.g.,

<http://192.168.2.10/action/Subscribe>

Issuance of body

```
{
  "operator": "Subscribe",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "Num": 2,
    "Topics": ["Snap", "VerifyNoPic"],
    "SubscribeAddr": "http://192.168.2.11:8080",
    "SubscribeUrl": {
      "Snap": "/Subscribe/Snap",
      "Verify": "/Subscribe/Verify",
      "HeartBeat": "/Subscribe/heartbeat"
    },
    "BeatInterval": 30,
    "ResumefromBreakpoint": 0,
    "Auth": "none"
  }
}
Or
{
  "operator": "Subscribe",
  "info": {
```

```

    "DeviceID": "005a213b000b93cc",
    "Num": 2,
    "Topics": ["Snap", "VerifyWithSnap"],
    "SubscribeAddr": "http://192.168.2.11:8080",
    "SubscribeUrl": {
        "Snap": "/Subscribe/Snap",
        "Verify": "/Subscribe/Verify",
        "HeartBeat": "/Subscribe/heartbeat"
    },
    "ResumefromBreakpoint": 1,
    "Auth": "none"
}
}
...

```

3.3.2. Provide username and password when subscribing, and authentication is required for submission.

Operator: **Subscribe**

URI: **http://<server ipaddr>/action/Subscribe**

e.g.,

http://192.168.2.10/action/Subscribe

Issuance of body

```

{
    "operator": "Subscribe",
    "info": {
        "DeviceID": "005a213b000b93cc",
        "Num": 2,
        "Topics": ["Snap", "VerifyNoPic"],
        "SubscribeAddr": "http://192.168.2.11:8080",
        "SubscribeUrl": {
            "Snap": "/Subscribe/Snap",
            "Verify": "/Subscribe/Verify",
            "HeartBeat": "/Subscribe/heartbeat"
        },
        "ResumefromBreakpoint": 1,
        "Auth": "Basic",
        "User": "admin",
        "Pwd": "amdin"
    }
}

```

```

    }
  }
  Or
  {
    "operator": "Subscribe",
    "info": {
      "DeviceID": "005a213b000b93cc",
      "Num": 2,
      "Topics": ["Snap", "VerifyWithSnap"],
      "SubscribeAddr": "http://192.168.2.11:8080",
      "SubscribeUrl": {
        "Snap": "/Subscribe/Snap",
        "Verify": "/Subscribe/Verify",
        "HeartBeat": "/Subscribe/heartbeat"
      },
      "ResumefromBreakpoint": 1,
      "Auth": "Basic",
      "User": "admin",
      "Pwd": "amdin"
    }
  }
  ...

```

3.3.3. Push stranger capture

Parameter information:

Key	Type	Values	Description
operator	char (computing)	SnapPush	Stranger Snap Push
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
CreateTime	char (computing)	YYYY-MM-DDThh:mm:ss	Stranger capture recording time. e.g., 2018-03-25T21:50:05
Sendintime	int	0~1	Whether the information is pushed in time, 0: not pushed in time (the push time is more than 10 seconds than the capture time) 1: pushed in time
SanpPic	char (computing)		Base64 encoded data of face images captured by strangers
ScenePic	char		Base64 encoded data of scene images captured by strangers

e.g., Raw.

```
-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "SnapPush",
  "info": {
    "DeviceID": "1299517",
    "CreateTime": "2024-05-28T19:00:38",
    "Sendintime": 0,
    "PushType": 2,
    "ManualPushID": 1,
    "nRecordIndex": 37
  },
  "SanpPic": "data:image/jpeg;base64,.....",
  "ScenePic": "data:image/jpeg;base64,....."
}
```

3.3.4. Push certification results

Parameter information:

Key	Type	Values	Description
operator	char (computing)	VerifyPush	Certification results push
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
PersonID	int		The device stores the ID number of the person, which can be used to modify the list information of the person in case the CustomizeID is invalid.
CreateTime	char (computing)	YYYY-MM-DDT hh:mm:ss	Control of recording time. e.g., 2018-03-25T21:50:05

Similarity1	float	0.0~100.0	Black and white list comparison similarity
VerifyStatus	int	0 to 3 or 22, 24	Certification results 0: None 1: Allowed 2: Rejection 3: Not yet registered
VerifyType	int	1: Ordinary neutral machine:1~3	Validation Type. 1: Allow list Validation 2: Identity card verification 3: Allow listing + ID verification
PersonType	int	0~1	Type of list 0: Allow list 1: Block lists
Name	char (computing)		Name (maximum length 32 bytes)
IdCard	char (computing)		ID number, maximum length 32 character length (including terminator)
Telnum	char (computing)		Phone number with a maximum length of 32 characters (including terminator)
Address	char (computing)		Address, maximum length 72 character length (including terminator)
CustomizeID	char (computing)		User-defined personnel ID number, you can use this ID number to manage the corresponding personnel information such as modification and deletion. Note: You can't use the same ID to add personnel repeatedly, otherwise it will cause errors in modifying and deleting operations.
PersonUUID	char (computing)		The user-defined personnel ID number is stored in the device's own database with no difference from CustomizeID;
Sendintime	int	0~1	Whether the information is pushed in time, 0: not pushed in time (the push time is more than the authentication time 10 seconds) 1: pushed in time
SanpPic	char (computing)		Base64 encoded data of face images captured in real time

ScenePic	char		Base64 encoded data of scene images captured by strangers
----------	------	--	---

e.g., Raw.

```
-- HEADERS  --
POST /Subscribe/Verify HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 155265
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

--  BODY  --
{
  "operator": "VerifyPush",
  "info": {
    "PersonID": 0,
    "CreateTime": "0000-00-00T00:00:00",
    "Similarity1": 0.000000,
    "VerifyStatus": 1,
    "VerfyType": 1,
    "PersonType": 0,
    "Name": "",
    "IdCard": "",
    "Telnum": "",
    "DeviceID": "123555",
    "CustomizeID": "",
    "PersonUUID": "",
    "Sendintime": 0,
    "PushType": 2,
    "ManualPushID": 0,
    "nRecordIndex": 4
  },
  "SanpPic": "data:image/jpeg;base64,.....",
  "ScenePic": "data:image/jpeg;base64,....."
}
```

3.3.5. Query subscribed information

Operator: **GetSubscribe**

URI: **http://<server ipaddr>/action/GetSubscribe**

e.g.,

http://192.168.2.10/action/GetSubscribe

Reply to body

```

{
  "operator": "GetSubscribe",
  "info": {
    "Num": 1,
    "Topics": ["Snap"],
    "SubscribeAddr": "http://192.168.2.11:8080",
    "SubscribeUrl": {
      "Snap": "/Subscribe/Snap",
      "Verify": "/Subscribe/Verify",
      "HeartBeat": "/Subscribe/heartbeat"
    },
    "ResumeFromBreakpoint": 0,
    "BeginTime": "2019-11-05T11:44:29",
    "Auth": "none"
  }
}
.....

```

3.3.6. Upload Intelligent violation alarm capture record

Parameter information:

Key	Type	Values	Description
operator	char (computing)		push alarm violation capture
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
CreateTime	char (computing)	YYYY-MM-DDThh:mm:ss	Violation alarm shot recording time. e.g., 2018-03-25T21:50:05
AlarmAction	char (computing)		Specific violations, alarm operations
Pic	char (computing)		Image base64 encoded data (within 1M)

e.g., Raw.

```

-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "SnapPush".
  "info": {
    "DeviceID": "005a213b000b93cc",
    "AlarmAction": " Not wearing a chef's hat ".
    "CreateTime": "2022-09-28T17:18:40",
    "Pic":
      "data:image/jpeg;base64,Qk3m5QAAAAAAAAAADYAAAAAAoAAAAAAjAAAAIwAA"
  }
}

```

3.3.7. Upload throwing objects from height event capture record

This set of interfaces is suitable for throwing-objects-from-height detection camera.

3.3.7.1. Upload event information and captured images

Parameter information:

Key	Type	Values	Description
operator	char (computing)	ParabolicSnapPush	Push violation alarm snapshot
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
ID	Int		Event ID
StartTime	char (computing)	YYYY-MM-DDT hh:mm:ss	Event start time, e.g. 2018-03-25t21:50:05
EndTime	char (computing)	YYYY-MM-DDT hh:mm:ss	Event end time,e.g. 2018-03-25T21:50:05
Pic	char (computing)		Image base64 encoded data (within 1M)

e.g., Raw.

```
-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "ParabolicSnapPush",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "ID": 1005,
    "StartTime": "2022-09-28T17:18:38",
    "EndTime": "2022-09-28T17:18:42"
  },
  "Pic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAIwAA"
}
```

3.3.7.2. Upload event-related video

Video upload using multipart/format format

Parameter information:

Key	Type	Values	Description
DeviceID	char (computing)		Device ID number of the device
ID	Int		Event ID
StartTime	char (computing)		Event start time. e.g. 2018-03-25t21:50:05
EndTime	char (computing)		Event end time. e.g. 2018-03-25T21:50:10

e.g., Raw.

```
-- HEADERS --
POST /Subscribe/PushVideo HTTP/1.1
Host:192.168.2.10
Content-Type: multipart/form-data;boundary=-----12356487851234
Accept:/*/*
```

```

Accept-Encoding: gzip, deflate, br
Content-Length: 77181
Connection: Keep-Alive

-----12356487851234
Content-Disposition: form-data; name=DeviceID

005a213b000b93cc
-----12356487851234
Content-Disposition: form-data; name=ID

10003
-----12356487851234
Content-Disposition: form-data; name=StartTime

2022-09-28t17:18:38
-----12356487851234
Content-Disposition: form-data; name=EndTime

2022-09-28t17:18:44
-----12356487851234
Content-Disposition: form-data; name="file"; filename="video.mp4"
Content-Type: video/mp4

<<mp4 data.....>>
-----12356487851234--
  
```

3.3.8. Upload thermal imaging alarm capture record

This interface is suitable for thermal imaging camera and triple-spectrum camera.

Parameter information:

Key	Type	Values	Description
operator	char (computing)	TemHighSnapPush	Push Hazardous high temperature alarm
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
SnapTime	char (computing)	YYYY-MM-DDThh:mm:ss	Capture time. e.g., 2018-03-25T21:50:05

	g)		
SparkAlarm	Int		Spark alarm:0:No1:Yes2:With and only with spark alarm
Message	Array[]		When sparkAlarm=2, there is no message array
Message.ArsssseaId	Int		Area ID
Message.MessageType	Int		Message type 0:Temperature monitoring 1: Person leave open flame area
Message.AlarmType	Int		Message type 0:warning 1:alarm
Message.TemRise	Int		Sudden temperature rise:0:No1:Yes
Message.DurationTime	Int		Duration (duration of continuous alarm) Unit: seconds
Message.TemRiseDuration	Int		Duration of temperature rise in seconds
Message.Temperature	Float		Temperature in °C
Pic	String		Image base64 encoded data (up to 1M)
TemPic	String		Thermal imaging image base64 encoded data (up to 1M)

e.g., Raw.

```
-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "TemHighSnapPush",
  "info": {
    "DeviceID": "005a213b000b93cc",
```

```

    "SnapTime": "2023-02-14 11:01:02",
    "SparkAlarm": 0,
    "Message": [{
      "ArssssseaId": 0,
      "MessageType": 0,
      "AlarmType": 0,
      "TemRise": 0,
      "DurationTime": 30,
      "TemRiseDuration": 5,
      "Temperature": 32.5
    }],
    "Pic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAA",
    "TemPic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAA"
  }
}

```

3.3.9. Upload personnel and vehicular capture record

This interface is suitable for human and vehicles structured detection camera.

Parameter information:

Key	Type	Values	Description
operator	char (computing)	FullStrSnapPush	Push violation alarm snapshot
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
SnapTime	char (computing)	YYYY-MM-DDThh: mm:ss	Capture time. e.g., 2018-03-25T21:50:05
SnapID	int		Target ID
ObjectType	int		Target type: 0: Face 1: Human body 2: Motor vehicle 3: Non-motor vehicle
ObjectAttr	Object		
ObjectAttr.Carp late	char (computing)		ObjectType=2: motor vehicle licence plate number
Pic	char (computing)		Image base64 encoded data (within 1M)

e.g., Raw.

-- HEADERS --

```

POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "FullStrSnapPush",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "snapTime": "2022-09-28T17:18:40",
    "ObjectType": 2,
    "ObjectAttr": {
      "Carplate": "粤 B888H9"
    },
    "Pic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAIwAA"
  }
}

```

3.3.10. Upload behavioural analysis capture record

Parameter information:

Key	Type	Values	Description
operator	char (computing)	BehaviorSnapPush	Push violation alarm snapshot
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
SnapTime	char (computing)	YYYY-MM-DDThh:m m:ss	Capture time. e.g., 2018-03-25T21:50:05
ObjectType	int		Target type: 0:Human 1:Vehicle
BehaviorType	int		Type of behaviour: 0: Tripwire incursion 1: Area incursion
BehaviourDirection	int		Direction: 0:Left to right 1:Right to left 2:Enter area 3:Leave area
Pic	char (computing)		Image base64 encoded data (within 1M)

e.g., Raw.


```

-- HEADERS  --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY  --
{
  "operator": "BehaviorSnapPush",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "CreateTime": "2022-09-28T17:18:40",
    "objectType": 0,
    "BehaviorType": 0,
    "BehaviorDirection": 0,
    "Pic": "data:image/jpeg;base64,Qk3m5QAAAAAAAAADYAAAAoAAAAjAAAAIwAA"
  }
}

```

3.3.10.1. Upload monitoring of absence from work reporting

Parameter information:

Key	Type	Values	Description
operator	char (computing)	LeaveSnapPush	Push monitoring of absence from work alarm
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
CreateTime	char (computing)	YYYY-MM-DDThh:m m:ss	Capture time. e.g.. 2018-03-25t21:50:05
Pic	char (computing)		Image base64 encoded data (within 1M)

e.g., Raw.

```

-- HEADERS  --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json

```

```

Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "LeaveSnapPush",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "CreateTime": "2022-09-28 17:18:40",
    "Pic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAIwAA"
  }
}

```

3.3.11. Upload licence plate recognition capture record

Parameter information:

Key	Type	Values	Description
operator	char (computing)	PlateSnapPush	Push violation alarm snapshot
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
ID	int		Push serial number
AlarmAction	char (computing)	vehicle licence plate recognition	Type of violation
PlateColor	int	0~7	Licence plate colour:0:unknown 1:White letters on blue background 2:Black letters on yellow background 3:Black text on white background 4:White text on black background 5:White on green 6: black lettering on a green background 7:Green and yellow with black lettering
PlateType	int		Licence plate type: 0:

			Indeterminate 1:Blue licence plate car 2:Single-deck yellow licence plate car 4: Police vehicles 8: Armed police vehicles 16:Double decker yellow licence 32:Motorcycle 64:Coaches 128:Military vehicles 256:Personalised Vehicles 512:Hong Kong and Macau Vehicles 1024:Embassy car 2048:Old-style licence plate 4096:Civil Aviation Vehicles 8192:New Energy
LicencePlate	char (computing)		vehicle registration number
RecordTime	int		Recording time (seconds)
PlatePic	char (computing)		Capture image base64 encoded data (within 1M)
ScenePic	char (computing)		Scene map base64 encoded data (within 1M)

e.g., Raw.

```

-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 86229
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "PlateSnapPush".
  "info": {
    "DeviceID": 1021544.
    "ID": 2,
    "AlarmAction": "Licence Plate Recognition".
    "PlateColour": 1,

```

```

    "PlateType": 1,
    "LicencePlate": "浙 B00XS9",
    "RecordTime": 11
  },
  "PlatePic": "data:image/jpeg;base64,/9j/",
  "ScenePic": "data:image/jpeg;base64,/9j/"
}

```

3.3.12. Upload regional headcount

Parameter information:

Key	Type	Values	Description
operator	char (computing)	CountInRegionPush	Push regional headcount push
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device
time	char (computing)	YYYY-MM-DDThh:m m:ss	Capture time. e.g., 2018-03-25T21:50:05
realtimeCount	int		Real-time foot traffic counts
averageCount	int		Average number of people in the cycle
maxCount	int		Maximum number of people in the cycle
minCount	int		Minimum number of people in the cycle

e.g., Raw.

```

-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "BehaviorSnapPush ",
  "info": {
    "DeviceID": "005a213b000b93cc",

```

```

    "time": "2022-09-28T17:18:40",
    "realtimeCount": 1,
    "averageCount": 1,
    "maxCount": 2,
    "minCount": 0
  }
}
```

3.3.13. Upload vehicle attributes

This operation is applicable to equipment for identifying personnel, vehicles, and non motorized vehicles in special customized versions.

Parameter information:

Key	Type	Values	Description
operator	char	CatAttrSnapPush	Upload vehicle attributes
info	json object		concrete content
DeviceID	char		Webcam ID, distinguish each machine
CreateTime	char	YYYY-MM-DDThh:m m:ss	Capture time。 e.g., 2023-12-19 18:12:23
objectType	int		Target type: 1: Vehicle
behaviorType	int		Behavior type: 0: Wire intrusion
behaviorDirection	int		Direction: 0: From left to right 1: From right to left
carColor	int		Vehicle color: 0: Other 1: Black 2: Blue 3: Brown 4: Green 5: Silver 6: White 7: Red 8: Yellow 9: Pink 10: Purple 11: cyan 12: Grey 13: Gold
carClass	int		Vehicle type: 0: Other 1: Sedan 2: SUV 3: Business vehicle 4: Small truck 5: Large truck 6: Light passenger vehicle 7: Small bus 8: Large bus 9: Tricycle 10: Minivan 10:Microvan 11:pickup truck 12:trailer 13:Concrete special vehicle 14:tanker

			15:crane truck 16:fire engine 17:Pulling soil truck 18:Escort vehicle 19:Engineering emergency repaivehicle 20:Rescue vehicle 21:Fence truck 24:tracto
carSpecial	int		Special vehicles: 0: Non special vehicles 101: Military vehicles 102: Training vehicles 103: Police vehicles 105: Fire trucks 106: School buses 107: Taxi 110: Ambulance 111: Escort truck 113: Express truck 114: Dangerous goods transport vehicle 115: Environmental sanitation vehicle 116: Engineering repair vehicle 117 Rescue vehicle
carBackup	int		spare tire: 0: Other 1: No spare tire 2: There is a spare tire
carViewpoint	int		orientation: 0: None 1: Front 2: Rear 4: Side
carplateColor	int		License plate color: 0: Other 1: Yellow 2: Blue 3: Black 4: White5: Green 6: Yellow Green 7: Gradient Green
carplateType	int		License plate type: 1: Large car license plate (yellow background with black text) 2: Small car license plate (blue background with white letters) 3: Embassy car license plate (black background with red letters) 4: Consulate car license plate (black background with red letters) 5: Overseas car license plate (black background with red text) 6: Foreign car license plate (black background with white text)

			7: Two, three wheeled motorcycle license plate (yellow background with black letters) 8: Light motorcycle license plate (blue background with white letters) 9: Embassy motorcycle license plate (black background with red letters) 10: Consulate motorcycle license plate (black background with red letters) 11: Overseas motorcycle license plate (black background with white text) 12: Foreign motorcycle license plate (black background with white text) 13: Agricultural transport vehicle license plate (yellow background with black letters) 14: Tractor license plate (green background with white letters) 15: Trailer license plate (yellow background with black text) 16: Coach car license plate (yellow background with black text) 17: Coach motorcycle license plate (yellow background with black text) 18: Test car license plate (yellow background with black text) 19: Test motorcycle license plate (yellow background with black text) 20: Temporary human border vehicle license plate (white background with red text) 21: Temporary pedestrian motorcycle license plate (white background with red text) 22: Temporary driving license
--	--	--	---

			plate (white background with black text) 23: Police car license plate (white background with red letters) 24: Police motorcycle license plate (white background with red text) 26: Hong Kong inbound and outbound vehicles (black background with white text) 27: Macau inbound and outbound vehicles (black background with white text) 31: Armed Police License Plate (white background with red text) 32: Military license plate (white background with red letters) 34: Small scale new energy 35: Large scale new energy 99: Other license plates
carplateFlag	int		License plate emblem: 0: No license plate 1: Single row license plate 2: Double row license plate 3: New Energy 4: False Detection 5: License Plate Too Small 6: No license plate detected 7: License plate obstruction (human error) 8: Incomplete license plate (non-human) 9: Partial obstruction of license plate (artificial)
carplate	char		license plate number
Pic	char		Target Image base64 encoded data (within 1M)

e.g.,Raw:

```

-- HEADERS  --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 59552
  
```



```

User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "CatAttrSnapPush",
  "info": {
    "DeviceID": "18974",
    "CreateTime": "2023-12-19T18:12:23",
    "objectType": 1,
    "behaviorType": 0,
    "behaviorDirection": 1,
    "carColor": 6,
    "carClass": 2,
    "carSpecial": 0,
    "carBackup": 0,
    "carViewpoint": 0,
    "carplateColor": 2,
    "carplateType": 2,
    "carplateFlag": 1,
    "carplate": "浙 B00QS9",
    "pic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAIwAA"
  }
}

```

3.3.14. Uploading of the vehicle flushing information

This set of interfaces is suitable for the vehicle flushing cameras.

Upload using the "multipart / form" format

Parameter information:

Key	Type	Values	Description
DeviceID	char		Webcam ID, distinguish each machine
ID	Int		event ID
EventType	int	0~1	0: Vehicle flushing 1: Vehicle detour
PlateColor	int	0~7	License plate color: 0: Unknown 1: Blue background and white font 2: Yellow background and black font 3: White background and black font 4: Black background and white font 5: Green background and white font

			6: Green background and black font 7: Green and yellow background and black font
PlateType	int	0~3	License plate type: 0: Uncertain 1: Blue brand car 2: single-layer yellow card car 3: New energy
LicensePlate	char		plate number
StartTime	char	YYYY-MM-DDT hh:mm:ss	The event start time, e.g. 2022-09-28T17:18:38
EndTime	char	YYYY-MM-DDT hh:mm:ss	End of the event, e.g. 2022-09-28T17:18:44
RecordTime	int		Video recording time (seconds)

e.g.,Raw:

```
-- HEADERS  --
POST /Subscribe/PlateSnapPush HTTP/1.1
Host:192.168.2.10
Content-Type: multipart/form-data;boundary=-----1704700208758
Accept: */*
Accept-Encoding: gzip, deflate, br
Content-Length: 8003165
Connection: keep-alive

-----1704700208758
Content-Disposition: form-data; name="DeviceID"

1669910
-----1704700208758
Content-Disposition: form-data; name="ID"

1
-----1704700208758
Content-Disposition: form-data; name="EventType"

0
-----1704700208758
Content-Disposition: form-data; name="PlateColor"

1
-----1704700208758
Content-Disposition: form-data; name="PlateType"
```

```

1
-----1704700208758
Content-Disposition: form-data; name="LicensePlate"

浙 B00QS9
----- 12356487851234
Content-Disposition: form-data; name=StartTime

2022-09-28T17:18:38
----- 12356487851234
Content-Disposition: form-data; name=EndTime

2022-09-28T17:18:44

-----1704700208758
Content-Disposition: form-data; name="RecordTime"

6
-----1704700208758
Content-Disposition: form-data; name="imgFile"; filename="imgFile.jpg"
Content-Type: image/jpg
<<image data.....>>

-----1704700208758
Content-Disposition: form-data; name="file"; filename="video.mp4"
Content-Type: video/mp4
<<mp4 data.....>>
-----1704700208758---
```

3.3.15. Upload helmet and reflective clothing not weared capture record

This set of interfaces is suitable for helmet reflective coat cameras.

Upload using the "multipart / form" format

Parameter information:

Key	Type	Values	Description
operator		Operation flag, ClothHelmetSnapPush	Capnap illegal alarm push; suitable for helmet reflective coat camera
DeviceID	String		Webcam ID, distinguish each machine

CreateTime	String	YYYY-MM-DDT hh:mm:ss	Capture the record time.e.g.,2018-03-25T21:50:05
Helmet	Int		Safety helmet 0: wearing 1: not wearing 2: not sure
ReflectiveVest	Int		Reflective clothing 0: wearing 1: not wearing 2: not sure
Pic	String		Target Image base64 encoded data (within 1M)
ScenePic	String		sceneImage base64 encoded data (within 2M)

e.g.,Raw:

```

-- HEADERS  --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY  --
{
  "operator": "ClothHelmetVerifyPush",
  "info": {
    "DeviceID": 1000593,
    "CreateTime": "2024-01-15T18:22:04",
    "Helmet": 1,
    "ReflectiveVest": 2
  },
  "Pic": "data:image/jpeg;base64,/9j/4AAQSkZJRgABAQEB.....",
  "ScenePic": "data:image/jpeg;base64,/9j/4AAQSkZJRgABAQEB.....",
}

```

Take an image, select the scene image, and upload the "scene" information.

Take an image, select the target image, and upload the "pic" information.

Take an image, select the target image+scene image, and upload the "pic" and "scene" information.

3.3.16. Upload pyrotechnic event capture record

This interface is suitable for pyrotechnic monitoring camera.

Upload using the "multipart / form" format

Parameter information:

Key	Type	Values	Description
operator		Operation flag, FireSmokeSnapPush	Push violation alarm snapshot; for helmet and reflective clothing detection camera.
DeviceID	String		Webcam ID, distinguish each machine
CreateTime	String	YYYY-MM-DDT hh:mm:ss	Capture the record time.e.g.,2018-03-25T21:50:05
Fire	Int		Flame 0:None 1:Present 2: not sure
Smoke	Int		Smoke 0:none 1:present 2:not sure
Pic	String		Target Image base64 encoded data (within 1M)
ScenePic	String		sceneImage base64 encoded data (within 2M)

e.g.,Raw:

```
-- HEADERS  --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY  --
{
  "operator": "ClothHelmetVerifyPush",
  "info": {
    "DeviceID": 1000593,
    "CreateTime": "2024-01-15T18:22:04",
    "Fire": 1,
    "Smoke": 2
  },
  "Pic": "data:image/jpeg;base64,/9j/4AAQSkZJRgABAQEB.....",
  "ScenePic": "data:image/jpeg;base64,/9j/4AAQSkZJRgABAQEB.....",
}
```

}

Take an image, select the scene image, and upload the "scene" information.

Take an image, select the target image, and upload the "pic" information.

Take an image, select the target image+scene image, and upload the "pic" and "scene" information.

3.3.17. Uploading safe riding incidents

Parameter information (Note: the field not marked optional is required)

Key	Type	Values	Description
operator	char	SafetyRidePush	Uploading safe riding incidents
deviceId	char		Webcam ID, distinguish each machine
time	char	YYYY-MM-DD hh:mm:ss	Capture time。 e.g., 2023-12-27 16:11:54
helmet	int		Wearing a helmet: 0: No 1: Yes
plate	char		Electric bicycle license plate number
pic	char		Target Image base64 encoded data (within 1M)

e.g.,Raw:

```

-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

{
  "operator": "SafetyRidePush",
  "info": {
    "deviceId": "1001336",
    "time": "2024-06-24T09:56:15",
    "helmet": 0,
    "plate": "",
    "pic": "data:image/jpeg;base64,....." (Fill in the image base64 encoded data, within 1M)
  }
}

```

```
"
  }
}
```

3.3.18. Electric spark high temperature event upload

This set of interfaces is suitable for three-spectral, dual-spectral, thermal imaging related devices.

Upload using the "multipart / form" format

Parameter information:

Key	Type	Values	Description
operator		TemHighSnapPush	Electric spark high-temperature alarm pushing
deviceId	String		Device ID number of the device
snapTime	String	YYYY-MM-DD hh:mm:ss	Capture time e.g., 2023-12-27 16:11:54
sparkAlarm	Int		Spark alarm: 0: No 1: Yes 2: Yes and only spark alarm
message	Array[]		When sparkAlarm=2, there is no message array
message.areaId	Int		region ID
message.messageType	Int		Message type 0: Temperature monitoring 1: fire
message.alarmType	Int		Message type 0: alert 1: alarm
message.temRise	Int		Temperature rise: 0: No 1: Yes
message.temperature	Float		Temperature in °C
pic	String		base64 code of visible light image (within 1M)
tempic	String		base64 code of thermal imaging images (within 1M)

e.g.,Raw:

```
-- HEADERS --
POST /Subscribe/Snap HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 77181
Accept-Encoding: gzip, deflate
```

```

User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

{
  "operator": "TemHighSnapPush",
  "info": {
    "deviceId": "005a213b000b93cc",
    "snapTime": "2023-02-14 11:01:02",
    "sparkAlarm": 0,
    "message": [
      {
        "areaId": 0,
        "messageType": 0,
        "alarmType": 0,
        "temRise": 0,
        "temperature": 32.5
      }
    ],
    "pic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAIwAA",
    "tempic": "data:image/jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAI"
  }
}

```

3.4. Cancel subscription

Cancellation of data subscription, types include: subscription of real-time capture information and subscription of authentication result information

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	Unsubscribe	Unsubscribe
info	json object		concrete content
DeviceID	char (computing)		The device ID number of the device to be operated can be obtained by the Get device information The device ID number of the device to be operated can be obtained through 3.9 Device Information
			Acquisition.

Num	int	1~2	Unsubscribe from how many types of information
Topics	json array	"Snap". "VerifyWithSnap". "VerifyNoPic"	A collection of single or multiple subscription message types such as: ["Snap"] : Unsubscribe from real-time snap reporting maybe ["VerifyWithSnap"] : Unsubscribe from authentication results reporting maybe ["VerifyNoPic"] : Unsubscribe from authentication result reporting maybe ["Snap", "VerifyWithSnap"] unsubscribe from snap and authentication results reporting maybe ["Snap", "VerifyNoPic"] unsubscribe from snap and authentication results reporting maybe

Operator: **Unsubscribe**

URI:<http://<server ipaddr>/action/Unsubscribe>

e.g.,

<http://192.168.2.10/action/Unsubscribe>

Issuance of body

```
{
  "operator": "Unsubscribe",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "Num": 2,
    "Topics": ["Snap", "VerifyNoPic"]
  }
}...
```

Return parameter information(Note: the field not marked optional is required):

operator	char	Unsubscribe	unsubscribe
----------	------	-------------	-------------

code	int		Instruction execution error code: 200-Success, see elsewhere C.13.1 Error codes for unsubscribe
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "Unsubscribe",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.5. The heartbeat of subscription

The device gets the address, port and URL of the subscribed heartbeat from the data subscription information, the device sends the heartbeat information to the subscription address throughout the subscription validity period, the subscription server needs to reply to the heartbeat likewise after receiving the heartbeat from the device in order to maintain a valid connection between the two sides, once the heartbeat handshake fails, the device side will shut down the connection and then re-try to connect to the subscription address, and the interval of the heartbeat is set at 30 seconds. The heartbeat report needs to subscribe to any HTTP subscription (authentication subscription or stranger capture subscription, etc.), and cannot subscribe to the heartbeat alone.

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	HeartBeat	Unsubscribe
info	json object		concrete content
DeviceID	char (computing)		Device ID number of the device to be operated
Time	char (computing)	YYYY-MM-DDThh:mm:ss	Current time of the device. e.g.,2018-03-25T21:50:05

e.g., Raw

```
-- HEADERS --
POST /Subscribe/heartbeat HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 128
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:192.168.2.10
Connection: Keep-Alive

-- BODY --
{
  "operator": "HeartBeat",
  "info":{
    "DeviceID": "005a213b000b93cc",
    "Time": "2018-03-12T09:09:20"
  }
}
```

3.6. Search and enquiry lists

Query the list of names that match the search criteria based on the appropriate search terms.

3.6.1. Query single personnel list

Operator: **SearchPerson**

URI: **http://<server ipaddr>/action/SearchPerson**

e.g., search the list according to the CustomizeID you are looking for.

http://192.168.2.10/action/SearchPerson

Body issued

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	SearchPerson	SearchPerson: list search by CustomizeID
info	json object		concrete content
DeviceID	char (computing)		ID of the device

SearchType	int (optional)	0~2	0:CustomizeID 1:LibID, (discarded) 2:PersonUUID
SearchID	char (computing)		CustomizeID or PersonUUID
Picture	int	0~1	Whether to include image information 0:List without picture information 1: List with picture information

```
{
  "operator": "SearchPerson",
  "info": {
    "DeviceID": "123555",
    "SearchType": 0,
    "SearchID": "1234",
    "Picture": 1
  }
}
```

Return parameter information(Note: the field not marked optional is required):

operator	char	SearchPerson	Query single personnel list
code	int		Instruction execution error code: 200-Success, see elsewhere C.15.1.1 Error codes for query single personnel list
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	
DeviceID	char		ID of the device
LibID	int		List database ID
PersonType	int	0~1	List type 0: whitelist 1: blacklist
Name	char		Name max length 32 character length (including end character)
Gender	int	0~1	Gender 0: male 1: female
IdCard	char		The maximum length of the ID number is 32 characters (including the end character)
Birthday	char	YYYY-MM-DD	Birthday e.g., 2018-1-1
Telnum	char		Maximum length of telephone

			number is 32 characters (including end character)
Address	char		The maximum length of the address is 72 characters (including end characters)
CustomizeID	unsigned int		The user-defined personnel ID number, you can modify and delete the corresponding personnel information through this ID number. Note: Do not reuse the same ID personnel, otherwise it will cause errors such as modification and deletion.
PersonUUID	char		User-defined UUID Maximum length of 48 characters (including end character)
picinfo	char (optional)		The base64 encoding data of the human face pictures

Reply to the correct body

```

{
  "operator": "SearchPerson",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "LibID": 1,
    "PersonType": 0,
    "Name": "test",
    "Gender": 0,
    "Nation": 1,
    "CardType": 0,
    "IdCard": " ",
    "Birthday": "2000-01-01",
    "Telnum": " ",
    "Address": " ",
    "CustomizeID": -2,
  }
},
  " picinfo ": "data:image/jpeg;base64,....."
}

```

3.6.2. Query total number of list

Operator: SearchPersonNum

URI: <http://<server ipaddr>/action/SearchPersonNum>

<http://192.168.2.10/action/SearchPersonNum>

Body issued

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	SearchPersonNum	SearchPersonNum: Returns the total number of names that match the query.
info	json object		concrete content
DeviceID	char (computing)		ID of the device

```
{
  "operator": "SearchPersonNum",
  "info": {
    "DeviceID": "005a213b000b93cc"
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

operator	char	SearchPersonNum	SearchPersonNum: Return the total number of eligible lists based on the query condition
code	int		Instruction execution error code: 200-Success, see elsewhere C.10.1 Add single list
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	
MaxListsNum	unsigned int		Number of lists already in place for the current device
PersonNum	unsigned int		Number of personnel issued through agreements

Reply to the correct body

```
{
  "operator": "SearchPersonNum",
  "code": 200,
  "info": {
    "DeviceID": "123555",
    "MaxListsNum": 0,
    "PersonNum": 0
  }
}
```

3.6.3. Query multi-person list

Operator: **SearchPersonList**

URI: **http://<server ipaddr>/action/SearchPersonList**

e.g., search the list according to the search criteria as well as the starting position to be searched and the number of lists to be searched

Search Description:

1. Search by time: set the start time and end time of search, and

the name is empty

2. Search by name or fuzzy search by name: set the name of search, and the start time and end time are empty

http://192.168.2.10/action/SearchPersonList

Body issued

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	SearchPersonList	SearchPersonList: Returns a list of people based on their starting location and number of queries.
info	json object		concrete content
DeviceID	char (computing)		ID of the device
PersonType	int (optional)	0~2	List type 0:Allow list 1:Block list 2:All

BeginTime	char (computing) (optional)		The start time of the search
EndTime	char (computing) (optional)		The end time of the search
Gender	int (optional)	0~2	Sex 0: Male 1: Female 2: All
Age	char (computing) (optional)		Age range: e.g. 1-100
Name	char (computing) (optional)		Person's full name
RequestCount	int (optional)		The total count of personnel informations returned from the query list. If it is set to be more than 100, only 100 personnel informations will be returned.
BeginNO	int (optional)	Default value 0, 0 or integer multiples of 'RequestCount'	The starting position of the query list, starting from the first person.
Picture	int	0~1	Whether to include image information 0:List without picture information 1:List with picture information (not supported yet)

```
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": "1000487",
    "PersonType": 0,
    "BeginTime": "2018-06-01T00:00:00",
    "EndTime": "2025-06-19T23:59:59",
    "Gender": 2,
    "Age": "0-100",
    "Name": ""
  }
}
```



```

        "RequestCount": 1,
        "BeginNO": 1,
        "Picture": 0
    }
}Or
{
    "operator": "SearchPersonList",
    "info": {
        "DeviceID": "005a213b000b93cc",
        "PersonType": 0,
        "BeginTime": "",
        "EndTime": "",
        "Gender": 2,
        "Age": "0-100",
        "Name": "test",
        "RequestCount": 10,
        "Picture": 1
    }
}

```

Return Parameter information(Note: the field not marked optional is required):

operator	char	SearchPersonList	SearchPersonList: Return the list based on the starting location and number of queries
code	int		Instruction execution error code: 200-Success, see elsewhere C.1 General error code
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	
LibID	int		List database ID
PersonType	int	0~1	List type 0: whitelist 1: blacklist
Name	char		Name max length 32 character length (including end character)
Gender	int	0~1	Gender 0: male 1: female
CardType	int		Certificate type 0: ID card
Birthday	char	YYYY-MM-DD	Birthday e.g., 2018-1-1
Telnum	char		Maximum length of telephone number is 32

			characters (including end character)
Address	char		The maximum length of the address is 72 characters (including end characters)
CustomizeID	unsigned int (optional)		The user-defined personnel ID number, you can modify and delete the corresponding personnel information through this ID number. Note: Do not reuse the same ID personnel, otherwise it will cause errors such as modification and deletion.
PersonUUID	char (optional)		User-defined UUID Maximum length of 48 characters (including end character)

Reply to the body format of SearchPersonList:

```
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "Listnum": 100,
    "List": [
      {
        PersonInfo
      },
      {
        PersonInfo
      },
      ...
    ]
  }
}
```

Reply to the correct body

```
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "Listnum": 100,
    "List": [
```

```
{
  "DeviceID": "005a213b000b93cc",
  "LibID": 1,
  "PersonType": 0,
  "Name": "test",
  "Gender": 0,
  "IdCard": " ",
  "Birthday": "2000-01-01",
  "Telnum": " ",
  "Address": " ",
  "CustomizeID": -2,
},
{
  PersonInfo...
},
...
]
```

3.7. Restore the device to factory settings

Restoring the device to factory settings mainly involves the setting of the factory mode. Currently support network parameters whether to restore the device to factory settings

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	SetFactoryDefault	Setting up the device to restore the device to factory settings
info	json object		concrete content
DefaltNetPar	unsigned char (optional)	0~1	Whether the network parameters are restored to the factory settings 0: Don't factory restore 1: Restore to factory
DefaltPerson	unsigned char (optional)	0~1	Whether the personnel-related are restored to the factory 0: Don't factory restore 1: Restore to factory

Operator: **SetFactoryDefault**

URI: **http://<server ipaddr>/action/SetFactoryDefault**

e.g.,

http://192.168.2.10/action/SetFactoryDefault

Issuance of body

```
{
  "operator": "SetFactoryDefault",
  "info": {
    "DefaultNetPar": 0
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

operator	char	SetFactoryDefault	SetFactoryDefault: Set up the equipment to restore the factory
code	int		Instruction execution error code: 200-Success, see elsewhere C.1 General error code
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "SetFactoryDefault",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.8. Restart the device

Gets or sets common parameter configuration information.

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	RebootDevice	RebootDevice: Restart the device
info	json object		concrete content

DeviceID	char (computing)		Device ID
IsRebootDevice	int (optional)	0~1	0:Do not restart the device 1: Restart the device

Operator: **RebootDevice**

URI: **http://<server ipaddr>/action/RebootDevice**

e.g.,

http://172.168.2.10/action/RebootDevice

Body:

```
{
  "operator": "RebootDevice",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "IsRebootDevice": 1
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

operator	char	RebootDevice	RebootDevice:Restart the device
code	int		Instruction execution error code: 200-Success, see elsewhere C.1 General error code
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "RebootDevice",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.9. Upgrade device

After upgrading the device successfully, the IP camera will reboot automatically.

3.9.1. Upgrade device interface 1

Parameter information

Key	Type	Values	Description
operator	char (computing)	Upgrade	Upgrade: Upgrade device
info	json object		concrete content
DeviceID	char (computing)		ID of the device
Name	char (computing)		version name
Path	char (computing)	Example: https://hq.oss-cn-shenzhen.aliyuncs.com/face/xxx.udx	Download path of the upgrade device file (http or https)
upgradeType	Int	1-4	Indicates upgrading the software firmware package; 2. Upgrade voice files (not supported) 3. Upgrade png image files (not supported) 4. Upgrade jpg image files (not supported)

Operator: **Upgrade**

URI:<http://<server ipaddr>/action/Upgrade>

e.g.,

<http://192.168.2.10/action/Upgrade>

Body issued

```
{
  "operator": "Upgrade",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "Name": "Latest Version",
    "upgradeType": 1,
    "Path": "https://hq.oss-cn-shenzhen.aliyuncs.com/face/xxx.udx"
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

operator	char	Upgrade	Upgrade: Version upgrade
code	int		Instruction execution error code: 200-Success, see elsewhere C.16.1 Error codes for version upgrade
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "Upgrade",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.10. MQTT Parameters

The MQTT parameters are mainly related to the MQTT service operation parameters of the network camera. Setting the important parameters of this interface will reconnect the network camera to the MQTT server.

Parameter information

Key	Type	Values	Description
operator		GetMQTTParam/ SetMQTTParam	GetMQTTParam:Get MQTT Parameters SetMQTTParam:Set MQTT parameters
info			concrete content
MQEnable	int (optional)	0~1	Enabling/disabling MQTT services 0: Closed 1: Switch on
MQCloudID	String (optional)		MQTT network camera cloud ID number Recommended local ID
MQAddr	String (optional)		MQTT Cloud Address
MQPort	int (optional)		MQTT Cloud Port
MQUser	String		MQTT Cloud Username
	(optional)		

MQPwd	String (optional)		MQTT Cloud Password
MQTopic	String (optional)		MQTT Cloud Topic
StrangerUploadType	int (optional)	0~1	upload personnel stranger record (default:0) 0: Upload 1: No upload
RecordUploadType	int (optional)	0~2	upload authentication identification information (default:1) 0:No upload 1:Recognition record upload with captured image 2:Identify records uploaded without capturing with pictures
ResumefromBreakpoint	int (optional)	0~1	Whether Stranger Capture records and personnel identification records are enabling MQTT Continuous transmission after network interruption (when Stranger Capture Upload or Identification Records Upload is enabling),0:Not enabled 1:Enabled. If you don't enable the function of continuous transmission, it only guarantees to push the record and doesn't need to be replied by the platform (cloud server). If enable the function, then pushed records need to be replied confirmation message to the camera by the server, see B.2 Set message replies , After 10 seconds the network camera does not receive the correct confirmation message from the server, it continues to push the same record.
BeginTime	String (optional)	YYYY-MM-DDTh h:mm:ss	The default start time of MQTT resume upload, you can leave it blank. Default time is the time when enable the stranger capture record upload or personnel identification record upload and enable the continuous transmission function. If

			the stranger capture and personnel identification record before the breakpoint is pushed completed, this time will become to the time when complete the record push. e.g., 2020-05-25T09:10:00
KeepAliveInterval	int	10~300(Sec)	Bottom heartbeat interval Interval
BasicTopic	char (computing)		Topics for online notification
HeartbeatTopic	char (computing)		Heartbeat Reporting Topic

3.10.1. Get MQTT parameters

Operator: **GetMQTTParam**

URI: **http://<server ipaddr>/action/GetMQTTParam**

e.g.,

http://192.168.2.10/action/GetMQTTParam

Reply to body

```
{
  "operator": "GetMQTTParam",
  "code": 200,
  "info": {
    "MQEnable": 0,
    "MQAddr": "",
    "MQPort": 0,
    "MQUser": "",
    "MQPwd": "",
    "MQTopic": "mqtt/face/1299517",
    "MQCloudID": "1299517",
    "StrangerUploadType": 1,
    "RecordUploadType": 1,
    "KeepAliveInterval": 60,
    "BasicTopic": "mqtt/face/basic",
    "HeartbeatTopic": "mqtt/face/heartbeat",
    "ResumefromBreakpoint": 0,
    "BeginTime": "2000-00-00T00:00:00"
  }
}
```

3.10.2. Set MQTT parameters

Operator: **SetMQTTParam**

URI: **http://<server ipaddr>/action/SetMQTTParam**

e.g.,

http://192.168.2.10/action/SetMQTTParam

Issuance of body

```
{
  "operator": "SetMQTTParam",
  "info": {
    "StrangerUploadType": 0,
    "RecordUploadType": 1
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

Type	Values	Description
	SetMQTTParam	SetMQTTParam:Set the MQTT parameter
int		Instruction execution error code: 200-Success, see elsewhere C.1General error code
json object		concrete content
char	“ok”/“fail”	Operation results
char	prompt message	

回复正确的 body

```
{
  "operator": "SetMQTTParam",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.11. System information

Get or set system information.

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	GetSysParam or SetSysParam	Getting or setting system information
info	json object		concrete content
Name	char (computing) (optional)		Device name, maximum support 64 characters (including the terminator)
DeviceID	int (optional)		Device ID (not settable)
Version	char (computing)		System version (not configurable)

3.11.1. Get system information

Operator: **GetSysParam**

URI: **http://<server ipaddr>/action/GetSysParam**

http://192.168.2.10/action/GetSysParam

Reply to body

```
{
  "operator": "GetSysParam",
  "code": 200,
  "info": {
    "Name": "123456",
    "DeviceID": "1299517",
    "Version": "v3.26.18.134_0.0.81_beta",
    "DeviceType": 0
  }
}
```

3.11.2. Set system information

Allows setting the name of the device.

Operator: **SetSysParam**

URI: **http://<server ipaddr>/action/SetSysParam**

e.g.,

http://192.168.2.10/action/SetSysParam

Reply to body

```
{
  "operator": "SetSysParam",
  "info": {
    "Name": "facegate_test"
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char	SetSysParam	Set system information
code	int		Instruction execution error code: 200-Success, see elsewhere C.1 General error code
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	

Reply to the correct body

```
{
  "operator": "SetSysParam",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

3.12. Device information

Get device information.

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	GetDeviceInformation	Getting device information
info	json object		concrete content
DeviceType	int	0~3	Broad category of equipment (0:IPC 1:DVR 2:NVR 3:Panel Unit)
DeviceSubType	int		Equipment subcategory (on hold)

3.12.1. Get device information

Operator: **GetDeviceInformation**

URI: **http://<server ipaddr>/action/GetDeviceInformation**

http://192.168.2.10/action/GetDeviceInformation

Reply to body

```
{
  "operator": "GetDeviceInformation",
  "info": {
    "DeviceType": 0,
    "DeviceSubType": 0
  }
}
```

3.13. Handshake Protocol Data

Handshake agreement data is mainly related to the customer docking platform can write some data content to the network camera to save, generally is the third party encrypted data content or third-party authentication data, etc., the size of the data content may **not exceed 4K bytes**.

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	GetHandSharkData or SetHandSharkData	GetHandSharkData:Get Handshake Protocol Data SetHandSharkData:Set Handshake Protocol Data
info	json object		concrete content
DeviceID	int		ID of the device
HandSharkInfo	char (computing)		Data content, not to exceed 4K bytes

3.13.1. Get Handshake Protocol Data

Operator: **GetHandSharkData**

URI: **http://<server ipaddr>/action/GetHandSharkData**

e.g.,

http://192.168.2.10/action/GetHandSharkData

Reply body

```
{
  "operator": "GetHandSharkData".
  "info": {
    "HandSharkInfo": "xxxx"
  }
}
```

3.13.2. Set Handshake Protocol Data

Operator: **SetHandSharkData**

URI: **http://<server ipaddr>/action/SetHandSharkData**

e.g.,

http://192.168.2.10/action/SetHandSharkData

Body issued

```
{
  "operator": "SetHandSharkData".
  "info": {
    "DeviceID": "1310001",
    "HandSharkInfo": "xxxx"
  }
}
```

3.14. Get body/vehicle counts

Operator: **GetCount**

URI: **http://<server ipaddr>/action/GetCount**

http://192.168.2.10/action/GetCount

Body issued

Parameter information(Note: the field not marked optional is required):

Key	Type	Values	Description
operator	char (computing)	GetCount	GetCount: Get the number of statistics
info	json object		concrete content

DeviceID	char (computing)		ID of the device
ObjectType	int	0~1	0:Human body 1: Vehicles
BehaviourDirection	int	0~2	0:Bidirectional 1:Left to right 2:Right to left

```
{
  "operator": "GetCount",
  "info": {
    "DeviceID": "005a213b000b93cc",
    "ObjectType": 0,
    "BehaviourDirection": 0
  }
}
```

Return Parameter information(Note: the field not marked optional is required):

operator	char	GetCount	GetCount:Get statistics
code	int		Instruction execution error code: 200-Success, see elsewhere C.17.1 Error codes for get body/vehicle counts
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
Detail	char	prompt message	
Number	unsigned int	quantities	

Reply to the correct body

```
{
  "operator": "GetCount",
  "code": 200,
  "info": {
    "DeviceID": "1299517",
    "ObjectType": 0,
    "Number": -1,
    "BehaviorDirection": 0
  }
}
```

3.15. Manually push and report personnel identification records

The manual push control record interface is mainly used to solve the problem of lost control records reported by the authentication and identification personnel information upload interface due to server-side reasons. By manually setting the interface again, the all-in-one machine actively uploads the authentication results within the time period through the authentication subscription topic mqtt/face/ID/Rec (where ID refers to the local ID, such as 1305433) to the server. This interface needs to ensure that it is connected to the server and that the recognition record subscription is enabled. This interface is a mandatory push to search for control records, regardless of whether the network interruption and continuation mode is used, which has no impact on this interface. The control records uploaded through this interface do not require a server reply. At the same time, it should be noted that the data reported by this interface may be saved multiple times by the server due to the same record being reported to the server before. The "PushType" in the upload of 5 Upload personnel identification record can distinguish whether it is a Manually push and report personnel identification records.

Parameter information (Note: the field not marked optional is required)

Key	Type	Values	Description
operator	char	ManualPushRecords	ManualPushRecords: Manually push and report personnel identification records
info	json object		concrete content
DeviceID	int		ID of the device
TimeS	char	YYYY-MM-DDThh:mm:ss	The start time of the control record that needs to be pushed. e.g., 2020-07-29T21:50:05
TimeE	char	YYYY-MM-DDThh:mm:ss	The end time of the control record that needs to be pushed. e.g., 2020-07-29T21:50:05

Operator: **ManualPushRecords**

URI: **http://<server ipaddr>/action/ManualPushRecords**

e.g.,

http://172.168.2.10/action/ManualPushRecords

body:

```
{
```



```

"operator": "ManualPushRecords",
"info": {
  "DeviceID": 123555,
  "TimeS": "2024-05-28T19:00:00",
  "TimeE": "2024-05-29T00:00:00"
}
}

```

Return parameter information(Note: the field not marked optional is required):

operator	char	ManualPushRecords	ManualPushRecords: Manually push and report personnel identification records
code	int		Instruction execution error code: 200-Success, see elsewhere C.18.1 Error codes for manual push control / capture record
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
RecordNum	char	Total number of matched control records	
ManualPushID	int		The ID that pushed the request manually
RecordTip	Char (optional)	prompt message	

Reply to the correct body

```

{
  "operator": "ManualPushRecords",
  "code": 200,
  "info": {
    "Result": "Ok",
    "RecordNum": "3",
    "ManualPushID": "1",
    "RecordTip": "Confirm connection to HTTP server is Ok ? Find 3 records, try to push  
now"
  }
}

```

3.16. Manually push and report stranger capture record

The manually push and report stranger capture record is mainly used to solve the problem of

lost control records reported by the stranger personnel information upload interface due to server-side reasons. By manually setting the interface again, the all-in-one machine actively uploads the stranger capture records during the time period to the server through the topic mqtt/face/ID/Snap (where ID refers to the local ID, such as 1305433) subscribed by the stranger. This interface needs to ensure that it is connected to the server and that stranger subscriptions are enabled. This interface is mandatory to push the captured records of strangers found during search, regardless of whether the network interruption and continuation mode is used, which has no impact on this interface. The captured records of strangers uploaded through this interface do not require a server reply. At the same time, it should be noted that the data reported by this interface may be saved multiple times on the server due to the same record being reported to the server before. The PushType in the 6 Upload personnel stranger record strangers can distinguish whether it is a manually pushed control record.

Parameter information (Note: the field not marked optional is required)

Key	Type	Values	Description
operator	char	ManualPushSnaps	ManualPushSnaps: Manually push and report stranger capture record
info	json object		concrete content
DeviceID	int		ID of the device
TimeS	char	YYYY-MM-DDThh:mm:ss	The start time of the control record that needs to be pushed. e.g., 2020-07-29T21:50:05
TimeE	char	YYYY-MM-DDThh:mm:ss	The end time of the control record that needs to be pushed. e.g., 2020-07-29T21:50:05

Operator: **ManualPushSnaps**

URI: **http://<server ipaddr>/action/ManualPushSnaps**

e.g.,

http://172.168.2.10/action/ManualPushSnaps

body:

```
{
```

```
{
  "operator": "ManualPushSnaps",
  "info": {
    "DeviceID": 123555,
    "TimeS": "2024-05-28T19:00:00",
    "TimeE": "2024-05-29T00:00:00"
  }
}
```

Return parameter information(Note: the field not marked optional is required):

operator	char	ManualPushSnaps	ManualPushSnaps: Manually push and report stranger capture record
code	int		Instruction execution error code: 200-Success, see elsewhere C.18.1 Error codes for manual push control / capture record
info	json object		concrete content
Result	char	“ok”/“fail”	Operation results
RecordNum	char	The total number of matched snap records	
ManualPushID	int		The ID that pushed the request manually
RecordTip	Char (optional)	prompt message	

Reply to the correct body

```
{
  "operator": "ManualPushSnaps",
  "code": 200,
  "info": {
    "Result": "Ok",
    "RecordNum": "4",
    "ManualPushID": "1",
    "RecordTip": "Confirm connection to HTTP server is Ok ? Find 4 records, try to push  
now"
  }
}
```

4. Appendix A: Revision History

dates	author	version number	Record of Changes
2022-09-27	XingJP	1.01	First draft of the programme
2022-12-20	XingJP	1.02	1. Add. 3.3.6 Upload Intelligent violation alarm capture record 2. Fixed: some test cases.
2022-12-30	XingJP	1.03	1. Add 3.13 Handshake protocol data
2023-04-23	XingJP	1.04	Add 3.3.7 Upload throwing objects from height event capture record Add 3.3.8 Upload thermal imaging alarm capture record Add 3.3.9 Upload personnel and vehicular capture record Add 3.3.10 Upload behavioural analysis capture record

5. Appendix B: Message Replies for Authentication Failures or Setup Interfaces

B.1 Authentication failure

```
{
  "operator": "authentication",
  "info": {
    "Result": "Fail",
    "Detail": "Unsupport authentication protocol type"
  }
}

Or

{
  "operator": "authentication",
  "info": {
    "Result": "Fail",
    "Detail": "Unknown user or password"
  }
}
```

B.2 Set message replies

The setup was successful:

```
{
  "operator": "<Operator>",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

Setup failed:

```
{
  "operator": "<Operator>",
  "info": {
```

```

"Result": "Fail",
"Detail": "<detail>"
}
}

```

6. Appendix C: Function-specific Interface Grab Bags or Error Codes

C.1 General error code

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json!"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Invalid Parameters"	The parameters are not legal

C.10 Add / modify the List

C.10.1 Add single list

```

POST /action/AddPerson HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 77281
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: cf37eff6-e05c-a46f-e2f1-d8ae94ab0784
Cache-Control: no-cache
Origin: chrome-extension://fhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/
69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "AddPerson",
  "info": {
    "DeviceID": 1305138,
    "PersonType": 0,
    "Name": ".....",
    "Gender": 0,
    "Nation": 0,
    "CardType": 0,
    "IdCard": "430923199011044411",
    "Birthday": "1990-11-04",
    "Telnum": "18888888888",
    "Native": ".....",
    "Address": ".....",
    "Notes": ".....",
    "MjCardFrom": 0,
    "MjCardNo": 1234,
    "Tempvalid": 0,
    "CustomizeID": 123456
  },
  "picinfo": "data:image/
jpeg;base64,Qk024QAAAAAADYAAAAoAAAAeAAAAKAAAAABABgAAAAAAAAAAAScWAAEgsAAAAAAAAAAAAA/v7+/v7+/v7+/
v7+/v7+/v7+/v7+/v7+/v7+/v7+/f/8/v3//v7+///7//39/Pz//v+//z+opCTrZ6ZtKSdm4+T59rpt7G/

```

.....

```

9gwU5fWk5jWk5hY1RqYVNaV9va11ycWh3hnqHnZaf5ubm70vq/Pn6npqg/////7+/v7+/
v7+ytl0ytqxyde1ydu0y9y3zNq3zdy2yti0zty6zty6zNm40N29zNy4ztq40ty4zNu40ty6ytq4zt29y9u8yNq1yNi3ydm5ydw2
0N2+yta9y9e7yNK8ws25wtC4ztXIlqKWrlism6GWhYOLpKOvenCBZGBzUFBqU1FnS0pa0z1XQz5bQDtYPz1aPT9ePjtbQj9mQUN
1TVF0UE9xT1N5UVZ9WwKIU1+IXwSVWmmYwWaqXGqaw2iWwWwXV2eTWwYzWwYXW2yUw2+TWnCTUGKHUmOKUWwKTmeMTGCGVGiOTF
6DVGWGU1uDUfZ6SEtxQkRmRkV1TUdmREBdTEdiQD5UQUbRkNdSk1hSkJcREFXSkReSkRcTUZfTkVdTudgUEheVExiUEpcU01gU
U5eUktciwBkV1FhW1NkY1ZqYVBkZFhsX1Jma19sa19wdmx4enV+4d7j50Te6ujm9/P4mZmf/v3+/v/9/v7+/v7+"
}HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 17:59:47 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

4b
{
  "operator": "AddPerson",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}

```

C.10.1.1 Add error codes to individual lists

errcode	Type	Values	Description
461	int	unknown operation command	Unknow operator
462	int	Parameter error (missing info)	Parameter error
463	int	DeviceID mismatch	Unkonw DeviceID
464	int	No picinfo or picURI passed in	Unkonw picinfo and get picURI error
465	int		Other
466	int	CustomizeID or UUID already exists	CustomizeID or UUID had existed
467	int		reserve
468	int		reserve
469	int	The Wergen card number already exists.	WG_CardNo already exist
470	int	ID (RFCard) card number already exists; (for built-in card machine models)	ID_CardNo already exist

471	int	List of personnel already exists	Person already exist
472	int		reserve
473	int	No face detected	Face Undetected
474	int	Image Base64 decoding failed	picinfo Base64 decode error
475	int	Parsing URI server address errors	Get URI server ip error
476	int	Failed to connect to the server IP when adding an image as a URL.	Get picinfo and connect URI IP error
477	int	Get URL image data too short	Get URI pic data too short
478	int	Get WGFacilityCode error	Get WGFacilityCode error
479	int	Get MjCardNo error	Get MjCardNo error

C.10.2 Add multiple list

```

POST /action/AddPersons HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 126027
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: e8080aa8-f5df-954c-0749-e9dd7e254d74
Cache-Control: no-cache
Origin: chrome-extension://fhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "AddPersons",
  "DeviceID": "1305138",
  "Total": 2,
  "Personinfo_0": {
    "PersonType": 0,
    "Name": "test",
    "Gender": 0,
    "Nation": 0,
    "CardType": 0,
    "IdCard": "430923199011044411",
    "Birthday": "1990-11-04",
    "Telnum": "18888888888",
    "Address": ""
  }
}

```

.....

```
wBcJf8A0VXyBf8A/I/T/wDA/wD2zrbCfovyifwp90CMf+IX1vdX8fD09lvzy128397Pc1YiONvvEoc7ueo/
yR6HB61Xn6Rj+50/H/DsBgD04GJv+WEX/X0oZa9Xp84/of41vb5L9CjNKwkgjHAKHPrx6dRz34PqMHmpVXakwH8DcH
+L5ZAuM+/8XcnBBGBirP8A8fNn/ut/Krn/AD9f75/9HCir
+i06CX6fqdBpthDeQ3MbtLGMQv8AuZnrFOu5k3fMdp6cEMByrBvmr6y/Y18d+PvgXd/En4hfBvxz4o+G/i/w/
wCOPhRpthq/hnUPI36XdeFLG5utK1KwuoprTWNK11S7+2va3cE1v9qh3rGsdexXXy5oP3br/r1bf8Aoo1718C/+RY
+Mv8A2Ub4Q/8AqI6JX554mYDA5hwVnWEx+Do43CV8LXjUo1qUKtKpF0neM6dSMoTi7K6kmnZaaH9M/
RTp063ijgadWEatP2GKbjOK1FuODxDi3GSabTSabV00mrNI/9k="
}
}HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 11:33:40 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

4c
{
  "operator": "AddPersons",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
0
```

C.10.3 Edit and modify the list

```

POST /action/EditPerson HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 77300
Authorization: Basic YWRtaW46YWRTaW4=
Postman-Token: 3ca13955-c832-247e-4dd9-a2f4f59316b8
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "EditPerson",
  "info": {
    "DeviceID": 1305138,
    "IdType": 0,
    "CustomizeID": 123456,
    "PersonType": 1,
    "Name": ".....-edit",
    "Gender": 1,
    "Nation": 0,
    "CardType": 0,
    "IdCard": "430923199011044411",
    "Birthday": "1990-09-10",
    "Telnum": "18888888888",
    "Native": ".....",
    "Address": ".....",
    "Notes": ".....",
    "MjCardFrom": 1,
    "MjCardNo": 1234,
    "Tempvalid": 0
  },
  "picinfo": "data:image/jpeg;base64,Qk024QAAAAAADYAAAAoAAAAeAAAAKAAAAABABgAAAAAAAAAAAAAScwAAEgsAAAAAAAAAAAAA/v7+/v7+/v7+/

```

.....


```

1TVF0UE9xT1N5UVZ9WWKIU1+IXWSVWmmYWwQXGqaw2iWwWwXV2eTWwYzWwYXW2yUW2+TWnCTUGKHUmOKUWWKTmeMTGCGVGiOTF
6DVGWGU1uDUFZ6SEtxQkRmRkV1TudmREBdTediQD5UQUbRkNdSk1hSkJcREFXSkrSkRcTUZfTkVdTUdGUeHeVExiUEpcU01gU
U5eUktCWbKv1FhW1NkY1ZqYVBkZFhsX1Jma19sa19wdmx4enV+4d7j50Te6ujm9/P4mZmf/v3+/v/9/v7+/v7+"
}HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:01:19 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8


4c
{
  "operator": "EditPerson",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}

```

C.10.4 Batch adding or modifying list

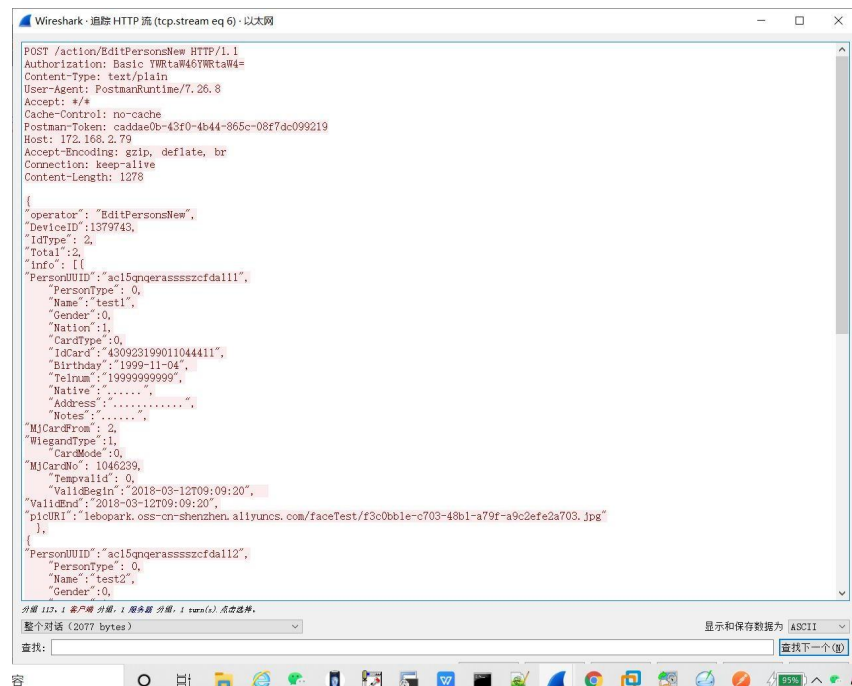

.....

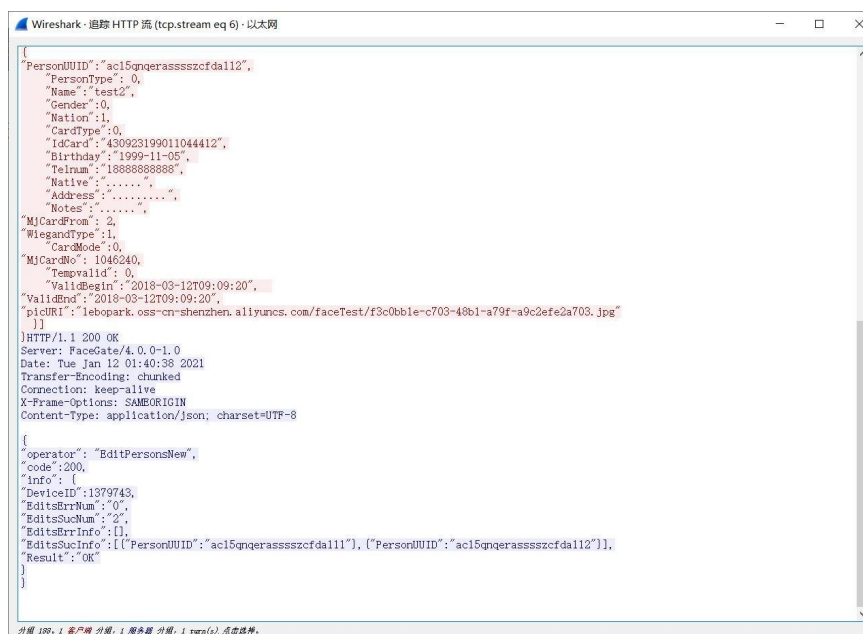

C.10.4.1 Return codes for batch adding or modifying list

code	Type	String	Description
200	int		Batch additions or modifications to the interface are complete, but list additions may not all be successful
201	int	"is not json"	The data format is wrong
411	int	Unknow operator	Failed to get keyword "EditPersonsNew".
412	int	"Parameter error"	Failed to get keyword "info".
413	int	"UnKnown DeviceID"	Failed to match "DeviceID".
414	int	"UnKnown Total"	Failed to get the keyword "Total".
415	int	"Total out of range"	Total exceeds the scope limit.
416	int	"json of data and Total is not equal"	Get the value of the json array whose name is not equal to Total.
417	int	"UnKnown IdType"	Failed to get keyword "IdType".
418	int	"IdType error"	IdType value input error

C.10.4.2 Error codes for batch adding or modifying list

errcode	Type	Values	Description
461	int	"Unkonw CustomizeID"	Failed to get the CustomizeID
462	int	"Unkonw PersonUUID"	Failed to get the PersonUUID
463	int	"CustomizeID Out of range"	CustomizeID Beyond the legal scope
464	int		Failed to get image address IP
465	int		Get URI image timeout or download image failure (Note that the device has the correct DNS)
466	int		Failed to get URI image data content (data less than 1000 bytes)
467	int		Image data is too large (must not exceed 1M)
468	int		Failed to extract facial features from images
469	int		Failure to write image data to database
470	int		Failed to modify the list in the database
471	int		reserve
472	int		reserve
473	int		reserve
474	int		reserve
475	int		Wergen Card No. MjCardNo already exists.
476	int		Failed to get WGFacilityCode keyword
477	int		Failed to get MjCardNo keyword
478	int		reserve

479	int		Failure to modify list of persons information
480	int		RFCard already exists
481	int		Failed to get picURI keyword
482	int		Failed to read pictures of existing people
483	int	"CustomizeID/PersonUUID had existed"	The person already exists

C.10.5 Error codes for adding or modifying single list

errcode	Type	Values	Description
461	int	unknown operation command	Unknow operator
462	int	Parameter error (missing info)	Parameter error
463	int	DeviceID mismatch	Unkonw DeviceID
464	int	CustomizeID not passed or does not exist	Unkonw CustomizeID
465	int	LibID not passed or does not exist	Unkonw LibID
466	int	UUID not passed or does not exist	Unkonw UUID
467	int	IdType not passed or does not exist	Unkonw IdType
468	int	Image Base64 decoding failed	Picinfo Base64 decode error
469	int		Other
470	int		reserve
471	int		reserve
472	int		reserve
473	int	ID (RFCard) card number already exists; (for built-in card machine models)	ID_CardNo already exist
474	int	The Wergen card number already exists.	WG_CardNo already exist
475	int	List of personnel already exists	Person already exist
476	int	Failed to connect to the server IP when adding an image as a URL.	Get picinfo and connect URI IP error
477	int	No face detected	Face Undetected
478	int	Error resolving URI server address Error getting WGFacilityCode	Get URI server ip error
479	int	Failed to connect to the server IP when adding an image as a URL.	Get picinfo and connect URI IP error
480	int	Get URL image data too short	Get URI pic data too short
481	int	No picinfo or picURI passed in	get picinfo and get picURI error
482	int	Failure to write list to database	InsertPerson2DBWithUUID err

C.11 Delete personnel list


```

POST /action/DeletePerson HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 120
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: text/plain; charset=UTF-8
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: f5be909a-2dbf-dc98-2b6d-ff415cfc78d3
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "DeletePerson",
  "info": {
    "DeviceID": 1305138,
    "TotalNum": 1,
    "IdType": 0,
    "CustomizeID": [123453]
  }
}
HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:02:25 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

4e
{
  "operator": "DeletePerson",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}

```

C.11.1 Error codes for add or modify single list

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Unkonw CustomizeID"	Failed to get the keyword "CustomizeID"
466	int	"Unkonw PersonUUID"	Failed to get the keyword "PersonUUID"
467	int	"Unkonw TotalNum"	The "TotalNum" field gets a match failure or an ID array size equal to 0
468	int	"Unkonw IdType"	Failed to get the keyword "IdType"

C.11.2 Error codes for delete all personnel lists

errcode	Type	Values	Description
---------	------	--------	-------------

200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Unkonw DeleteAllPersonCheck"	Failed to get the keyword "DeleteAllPersonCheck"

C.12 Data subscription

C.12.1 Push messages without authentication

```
POST /action/Subscribe HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 318
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: text/plain; charset=UTF-8
Authorization: Basic YWRtaW46YWRTaW4=
Postman-Token: 13af34ce-2aaa-ba07-ec76-5d147a1ce4e3
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "Subscribe",
  "info": {
    "DeviceID": 1305138,
    "Num": 2,
    "Topics": ["Snap", "Verify"],
    "SubscribeAddr": "http://192.168.2.11:8080",
    "SubscribeUrl": {"Snap": "/Subscribe/Snap",
    "Verify": "/Subscribe/Verify", "HeartBeat": "/Subscribe/heartbeat"},
    "Auth": "none",
    "bTimedPush": 0,
    "PushInterval": 0
  }
}
HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:03:21 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

4b
{
  "operator": "Subscribe",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```


C.12.2 Username and password provided for subscription, authentication required for submission

```
POST /action/Subscribe HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 314
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: text/plain; charset=UTF-8
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: a0112839-2e0c-e9f5-4cc9-d83e95a25085
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "Subscribe",
  "info": {
    "DeviceID": 1305138,
    "Num": 2,
    "Topics": ["Snap", "Verify"],
    "SubscribeAddr": "http://172.168.2.65:8021",
    "SubscribeUrl": {"Snap": "/Subscribe/Snap",
    "Verify": "/Subscribe/Verify", "HeartBeat": "/Subscribe/heartbeat"},
    "Auth": "Basic",
    "User": "admin",
    "Pwd": "amdin"
  }
}
HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:03:28 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

4b
{
  "operator": "Subscribe",
  "code": 200,
  "info": {
    "Result": "Ok"
  }
}
```

C.12.3 Push stranger capture

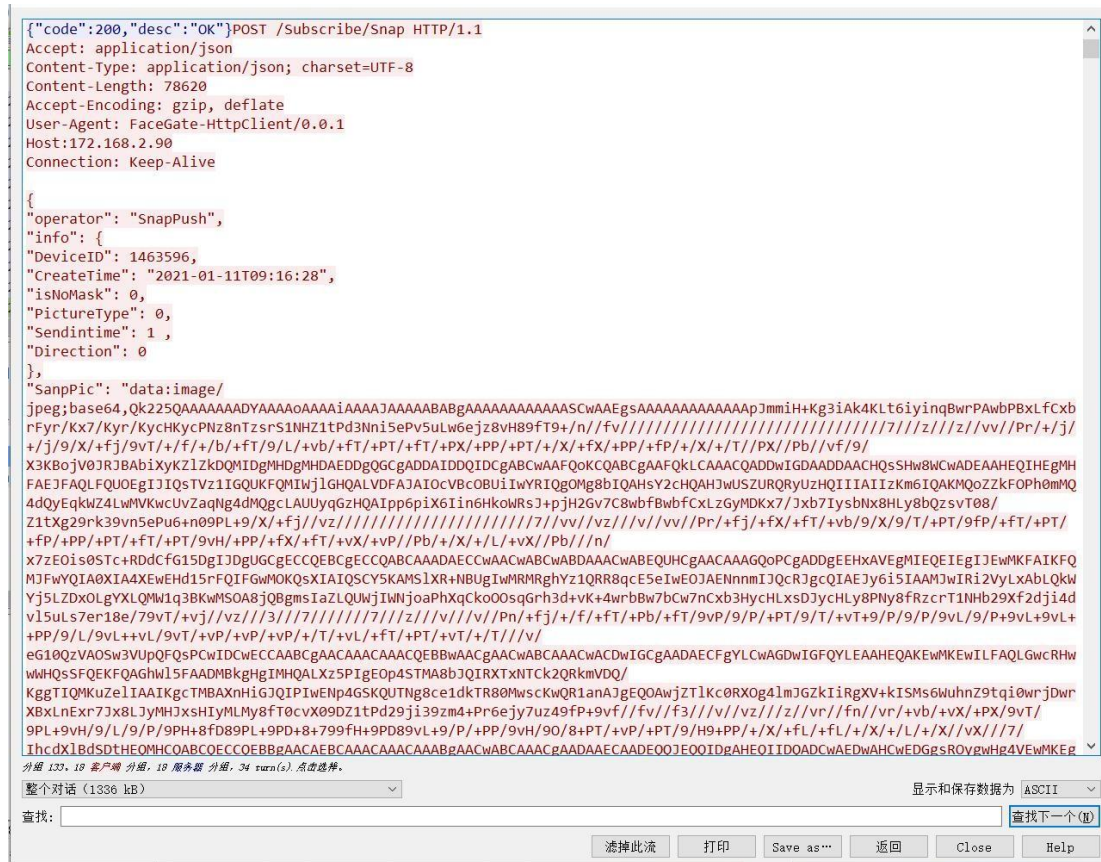

.....

```
NX1bCGKkV0NLULWGRUKrGOKUgWUGWmHA4UHqWKHASU1NawG5UGAGN1wgKHG05GWS5G5UGQUP0G0PHQ5K1NAV1A411A411W8UJBM1Y1g8X1A8X1QX1AWWGW
owIhAcIXiCIBAEKBQnJhMkIXiJKBuMLBooKxklJBmHkXUoKXyRJRymJxQpKhovNyU/
PipCNyRanyhBNCcSNCQ50io9LyayLBsyKBUTMyI5PSZANx83Pi1CNy490C1Ioy1JPi9I0Sh80ic/
OSg4NyM2Oyg5MR0pMxcnMBUgMBYfLBIBmXkkMxcgOBwLmHqCOR0mLxMcnBUHmXmBOB4iLxIXMRIcMhccLRcbNh4p0iEnNBghNRogPSIpohwLnxkhOBQfOhohOR
kg0xkfPxoIhNccOBYcOchfRiYsPR4hPyImQ5Qo0SAnOBwLNBwmPCIRNB01oyIvQsS2Z1hhZ1pmSKRjZV1hh4CgoJ2ftrC1wL3Aw73AxcDDyMTJwsDAXsLFycPG
yMXHysThy8XJysXGy8XJzcjLzCjLzMFk0MnPxMfKz8nM1J0BkZSE1Za1i416jY15i4t2kpCBkpSBjox/kYl/
gn50cGZhtUBAByWHA8THRAUGwRHg4PGwgJGQoNHQwRHg0SHASNGwG0QGP0GA0MHg0PHg8SFwsNHA0SJRIaIg4VIQ4WIBASig4SIawRIawSHASQKBQZIQ4WJX
MfJBEBtG8ZJBACJRMfJfUHuIA8gLRcpJREdMBwoLBkoMx0wLxsuJBmKXksMR40NSU4PC1BoypDNsc+NCg40i0/
NyM7LxowKhouLBkvOCU60yU9PCY+PiTAOSw+LSI2PCTHMCANyU/
OCZAOCU6NiE3NyQ0Mx4tmHkmNRkXaEMhUimRYjPB8qNRUhmRYcMxogNhojMRMaOBWgNxcEMhMdLxcGOCEpNR0mPCUTNB0eMxogNhx4GPCEnNxohMBIBPBWjOB
keOBcFOR0fPh4hPB0iNXU0hCfNRkbMREZ0h0hNBcMhQdNRgkMhUjMxcLNSetNiErTD1DTONY1ZfSDxFO5We3R8k4ySuba5wry/xb7Ew7/EXMHExMHExb/
EycPGysXGy8XJycPGYMXGsxHEycPGy8XJycPGY8XKZcfNz8nM"}
HTTP/1.1 200 OK
Content-Type: application/json
Date: Mon, 11 Jan 2021 01:30:57 GMT
Connection: keep-alive
Transfer-Encoding: chunked

{"code":200,"desc":"OK"}
Accept: application/json
```



```
POST /Subscribe/Verify HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 11762
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host: 172.168.2.65
Connection: Keep-Alive
```

```
{
  "operator": "VerifyPush",
  "info": {
    "DeviceID": "1305138",
    "PersonID": "58",
    "CreateTime": "2019-12-04T18:06:56",
    "Similarity1": 95.719673,
    "Similarity2": 0.000000,
    "VerifyStatus": 1,
    "VerifyType": 1,
    "PersonType": 0,
    "Name": ".....",
    "Gender": 0,
    "Nation": 1,
    "CardType": 0,
    "IdCard": " ",
    "Birthday": "1970-01-01",
    "Telnum": " ",
    "Native": " ",
    "Address": " ",
    "Notes": " ",
    "MjCardFrom": 0,
    "MjCardNo": 1,
    "Tempvalid": 0,
    "CustomizeID": 0,
    "PersonUUID": " ",
    "ValidBegin": "0000-00-00T00:00:00",
    "ValidEnd": "0000-00-00T00:00:00",
    "RFIDCard": "",
    "Sendintime": 1
  }
}
```


• • • • •

```
ODK6Q0RFRkdISUpTVFVWV1hZWmNkZWZnaGlqc3R1dnd4eXQdIiWGH41j1pKt1JlWl15iZmqKjpKWmp6ipqrKztLW2t7i5usLDxMfGx8jJytLT1NXW19jZ2uHi4+T15ufo6erx8vP09fb3+Pn6/8QAHWEEAAWEBAQEBAQEBAQAAAAAAAAEAAwQFBgcICQoL/8QAtREAAgECBAQDBAcFBAQHTTP/1.1 200 OK
Content-Type: application/json
Date: Wed, 04 Dec 2019 10:08:05 GMT
Connection: keep-alive
Transfer-Encoding: chunked
```

```
18 {"code":200,"desc":"OK"}
0
```

C.12.4.1 Use disconnected server reply packets

Note that the HTTP header contains Content-Length, which is case-sensitive.

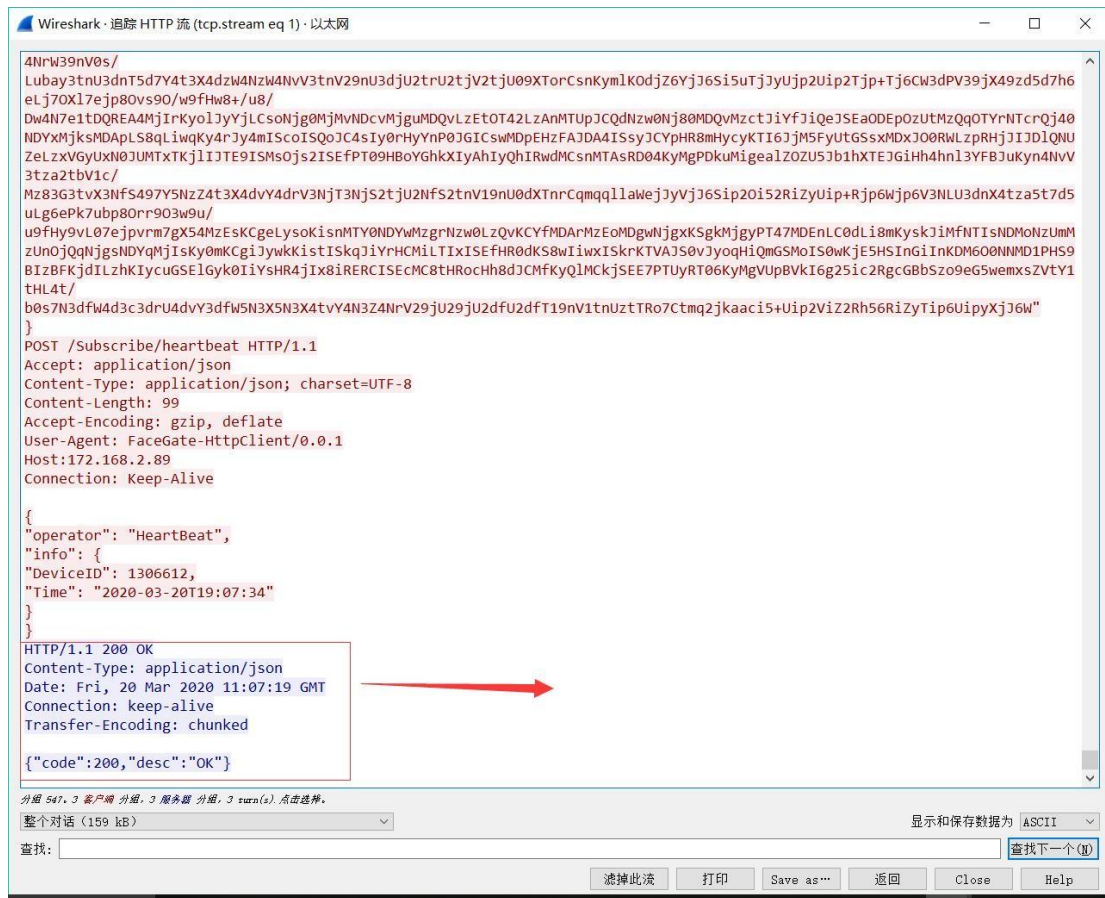

C.12.5 Query subscribed messages

```
POST /action/GetSubscribe HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 0
Authorization: Basic YWRtaW46YWRtaW4=
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/
69.0.3497.81 Safari/537.36
Postman-Token: 90fe3bc4-5b86-ba51-f83c-4ec9707f49cc
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:09:46 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

14b
{"operator": "GetSubscribe", "info": {"Num": 2, "Topics": ["Snap", "VerifyWithReg"], "SubscribeAddr":
"http://172.168.2.65:8021", "SubscribeUrl": {"Snap": "/Subscribe/Snap", "Verify": "/Subscribe/Verify",
"HeartBeat": "/Subscribe/heartbeat"}, "BeatInterval": 60, "ResumefromBreakpoint": 0, "BeginTime":
"2019-12-02T09:48:40", "Auth": "none"}}
0
```

C.13 Unsubscribe

```

POST /action/Unsubscribe HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 108
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: text/plain; charset=UTF-8
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: 1c43c194-5a70-0224-ee22-5aa4d4827ec0
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "Unsubscribe",
  "info": {
    "DeviceID": 1305138,
    "Num": 2,
    "Topics":["Snap", "Verify"]
  }
}
HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Thu Dec 5 09:04:39 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

4d
{
  "operator": "Unsubscribe",
  "code":200,
  "info": {
    "Result": "Ok"
  }
}

```

C.13.1 Error codes for unsubscribe

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Unkonw Topic"	Unknown topic
465	int	"Unkonw Num"	Failed to get the keyword "Num"
466	int	"Unkonw Topics"	Failed to get the keyword "Topics"

C.14 Subscribed Heartbeats

```
POST /Subscribe/heartbeat HTTP/1.1
Accept: application/json
Content-Type: application/json; charset=UTF-8
Content-Length: 99
Accept-Encoding: gzip, deflate
User-Agent: FaceGate-HttpClient/0.0.1
Host:172.168.2.65
Connection: Keep-Alive

{
  "operator": "HeartBeat",
  "info": {
    "DeviceID": 1305138,
    "Time": "2019-12-04T18:09:54"
  }
}
HTTP/1.1 200 OK
Content-Type: application/json
Date: Wed, 04 Dec 2019 10:09:54 GMT
Connection: keep-alive
Transfer-Encoding: chunked

18
{"code":200,"desc":"OK"}
0
```


C.15 Query list

C.15.1 Query single list

```

POST /action/SearchPerson HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 120
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: 5b97748b-e150-ed7a-cef4-148cf813c7c7
Cache-Control: no-cache
Origin: chrome-extension://fhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "SearchPerson",
  "info": {
    "DeviceID": 1305138,
    "SearchType": 0,
    "SearchID": "123456",
    "Picture": 1
  }
}
}HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:11:14 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

3fdf
{
  "operator": "SearchPerson",
  "info": {
    "DeviceID": 1305138,
    "LibID": 106,
    "PersonType": 1,
    "Name": ".....-edit",
    "Gender": 1,
    "Nation": 0,
    "CardType": 0,
    "IdCard": "430923199011044411",
    "Birthday": "1990-09-10",
    "Telnum": "18888888888",
    "Native": " "
  }
}

```

C.15.1.1 Error codes for query single personnel list

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"

463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
465	int	"Unkonw picinfo"	Failed to get the keyword "Picture"
467	int	"Unkonw SearchID"	The "SearchID" field has a fetch lookup failure
468	int	"Unkonw IdType"	Failed to get the keyword "IdType"

C.15.2 Query total number of lists

```

POST /action/SearchPersonNum HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 231
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: 4dbbc6b2-902e-bc28-f796-3dbc6a1d8b85
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "SearchPersonNum",
  "info": {
    "DeviceID": 1305138,
    "SearchType": 0,
    "PersonType": 0,
    "BeginTime": "2019-06-01T00:00:00",
    "EndTime": "2019-12-19T23:59:59",
    "Gender": 2,
    "Age": "0-100",
    "MjCardNo": 0,
    "Name": ""
  }
}
HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:12:32 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

5b
{
  "operator": "SearchPersonNum",
  "info": {
    "DeviceID": 1305138,
    "PersonNum": 53
  }
}

```

.....

```
POST /action/SearchPersonList HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 262
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: d44c96e7-2f24-6930-4535-61f1e9231c12
Cache-Control: no-cache
Origin: chrome-extension://fhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9
```

```
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": 1305138,
    "PersonType": 0,
    "BeginTime": "2018-06-01T00:00:00",
    "EndTime": "2020-06-19T23:59:59",
    "Gender": 2,
    "Age": "0-100",
    "MjCardNo": 0,
    "Name": "",
    "BeginNO": 0,
    "RequestCount": 10,
    "Picture": 1
  }
}
```

```
}HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:13:24 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8
```

```
3fdf
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": 1305138,
    "Listnum": 10,
    "List": [
      {

```

C.15.3 Query multiple list

```
POST /action/SearchPersonList HTTP/1.1
Host: 172.168.2.238
Connection: keep-alive
Content-Length: 262
Authorization: Basic YWRtaW46YWRtaW4=
Postman-Token: d44c96e7-2f24-6930-4535-61f1e9231c12
Cache-Control: no-cache
Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/69.0.3497.81 Safari/537.36
Content-Type: application/json
Accept: */*
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9

{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": 1305138,
    "PersonType": 0,
    "BeginTime": "2018-06-01T00:00:00",
    "EndTime": "2020-06-19T23:59:59",
    "Gender": 2,
    "Age": "0-100",
    "MjCardNo": 0,
    "Name": "",
    "BeginNO": 0,
    "RequestCount": 10,
    "Picture": 1
  }
}
HTTP/1.1 200 OK
Server: FaceGate/4.0.0-1.0
Date: Wed Dec 4 18:13:24 2019
Transfer-Encoding: chunked
Connection: keep-alive
X-Frame-Options: SAMEORIGIN
Access-Control-Allow-Credentials: true
Access-Control-Allow-Origin: chrome-extension://fhhbjgbiflinjbdggehcdcbncdddomop
Content-Type: application/json; charset=UTF-8

3fdf
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": 1305138,
    "Listnum": 10,
    "List": [
    {
```

.....

```
{
  "operator": "SearchPersonList",
  "info": {
    "DeviceID": 1305138,
    "Listnum": 10,
    "List": [
      {
        "LibID": 55,
        "PersonType": 0,
        "Name": ".....",
        "Gender": 0,
        "Nation": 1,
        "CardType": 0,
        "IdCard": " ",
        "Birthday": "1970-01-01",
        "Telnum": " ",
        "Native": " ",
        "Address": " ",
        "Notes": " ",
        "MjCardFrom": 0,
        "MjCardNo": 1,
        "Tempvalid": 0,
        "CustomizeID": 0,
        "PersonUUID": " ",
        "ValidBegin": "0000-00-00T00:00:00",
        "ValidEnd": "0000-00-00T00:00:00",
        "Picinfo": "data:image/
jpeg;base64,Qk3m5QAAAAAADYAAAAoAAAAjAAAAIwAAAAABAgAAAAAAAAAAAAAScWAAEgSAAAAAAAAAAAAAN0RCbXp4VWpoNUP
ILT9GgcC/
bp2zWperRYKWYZuuUoaaWYaXVHeFRWRzIjU4MDs5WGVjNkNBjMxJTAuJzIwNT05KzAvNjs6ISkoIiopL01RO19oJUhrVnN3Jjg
5GiYmFx0e0Do7Mjg5FB0dGCAgGCIiIygnISY1HiQjGyMiFx8eHCQjGSEgGR4fKVFRTWRpBRIWQEHMICsFx8kVo
+ZVI2dFBgdJi4tGiIhHyYfKc8oLjUuIikiGyIbLjYsTV1DGyQXd390PUU6MDguICyhKC0sKzAvHiMiFBwbHycmIysqEhoZKDAvL
jY1GyMiHCQjMjo5FBwcDxcXDxcXFR0dFBwcFhkZBREXNUhPIiwwHR8ffH4eFBwcEhoZExsaGB8eGyAfHSIhGR4dIicmFByWHyEh
ISMjGRwaGx4cCxAOFRoYFRoYFRoZDBEQDBEQERYVFBkYFxbwKi8uCXMSGiIhDRUUCxMSERkYFh4dFR0cHiY1QU1IU11bKzY0JzI
wJjEvJC8tFSAeGiUjLTc2GiIhERkYGx0dGx0dFRoZGB0cFRoZGR4dPE1Hdo0BVmNi001I0kFFYnZ4UYaXV5SoWJwPvY
+iVYqeTnqLSWx6Q2JxKD09KzY0SFVT0UZEJjMxICspJzIwMzg3HyQJLjMyKzMyHSUKZ5CTHE1VFz9LP15ofpSaHCcnJiwsTFJSQ
1BQTF9eGywrHiU1JywrHiMiFRsaGCAfGCAfGiAfHic1Cx4hRHt/
Gz1GGy00LzpCISktISouYZmft4qUREtKFx8eHSUKHCEfGh8dLzQyHyQiHiMiQkpAXmpUHCcVjJaET1hGPUU6JCo1KC0sGR4dICY
1HiY1HCQjGSEgFBwbICgnGSEgGSEgKzMyGCAfHiYmFh4eEhoaERkZExsbEBkZJTk9Jz1DHSrHB8fFR0dExsbF8eFR0cGyEgGR
4dGR4dGh8eLjMyERMTFByWGB0aHB8dEBMRHcVFxwaEBUTDhMSEBUUEXgXFRoZExgXFhsaFRoZExsaEhoZDRUUCREQDxcWCBAPE
BxVhG0cGtHfG...

```

C.16 Version upgrade

C.16.1 Error codes for version upgrade

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Unknow Path"	Failed to get the keyword "Path"
466	int	"Can't find upgrade file"	No upgrade file was found
468	int	"Unknow Name"	Failed to get the keyword "Name"
475	int	"upgradeTyp Not supported"	Upgrade type is not supported
477	int	"Unknow upgradeType"	Failed to get the keyword "upgradeType"

483	int	"download file fail"	Upgrade file download failed
484	int	"file too big"	The upgrade file is too big
485	int	"get file length is error"	The read length does not match the file
486	int	"upgrade fial"	The upgrade failed

C.17.1 Error codes for get body/vehicle counts

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Unknow ObjectType"	Failed to get the keyword "ObjectType"
465	int	"Unknow BehaviorDirection"	Failed to get the keyword "BehaviorDirection"
466	int	"People Statistics Not Enabled"	Number count not enabled

C.18 Manual push control / capture record

C.18.1 Error codes for manual push control / capture record

errcode	Type	Values	Description
200	int		Successful operation
201	int	"is not json"	The data format is wrong
461	int	"Unknow operator"	The "operator" error
462	int	"Parameter error"	Failed to get the keyword "info"
463	int	"Unknow DeviceID"	The "DeviceID" field failed to get a match
464	int	"Unknow TimeS"	Failed to get the keyword "TimeS"
465	int	"Unknow TimeE"	Failed to get the keyword "TimeE"
466	int	"HTTP SubscribeInfo error"	HTTP subscription configuration information error (incorrect IP and port address format; authentication record subscription function is not enabled)
467	int	"Can't Find any record issue, please check TimeS and TimeE"	Record is not found, please check the start time and end time
468	int	"Last manual push not completed"	The last manual push was not complete