

Micron 대만 AP, Bridge 추가 설정 매뉴얼



2026. 03

주식회사 아이에스엘

1. MOXA AWK-3131A-US

1. Advanced WLAN Settings
2. Save Configuration
3. Firmware update

2. MOXA AWK-1137C-US

1. Advance WLAN Settings
2. Save Configuration
3. Firmware update

1. Moxa AWK-3131A-US

1. Advanced WLAN Settings

The screenshot shows the MOXA web interface at the URL <https://10.10.201/home.asp>. The left sidebar contains the following navigation links: Home, Main Menu, Overview, General Setup, Wireless LAN Setup (1), AeroMag, Operation Mode (2), WLAN (3), Basic WLAN Setup, WLAN Security Settings, Advanced WLAN Settings (4), WLAN Certificate Settings, Advanced Setup, VLAN Settings, DHCP Server, Packet Filters, RSTP Settings, Static Route, NAT/Port Forwarding, SNMP Agent, Link Fault Pass-Through, Remote Host Check via LAN, Logs and Notifications, Status, Maintenance, Save Configuration, Restart, and Logout.

The main content area displays the 'Advanced WLAN Settings' page. The settings are as follows:

Setting	Value	Range/Unit
Transmission rate	Auto	
Minimum transmission rate	0	(0~54Mbps, 0 to disable)
Multicast rate	6M	
Maximum transmission power	20 dBm	
Beacon interval	100	(40 to 1000 ms)
DTIM interval	1	(1 to 15)
Inactive timeout	8	(8 to 240 second)
Fragmentation threshold	2346	(256 to 2346)
RTS threshold	2346	(32 to 2346)
Transmission distance	500	(500 to 11000m)
CCA Settings	Auto	
Maximum CCA	-75	(-100~-50dBm)
CCA Threshold	30	(0~80dBm)
Antenna	Both	
WMM	Enable	

Below the settings, there is a 'Submit' button (5) and a note: "Regarding Wi-Fi performance, we recommend you to use two antennas to ensure high throughput."

순서

내용

- 1~3. Wireless LAN Setup > WLAN > Advanced WLAN Settings 항목을 선택합니다.
4. Multicast rate : 6M, Inactive timeout : 8, CCA Settings : Auto, Maximum CCA : -75, CCA Threshold : 30 (해당 값 설정 必)
5. Advanced WLAN Settings을 마치면 'Submit' 버튼 클릭

2. Save Configuration

MOXA® www.moxa.com

Home
Main Menu
Overview
General Setup
Wireless LAN Setup
Advanced Setup
Logs and Notifications
Status
Maintenance
Save Configuration
Restart
Logout

Save Configuration

You must save the changes and restart the system for configuration changes to take effect. Click **Save** to save configuration changes to the system memory.

Save

Network Settings After Reboot

Network Info	
LAN IP address	192.168.127.253
LAN subnet mask	255.255.255.0
LAN gateway	0.0.0.0


순서

내용

1~2.

Save Configuration 항목 선택 후 'Save' 합니다.


3. Firmware update

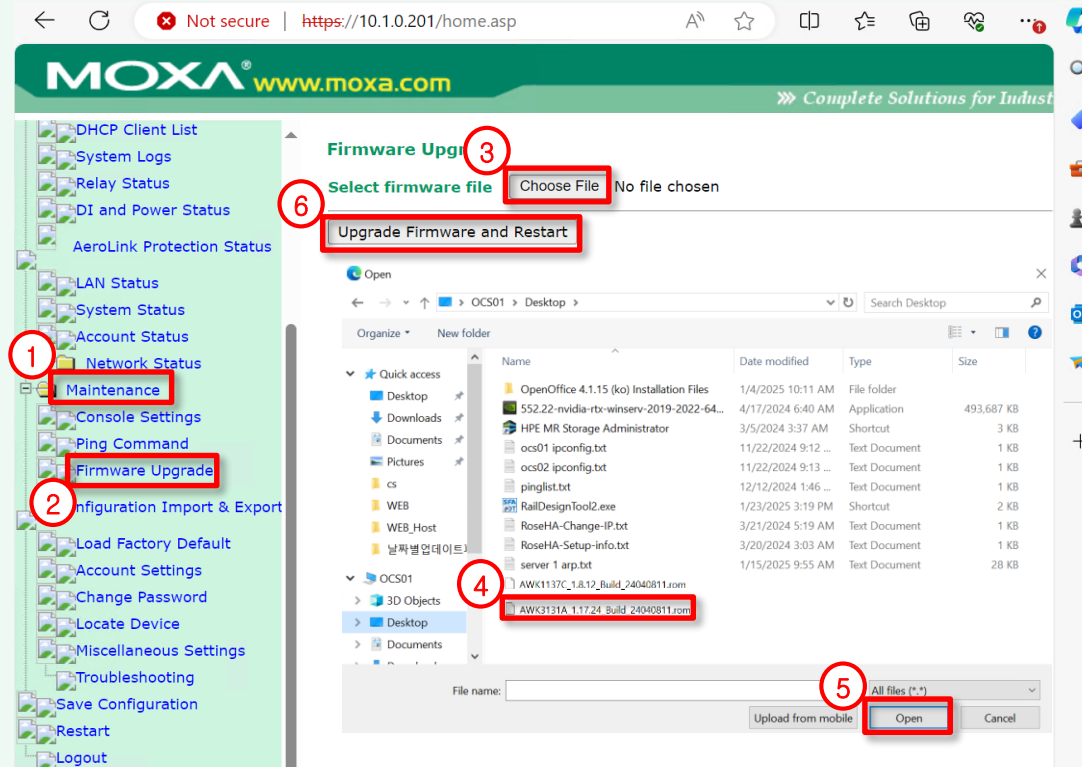

순서	내용
1~3.	Maintenance> Firmware Upgrade > Choose File 항목을 선택합니다.
4~5.	업데이트 하고자 하는 파일을 선택 후 Open
6.	Upgrade Firmware and Restart 버튼 클릭 (펌웨어 업데이트 후 재부팅까지 약 4분 소요)

2. Moxa AWK-1137C-US

1. Advanced WLAN Settings

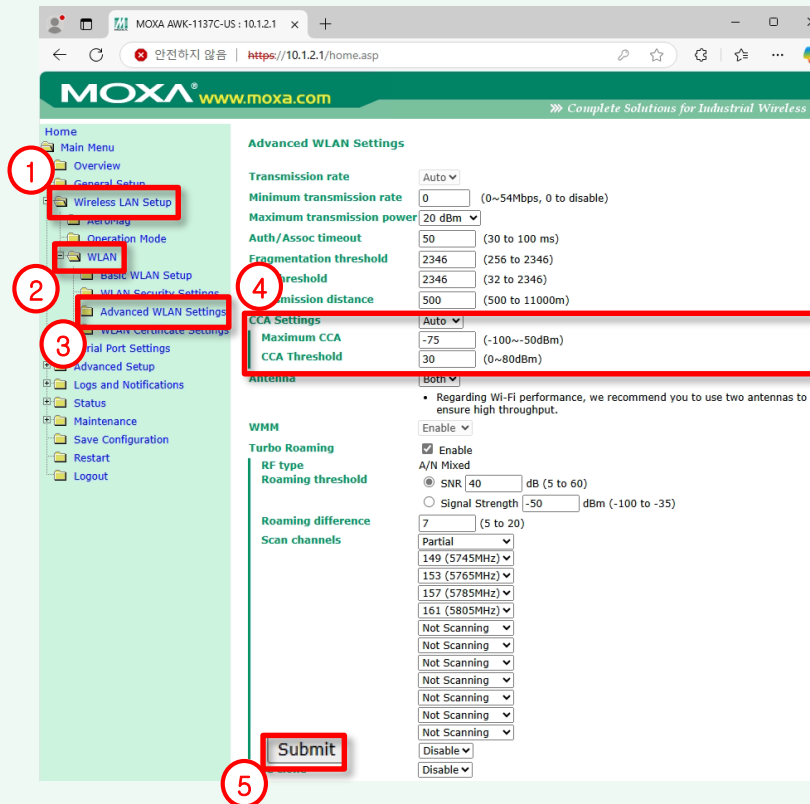

순서	내용
1~3.	Wireless LAN Setup > WLAN > Advanced WLAN Settings 항목을 선택합니다.
4.	CCA Settings : Auto , Maximum CCA : -75 , CCA Threshold : 30 (해당 값 설정 必)
5.	설정 완료 후 Submit 버튼을 누릅니다.

2. Save Configuration

MOXA® www.moxa.com

Home
Main Menu
Overview
General Setup
Wireless LAN Setup
Advanced Setup
Logs and Notifications
Status
Maintenance
Save Configuration
Restart
Logout

Save Configuration

You must save the changes and restart the system for configuration changes to take effect. Click **Save** to save configuration changes to the system memory.

Save

Network Settings After Reboot


Network Info	
LAN IP address	192.168.127.253
LAN subnet mask	255.255.255.0
LAN gateway	0.0.0.0

순서

내용

1~2. Save Configuration 항목 선택 후 'Save' 합니다.

3. Firmware update

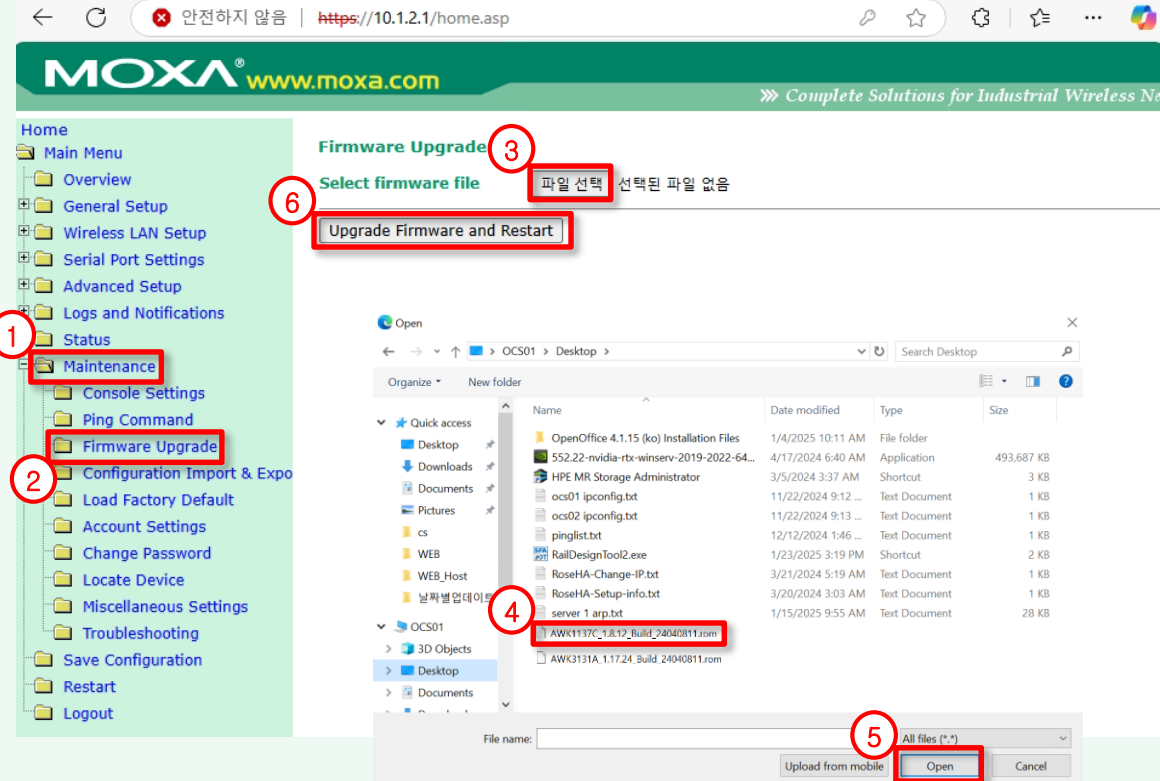

순서

내용

- 1~3. Maintenance> Firmware Upgrade > Choose File 항목을 선택합니다.
- 4~5. 업데이트 하고자 하는 파일을 선택 후 Open
6. Upgrade Firmware and Restart 버튼 클릭 (펌웨어 업데이트 후 재부팅까지 약 4분 소요)

감사합니다.