



## **Firepower Management Center REST API Quick Start Guide, Version 7.0**

**First Published:** 2021-05-24

**Last Modified:** 2021-05-24

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© Cisco Systems, Inc. All rights reserved.



## CONTENTS

---

### CHAPTER 1

#### About the Firepower Management Center REST API 1

About the Firepower Management Center REST API 1

Enabling the REST API 1

Best Practices 2

Additional Resources 2

---

### CHAPTER 2

#### About the API Explorer 3

About the API Explorer 3

Authentication to the API Explorer 3

Logging into API Explorer 4

Setting the Domain 4

Accessing the Legacy API Explorer 4

Obtaining Sample Code with CodeGen 5

Downloading the Open API Spec 5

Generating Sample Code with the CodeGen Utility 6

Viewing API Parameters 6

---

### CHAPTER 3

#### Connecting with a Client 9

Authentication from a REST API Client 9

Requesting an Authentication Token 10

Refreshing an Authentication Token 11

---

### CHAPTER 4

#### Objects in the REST API 13

Request Structure 13

Bulk Rule Posting 15

Response Structure 16

Rate Limiting	18
Payload Limiting	18
Object Overrides	18
Audit Services	19
GET auditrecords	19
Users	20
GET authroles	20
GET SSO Config	20
PUT SSO Config	20
Deployment Services	20
GET deployabledevices	20
GET deployments	21
GET pendingchanges	21
POST deploymentrequests	21
GET jobhistories	21
POST rollbackrequests	21
Device Group Services	22
DELETE devicegrouprecords	22
PUT devicegrouprecords	22
POST devicegrouprecords	22
GET devicegrouprecords	22
Device Clusters	22
GET ftddevicecluster	22
Device HA Pair Services	23
DELETE ftddevicehapair	23
PUT ftddevicehapair	23
POST ftddevicehapairs	23
GET ftddevicehapairs	24
DELETE failoverinterfacemacaddressconfigs	24
GET failoverinterfacemacaddressconfigs	24
POST failoverinterfacemacaddressconfigs	25
PUT failoverinterfacemacaddressconfigs	25
GET monitoredinterfaces	25
PUT monitoredinterfaces	25

Health Services	26
GET Health Alerts	26
GET Health Metrics	26
Device Services	26
POST copyconfigrequests	26
DELETE devicerecords	26
PUT devicerecords	27
POST devicerecords	27
GET devicerecords	27
PUT fpphysicalinterfaces	27
GET fpphysicalinterfaces	27
DELETE fplogicalinterfaces	28
PUT fplogicalinterfaces	28
POST fplogicalinterfaces	28
GET fplogicalinterfaces	28
DELETE inlinesets	29
PUT inlinesets	29
POST inlinesets	29
GET inlinesets	29
GET commands	29
GET Metrics	30
GET staticroutes	30
GET virtualrouters	31
PUT virtual routers	31
POST virtual routers	31
DELETE virtual routers	31
GET virtual BGP	32
GET virtual ipv4staticroutes	32
PUT virtual ipv4 static routes	32
POST virtual ipv4 static routes	33
DELETE virtual ipv4 static routes	33
GET virtual ipv6staticroutes	33
PUT virtual ipv6 static routes	34
POST virtual ipv6 static routes	34

DELETE virtual ipv6 static routes	34
GET virtual ospf interface	35
GET virtual ospfv2 routes	35
GET virtual static routes	35
DELETE ipv4staticroutes	35
PUT ipv4staticroutes	36
POST ipv4staticroutes	36
GET ipv4staticroutes	36
DELETE ipv6staticroutes	36
PUT ipv6staticroutes	36
POST ipv6staticroutes	37
GET ipv6staticroutes	37
GET ospf interface	37
GET ospfv2routes	37
GET ospfv3interfaces	38
GET ospfv3routes	38
DELETE virtualswitches	38
PUT virtualswitches	38
POST virtualswitches	39
GET virtualswitches	39
GET Virtual Tunnel Interfaces	39
PUT Virtual Tunnel Interfaces	39
POST Virtual Tunnel Interfaces	40
DELETE Virtual Tunnel Interfaces	40
DELETE vlaninterfaces	40
PUT vlaninterfaces	40
POST vlaninterfaces	41
GET vlaninterfaces	41
PUT fpphysicalinterfaces	41
GET fpphysicalinterfaces	41
PUT physicalinterfaces	42
GET physicalinterfaces	42
GET bridgegroupinterfaces	42
POST bridgegroupinterfaces	42

PUT bridgegroupinterfaces	43
DELETE bridgegroupinterfaces	43
GET redundantinterfaces	43
POST redundantinterfaces	43
PUT redundantinterfaces	43
DELETE redundantinterfaces	44
GET bgp routing	44
GET bgp general settings	44
GET etherchannelinterfaces	44
POST etherchannelinterfaces	45
PUT etherchannelinterfaces	45
DELETE etherchannelinterfaces	45
GET subinterfaces	45
POST subinterfaces	46
PUT subinterfaces	46
DELETE subinterfaces	46
GET fpinterfacestatistics	46
POST interfaceevents	46
GET interfaceevents	47
GET commands	47
Intelligence Services	48
POST collections	48
POST discoveryinfo	48
GET element	48
DELETE incident	48
PUT incident	48
GET incident	49
PUT indicator	49
GET indicator	49
PUT observable	49
GET observable	49
PUT settings	50
GET settings	50
DELETE source	50

PUT source	50
POST source	50
GET source	51
Search	51
GET globalsearch	51
GET objectsearch	51
GET policysearch	51
Integration Services	52
PUT cloudeventsconfigs	52
GET cloudeventsconfigs	52
PUT cloudregions	52
GET cloudregions	52
DELETE externallookups	53
PUT externallookups	53
POST externallookups	53
GET externallookups	53
DELETE packetanalyzerdevices	53
PUT packetanalyzerdevices	54
POST packetanalyzerdevices	54
GET packetanalyzerdevices	54
GET External Storage	54
PUT External Storage	54
GET FMC HA Statuses	55
GET SecureX Configs	55
PUT SecureX Configs	55
Object Services	55
GET AnyConnect Custom Attributes	55
GET AnyConnect Packages	56
GET AnyConnect Profiles	56
GET anyprotocolportobjects	56
GET applicationcategories	56
GET applicationfilters	57
PUT applicationfilters	57
POST applicationfilters	57



DELETE applicationfilters	57
GET applicationproductivities	57
GET applicationrisks	58
GET applications	58
GET applicationtags	58
GET applicationtypes	58
GET aspathlists	59
GET certenrollments	59
GET communitylists	59
GET Certificate Maps	59
GET continents	60
GET countries	60
DELETE dnsservergroups	60
PUT dnsservergroups	60
POST dnsservergroups	60
GET dnsservergroups	61
POST dynamicobjectmappings	61
DELETE dynamicobjectmappings	61
GET dynamicobjects	62
POST dynamicobjects	62
DELETE dynamicobjects	62
PUT dynamicobjects	62
GET mappings	63
PUT mappings	63
DELETE mappings	63
GET endpointdevicetypes	63
GET expanded community lists	63
GET extended access lists	64
DELETE fqdns	64
PUT fqdns	64
POST fqdns	64
GET fqdns	65
GET geolocation	65
PUT geolocations	65

POST geolocations	65
DELETE geolocations	66
GET global time zones	66
GET groupolicies	66
DELETE hosts	66
PUT hosts	66
POST hosts	67
GET hosts	67
GET hostscanpackages	67
DELETE icmpv4objects	67
PUT icmpv4objects	68
POST icmpv4objects	68
GET icmpv4objects	68
DELETE icmpv6objects	68
PUT icmpv6objects	69
POST icmpv6objects	69
GET icmpv6objects	69
DELETE ikev1ipsecproposals	70
PUT ikev1ipsecproposals	70
POST ikev1ipsecproposals	70
GET ikev1ipsecproposals	70
DELETE ikev1policies	70
PUT ikev1policies	71
POST ikev1policies	71
GET ikev1policies	71
DELETE ikev2ipsecproposals	71
PUT ikev2ipsecproposals	71
POST ikev2ipsecproposals	72
GET ikev2ipsecproposals	72
DELETE ikev2policies	72
PUT ikev2policies	72
POST ikev2policies	72
GET ikev2policies	73
DELETE interfacegroups	73

PUT interfacegroups	73
POST interfacegroups	73
GET interfacegroups	73
GET interfaceobjects	74
GET intrusionrulegroups	74
PUT intrusionrulegroups	75
POST Intrusion Rule Groups	75
DELETE Intrusion Rule Groups	75
GET intrusionrules	75
PUT intrusionrules	75
POST intrusionrules	76
DELETE intrusionrules	76
GET ipv4addresspools	76
GET ipv6addresspools	76
GET ipv4prefixlists	77
GET ipv6prefixlists	77
GET isecuritygrouptags	77
GET keychain	77
DELETE keychain	78
PUT keychain	78
POST keychain	78
GET localrealmusers	79
PUT localrealmusers	79
POST localrealmusers	79
POST localrealmusers	79
GET networkaddresses	80
DELETE networkgroups	80
PUT networkgroups	80
POST networkgroups	80
GET networkgroups	80
DELETE networks	81
PUT networks	81
POST networks	81
GET networks	82

GET Usage	82
GET policy lists	82
DELETE portobjectgroups	83
PUT portobjectgroups	83
POST portobjectgroups	83
GET portobjectgroups	83
GET ports	84
DELETE protocolportobjects	84
PUT protocolportobjects	84
POST protocolportobjects	84
GET protocolportobjects	85
GET radiusservergroups	85
DELETE ranges	85
PUT ranges	86
POST ranges	86
GET ranges	86
GET realms	86
PUT realms	87
POST realms	87
DELETE realms	87
GET realmusergroups	87
GET realmusers	87
GET route maps	88
GET securitygrouptags	88
DELETE securityzones	88
PUT securityzones	88
POST securityzones	89
GET securityzones	89
GET SI DNS Feeds	89
GET SI DNS Lists	89
GET sinetworkfeeds	90
GET SI Network Lists	90
GET Sinkholes	90
GET siurlfeeds	90

GET siurllists	90
DELETE slamonitors	91
PUT slamonitors	91
POST slamonitors	91
GET slamonitors	91
GET SSO Servers	91
GET standard access lists	92
GET standard community lists	92
GET time ranges	92
PUT time ranges	93
POST time ranges	93
DELETE time ranges	93
GET time zone objects	93
PUT time zone objects	93
POST time zone objects	94
DELETE time zone objects	94
DELETE tunneltags	94
PUT tunneltags	94
POST tunneltags	94
GET tunneltags	94
GET urlcategories	95
DELETE urlgroups	95
PUT urlgroups	95
POST urlgroups	95
GET urlgroups	96
DELETE urls	96
PUT urls	96
POST urls	96
GET urls	97
GET Usage	97
GET variablesets	97
DELETE vlangrouptags	98
PUT vlangrouptags	98
POST vlangrouptags	98

GET vlangrouptags	98
DELETE vlangtags	99
PUT vlangtags	99
POST vlangtags	99
GET vlangtags	99
Policy Services	100
DELETE accesspolicies	100
PUT accesspolicies	100
POST accesspolicies	100
GET accesspolicies	101
DELETE accessrules	101
PUT accessrules	101
POST accessrules	101
GET accessrules	101
DELETE categories	102
PUT categories	102
POST categories	102
GET categories	102
PUT defaultactions	102
GET defaultactions	103
GET loggingsettings	103
PUT loggingsettings	103
GET securityintelligencepolicies	103
GET dnspolicies	104
GET allowdnrules	104
GET blockdnrules	104
GET dynamicaccesspolicies	104
PUT dynamicaccesspolicies	105
POST dynamicaccesspolicies	105
DELETE dynamicaccesspolicies	105
GET filepolicies	105
DELETE ftdnatpolicies	105
PUT ftdnatpolicies	106
POST ftdnatpolicies	106

GET ftdnatpolicies	106
DELETE ftds2svpns	106
PUT ftds2svpns	106
POST ftds2svpns	107
GET ftds2svpns	107
PUT advancedsettings	107
GET advancedsettings	107
DELETE endpoints	107
PUT endpoints	108
POST endpoints	108
GET endpoints	108
PUT ikesettings	108
GET ikesettings	109
PUT ipsecsettings	109
GET ipsecsettings	109
DELETE autonatrules	109
PUT autonatrules	109
POST autonatrules	110
GET autonatrules	110
DELETE manualnatrules	110
PUT manualnatrules	110
POST manualnatrules	111
GET manualnatrules	111
GET natrules	111
PUT inheritancesettings	111
GET inheritancesettings	111
GET identitypolicies	112
GET intrusionpolicies	112
PUT intrusionpolicies	112
POST intrusionpolicies	112
DELETE intrusionpolicies	112
GET intrusionrulegroups	113
PUT intrusionrulegroups	113
POST intrusionrulegroups	113

GET intrusionrules	113
PUT intrusionrules	114
GET networkanalysispolicies	114
PUT networkanalysispolicies	114
POST networkanalysispolicies	114
DELETE networkanalysispolicies	115
GET Inspector Configurations	115
GET inspectoroverrideconfigs	115
PUT inspectoroverrideconfigs	115
DELETE prefilterpolicies	115
PUT prefilterpolicies	115
POST prefilterpolicies	116
GET prefilterpolicies	116
GET remoteaccessvpns	116
GET addressassignmentsettings	116
GET certificatemapsettings	117
GET connectionprofiles	117
DELETE hitcounts	117
PUT hitcounts	117
GET hitcounts	118
DELETE prefilterrules	118
PUT prefilterrules	118
POST prefilterrules	119
GET prefilterrules	119
GET snmpalerts	119
GET syslogalerts	119
Policy Assignment Services	120
PUT policyassignments	120
POST policyassignments	120
GET policyassignments	120
Status Services	120
GET taskstatuses	120
System Information	121
GET domain	121



GET serverversion	121
Update Packages	121
POST Cancel Upgrades	121
POST Retry Upgrades	121
DELETE upgradepackages	122
GET upgradepackages	122
GET listapplicabledevices	122
POST upgradepackage	122
GET upgradepackages: Monitor	123





## CHAPTER 1

# About the Firepower Management Center REST API

---

The Firepower Management Center REST API provides a lightweight API to manage a Firepower Management Center.

- [About the Firepower Management Center REST API, on page 1](#)
- [Enabling the REST API, on page 1](#)
- [Best Practices, on page 2](#)
- [Additional Resources, on page 2](#)

## About the Firepower Management Center REST API

With the release of Cisco's Firepower Management Center REST API, you now have light-weight, easy-to-use option for managing Firepower Threat Defense and legacy Firepower devices through a Firepower Management Center.

The REST API is an application programming interface (API), based on “RESTful” principles, which you can quickly enable on any Firepower Management Center running version 6.1 or higher, and use with a REST client.

After installing a REST client, you can contact the specific Firepower Management Center's REST agent and use standard HTTP methods to access current configuration information, and issue additional configuration parameters.

## Enabling the REST API

In Firepower Management Center, the REST API is enabled by default. However, if you are intending to use the REST API, you should confirm that it is enabled.



---

**Note**

If you are using UCAPL mode, check that the REST API is not enabled.

---

---

**Step 1**    Navigate to System>Configuration>REST API Preferences>Enable REST API

**Step 2** Check the "Enable REST API" checkbox.

**Step 3** Click "Save". A "Save Successful" dialog will display when the REST API is enabled.

---

## Best Practices

Cisco recommends the following best practices for optimal results with the REST API:

- Keep UI users and script users separate. Especially do not use the admin account as an API user.
- Do not give script users more privilege than needed.
- Always validate the content coming from the server.
- Validate/sanitize JSON content, as it may include embedded executable code.
- If you are using CC or UCAPL mode you should disable REST API access to the Firepower Management Center and managed devices.

## Additional Resources

Additional resources for the Firepower Management Center REST API can be found on Cisco DevNet at <https://developer.cisco.com/firepower/>.



## CHAPTER 2

# About the API Explorer

---

- [About the API Explorer, on page 3](#)
- [Authentication to the API Explorer, on page 3](#)
- [Accessing the Legacy API Explorer, on page 4](#)
- [Obtaining Sample Code with CodeGen, on page 5](#)
- [Viewing API Parameters, on page 6](#)

## About the API Explorer

The API Explorer provides a limited interface for the REST API as well as giving a view of the abilities of the REST API.

The API Explorer resides on the Firepower Management Center, and can be accessed via the Firepower Management Center at:

```
https://<management_center_IP_or_name>:<https_port>/api/api-explorer
```

Version 6.4 uses a new API Explorer, based on the OpenAPI Specification (OAS). You can still access the legacy API Explorer if you prefer.

As part of the OAS, you now use CodeGen to generate sample code.

This explorer provides the list of APIs available on the Firepower Management Center, and their details.

## Authentication to the API Explorer

The REST API relies on the same authentication as the Firepower Management Center. Each function in the REST API maps to permissions in the Firepower Management Center.

You can log into the API Explorer using any account on the Firepower Management Center, but you will only be able to perform the functions for which the account has permissions. For more information on setting permissions for user roles, see the *Firepower Management Center Configuration Guide*.

The first time you connect to the API Explorer you may receive an error that the connection is not secure due to an invalid certificate. You will need to add an exception in your browser to use the certificate and accept the connection.

## Logging into API Explorer

The REST API uses the same authentication and permission model as the Firepower Management Center. See the *Firepower Management Center Configuration Guide* for more information.

### Before you begin

Make sure you have an account on your Firepower Management Center with the required permissions to perform the tasks you want to perform using the REST API.

---

**Step 1** Navigate to the following URL: `https://<management_center_IP_or_name>:<https_port>/api/api-explorer`

If you experience an extended load time for the logon screen when using a Firefox browser, enter **about:support** in the search bar and click the **Refresh Firefox** option, then view the Firepower Management Center interface with self-signed certificates in the same Firefox browser. For more information, see <https://support.mozilla.org/en-US/kb/refresh-firefox-reset-add-ons-and-settings>.

**Step 2** Log in with your username and password and click "Sign In"

---

### What to do next

Locate the desired resource and request.

## Setting the Domain

The REST API can perform functions globally, in the default domain, or in specific domains.

### Before you begin

You must have a configured Firepower Management Center, an account with permissions to access the REST API in one or more domains configured on your FMC.

---

In the upper right, drop down the `Domains` menu and select the desired domain.

---

### What to do next

Locate the desired resource and request type.

## Accessing the Legacy API Explorer

The API Explorer has changed for 6.4.0. While the newer API Explorer retains nearly all of the previous functionality, some users may prefer the older interface.

### Before you begin



**Note** The Legacy Explorer will be removed in future releases of Firepower Management Center. Please use the Open API Specification for access to current REST API functionality in the future.

Make sure you have an account on your Firepower Management Center with the required permissions to perform the tasks you want to perform using the REST API.

Log in to the API Explorer at [https://<management\\_center\\_IP\\_or\\_name>:<https\\_port>/api/api-explorer](https://<management_center_IP_or_name>:<https_port>/api/api-explorer).

In the upper right-hand corner click on `Legacy Explorer`.

### What to do next

Use the Legacy API Explorer as you would normally.

## Obtaining Sample Code with CodeGen

You can use the CodeGen utility on the Open API Spec to generate sample code in a number of different languages. This utility is an open-source tool you can download online. The resultant code is meant primarily as an educational and bootstrapping tool.

The CodeGen utility creates sample code for the entire Open API Spec. As such, it generates sample code for every allowed method and endpoint in the REST API. The sample code can be in a variety of languages, including HTML, Perl, Python, and Java.

For complete documentation of the CodeGen utility go to <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

## Downloading the Open API Spec

The Open API Spec is a standardized specification of a REST API. The Open API Spec for the Firepower Management Center REST API contains details about the endpoints, fields, parameters, and requirements of the API. You can use the API Spec to generate sample code as well as find specific information about API functionality.

The Open API Spec is a JSON file. It can be read by most text editors.

### Before you begin

Have an account on the Firepower Management Center which is able to access the API Explorer.

Make sure that your browser is able to download from sites with self-signed certificates.

**Step 1** Navigate to the following URL: [https://<management\\_center\\_IP\\_or\\_name>:<https\\_port>/api/api-explorer](https://<management_center_IP_or_name>:<https_port>/api/api-explorer)

**Step 2** Click on `Download Spec` in the upper right corner. Depending on your browser configuration, you will either be given a prompt to save the file, or be shown the file directly.

**Step 3** Save the file. Be sure to note the destination and filename.

---

#### What to do next

Run the CodeGen utility on the downloaded file.

## Generating Sample Code with the CodeGen Utility

The Swagger CodeGen utility allows you to generate sample code from an Open API Spec. This sample code can be in a variety of languages including Java, HTML, Python, and Perl.

#### Before you begin

Download the Swagger CodeGen Utility. It can be found at <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

Have a Java Runtime Environment installed on your computer

Download the Firepower Management Center REST API Open API Spec

Set environment variables to allow you to run the CodeGen utility

---

From the command line, run the command `java -jar ./swagger-codegen-cli-<VERSION>.jar generate -o <OUTPUT_PATH> -l <LANGUAGE> -i <OPEN_API_SPEC_FILE>`

#### Example:

```
java -jar ./swagger-codegen-cli-2.3.1.jar generate -o C:\work\code\api_schema\html -l html -i fmc_swagger.json
```

<VERSION> is the specific version of the CodeGen utility you are using. It must match the filename of the CodeGen .jar file.

<OUTPUT\_PATH> is the path to which you want to output the generated code.

<LANGUAGE> is the language which you want CodeGen to generate. Suggested options include `html`, `java`, `perl`, and `python`. Other options are possible, check the CodeGen documentation for the complete list of choices.

<OPEN\_API\_SPEC\_FILE> is the Open API Spec file which you downloaded. This is the source from which CodeGen is generating example code. Without it, CodeGen cannot provide output.

---

#### What to do next

Find the generated code in the output path and use as desired. Generated code should be considered an example, and may not perform as desired unless modified to meet your needs.

## Viewing API Parameters

Each resource has a set of parameters and fields associated with it. You can view the parameters and fields by performing any of the supported operations for that resource within API Explorer.



**Before you begin**

You must have a configured Firepower Management Center and an account on that center with the permissions required to use the desired REST API functions.

---

**Step 1** Select the desired resource.

**Step 2** Select one of the supported operations for that resource.

---





## CHAPTER 3

# Connecting with a Client

You can access the REST API using any REST API client. Typically REST API clients are available as browser plugins, but any REST API client is allowed.



**Note** If connecting to the REST API for the first time, you will receive a certificate warning. You need to accept the certificate in order to use the REST API.

- [Authentication from a REST API Client, on page 9](#)


## Authentication from a REST API Client

**Cisco recommends that you use different accounts for interfacing with the API and the Firepower User Interface.** Credentials cannot be used for both interfaces simultaneously, and will be logged out without warning if used for both.

The first time you connect to the REST API you may receive an error that the connection is not secure due to an invalid certificate. Add an exception in your browser to use the certificate and accept the connection.

With Token Based Authentication you obtain a token by providing your username and password. You use this token to access an HTTP service for a limited time period without the need for the username and password with every request. In other words, to eliminate the need for authenticating with your username and password with each request, you replace user credentials with a uniquely generated access token, which you use for accessing resources for up to 30 minutes and can refresh up to three times.

The diagram below illustrates the concept of token-based authentication:

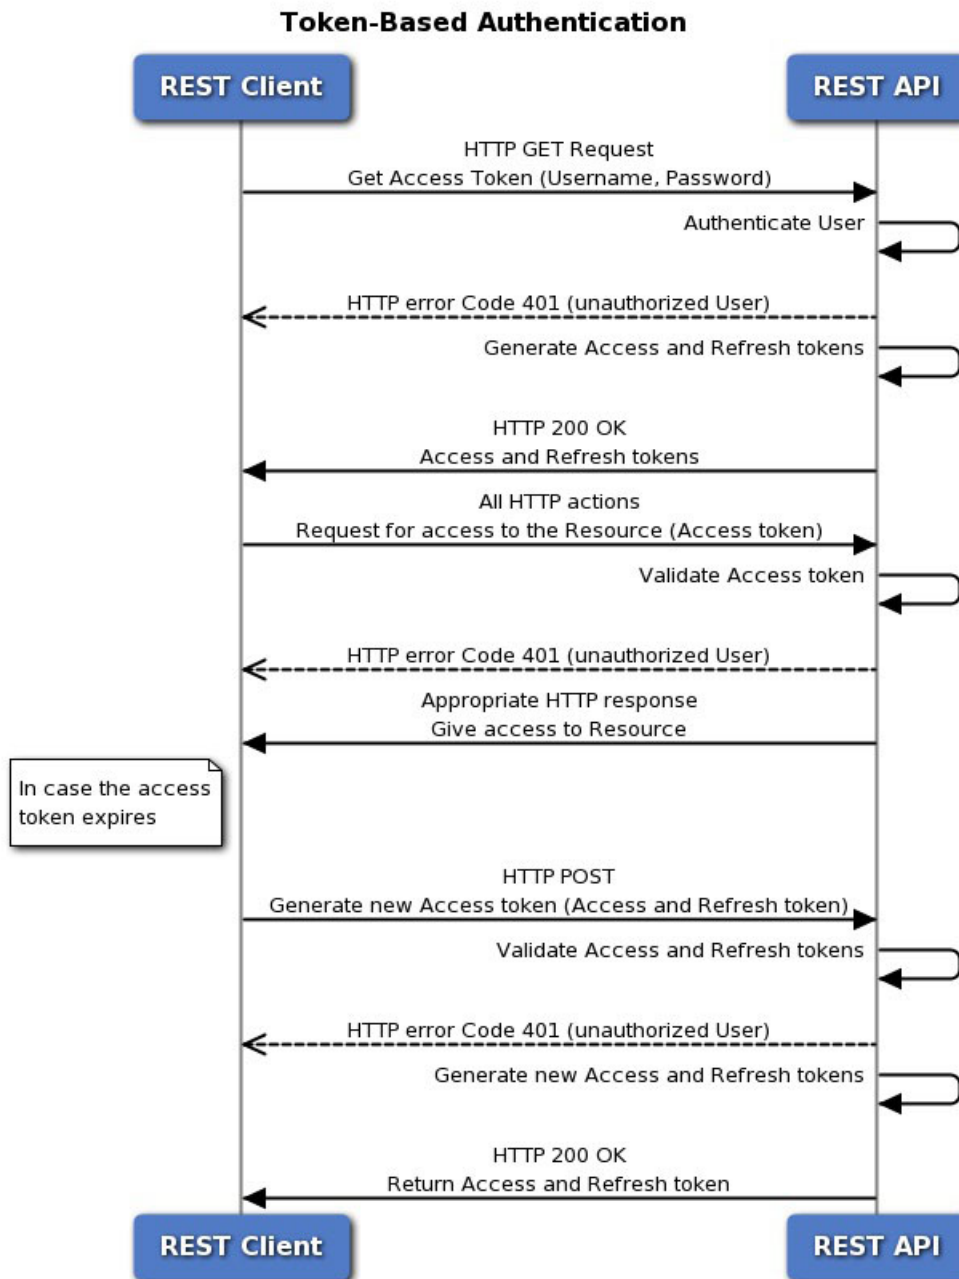

## Requesting an Authentication Token

The Token Generation Utility provides an authentication token which can be used in your REST API client.

### Before you begin

You must have a configured Firepower Management Center and an account on that center with credentials to use the REST API. You must also have a REST API Client which can perform basic authentication.

- 
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:  
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/generatetoken.`
- Step 3** Include the username and password as a basic authentication header. The POST body should be blank.
- 

#### What to do next

Add the header `X-auth-access-token:<authentication token value>` in requests to the API.

Add the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>` in requests to refresh the token as described in [Authentication from a REST API Client, on page 9](#)

Use the `Domain_UUID` from the authentication token in all REST requests to the server.

## Refreshing an Authentication Token

Firepower Management Center REST API authentication tokens are valid for 30 minutes, and can be refreshed up to three times.

#### Before you begin

Obtain valid authentication and refresh tokens from the Firepower Management Center REST API. Ensure these tokens have been refreshed less than three times.

- 
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:  
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/refresh-token` with the headers  
`X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>`.
- 

#### What to do next

Add the header `X-auth-access-token:<new authentication token value>` in requests to the API.

Add the header `X-auth-refresh-token:<new refresh token value>` in requests to refresh the token.





## CHAPTER 4

# Objects in the REST API

---

- Request Structure, on page 13
- Bulk Rule Posting, on page 15
- Response Structure, on page 16
- Rate Limiting, on page 18
- Payload Limiting, on page 18
- Object Overrides, on page 18
- Audit Services, on page 19
- Users, on page 20
- Deployment Services, on page 20
- Device Group Services, on page 22
- Device Clusters, on page 22
- Device HA Pair Services, on page 23
- Health Services, on page 26
- Device Services, on page 26
- Intelligence Services, on page 48
- Search, on page 51
- Integration Services, on page 52
- Object Services, on page 55
- Policy Services, on page 100
- Policy Assignment Services, on page 120
- Status Services, on page 120
- System Information, on page 121
- Update Packages, on page 121

## Request Structure

Request Structure:

Requests are sent to the Firepower Management Center as HTTPS requests with the Uniform Resource Identifier (URI) of the form described below:

```
https://<management_center_IP_or_name>:<https_port>/<object_URL>/object_UUIDoptions
```

Where:

- <management\_center\_IP\_or\_name>

is the IP address or Fully Qualified Domain Name of the Firepower Management Center

- `<https_port>`

is the port number used by the Firepower Management Center for HTTPS connections. This port is always 443.

- `<object_URL>`

is the specific URL for the desired resource. These URLs are unique for each resource and are given below.

- `options`

are the options given with the request. Options can be used to modify the output and filter results.

- `{UUID}`

Many URLs contain one or more UUIDs which must be specified. Most URIs include the domain UUID, which can be found in the Authentication Token. When deleting or modifying an object, or requesting information about a specific object, the URI will end with the object UUID.

Available request methods are:

- GET

– Retrieves data from the specified object. GET is a read-only operation.

- PUT

– Adds the supplied information to the specified object; returns a 404 Resource Not Found error if the object does not exist.



**Note**

Currently PUT may be used to create a new object, but this ability may be removed in later releases. Use POST to create new objects and PUT to modify existing objects.

- POST

– Creates the object with the supplied information. POST operations should be followed with a payload consisting of the JSON object to be created, enclosed in braces:

```
{object}
```



**Note**

The maximum number of rules you can use depends on memory of the device. There is no set limit, because complex rules use more memory. For rule performance and optimization guidelines, see the Firepower Management Center Configuration Guide.

- DELETE

– Deletes the specified object.

- PATCH

– **Not supported.**



The API supports query parameters for almost all requests. For GET requests, the following query parameters can be used to control the number of returned objects and the pagination:

- `expanded`
  - This is a True/False value which indicates whether you get a full listing of an item in a list or only a reference. Some fields will only show if this flag is set to true.
- `offset`
  - Indicates the position in the list where you want to start.
- `limit`
  - Indicates the number of items you want to retrieve in a page.

The API supports filtering on the basis of query parameters passed with a request. Filtering can be done based on specific attributes in a model. The parameters available for filtering vary by object, and are listed with the request below.

## Bulk Rule Posting

Multiple access control rules can be added with a POST command using the bulk insert feature. This feature allows as many as 1,000 rules to be added at once.

This feature is only available for access rules.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{policy_UUID}/accessrules?bulk=true
```

The option:

```
?bulk=true
```

indicates that that multiple rules will be used in the payload of this request.

All objects in the payload of the bulk POST request must be of the same type. You cannot mix different objects in the same bulk request.

Unlike a normal POST operation, the bulk POST requires a list of JSON objects. This list may have as many as 1,000 objects or as few as one. The individual JSON objects must be enclosed in braces. Each object must be separated by commas, and the entire list is enclosed in brackets:

```
[{object}]
[{object1},{object2},{object3},{object4},{object5} ...]
```

The following query parameters are supported in bulk POST requests:

- `bulk=true`

This parameter specifies that the bulk POST feature is being used in the query. This parameter is **required** for bulk rule posting.
- `section=mandatory/default`

This parameter specifies the section into which the rules will be added. If this parameter is not used the section will be the default section. Only `mandatory` and `default` are allowed values. If a section is specified it must exist or the request will fail. If a section is specified, a category cannot be specified.

- `category=<Name of the category>`

This parameter specifies the category into which the rules will be added. If a category is specified it must exist or the request will fail. If a category is specified, a section cannot be specified.

- `insertAfter=<Index of rule>`

This parameter specifies that the rules will be inserted after the specified rule index. If no section or category is specified, the rules will be added to the section or category after the insertion point.

- `insertBefore=<Index of rule>`

This parameter specifies that the rules will be inserted before the specified rule index. If no section or category is specified, the rules will be added to the section or category before the insertion point. `insertBefore` takes precedence over `insertAfter` - if both are specified, the `insertBefore` parameter will apply.

When a rule or group of rules are inserted at an index which is part of either a section or a category, the category or section parameter can be used along with index to specify the insertion location of the rule(s). If an index is given along with a section or category, but the index is not in that section or category, you will receive an error.

If no index is specified, rules will be inserted after the end of the access policy. If a category or section is specified but no index is specified, rules will be inserted at the end of the category or section.

In any given POST all of the rules will be inserted at a single point. You cannot specify multiple insertion locations in a POST request.

**Note**

Rule order affects how orders are parsed by the Firepower Management Center.

## Response Structure

**Note**

The REST API will serve only 25 results per page. This can be increased up to 1000 using the limit query parameter.

The response structure can be:

- **LOCATION** – Newly created resource ID; for POST only—holds the new resource ID (as a URI representation).
- **CONTENT-TYPE** – Media type describing the response message body; describes the representation and syntax of the response message body.
- Each response includes an HTTP status or error code. Available codes fall into these categories:
  - **20x** - A two-hundred series code indicates successful operation, including:
    - **200 200**
      - "OK". Standard response for successful requests.

- 201 201
  - "Created". Request completed; new resource created.
- 202 202
  - "Accepted". Request accepted, but processing not complete.
- 204 204
  - "No Content". Server successfully processed request; no content is being returned.
- 4xx - A four-hundred series code indicates a client-side error, including:
- 400 400
  - "Bad Request". Invalid query parameters, including unrecognized parameters, missing parameters, or invalid values.

This can indicate that the object was edited or deleted via REST API such that the corresponding policy is invalidated.
- 404 404
  - "Not Found". The provided URL does not match an existing resource. For example, an HTTP DELETE may fail because the resource is unavailable.
- 405 405
  - "Method Not Allowed". An HTTP request was presented that is not allowed on the resource; for example, a POST on a read-only resource.
- 422 422
  - "Unprocessable Entity". The payload is too large. This will occur when you send a payload greater than 2048000 bytes.
  - The payload contains an unprocessable or unreadable entity such as a invalid attribut name or incorrect JSON syntax.
- 429 429
  - "Too Many Requests". Too many requests were sent to the API. This error will occur if you send more than 120 requests per minute.
  - Too many concurrent requests. The system cannot accept more than 10 parallel requests from all clients.
  - Too many write operations per server. The API will only allow one PUT, POST, or DELETE request per user on a server at a time.
- 5xx - A five-hundred series code indicates a server-side error.

In the case of an error, in addition to the error code, the return response may include an error object containing more details about the error. The JSON error/warning response schema is as follows:

```
{
  "error": {
    "category": "FRAMEWORK",
    "messages": [
      {
```

```

    "description": "Action is mandatory to be specified."
  }
],
"severity": "ERROR"
}
}

```

where the object properties are:

**Table 1: Object Properties**

Property	Type	Description
messages	List of Dictionaries	List of error or warning messages
code	String	Error/Warning/Info code
details	String	Detailed message corresponding to Error/Warning/Info

## Rate Limiting

The Firepower Management Center REST API implements rate limiting to reduce network load.

The API will accept no more than 120 messages per minute from an individual IP address. It will only allow 10 simultaneous connections per IP address. These are not configurable parameters.

If a client exceeds these limits, the API will give an HTTP 429 error.

## Payload Limiting

The API cannot accept a message with a payload greater than 2048000 bytes. This applies to both the REST API and to API Explorer. This is not a configurable parameter.

If a message exceeds this limit, the API will give an HTTP 422 error.

## Object Overrides

An override defines an alternate value for an object, which the system uses for the device or domain specified. In a single request user can create multiple overrides for multiple objects using bulk operation.

When an object is overridden, the alternate values will be provided for that object when it is requested. This does not overwrite the original values, which will return if the override is removed. The override gives alternate values for all fields in the object except for the `Name` and `Description` fields.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{Domain_uuid} /object/hosts
```

Request payload to create an override for object “testhost” on domain “Global \\ RETAIL” with the override value being “1.2.3.5”:

```
{
  "type": "Host",
  "value": "1.2.3.5",
  "overrides": {
    "parent": {
      "id": "<Parent UUID>",
      "type": "Host"
    },
    "target": {
      "name": "Global \\ RETAIL",
      "id": "<target domain UUID>",
      "type": "Domain"
    }
  },
  "overridable": true,
  "description": " ",
  "name": "testhost",
}
```

Optional:

?bulk=true

indicates the override creation for more than one object.

GET:

URL to list all overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/hosts/{host\_UUID}/overrides

URL for override for an object on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/hosts/{host\_UUID}?overrideTargetId={target\_UUID}

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/hosts?overrideTargetId={target\_UUID}



**Note**

When overridden, the parent object value will never change.

## Audit Services

### GET auditrecords

Request Type: **GET**

Description: Retrieves audit records.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/audit/auditrecords

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/audit/auditrecords/{objectID}

Permissions: System > Monitoring > Audit

Parameters available for filtering: username, subsystem, source, starttime, endtime

# Users

.

## GET authroles

Request Type: **GET**

Description: Retrieves the list of all existing user roles in the system.

URL: /api/fmc\_config/v1/domain/{domainUUID}/users/authroles

Permissions: System > User Management

Parameters available for filtering: none

## GET SSO Config

Request Type: **GET**

Description: Retrieves the Single Signon Configuration for the device.

URL: /api/fmc\_config/v1/domain/{domainUUID}/users/ssoconfigs/{objectId}

Permissions: System > User Management > Single Sign-On

Parameters available for filtering: none

## PUT SSO Config

Request Type: **PUT**

Description: Modifies the Single Signon configuration for the device.

URL: /api/fmc\_config/v1/domain/{domainUUID}/users/ssoconfigs/{objectId}

Permissions: System > User Management > Single Sign-On

# Deployment Services

## GET deployabledevices

Request Type: **GET**

Description: Retrieves list of all devices with configuration changes, ready to be deployed.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/deployment/deployabledevices

Permissions: Deploy Configuration to Devices

Parameters available for filtering: name

## GET deployments

Request Type: **GET**

Description: Retrieves deployment details for device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/deployments`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: startTime, endTime

## GET pendingchanges

Request Type: **POST**

Description: Retrieves all the policy and object changes for the selected device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/pendingchanges`

Permissions: Deploy Configuration to Devices

## POST deploymentrequests

Request Type: **POST**

Description: Creates a request for deploying configuration changes to the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deploymentrequests/{object_UUID}`

Permissions: Deploy Configuration to Devices

## GET jobhistories

Request Type: **GET**

Description: Retrieves all the deployment jobs.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: Various filter criteria can be specified using the format

`deviceUUID:{uuid};startTime:start_time_in_secs;endTime:end_time_in_secs;rollbackApplicable:true_or_false`

## POST rollbackrequests

Request Type: **POST**

Description: Creates a request for rollback configuration to devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/rollbackrequest`

Permissions: Deploy Configuration to Devices

# Device Group Services

## DELETE devicegrouprecords

Request Type: **DELETE**

Description: Deletes a device group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/devicegrouprecords/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## PUT devicegrouprecords

Request Type: **PUT**

Description: Modifies a device group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/devicegrouprecords/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## POST devicegrouprecords

Request Type: **POST**

Description: Creates a device group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/devicegrouprecords

Permissions: Devices > Device Management > Modify Devices

## GET devicegrouprecords

Request Type: **GET**

Description: Retrieves the device group associated with the specified ID. If no ID is specified, retrieves list of all device groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/devicegrouprecords

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/devicegrouprecords/{object\_UUID}

Permissions: Devices > Device Management > View Devices

# Device Clusters

## GET ftddevicecluster

Request Type: **GET**



Description: Retrieves or modifies the FTD Cluster record associated with the specified ID. If no ID is specified for a GET, retrieves list of all FTD Clusters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}`

Permissions: Devices > Device Management > View Devices

## Device HA Pair Services

### DELETE ftddevicehapair

Request Type: **DELETE**

Description: Deletes a device high availability pair with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

**Note**

Run the *configure high-availability disable* command to remove the failover configurations from FTD devices.

### PUT ftddevicehapair

Request Type: **PUT**

Description: Sets any one of the following actions for the Firepower Threat Defense high availability device:

- Sets the failover trigger criteria for the device
- Switches states within the device
- Breaks or force-breaks the device

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}`

Permissions: Devices > Device Management > Modify Devices

### POST ftddevicehapairs

Request Type: **POST**

Description: Creates a high availability device pair with the specified primary and secondary object IDs. Do not perform the POST operation for more than one high availability pair at a time. Ensure that the current POST operation is completed successfully before proceeding to the next POST operation.

**Note**

Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses](#), on page 120.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs

Permissions: Devices > Device Management > Modify Devices

## GET ftddevicehapairs

Request Type: **GET**

Description: Retrieves the details associated with the specified high availability container ID. If no ID is specified, retrieves a list of all high availability container objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs/{ha\_container\_UUID}

Permissions: Devices > Device Management > Modify Devices

## DELETE failoverinterfacemacaddressconfigs

Request Type: **DELETE**

Description: Deletes the Firepower Threat Defense high availability failover policy interface MAC addresses record associated with the specified Firepower Threat Defense high availability pair.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs/{hacontainer\_UUID}/failoverinterfacemacaddressconfigs

Permissions: Devices > Device Management > Modify Devices

## GET failoverinterfacemacaddressconfigs

Request Type: **GET**

Description: Retrieves the Firepower Threat Defense high availability failover policy interface MAC addresses record associated with the specified FTD HA pair. If no ID is specified for a GET, it retrieves the list of all Firepower Threat Defense high availability failover policy interface MAC addresses records.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs/{hacontainer\_UUID}/failoverinterfacemacaddressconfigs

URL for GET by ID :

/api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs/{hacontainer\_UUID}/failoverinterfacemacaddressconfigs/{object\_UUID}

Permissions: Devices > Device Management

## POST failoverinterfacemacaddressconfigs

Request Type: **POST**

Description: Creates the Firepower Threat Defense high availability failover policy interface MAC addresses record associated with the specified Firepower Threat Defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

Permissions: Devices > Device Management > Modify Devices

## PUT failoverinterfacemacaddressconfigs

Request Type: **PUT**

Description: Modifies the Firepower Threat Defense high availability failover policy interface MAC addresses record associated with the specified Firepower Threat Defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}
```

Permissions: Devices > Device Management > Modify Devices

## GET monitoredinterfaces

Request Type: **GET**

Description: Retrieves the Firepower Threat Defense high availability Monitored interface policy record associated with the specified FTD HA pair. If no ID is specified for a GET, it retrieves the list of all Firepower Threat Defense high availability monitored interface policy records.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces
```

URL for GET by ID :

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

## PUT monitoredinterfaces

Request Type: **PUT**

Description: Modifies the Firepower Threat Defense high availability Monitored interface policy record associated with the specified Firepower Threat Defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftdddevicehapairs/  
{hacontainer_UUID}/monitoredinterfaces
```

Permissions: Devices > Device Management > Modify Devices

## Health Services

.

### GET Health Alerts

Request Type: **GET**

Description: Retrieves health alerts.

URL: /api/fmc\_config/v1/domain/{domainUUID}/health/alerts

Permissions: System > Health > Health Events

Parameters available for filtering: startTime, endTime, deviceUUIDs, status, moduleIDs

### GET Health Metrics

Request Type: **GET**

Description: Retrieves health monitor metrics for the device.

URL: /api/fmc\_config/v1/domain/{domainUUID}/health/metrics

Permissions: System > Health > Health Events

Parameters available for filtering: deviceUUIDs, metric, startTime, endTime, step, regexFilter, queryFunction

## Device Services

### POST copyconfigrequests

Request Type: **POST**

Description: Copies device configuration to the specified Firepower Threat Defense device.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/copyconfigrequests

Permissions: Devices > Device Management > Modify Devices

### DELETE devicerecords

Request Type: **DELETE**

Description: Unregisters the specified device.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## PUT devicerecords

Request Type: **PUT**

Description: Modifies the device record associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## POST devicerecords

Request Type: **POST**

Description: Registers the specified device to the Firepower Management Center.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords

Permissions: Devices > Device Management > Modify Devices

## GET devicerecords

Request Type: **GET**

Description: Retrieves device information. If a device ID is specified, the information for the specified device is retrieved. If no ID is specified, retrieves information for all devices.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: hostName

## PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fpphysicalinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fpphysicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

## DELETE fplogicalinterfaces

Request Type: **DELETE**

Description: Deletes logical interfaces on the specified device.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## PUT fplogicalinterfaces

Request Type: **PUT**

Description: Modifies a logical interface on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## POST fplogicalinterfaces

Request Type: **POST**

Description: Creates logical interfaces on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces

Permissions: Devices > Device Management > Modify Device

## GET fplogicalinterfaces

Request Type: **GET**

Description: Retrieves the logical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all logical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

## DELETE inlinesets

Request Type: **DELETE**

Description: Deletes inline sets on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/inlinesets/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## PUT inlinesets

Request Type: **PUT**

Description: Modifies an inline set on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/inlinesets/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## POST inlinesets

Request Type: **POST**

Description: Creates inline sets on the specified device.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/inlinesets

Permissions: Devices > Device Management > Modify Device

## GET inlinesets

Request Type: **GET**

Description: Retrieves information on the inline set associated with the specified NGIPS device ID and inline set ID. If no inline set ID is specified, retrieves list of all inline sets associated with the specified NGIPS device ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/inlinesets

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/inlinesets/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

## GET commands

Request Type: **GET**

Description: Retrieves the list of all command line interface commands available on the device. If a command is specified in the payload, retries the output of that command.

The below table lists the commands which can be used with the `commands` service. Some commands are only allowed with certain parameters, or specific parameters may not be allowed, as specified in the **Blocked** column.

Command	Blocked
show version	
show failover	
show dhcpd	show dhcpd binding, show dhcpd statistics
show ip	
show aaa-server	
show logging	show logging asdm, show logging queue
show snmp-server	
show running-config {any}	show running-config {no parameters}
show ssl	
show firewall	
show logging	
show network	
show ntp	
show banner	

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/commands`

Permissions: Devices > Device Management

## GET Metrics

Request Type: **GET**

Description: Retrieves HealthMonitor metrics for the device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/metrics`

Permissions: Devices > Device Management

Parameters available for filtering: metric

## GET staticroutes

Request Type: **GET**



Description: Retrieves the static route associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all static routes associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroute

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}

Permissions: Devices > Device Management

## GET virtualrouters

Request Type: **GET**

Description: Retrieves the the virtual router with the specified ID. If no ID is specified, retrieves list of all virtual routers.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}

Permissions: Devices > Device Management

## PUT virtual routers

Request Type: **PUT**

Description: Modifies a virtual router on the specified device.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}

Permissions: Devices > Device Management > Modify Device

## POST virtual routers

Request Type: **POST**

Description: Creates virtual routers associated with the specified container.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters

Permissions: Devices > Device Management > Modify Device

## DELETE virtual routers

Request Type: **DELETE**

Description: Deletes the specified virtual router.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}

Permissions: Devices > Device Management > Modify Device

## GET virtual BGP

Request Type: **GET**

Description: Retrieves specified BGP (ipv4 and ipv6) on the specified virtual router. If no ID is specified, retrieves list of all BGP on the virtual router.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}

Permissions: Devices > Device Management

## GET virtual ipv4staticroutes

Request Type: **GET**

Description: Retrieves specified IPv4 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv4 static routes on the virtual router.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}



### Note

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

## PUT virtual ipv4 static routes

Request Type: **PUT**

Description: Modifies an IPv4 static route on the specified device.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}



### Note

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## POST virtual ipv4 static routes

Request Type: **POST**

Description: Creates IPv4 static routes associated with the specified virtual router.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes



**Note**

For static routes (IPv4), the methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## DELETE virtual ipv4 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv4 static route.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}



**Note**

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## GET virtual ipv6staticroutes

Request Type: **GET**

Description: Retrieves specified IPv6 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv6 static routes on the virtual router.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}



**Note**

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

## PUT virtual ipv6 static routes

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}



### Note

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## POST virtual ipv6 static routes

Request Type: **POST**

Description: Creates IPv6 static routes associated with the specified virtual router.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes



### Note

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## DELETE virtual ipv6 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv6 static route.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}



### Note

The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter ignoreWarning=true, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## GET virtual ospf interface

Request Type: **GET**

Description: Retrieves specified OSPF interface associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF interfaces associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}`

Permissions: Devices > Device Management

## GET virtual ospfv2 routes

Request Type: **GET**

Description: Retrieves specified OSPFV2 process associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF v2 process associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes/{objectId}`

Permissions: Devices > Device Management

## GET virtual static routes

Request Type: **GET**

Description: Retrieves specified static routes (ipv4 and ipv6) associated with the specified virtual router. If no ID is specified, retrieves list of all Static routes (ipv4 and ipv6) associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

## DELETE ipv4staticroutes

Request Type: **DELETE**

Description: Deletes the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

## PUT ipv4staticroutes

Request Type: **PUT**

Description: Modifies the IPv4 Static Route associated with the specified ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object\_UUID}

Permissions: Devices > Devices Management > Modify Devices

## POST ipv4staticroutes

Request Type: **POST**

Description: Creates an IPv4 Static Route.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes

Permissions: Devices > Device Management > Modify Devices

## GET ipv4staticroutes

Request Type: **GET**

Description: Retrieves the IPv4 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv4 Static Routes.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes

URL for GET ID::

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object\_UUID}

Permissions: Devices > Devices Management

## DELETE ipv6staticroutes

Request Type: **DELETE**

Description: Deletes the IPv6 Static Route associated with the specified ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## PUT ipv6staticroutes

Request Type: **PUT**

Description: Modifies the IPv6 Static Route associated with the specified ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## POST ipv6staticroutes

Request Type: **POST**

Description: Creates an IPv6 Static Route.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes

Permissions: Devices > Device Management > Modify Devices

## GET ipv6staticroutes

Request Type: **GET**

Description: Retrieves the IPv6 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv6 Static Routes.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes

URL for GET ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object\_UUID}

Permissions: Devices > Device Management

## GET ospf interface

Request Type: **GET**

Description: Retrieves the OSPF interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all OSPF interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}

Permissions: Devices > Device Management

## GET ospfv2routes

Request Type: **GET**

Description: Retrieves OSPF V2 routes associated with the specified ID. If no ID is specified, retrieves list of all OSPF v2 routes.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes/{objectId}

Permissions: Devices > Device Management

## GET ospfv3interfaces

Request Type: **GET**

Description: Retrieves OSPF v3 interface associated with the specified ID. If no ID is specified, retrieves a list of all OSPF v3 interfaces.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces/{objectId}

Permissions: Devices > Device Management

## GET ospfv3routes

Request Type: **GET**

Description: Retrieves the OSPFv3 process associated with the specified ID. If no ID is specified, retrieves list of all OSPFv3 processes.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes/{objectId}

Permissions: Devices > Device Management

## DELETE virtualswitches

Request Type: **DELETE**

Description: Deletes a virtual switch on the specified device.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## PUT virtualswitches

Request Type: **PUT**

Description: Modifies a virtual switch on the specified device.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object\_UUID}

Permissions: Devices > Device Management > Modify Device



## POST virtualswitches

Request Type: **POST**

Description: Creates a virtual switch on the specified device.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/virtualswitches

Permissions: Devices > Device Management > Modify Device

## GET virtualswitches

Request Type: **GET**

Description: Retrieves virtual switch associated with the specified NGIPS device ID and virtual switch ID. If no virtual switch ID is specified, retrieves list of all virtual switches associated with the specified NGIPS device ID.

**This method is only available on a Firepower 1010 device.**

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/virtualswitches

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

## GET Virtual Tunnel Interfaces

Request Type: **GET**

Description: Retrieves the virtual tunnel interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all virtual tunnel interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}

Permissions: Devices > VPN

Parameters available for filtering: none

## PUT Virtual Tunnel Interfaces

Request Type: **PUT**

Description: modifies the virtual tunnel interface associated with the specified NGFW device ID and/or interface ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}

Permissions: Devices > VPN > Modify VPN

## POST Virtual Tunnel Interfaces

Request Type: **POST**

Description: Creates a virtual tunnel interface on the NGFW device.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces

Permissions: Devices > VPN > Modify VPN

## DELETE Virtual Tunnel Interfaces

Request Type: **DELETE**

Description: Deletes the virtual tunnel interface associated with the specified NGFW device ID and interface ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}

Permissions: Devices > VPN > Modify VPN

## DELETE vlaninterfaces

Request Type: **DELETE**

Description: Deletes the vlan interface associated with the specified NGFW device ID and interface ID.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces/{object\_UUID}

Permissions: Devices > VPN > Modify VPN

## PUT vlaninterfaces

Request Type: **PUT**

Description: Modifies the vlan interface associated with the specified NGFW device ID and interface ID.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces/{object\_UUID}

Permissions: Devices > VPN > Modify VPN

## POST vlaninterfaces

Request Type: **POST**

Description: Creates a vlan interface on the NGFW device.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces

Permissions: Devices > VPN > Modify VPN

## GET vlaninterfaces

Request Type: **GET**

Description: Retrieves the vlan interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all vlan interfaces associated with the specified NGFW device ID.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces/{object\_UUID}

Permissions: Devices > VPN

Parameters available for filtering: name

## PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fpphysicalinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fpphysicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

## PUT physicalinterfaces

Request Type: **PUT**

Description: Modifies physical interfaces on a specified device.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/physicalinterfaces

Permissions: Devices > Device Management > Modify Device

## GET physicalinterfaces

Request Type: **GET**

Description: Retrieves the physical interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all physical interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/physicalinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/physicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management

## GET bridgegroupinterfaces

Request Type: **GET**

Description: Retrieves the bridge group interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all bridge group interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/bridgegroupinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/bridgegroupinterfaces/{object\_UUID}

Permissions: Devices > Device Management

## POST bridgegroupinterfaces

Request Type: **POST**

Description: Creates bridge group interfaces associated with the specified NGFW device ID and interface ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/bridgegroupinterfaces

Permissions: Devices > Device Management > Modify Device

## PUT bridgegroupinterfaces

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/bridgegroupinterfaces

Permissions: Devices > Device Management > Modify Device

## DELETE bridgegroupinterfaces

Request Type: **DELETE**

Description: Deletes a bridge group interface associated with the specified NGFW device ID and interface ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/bridgegroupinterfaces

Permissions: Devices > Device Management > Modify Device

## GET redundantinterfaces

Request Type: **GET**

Description: Retrieves the redundant interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all redundant interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/redundantinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/redundantinterfaces/{object\_UUID}

Permissions: Devices > Device Management

## POST redundantinterfaces

Request Type: **POST**

Description: Creates redundant interfaces on a specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/redundantinterfaces

Permissions: Devices > Device Management

## PUT redundantinterfaces

Request Type: **PUT**

Description: Modifies redundant interfaces on a specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/redundantinterfaces

Permissions: Devices > Device Management > Modify Device

## DELETE redundantinterfaces

Request Type: **DELETE**

Description: Removes redundant interfaces on a specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/redundantinterfaces

Permissions: Devices > Device Management

## GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: /api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}

Permissions: Devices > Device Management

## GET bgp general settings

Request Type: **GET**

Description: Retrieves BGP general settings associated with the specified device. If no device is specified, retrieves list of all BGP general settings.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}

Permissions: Devices > Device Management

## GET etherchannelinterfaces

Request Type: **GET**

Description: Retrieves the ethernet channel interface associated with the specified NGFW device ID and interface ID. If no ID is specified, retrieves list of all ethernet channel interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/etherchannelinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/etherchannelinterfaces/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering:

## POST etherchannelinterfaces

Request Type: **POST**

Description: Creates ethernet channel interfaces on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/ethernetchannelinterfaces

Permissions: Devices > Device Management > Modify Device

## PUT etherchannelinterfaces

Request Type: **PUT**

Description: Modifies an ethernet channel interfaces on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/ethernetchannelinterfaces/

Permissions: Devices > Device Management > Modify Device

## DELETE etherchannelinterfaces

Request Type: **DELETE**

Description: Removes ethernet channel interfaces from a specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/ethernetchannelinterfaces

Permissions: Devices > Device Management

## GET subinterfaces

Request Type: **GET**

Description: Retrieves the sub-interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all sub-interfaces associated with the specified NGFW device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/subinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/subinterfaces/{object\_UUID}

Permissions: Devices > Device Management

## POST subinterfaces

Request Type: **POST**

Description: Creates sub interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

Permissions: Devices > Device Management

## PUT subinterfaces

Request Type: **PUT**

Description: Modifies a sub interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/`

Permissions: Devices > Device Management > Modify Device

## DELETE subinterfaces

Request Type: **DELETE**

Description: Deletes sub interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

Permissions: Devices > Device Management

## GET fpinterfacestatistics

Request Type: **GET**

Description: Retrieves list of statistics for all interfaces associated with the specified NGIPS device ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpinterfacestatistics`

Permissions: Devices > Device Management

Parameters available for filtering: name

## POST interfaceevents

Request Type: **POST**

Description: Creates netmod events on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management > Modify Device



## GET interfaceevents

Request Type: **GET**

Description: Retrieves list of all netmod events on the device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/interfaceevents

Permissions: Devices > Device Management

## GET commands

Request Type: **GET**

Description: Retrieves the list of all command line interface commands available on the device. If a command is specified in the payload, retries the output of that command.

The below table lists the commands which can be used with the `commands` service. Some commands are only allowed with certain parameters, or specific parameters may not be allowed, as specified in the **Blocked** column.

Command	Blocked
show version	
show failover	
show dhcpd	show dhcpd binding, show dhcpd statistics
show ip	
show aaa-server	
show logging	show logging asdm, show logging queue
show snmp-server	
show running-config {any}	show running-config {no parameters}
show ssl	
show firewall	
show logging	
show network	
show ntp	
show banner	

URL:

/api/fmc\_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/commands

Permissions: Devices > Device Management

# Intelligence Services

## POST collections

Request Type: **POST**

Description: Adds a collections from a TAXII source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/collections`

Permissions: Intelligence

## POST discoveryinfo

Request Type: **POST**

Description: Adds information about TAXII collections available from a source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/discoveryinfo`

Permissions: Intelligence

## GET element

Request Type: **GET**

Description: Retrieves the intelligence-enabled sensor associated with the specified ID. If no ID is specified, retrieves list of all intelligence-enabled sensors.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element/{object_UUID}`

Permissions: Intelligence

## DELETE incident

Request Type: **DELETE**

Description: Deletes an incident.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/incident/{object_UUID}`

Permissions: Intelligence

## PUT incident

Request Type: **PUT**

Description: Modifies an intelligence incident with the specified object ID.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

## GET incident

Request Type: **GET**

Description: Retrieves the intelligence incident associated with the specified ID. If no ID is specified, retrieves list of all intelligence incidents. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

## PUT indicator

Request Type: **PUT**

Description: Modifies an indicator with the specified object ID.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

## GET indicator

Request Type: **GET**

Description: Retrieves the indicator associated with the specified ID. If no ID is specified, retrieves list of all indicators. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

## PUT observable

Request Type: **PUT**

Description: Modifies an observable with the specified object ID.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

## GET observable

Request Type: **GET**

Description: Retrieves the observable associated with the specified ID. If no ID is specified, retrieves list of all observables. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

## PUT settings

Request Type: **PUT**

Description: Activates or deactivates an intelligence setting.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

## GET settings

Request Type: **GET**

Description: Retrieves the on/off settings for the specified value. If no ID is specified, retrieves list of all TID settings.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings`

URL for GET by value: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

## DELETE source

Request Type: **DELETE**

Description: Deletes an intelligence source from the device.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/source/{object_UUID}`

Permissions: Intelligence

## PUT source

Request Type: **PUT**

Description: Modifies an intelligence source with the specified object ID.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

## POST source

Request Type: **POST**

Description: Adds a source for intelligence information.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

Permissions: Intelligence

## GET source

Request Type: **GET**

Description: Retrieves the intelligence source associated with the specified ID. If no ID is specified, retrieves list of all intelligence sources. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

## Search

### GET globalsearch

Request Type: **GET**

Description: Search for objects and policies matching specified text or IP address.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/globalsearch`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

### GET objectsearch

Request Type: **GET**

Description: Search for objects matching specified text or IP address.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/object`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

### GET policysearch

Request Type: **GET**

Description: Search for policies matching specified text or IP address (literal values in policies).

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/policy`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

# Integration Services

## PUT cloudeventsconfigs

Request Type: **PUT**

Description: Modifies the cloud event configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET cloudeventsconfigs

Request Type: **GET**

Description: Retrieves the cloud event configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all cloud event configuration objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager

## PUT cloudregions

Request Type: **PUT**

Description: Modifies the cloud region configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

## GET cloudregions

Request Type: **GET**

Description: Retrieves the cloud region configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all cloud regions.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

## DELETE externallookups

### DELETE externallookups

Description: Deletes the external lookup objects with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

## PUT externallookups

Request Type: **PUT**

Description: Modifies externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

## POST externallookups

### POST externallookups

Description: Creates externallookups objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

Permissions: Object Manager>Modify Object Manager

## GET externallookups

### GET externallookups

Retrieves the externallookups object associated with the specified ID. If no ID, retrieves list of all externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

## DELETE packetanalyzerdevices

Request Type: **DELETE**

Description: Deletes the packet analyzer object with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

## PUT packetanalyzerdevices

Request Type: **PUT**

Description: Modifies the packet analyzer object with the specified UUID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/integration/packetanalyzerdevices/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

## POST packetanalyzerdevices

Request Type: **POST**

Description: Creates PKI enrollments objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/packetanalyzerdevices

Permissions: Object Manager

## GET packetanalyzerdevices

Request Type: **GET**

Description: Retrieves the packetanalyzerdevices object associated with the specified ID. If no ID, retrieves list of all packetanalyzerdevices objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/integration/packetanalyzerdevices

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/integration/packetanalyzerdevices/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

## GET External Storage

Request Type: **GET**

Description: Retrieves the external event storage configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all external event storage configurations.

URL for listing: /api/fmc\_config/v1/domain/{domainUUID}/integration/externalstorage

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}

Permissions: System > Integration

Parameters available for filtering: None

## PUT External Storage

Request Type: **PUT**

Description: Modifies the external event storage configuration associated with the specified ID.



URL: /api/fmc\_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}

Permissions: System > Integration

## GET FMC HA Statuses

Request Type: **GET**

Description: Retrieves Firepower Management Center HA Statuses.

URL: /api/fmc\_config/v1/domain/{domainUUID}/integration/fmchastatuses

Permissions: System>Integration>High Availability

## GET SecureX Configs

Request Type: **GET**

Description: Retrieves the SecureX configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all SecureX configurations.

URL: /api/fmc\_config/v1/domain/{domainUUID}/integration/securexconfigs

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}

Permissions: System>SecureX

## PUT SecureX Configs

Request Type: **PUT**

Description: Modifies the SecureX configuration associated with the specified ID

URL: /api/fmc\_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}

Permissions: System>SecureX

# Object Services

## GET AnyConnect Custom Attributes

Request Type: **GET**

Description: Retrieves the AnyConnect Custom Attribute associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Custom Attribute objects.

URL for listing: /api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{objectId}

URL to list all overrides:

/api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{containerUUID}/override

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value

## GET AnyConnect Packages

Request Type: **GET**

Description: Retrieves the AnyConnect Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Package objects..

URL for listing: /api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectpackages

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}

Permissions: Object Manager

## GET AnyConnect Profiles

Request Type: **GET**

Description: Retrieves the AnyConnect Profile associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Profile objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectprofiles

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}

Permissions: Object Manager

Parameters available for filter: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

Parameters available for filter: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET anyprotocolportobjects

Request Type: **GET**

Description: Retrieves the any protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects with the protocol set to All.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/anyprotocolportobjects

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/anyprotocolportobjects/{object\_UUID}

Permissions: Object Manager

## GET applicationcategories

Request Type: **GET**

Description: Retrieves the application category object associated with the specified ID. If no ID is specified, retrieves list of all application category objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationcategories

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationcategories/{object\_UUID}

Permissions: Object Manager

## GET applicationfilters

Request Type: **GET**

Description: Retrieves the application filter object associated with the specified ID. If no ID is specified, retrieves list of all application filter objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationfilters

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationfilters/{object\_UUID}

Permissions: Object Manager

## PUT applicationfilters

Request Type: **PUT**

Description: Modifies the application filter object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

## POST applicationfilters

Request Type: **POST**

Description: Creates or overrides the application filter object with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/applicationfilters

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

## DELETE applicationfilters

Request Type: **DELETE**

Description: Deletes the application filter object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

## GET applicationproductivities

Request Type: **GET**

Description: Retrieves the application productivity object associated with the specified ID. If no ID is specified, retrieves list of all application productivity objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationproductivities

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationproductivities/{object\_UUID}

Permissions: Object Manager

## GET applicationrisks

Request Type: **GET**

Description: Retrieves the application risk object associated with the specified ID. If no ID is specified, retrieves list of all application risk objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationrisks

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationrisks/{object\_UUID}

Permissions: Object Manager

## GET applications

Request Type: **GET**

Description: Retrieves the application object associated with the specified ID. If no ID is specified, retrieves list of all application objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applications

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applications/{object\_UUID}

Permissions: Object Manager

## GET applicationtags

Request Type: **GET**

Description: Retrieves the application tag object associated with the specified ID. If no ID is specified, retrieves list of all application tag objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationtags

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationtags/{object\_UUID}

Permissions: Object Manager

## GET applicationtypes

Request Type: **GET**

Description: Retrieves the application type object associated with the specified ID. If no ID is specified, retrieves list of all application type objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationtypes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationtypes/{object\_UUID}

Permissions: Object Manager

## GET aspathlists

Request Type: **GET**

Description: Retrieves the autonomous system path list associated with the specified ID. If no ID is specified, retrieves list of all autonomous system paths.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/aspathlists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}

Permissions: Object Manager

## GET certenrollments

Request Type: **GET**

Description: Retrieves the PKI enrollments object associated with the specified ID. If no ID is specified for a GET, retrieves list of all PKI enrollment objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/certenrollments

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devicegroups/certenrollments/{parent\_object\_UUID}

Permissions: Devices > Device Management > View Devices

## GET communitylists

Request Type: **GET**

Description: Retrieves the community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/communitylists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/communitylists/{objectId}

Permissions: Object Manager

## GET Certificate Maps

Request Type: **GET**

Description: Retrieves the Certificate Map associated with the specified ID. If no ID is specified for a GET, retrieves list of all Certificate Map objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/certificatemaps

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}

Permissions: Devices > Certificates

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET continents

Request Type: **GET**

Description: Retrieves the continent object associated with the specified ID. If no ID is specified, retrieves list of all continent objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/continents

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/continents/{object\_UUID}

Permissions: Object Manager

## GET countries

Request Type: **GET**

Description: Retrieves the country object associated with the specified ID. If no ID is specified, retrieves list of all country objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/countries

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/countries/{object\_UUID}

Permissions: Object Manager

## DELETE dnsservergroups

Request Type: **DELETE**

Description: Deletes a DNS server group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## PUT dnsservergroups

Request Type: **PUT**

Description: Modifies a DNS server group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups

Permissions: Devices > Device Management > Modify Devices

## POST dnsservergroups

Request Type: **POST**

Description: Creates a DNS server group group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

Permissions: Devices > Device Management > Modify Devices

## GET dnsservergroups

Request Type: **GET**

Description: Retrieves the DNS server group associated with the specified ID. If no ID is specified, retrieves list of all dns server groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups/{object_UUID}`

Description: Retrieves all(Domain and Device) overrides on a ICMPV4 object. Response will always be in expanded form. If passed, the "expanded" query parameter will be ignored.

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides/{objectId}`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides`

Permissions: Devices > Device Management > View Devices

## POST dynamicobjectmappings

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings`

Permissions: Object Manager > Modify Object Manager

## DELETE dynamicobjectmappings

Request Type: **DELETE**

Description: Removes Dynamic Object Mappings for specific Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings`

Parameters available for filtering:

Object with ids: <code>"ids:id1,id2,..."</code>
Unused objects: <code>"unusedOnly:true"</code>
Name starts with: <code>"nameStartsWith:{name-pattern}"</code>
Agent ID: <code>"agentId:{Agent ID}"</code>

Permissions: Object Manager > Modify Object Manager

## GET dynamicobjects

Request Type: **GET**

Description: Retrieves the Dynamic Object associated with the specified ID. If no ID is specified for a GET, retrieves list of all Dynamic Objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Permissions: Object Manager

Parameters available for filtering: name (Cannot be used if object ID is specified in path.)

## POST dynamicobjects

Request Type: **POST**

Description: Creates or overrides the Dynamic Objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects

Permissions: Object Manager > Modify Object Manager

## DELETE dynamicobjects

Request Type: **DELETE**

Description: Deletes the Dynamic Object associated with the specified ID. If used without an ID, deletes objects selected by filtering.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/

URL for DELETE by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Parameters available for filtering:

Object with ids: "ids:id1,id2,..."
Unused objects: "unusedOnly:true"
Name starts with: "nameStartsWith:{name-pattern}"

Permissions: Object Manager > Modify Object Manager

## PUT dynamicobjects

Request Type: **PUT**

Description: Modifies the Dynamic Object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}

Permissions: Object Manager > Modify Object Manager



## GET mappings

Request Type: **GET**

Description: Retrieves the Dynamic Object Mappings associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}/mappings`

Permissions: Object Manager

## PUT mappings

Request Type: **PUT**

Description: Adds Dynamic Object Mappings associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings`

Permissions: Object Manager > Modify Object Manager

## DELETE mappings

Request Type: **DELETE**

Description: Removes the Dynamic Object Mappings associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings`

Parameters available for filtering:

Object with ids: "ids:id1,id2,..."
Unused objects: "unusedOnly:true"
Name starts with: "nameStartsWith:{name-pattern}"
Agent ID: "agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

## GET endpointdevicetypes

Request Type: **GET**

Description: Retrieves the endpoint device type object associated with the specified ID. If no ID is specified, retrieves list of all endpoint device type objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/endpointdevicetypes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/endpointdevicetypes/{object_UUID}`

Permissions: Object Manager

## GET expanded community lists

Request Type: **GET**

Description: Retrieves the expanded community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}`

Permissions: Object Manager

## GET extended access lists

Request Type: **GET**

Description: Retrieves extended access list associated with the specified ID. If no ID is specified, retrieves list of all extended access lists.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/extendedaccesslists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/extendedaccesslists/{object_UUID}`

Permissions: Devices > Device Management > View Devices

## DELETE fqdns

Request Type: **DELETE**

Description: Deletes the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT fqdns

Request Type: **PUT**

Description: Modifies the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST fqdns

Request Type: **POST**

Description: Creates or overrides the FQDN objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET fqdns

Request Type: **GET**

Description: Retrieves the FQDN object associated with the specified ID. If no ID is specified for a GET, retrieves list of all FQDN objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{fqdn_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET geolocation

Request Type: **GET**

Description: Retrieves the geolocation object associated with the specified ID. If no ID is specified, retrieves list of all geolocation objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations/{object_UUID}`

Permissions: Object Manager

## PUT geolocations

Request Type: **PUT**

Description: Modifies the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

## POST geolocations

Request Type: **POST**

Description: Creates or overrides the Geolocation objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations`

Permissions: Object Manager > Modify Object Manager

## DELETE geolocations

Request Type: **DELETE**

Description: Deletes the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET global time zones

Request Type: **GET**

Description: Retrieves the global time zone object associated with the specified ID. If no ID is specified, retrieves list of all global time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones/{objectId}`

Permissions: Object Manager

## GET grouppolicies

Request Type: **GET**

Description: Retrieves the VPN group policies associated with the specified ID. If no ID is specified for a GET, retrieves list of all VPN group policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies/{objectId}`

Permissions: Devices > VPN

## DELETE hosts

Request Type: **DELETE**

Description: Deletes the specified host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT hosts

Request Type: **PUT**

Description: Modifies a host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST hosts

Request Type: **POST**

Description: Creates or overrides the host objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET hosts

Request Type: **GET**

Description: Retrieves the host object associated with the specified ID. If no ID is specified, retrieves list of all host objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET hostscanpackages

Request Type: **GET**

Description: Retrieves HostScan packages. If no ID is specified for a GET, retrieves list of all HostScan packages.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices

## DELETE icmpv4objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv4 port.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT icmpv4objects

Request Type: **PUT**

Description: Modifies ICMPv4 port objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST icmpv4objects

Request Type: **POST**

Description: Creates or overrides the ICMPv4 port objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects

URL for Bulk Post : /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET icmpv4objects

Request Type: **GET**

Description: Retrieves the ICMPv4 object associated with the specified ID. If no ID, retrieves list of all ICMPv4 objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp4objects?overrideTargetId={target\_UUID}

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects/{object\_UUID}

URL to list all overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp4objects/{icmpv4object\_UUID}/overrides

URL for override for an object on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp4objects/{icmp4object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager

## DELETE icmpv6objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv6 port objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT icmpv6objects

Request Type: **PUT**

Description: Modifies ICMPv6 port objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST icmpv6objects

Request Type: **POST**

Description: Creates or overrides the ICMPv6 port objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET icmpv6objects

Request Type: **GET**

Description: Retrieves the ICMPv6 object associated with the specified ID. If no ID is specified, retrieves list of all ICMPv6 objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp6objects?overrideTargetId={target\_UUID}

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}

URL to list all overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp6objects/{icmpv6object\_UUID}/overrides

URL for override for an object on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp6objects/{icmp6object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager

## DELETE ikev1ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv1 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT ikev1ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv1 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ikev1ipsecproposals

Request Type: **POST**

Description: Creates the IKEv1 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals`

Permissions: Object Manager > Modify Object Manager

## GET ikev1ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv1 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 IPsec Proposal objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1ipsecproposals`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager

## DELETE ikev1policies

Request Type: **DELETE**

Description: Deletes the IKEv1 policy object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}`

Permissions: Object Manager > Modify Object Manager



## PUT ikev1policies

Request Type: **PUT**

Description: Modifies the IKEv1 policy object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ikev1policies

Request Type: **POST**

Description: Creates the IKEv1 policy object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies`

Permissions: Object Manager > Modify Object Manager

## GET ikev1policies

Request Type: **GET**

Description: Retrieves the IKEv1 policy object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 policy objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1policies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}`

Permissions: Object Manager

## DELETE ikev2ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT ikev2ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ikev2ipsecproposals

Request Type: **POST**

Description: Creates the IKEv2 IPsec Proposal associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2ipsecproposals

Permissions: Object Manager > Modify Object Manager

## GET ikev2ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv2 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ikev2ipsecproposals

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal\_UUID}

Permissions: Object Manager

## DELETE ikev2policies

Request Type: **DELETE**

Description: Deletes the IKEv2 object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies/{ikev2policy\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT ikev2policies

Request Type: **PUT**

Description: Modifies the IKEv2 object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies/{ikev2policy\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST ikev2policies

Request Type: **POST**

Description: Creates the IKEv2 object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies

Permissions: Object Manager > Modify Object Manager

## GET ikev2policies

Request Type: **GET**

Description: Retrieves the IKEv2 object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev2policies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}`

Permissions: Object Manager

## DELETE interfacegroups

Request Type: **DELETE**

Description: Deletes the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT interfacegroups

Request Type: **PUT**

Description: Modifies the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST interfacegroups

Request Type: **POST**

Description: Creates or overrides the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET interfacegroups

Request Type: **GET**

Description: Retrieves the Interface group objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all interface group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET interfaceobjects

Request Type: **GET**

Description: Retrieves list of all the interface objects both security zones and interface groups.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/intrusionrulegroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=name:Browser OR filter=name:Browser/Firefox OR filter=showonlyparents:true OR filter=showonlyparents:false OR filter=issystemdefined:true OR filter=issystemdefined:false.

## PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the Snort3 Intrusion rule group with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST Intrusion Rule Groups

Request Type: **POST**

Description: Creates or overrides the Snort3 Intrusion rule group with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrulegroups

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## DELETE Intrusion Rule Groups

Request Type: **DELETE**

Description: Deletes the specified Snort3 intrusion rule group.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET intrusionrules

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=gid:123 OR filter=sid:123 OR filter=gid:123;sid:456 OR filter=overrides:true OR filter=overrides:true;ipspolicy:UUID1,UUID2,UUID3 OR filter=fts:123. ipspolicy is comma separated Snort3 Intrusion Policy UUID.

## PUT intrusionrules

Request Type: **PUT**

Description: Creates or modifies the Snort3 rule with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules

URL for PUT by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST intrusionrules

Request Type: **POST**

Description: Creates or overrides the Snort3 rules with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## DELETE intrusionrules

Request Type: **DELETE**

Description: Deletes the specified Snort3 rule.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET ipv4addresspools

Request Type: **GET**

Description: Retrieves the IPv4 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv4 Address Pool objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv4addresspools

URL for overrides:

/api/fmc\_config/v1/domain/{domainUUID}/object/ipv4addresspools/{containerUUID}/overrides

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET ipv6addresspools

Request Type: **GET**

Description: Retrieves the IPv6 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv6 Address Pool objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6addresspools

URL for overrides:

/api/fmc\_config/v1/domain/{domainUUID}/object/ipv6addresspools/{containerUUID}/overrides

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET ipv4prefixlists

Request Type: **GET**

Description: Retrieves the IPv4 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv4 prefix lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv4prefixlists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}

Permissions: Object Manager

## GET ipv6prefixlists

Request Type: **GET**

Description: Retrieves the IPv6 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv6 prefix lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6prefixlists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}

Permissions: Object Manager

## GET isesecuritygrouptags

Request Type: **GET**

Description: Retrieves the ISE security group tag object with the specified ID. If no ID is specified, retrieves list of all ISE security group tag objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/isesecuritygrouptags

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/isesecuritygrouptags/{object\_UUID}

Permissions: Object Manager

## GET keychain

Request Type: **GET**

Description: Retrieves the keychain object associated with the specified ID. If no ID is specified for a GET, retrieves list of all keychain objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains/{keychain\_UUID}

URL to list all overrides on a particular object. If the object ID is not specified, displays all keychain objects:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains/{keychains\_UUID}/overrides/{objectId}

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains?overrideTargetId={target\_UUID}

URL for override for an object on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}
```




---

**Note** The target UUID could be that of a domain or a device.

---

Permissions: Object Manager

## DELETE keychain

Request Type: **DELETE**

Description: Deletes the keychain object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains/{keychain\_UUID}

URL to DELETE overrides on a particular object:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}
```




---

**Note** The target UUID could be that of a domain or a device.

---

Permissions: Object Manager > Modify Object Manager

## PUT keychain

Request Type: **PUT**

Description: Modifies the keychain object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains/{keychain\_UUID}

URL to edit or update an override on a particular object:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}
```

Permissions: Object Manager > Modify Object Manager

## POST keychain

Request Type: **POST**

Description: Creates or overrides the keychain objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/keychains

URL for Bulk Post:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?bulk=true
```

URL to create an override on a particular object:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/keychains
```



**Attention**

If override was not set when creating the key chain object:

1. Using PUT, update the override property of the key chain object to "true".
2. Create the POST override for the key chain object.

Permissions: Object Manager > Modify Object Manager

## GET localrealmusers

Request Type: **GET**

Description: Retrieves the local realm user object associated with the specified ID. If no ID is specified, retrieves list of all local realm user objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/localrealmusers

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}

Permissions: System > Integration > Realms

Parameters available for filtering: To filter users by realm, use `realm:{realmUUID}`. To filter users by name, use `name:{name}`

## PUT localrealmusers

Request Type: **PUT**

Description: Modifies the local realm user object with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}

Permissions: System > Integration > Realms > Modify Realms

## POST localrealmusers

Request Type: **POST**

Description: Creates or overrides the local realm user objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/localrealmusers

Permissions: System > Integration > Realms > Modify Realms

## POST localrealmusers

Request Type: **DELETE**

Description: Deletes the specified local realm user object.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}

Permissions: Object Manager > Modify Object Manager

## GET networkaddresses

Request Type: **GET**

Description: Retrieves list of all network and host objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## DELETE networkgroups

Request Type: **DELETE**

Description: Deletes the specified Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT networkgroups

Request Type: **PUT**

Description: Modifies a Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST networkgroups

Request Type: **POST**

Description: Creates or overrides the network group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET networkgroups

Request Type: **GET**

Description: Retrieves the network group object associated with the specified ID. If no ID is specified, retrieves list of all network group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## DELETE networks

Request Type: **DELETE**

Description: Deletes the specified network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT networks

Request Type: **PUT**

Description: Modifies network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST networks

Request Type: **POST**

Description: Creates or overrides the network objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET networks

Request Type: **GET**

Description: Retrieves the network objects associated with the specified ID. If no ID is specified, retrieves list of all network objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET Usage

Request Type: **GET**

Description:

Find usage of specified object uuid and type across objects and policies. Supported object types:

Type	Value
Network	NetworkAddress, Host, Network, Range, FQDN, NetworkGroup
Port	Port, ProtocolPortObject, PortObjectGroup, ICMPV4Object, ICMPV6Object, AnyProtocolPortObject
VLAN tag	VlanTag, VlanGroupTag
URL	Url, UrlGroup

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/operational/usagee`

Parameters available for filtering: Specify uuid "uuid:object-uuid" and "type:object-type" and type of object.

Permissions: Object Manager

## GET policy lists

Request Type: **GET**

Description: Retrieves the policy list associated with the specified ID. If no ID is specified, retrieves all policy lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager

## DELETE portobjectgroups

Request Type: **DELETE**

Description: Deletes the specified port object groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT portobjectgroups

Request Type: **PUT**

Description: Modifies port object groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST portobjectgroups

Request Type: **POST**

Description: Creates or overrides the port object groups with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET portobjectgroups

Request Type: **GET**

Description: Retrieves the port object group object associated with the specified ID. If no ID is specified, retrieves list of all port object group objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups?overrideTargetId={target\_UUID}

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}

URL to list all overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{portobjectgroup\_UUID}/overrides

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## GET ports

Request Type: **GET**

Description: Retrieves list of all port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ports`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## DELETE protocolportobjects

Request Type: **DELETE**

Description: Deletes the specified protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT protocolportobjects

Request Type: **PUT**

Description: Modifies protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST protocolportobjects

Request Type: **POST**

Description: Creates or overrides the protocol port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET protocolportobjects

Request Type: **GET**

Description: Retrieves the protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET radiusservergroups

Request Type: **GET**

Description: Retrieves the Radius Server Group associated with the specified ID. If no ID is specified for a GET, retrieves list of all Radius Server Group objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

## DELETE ranges

Request Type: **DELETE**

Description: Deletes the specified address range.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT ranges

Request Type: **PUT**

Description: Modifies an address range.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ranges

Request Type: **POST**

Description: Creates or overrides an address range with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET ranges

Request Type: **GET**

Description: Retrieves the address range object associated with the specified ID. If no ID is specified, retrieves list of all address range objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET realms

Request Type: **GET**

Description: Retrieves the realm object associated with the specified ID. If no ID is specified, retrieves list of all realm objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms/{object_UUID}`

Permissions: System > Integration > Realms



## PUT realms

Request Type: **PUT**

Description: Modifies the realm object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

## POST realms

Request Type: **POST**

Description: Creates or overrides the realm objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms`

Permissions: System > Integration > Realms > Modify Realms

## DELETE realms

Request Type: **DELETE**

Description: Deletes the specified realm object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

## GET realmusergroups

Request Type: **GET**

Description: Retrieves the realm user group object associated with the specified ID. If no ID is specified, retrieves list of all realm user group objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid

**Note**

This is a required parameter.

## GET realmusers

Request Type: **GET**

Description: Retrieves the realm user object associated with the specified ID. If no ID is specified, retrieves list of all realm user objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/realmusers

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/realmusers/{object\_UUID}

Permissions: Object Manager

Parameters available for filtering: realmUuid


**Note**

This is a required parameter.

## GET route maps

Request Type: **GET**

Description: Retrieves the route map associated with the specified ID. If no ID is specified, retrieves list of all route maps.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/routemaps

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/routemaps/{objectId}

Permissions: Object Manager

## GET securitygrouptags

Request Type: **GET**

Description: Retrieves the custom security group tag object associated with the specified ID. If no ID is specified, retrieves list of all custom security group tag objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securitygrouptags

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/securitygrouptags/{object\_UUID}

Permissions: Object Manager

Parameters available for filtering: name

## DELETE securityzones

Request Type: **DELETE**

Description: Deletes the specified securityzone objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

## PUT securityzones

Request Type: **PUT**

Description: Modifies a securityzone object.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

## POST securityzones

Request Type: **POST**

Description: Creates or overrides the securityzone objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET securityzones

Request Type: **GET**

Description: Retrieves the security zone objects associated with the specified ID. If no ID is specified, retrieves list of all security zone objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones/{object\_UUID}

Permissions: Object Manager

Parameters available for filtering: name

## GET SI DNS Feeds

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS feed objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/sidsfeeds

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/sidsfeeds/{objectId}

Permissions: Object Manager

## GET SI DNS Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS list objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/sidnslists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/sidnslists/{objectId}

Permissions: Object Manager

## GET sinetworkfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence Network Feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence Network Feed objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/sinetworkfeeds

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/sinetworkfeeds/{objectId}

Permissions: Object Manager

## GET SI Network Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence network list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence network list objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/sinetworklists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/sinetworklists/{objectId}

Permissions: Object Manager

## GET Sinkholes

Request Type: **GET**

Description: Retrieves the Sinkhole objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Sinkhole objects.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/sinkholes

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/sinkholes/{objectId}

Permissions: Object Manager

## GET siurlfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence url feed object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url feed objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/siurlfeeds

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/siurlfeeds/{object\_UUID}

Permissions: Object Manager

## GET siurllists

Request Type: **GET**

Description: Retrieves the Security Intelligence url list object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url list objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/siurllists

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/siurllists/{object\_UUID}

Permissions: Object Manager

## DELETE slamonitors

Request Type: **DELETE**

Description: Deletes the sla monitor object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/slamonitors/{object\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT slamonitors

Request Type: **PUT**

Description: Modifies the sla monitor object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/slamonitors/{object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST slamonitors

Request Type: **POST**

Description: Creates or overrides a SLA monitor with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/slamonitors

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/slamonitors?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET slamonitors

Request Type: **GET**

Description: Retrieves the SLA Monitors associated with the specified ID. If no ID is specified, retrieves list of all SLA Monitors.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/slamonitors

URL by GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/slamonitors/{object\_UUID}

Permissions: Object Manager

## GET SSO Servers

Request Type: **GET**

Description: Retrieves the SSO Server Policy Object associated with the specified ID. If no ID is specified, retrieves list of all SSO Server Policy Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers`

URL for all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management> Single Sign-On (SSO)

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value

## GET standard access lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager

## GET standard community lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager

## GET time ranges

Request Type: **GET**

Description: Retrieves the time range object associated with the specified ID. If no ID is specified, retrieves list of all time range objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

## PUT time ranges

Request Type: **PUT**

Description: Modifies a time range object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

## POST time ranges

Request Type: **POST**

Description: Creates or overrides a time range object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

Permissions: Object Manager > Modify Object Manager

## DELETE time ranges

Request Type: **DELETE**

Description: Deletes the time range object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET time zone objects

Request Type: **GET**

Description: Retrieves the time zone object associated with the specified ID. If no ID is specified, retrieves list of all time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{containerUUID}/overrides`

Permissions: Object Manager

## PUT time zone objects

Request Type: **PUT**

Description: Modifies a time zone object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager

## POST time zone objects

Request Type: **POST**

Description: Creates or overrides a time zone object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

Permissions: Object Manager > Modify Object Manager

## DELETE time zone objects

Request Type: **DELETE**

Description: Deletes the time zone object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager > Modify Object Manager

## DELETE tunneltags

Request Type: **DELETE**

Description: Deletes the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT tunneltags

Request Type: **PUT**

Description: Modifies the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST tunneltags

Request Type: **POST**

Description: Creates or overrides a tunnel tag with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/tunneltags`

Permissions: Object Manager > Modify Object Manager

## GET tunneltags

Request Type: **GET**

Description: Retrieves the tunnel tag object associated with the specified ID. If no ID is specified, retrieves list of all tunnel tag objects.



URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/tunnehtags

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/tunnehtags/{object\_UUID}

Permissions: Object Manager

## GET urlcategories

Request Type: **GET**

Description: Retrieves the url category object associated with the specified ID. If no ID is specified, retrieves list of all url category objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/urlcategories

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/urlcategories/{object\_UUID}

Permissions: Object Manager

## DELETE urlgroups

Request Type: **DELETE**

Description: Deletes the specified urlgroup objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/urlgroups/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/urlgroups/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT urlgroups

Request Type: **PUT**

Description: Modifies urlgroup objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/urlgroups/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/urlgroups/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST urlgroups

Request Type: **POST**

Description: Creates or overrides the urlgroup objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/urlgroups

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/urlgroups?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET urlgroups

Request Type: **GET**

Description: Retrieves the url group objects associated with the specified ID. If no ID is specified, retrieves list of all url group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## DELETE urls

Request Type: **GET**

Description: Deletes the specified URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT urls

Request Type: **PUT**

Description: Modifies a URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{parent_object_UUID}`

Permissions: Object Manager

## POST urls

Request Type: **POST**

Description: Creates or overrides the URLs with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/urls?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET urls

Request Type: **GET**

Description: Retrieves the url objects associated with the specified ID. If no ID is specified, retrieves list of all url objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## GET Usage

Request Type: **GET**

Description:

Find usage of specified object uuid and type across objects and policies. Supported object types:

Type	Value
Network	NetworkAddress, Host, Network, Range, FQDN, NetworkGroup
Port	Port, ProtocolPortObject, PortObjectGroup, ICMPV4Object, ICMPV6Object, AnyProtocolPortObject
VLAN tag	VlanTag, VlanGroupTag
URL	Url, UrlGroup

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/operational/usagee`

Parameters available for filtering: Specify uuid "uuid:object-uuid" and "type:object-type" and type of object.

Permissions: Object Manager

## GET variablesets

Request Type: **GET**

Description: Retrieves the variable set object associated with the specified ID. If no ID is specified, retrieves list of all variable set objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/variablessets

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/variablessets/{object\_UUID}

Permissions: Object Manager

## DELETE vlangrouptags

Request Type: **DELETE**

Description: Deletes the specified vlangrouptag objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT vlangrouptags

Request Type: **PUT**

Description: Modifies vlangrouptag objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST vlangrouptags

Request Type: **POST**

Description: Creates or overrides the VLAN group tags with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags

URL for Bulk Post : /api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags?bulk=true

Permissions: Object Manager > Modify Object Managers

## GET vlangrouptags

Request Type: **GET**

Description: Retrieves the vlan group tag objects associated with the specified ID. If no ID is specified, retrieves list of all vlan group tag objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/vlangrouptags?overrideTargetId={target\_UUID}

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager > Modify Object Manager

## DELETE vlantags

Request Type: **DELETE**

Description: Deletes the specified VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT vlantags

Request Type: **PUT**

Description: Modifies VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST vlantags

Request Type: **POST**

Description: Creates or overrides the VLAN tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET vlantags

Request Type: **GET**

Description: Retrieves the vlantag objects associated with the specified ID. If no ID is specified, retrieves list of all vlantag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## Policy Services

### DELETE accesspolicies

Request Type: **DELETE**

Description: Deletes the access control policy with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

### PUT accesspolicies

Request Type: **PUT**

Description: Modifies an access control policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

### POST accesspolicies

Request Type: **POST**

Description: Creates an access control policy with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

## GET accesspolicies

Request Type: **GET**

Description: Retrieves the access control policy associated with the specified ID. If no ID is specified, retrieves a list of all access control policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies

## DELETE accessrules

Request Type: **DELETE**

Description: Deletes an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## PUT accessrules

Request Type: **PUT**

Description: Modifies an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## POST accessrules

Request Type: **POST**

Description: Creates an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## GET accessrules

Request Type: **GET**

Description: Retrieves the access control rule associated with the specified policy ID and rule ID. If no rule ID is specified, retrieves list of all access rules associated with the specified policy ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules`

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/accessrules/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy

## DELETE categories

Request Type: **DELETE**

Description: Deletes a category associated with the specified policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories/{object\_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## PUT categories

Request Type: **PUT**

Description: Modifies the category associated with the specified policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories/{object\_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## POST categories

Request Type: **POST**

Description: Creates a category for access control policies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## GET categories

Request Type: **GET**

Description: Retrieves the category associated with the specified policy ID. If no ID is specified, retrieves list of all categories associated with the specified policy ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories/{object\_UUID}

Permissions: Policies > Access Control > Access Control Policy

## PUT defaultactions

Request Type: **PUT**



Description: Modifies the default action associated with the specified access control policy ID and default action ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/defaultactions/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## GET defaultactions

Request Type: **GET**

Description: Retrieves the default action associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/defaultactions

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/defaultactions/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy

## GET loggingsettings

Request Type: **GET**

Description: Retrieves the logging setting associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{object\_UUID}

Permissions: Policies

## PUT loggingsettings

Request Type: **PUT**

Description: Modifies the logging setting associated with the specified access control policy ID and default action ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{objectId}

Permissions: Policies>Access Control Policy>Modify Access Control Policy

## GET securityintelligencepolicies

Request Type: **GET**

Description: Retrieves the security intelligence policy associated with the specified Access Policy. If no ID is specified for a GET, retrieves all security intelligence policies.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies/{objectId}

Permissions: Intelligence

## GET dnspolicies

Request Type: **GET**

Description: Retrieves the DNS Policy. If no ID is specified, retrieves a list of all DNS policies.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dnspolicies

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/policy/dnspolicies/{objectId}

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name.

## GET allowdnrules

Request Type: **GET**

Description: Retrieves all the allow rules for a given DNS Policy.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/allowdnrules

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

## GET blockdnrules

Request Type: **GET**

Description: Retrieves all the block rules for a given DNS Policy.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/blockdnrules

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

## GET dynamicaccesspolicies

Request Type: **GET**

Description: Retrieves the Dynamic Access Policy. If no ID is specified for a GET, retrieves list of all Dynamic Access Policies.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN

## PUT dynamicaccesspolicies

Request Type: **PUT**

Description: Modifies the Dynamic Access Policy associated with the specified rule ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN > Modify VPN

## POST dynamicaccesspolicies

Request Type: **POST**

Description: Creates a Dynamic Access policy associated.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies

Permissions: Devices > VPN > Modify VPN

## DELETE dynamicaccesspolicies

Request Type: **DELETE**

Description: Deletes the Dynamic Access Policy associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN > Modify VPN

## GET filepolicies

Request Type: **GET**

Description: Retrieves the file policy object associated with the specified ID. If no ID is specified, retrieves list of all file policy objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/filepolicies

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/filepolicies/{object\_UUID}

Permissions: Policies>Access Control>Malware & File Policy

## DELETE ftdnatpolicies

Request Type: **DELETE**

Description: Deletes the Firepower Threat Defense NAT policy with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## PUT ftdnatpolicies

Request Type: **PUT**

Description: Modifies an Firepower Threat Defense NAT policy with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## POST ftdnatpolicies

Request Type: **POST**

Description: Creates a Firepower Threat Defense device NAT policy with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies?bulk=true

Permissions: Devices>NAT>NAT List >Modify NAT policy

## GET ftdnatpolicies

Request Type: **GET**

Description: Retrieves the Firepower Threat Defense NAT policy associated with the specified ID. If no ID is specified, retrieves a list of all Firepower Threat Defense NAT policies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{object\_UUID}

Permissions: Devices>NAT>NAT List

## DELETE ftds2svpn

Request Type: **DELETE**

Description: Deletes the Firepower Threat Defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}

Permissions: Devices > VPN > Modify VPN

## PUT ftds2svpn

Request Type: **PUT**

Description: Modifies a Firepower Threat Defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}

Permissions: Devices > VPN > Modify VPN

## POST ftds2svpn

Request Type: **POST**

Description: Creates a Firepower Threat Defense Site to Site VPN topology with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn

Permissions: Devices > VPN > Modify VPN

## GET ftds2svpn

Request Type: **GET**

Description: Retrieves the Firepower Threat Defense Site to Site VPN topology associated with the specified ID. If no ID is specified, retrieves a list of all Firepower Threat Defense Site to Site VPN topologies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}

Permissions: Devices > VPN

## PUT advancedsettings

Request Type: **PUT**

Description: Modifies advanced settings inside a VPN Site to Site Topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/advancedsettings/{advancedsetting\_UUID}

Permissions: Devices > VPN > Modify VPN

## GET advancedsettings

Request Type: **GET**

Description: Retrieves an advanced settings inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list containing a single AdvancedSettings entry of the topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/advancedsettings

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/advancedsettings/{advancedSetting\_UUID}

Permissions: Devices > VPN

## DELETE endpoints

Request Type: **DELETE**

Description: Deletes all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN > Modify VPN

## PUT endpoints

Request Type: **PUT**

Description: Modifies all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN > Modify VPN

## POST endpoints

Request Type: **POST**

Description: Creates all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints`

Permissions: Devices > VPN > Modify VPN

## GET endpoints

Request Type: **GET**

Description: Retrieves all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list of all Endpoints of a topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN

## PUT ikesettings

Request Type: **PUT**

Description: Modifies the IKE Settings associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/ikesettings/{ikesetting_UUID}`

Permissions: Devices > VPN > Modify VPN

## GET ikesettings

Request Type: **GET**

Description: Retrieves the IKE Settings associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves IKE Settings of a topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/ikesettings

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/ikesettings/{ikesetting\_UUID}

Permissions: Devices > VPN

## PUT ipsecsettings

Request Type: **PUT**

Description: Modifies an IPsec Proposal settings inside a VPN Site to Site Topology.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/ipsecsettings/{ipsecsetting\_UUID}

Permissions: Devices > VPN > Modify VPN

## GET ipsecsettings

Request Type: **GET**

Description: Retrieves an IPsec Proposal Settings inside a VPN Site To Site Topology. If no ID is specified for a GET, retrieves list containing a single IPsec Settings entry of the topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/ipsecsettings

URL for GET by ID: /api/fmc\_config/v1/domain/DomainUUID/policy/ftds2svpn/{topology\_UUID}/ipsecsettings/{ipsecsetting\_UUID}

Permissions: Devices > VPN

## DELETE autonatrules

Request Type: **DELETE**

Description: Deletes a NAT rule with the specified parameters.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules/{autonatrule\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## POST autonatrules

Request Type: **POST**

Description: Creates a NAT policy with the specified parameters.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules

Permissions: Devices>NAT>NAT List >Modify NAT policy

## GET autonatrules

Request Type: **GET**

Description: Retrieves the NAT rule associated with the specific ID. If no ID is specified, retrieves a list of all NAT rules.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules/{object\_UUID}

Permissions: Devices>NAT>NAT List

## DELETE manualnatrules

Request Type: **POST**

Description: Deletes a manual NAT rule in the specified NAT policy.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/manualnatrules/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## PUT manualnatrules

Request Type: **PUT**

Description: Modify a manual NAT rule in the specified NAT policy.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/manualnatrules/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy



## POST manualnatrules

Request Type: **POST**

Description: Creates manual NAT rules with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules`

Permissions: Devices>NAT>NAT List >Modify NAT policy

## GET manualnatrules

Request Type: **GET**

Description: Retrieves the manual NAT rule associated with the specified ID. If no ID is specified, retrieves a list of all manual NAT rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List

## GET natrules

Request Type: **GET**

Description: Retrieves the list of all NAT rules (manual and auto) associated with the specified NAT policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/natrules`

Permissions: Devices>NAT>NAT List

## PUT inheritancesettings

Request Type: **PUT**

Description: Modifies the inheritance settings associated with specified Access Policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}`

Permissions: Policies > Access Control Policy > Modify Access Control Policy

## GET inheritancesettings

Request Type: **GET**

Description: Retrieves the inheritance settings associated with specified Access Policy. If no ID is specified, retrieves a list of all inheritance settings.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/`

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/inheritancesettings/{object\_UUID}

Permissions: Policies > Access Control Policy

## GET identitypolicies

Request Type: **GET**

Description: Retrieves the Identity Policy associated with the specified ID. If no ID is specified, retrieves all Identity Policies.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/identitypolicies

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/policy/identitypolicies/{objectId}

Permissions: Policies > Access Control > Identity Policy

## GET intrusionpolicies

Request Type: **GET**

Description: Retrieves the intrusion policy associated with the specified ID. If no ID is specified, retrieves list of all intrusion policies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/intrusionpolicies

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/intrusionpolicies/{object\_UUID}

Permissions: Policies > Access Control > Intrusion Policy

## PUT intrusionpolicies

Request Type: **PUT**

Description: Modifies the intrusion policy associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST intrusionpolicies

Request Type: **POST**

Description: Creates an intrusion policy with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## DELETE intrusionpolicies

Request Type: **DELETE**

Description: Deletes the intrusion policy associated with the specified ID.

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/intrusionpolicies/{object\_UUID}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rulegroups associated with the policy ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy

## PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET intrusionrules

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rules associated with the policy ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy

## PUT intrusionrules

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET networkanalysispolicies

Request Type: **GET**

Description: Retrieves the network analysis policy with the specified ID. If no ID is specified, retrieves list of all network analysis policies.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/networkanalysispolicies

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}

Permissions: Policies > Access Control > Access Control Policy

## PUT networkanalysispolicies

Request Type: **PUT**

Description: Modifies the network analysis policy associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## POST networkanalysispolicies

Request Type: **POST**

Description: Creates a network analysis policy.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/networkanalysispolicies

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## DELETE networkanalysispolicies

Request Type: **DELETE**

Description: Deletes the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## GET Inspector Configurations

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy

## GET inspectoroverrideconfigs

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectoroverrideconfigs`

Permissions: Policies > Access Control > Access Control Policy

## PUT inspectoroverrideconfigs

Request Type: **GET**

Description: Modifies the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## DELETE prefilterpolicies

Request Type: **DELETE**

Description: Deletes a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## PUT prefilterpolicies

Request Type: **PUT**

Description: Modifies a prefilter policy associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/prefilterpolicies/{object\_UUID}

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## POST prefilterpolicies

Request Type: **POST**

Description: Creates a prefilter policy associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/prefilterpolicies/{object\_UUID}

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## GET prefilterpolicies

Request Type: **GET**

Description: Retrieves the prefilter policy associated with the specified ID. If no ID is specified, retrieves a list of all prefilter policies.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/prefilterpolicies

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{object\_UUID}

Permissions: Policies > Access Control > Prefilter Policy

## GET remoteaccessvpns

Request Type: **GET**

Description: Retrieves the FTD RA VPN topology associated with the specified ID. If no ID is specified for a GET, retrieves list of all FTD RA VPN topologies.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/ravpns

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}

Permissions: Devices > VPN

## GET addressassignmentsettings

Request Type: **GET**

Description: Retrieves Address Assignment Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Address Assignment Setting entry of the topology.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}

Permissions: Devices > VPN

## GET certificatemapsettings

Request Type: **GET**

Description: Retrieves Certificate Map Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Certificate Map Setting entry of the topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/certificatemapsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/certificatemapsettings/{objectId}`

Permissions: Devices > VPN

## GET connectionprofiles

Request Type: **GET**

Description: Retrieves Connection Profile data inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Connection Profile entry of the topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN

## DELETE hitcounts

Request Type: **DELETE**

Description: Deletes the hit count information and resets the hit count to zero for an assigned policy or rule in a device, from the Firepower Management Center.

Note that the DELETE operation returns a 200 (OK) message upon successful completion of the operation.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

## PUT hitcounts

Request Type: **PUT**

Description: Retrieves the latest hit count information for a device against an assigned policy, and stores it in the Firepower Management Center.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

## GET hitcounts

Request Type: **GET**

Description: Retrieves the last collected hit count information for a device against an assigned policy or its rules, from the Firepower Management Center.

Note that during the GET operation, hit counts will be automatically pre-fetched from the device if it is the first retrieval being done against a specific device.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

## DELETE prefilterrules

Request Type: **DELETE**

Description: Deletes the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## PUT prefilterrules

Request Type: **PUT**

Description: Modifies the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy



## POST prefilterrules

Request Type: **POST**

Description: Creates a prefilter rule.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## GET prefilterrules

Request Type: **GET**

Description: Retrieves the prefilter rule associated with the specified rule ID. If no ID is specified, retrieves list of all prefilter rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

## GET snmpalerts

Request Type: **GET**

Description: Retrieves the SNMP alert object associated with the specified ID. If no ID is specified, retrieves a list of all SNMP alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts > View Alerts

## GET syslogalerts

Request Type: **GET**

Description: Retrieves the syslog alert object associated with the specified ID. If no ID is specified, retrieves a list of all syslog alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts

# Policy Assignment Services

## PUT policyassignments

Request Type: **PUT**

Description: Modifies an assigned access policy to add a new device or a new device group.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/assignment/policyassignments/{object\_UUID}

Permissions:

## POST policyassignments

Request Type: **POST**

Description: Assigns an unassigned access policy to devices or device groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/assignment/policyassignments

Permissions:

## GET policyassignments

Request Type: **GET**

Description: Retrieves the policy assignment associated with the specified ID. If no ID is specified, retrieves a list of all policy assignments to target devices.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/assignment/policyassignments

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/assignment/policyassignments/{object\_UUID}

Permissions:

Parameters available for filtering: name

# Status Services

## GET taskstatuses

Description: Retrieves information about a previously submitted pending job/task with the specified ID. This is currently supported for device registration and deployment jobs.

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/job/taskstatuses/{object\_UUID}

Permissions: Modify Devices/Deployment

# System Information

## GET domain

Request Type: **GET**

Description: Requests version information for the domain. If no ID is specified, retrieves a list of all domains.

URL: /api/fmc\_platform/v1/info/domain/{domain\_UUID}/

URL for GET by ID: /api/fmc\_platform/v1/info/domain/{domain\_UUID}/{object\_UUID}

Permissions: System > Domains

## GET serverversion

Request Type: **GET**

Description: Requests version information for the server. If no ID is specified, retrieves a list of all servers.

URL: /api/fmc\_platform/v1/info/serverversion

URL for GET by ID: /api/fmc\_platform/v1/info/serverversion/{objectID}

Permissions:

# Update Packages

## POST Cancel Upgrades

Request Type: **POST**

Description: This POST operation cancels software upgrade packages to applicable devices running Firepower Threat Defense.

URL: /api/fmc\_platform/v1/updates/cancelupgrades

Permissions: System > Updates

## POST Retry Upgrades

Request Type: **POST**

Description: This POST operation retries software upgrade packages to applicable devices running Firepower Threat Defense.

URL: /api/fmc\_platform/v1/updates/retryupgrades

Permissions: System > Updates

## DELETE upgradepackages

Request Type: **DELETE**

Description: Deletes a specific Firepower Threat Defense upgrade package from the managing Firepower Management Center.

URL: /api/fmc\_platform/v1/updates/upgradepackages/{package\_UUID}

## GET upgradepackages

Request Type: **GET**

Description: Retrieves a list of locally available Firepower Threat Defense upgrade packages, including major upgrades, maintenances release upgrades, and hotfixes.

URL: /api/fmc\_platform/v1/updates/upgradepackages

URL for GET by ID: /api/fmc\_platform/v1/updates/upgradepackages/{package\_UUID}

## GET listapplicabledevices

Request Type: **GET**

Description: Lists registered device containers that support the specific upgrade package.

URL: /api/fmc\_platform/v1/updates/upgradepackages/{container\_UUID}/applicabledevices

## POST upgradepackage

Request Type: **POST**

Description: Dependent on the parameters, this POST operation either pushes available software upgrade packages to applicable devices running Firepower Threat Defense or initiates the upgrade process for applicable devices running Firepower Threat Defense. This process is applicable for standalone, clustered, or high availability pairs with the following limitations:

- For all configurations, ensure that the current POST operation is completed successfully before proceeding to the next POST operation.
- Perform the POST operation on the primary node of a high availability pair. Do not perform the POST operation for more than one high availability pair at a time.
- Perform the POST operation on the



### Note

Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses, on page 120](#).

URL: /api/fmc\_platform/v1/updates/upgrades/

## GET upgradepackages: Monitor

Request Type: **GET**

Description: Monitors the upgrade process once you have executed the POST upgrade task.

URL: `/api/fmc_platform/v1/domain/{domain_UUID}/job/taskstatuses/{task_ID}`

