

Déploiement des infrastructures réseaux

DJEFEL Mohamed



GABIN Floralyn

Quelque images pour visualiser le switch d'analyse.





La références du câble de connexion Aruba,
On interconnecte à un adaptateur pour le
brancher sur la prise USB C de l'unité
centrale du pc.

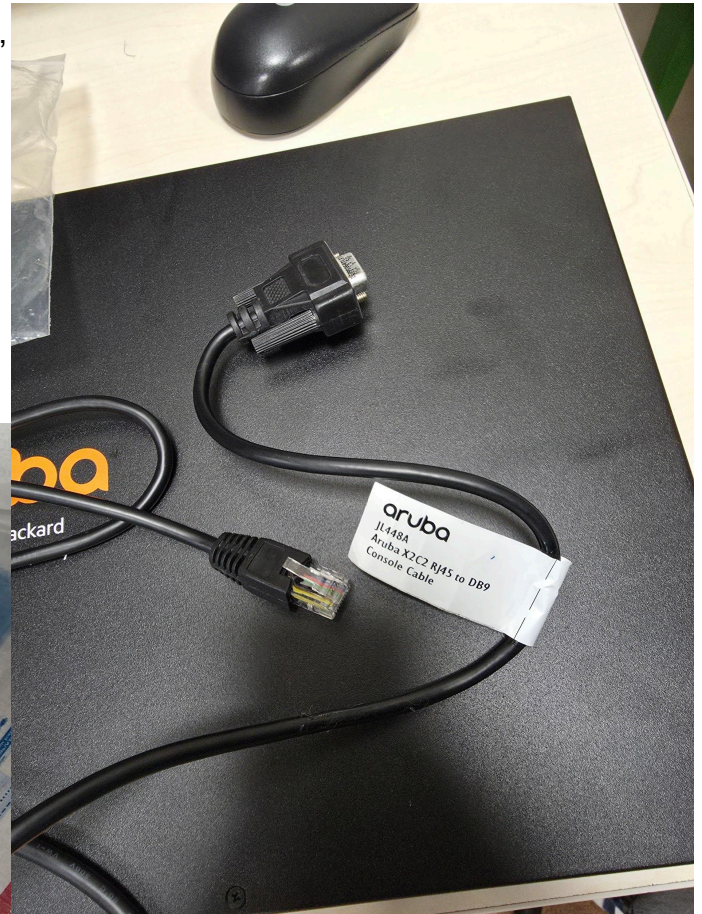
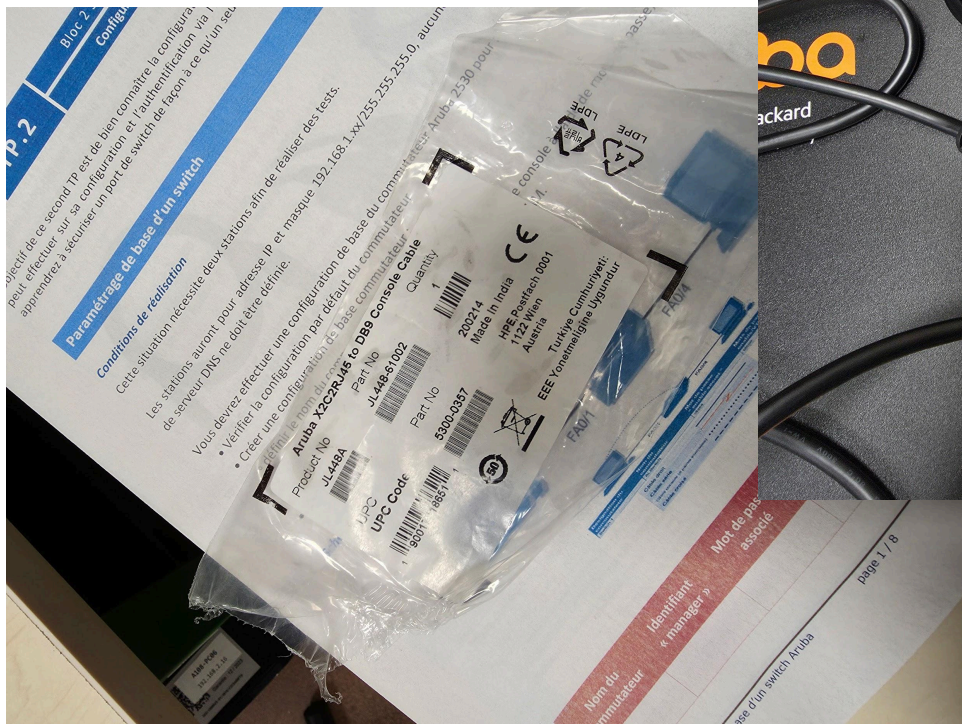










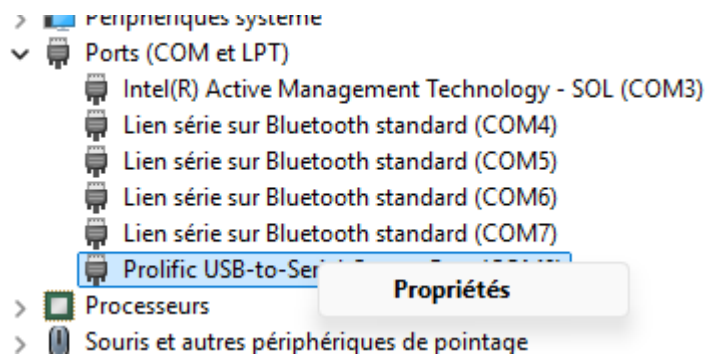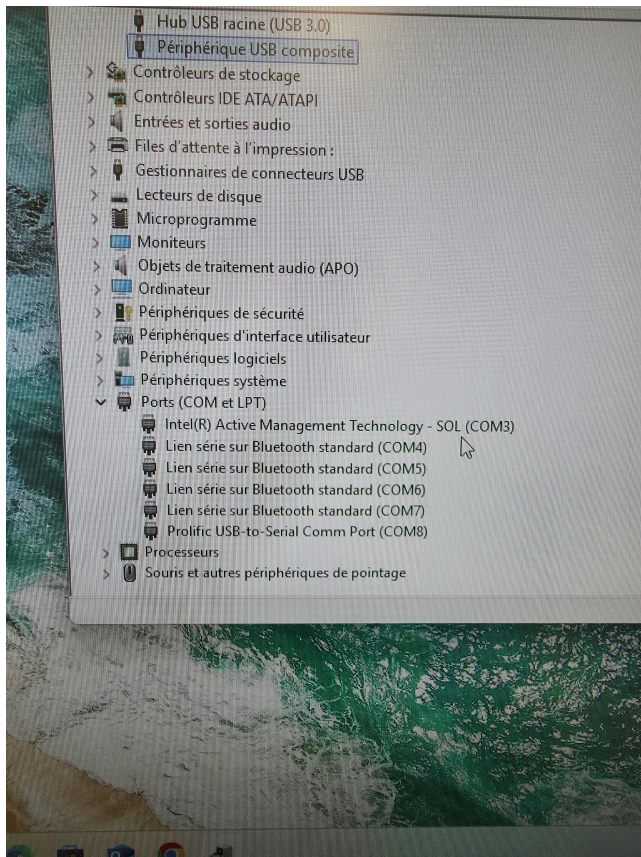


Le port USB C est bien branché au port : COM8

Se rendre sur l'application PuTTY, pour observer l'évolution du switch



COM8 : Initialisation

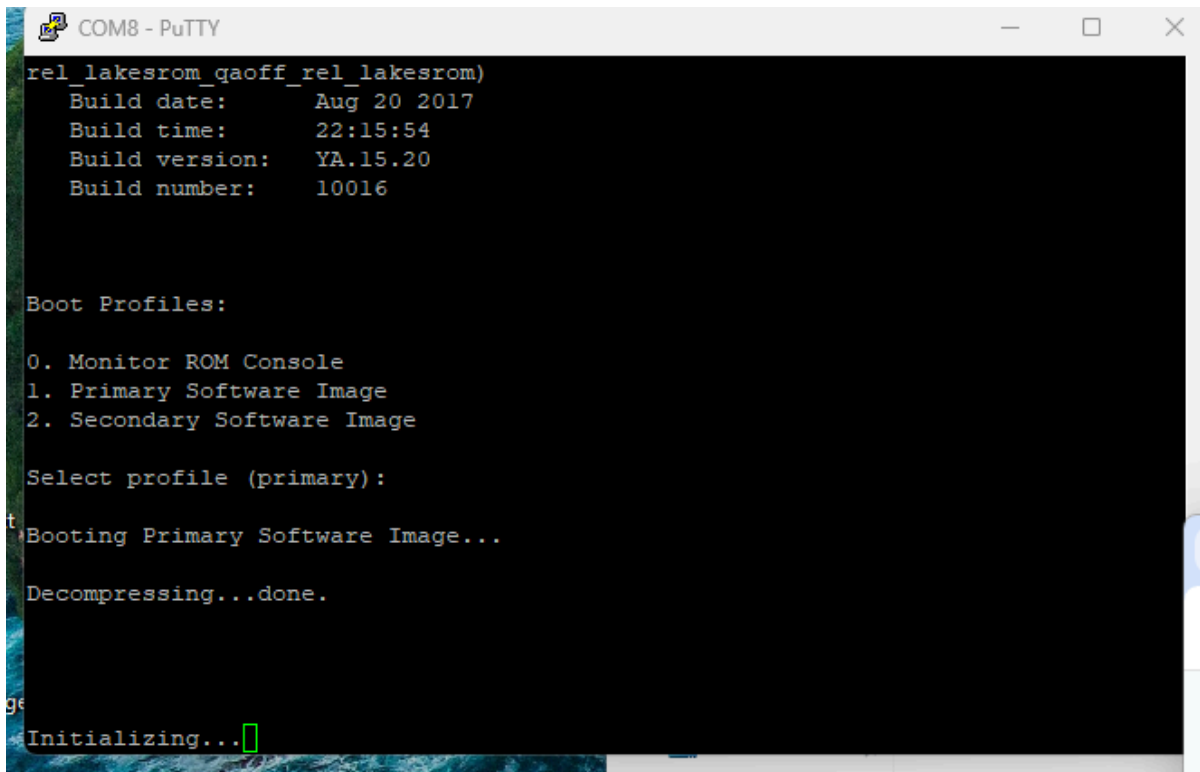

```
rel_lakesrom_qaoff_rel_lakesrom)
Build date:      Aug 20 2017
Build time:      22:15:54
Build version:   YA.15.20
Build number:    10016

Boot Profiles:

0. Monitor ROM Console
1. Primary Software Image
2. Secondary Software Image

Select profile (primary):

t Booting Primary Software Image...

Decompressing...done.

ge
Initializing...█
```

La commande “show system information” : pour trouver la version de l’OS

```
COM8 - PuTTY

Status and Counters - General System Information

System Name      : HP-2530-48G
System Contact   :
System Location  :

MAC Age Time (sec) : 300

Time Zone       : 0
Daylight Time Rule : None

Software revision : YA.16.06.0006      Base MAC Addr   : 883a30-1d4580
ROM Version      : YA.15.20           Serial Number  : CN9BFP60H0

Up Time         : 10 mins              Memory - Total  : 67,108,864
CPU Util (%)    : 0                   Free          : 38,559,288

IP Mgmt  - Pkts Rx : 73                Packet - Total  : 3020
          Pkts Tx  : 73                Buffers - Free  : 2792
                                          Lowest   : 2755
                                          Missed   : 0

- MORE --, next page: Space, next line: Enter, quit: Control-C
```

La version ci-dessous :

```
Software revision : YA.16.06.0006
```

show tech buffers : pour plus de détail sur les composants du switch

show interface ethernet “numéro de port” : Connaître l’adresse MAC du port et tous les détails.

show vlans : montre les vlans par défauts ou attribués

```
Status and Counters - VLAN Information

Maximum VLANs to support : 256
Primary VLAN : DEFAULT_VLAN
Management VLAN :

VLAN ID Name | Status   Voice Jumbo
-----+-----+-----+-----
1    DEFAULT_VLAN | Port-based No    No

HP-2530-48G#
```

Comment mettre un mot de passe en tant que manager "password manager
user-name **NOM** plaintext **MDP**", Comment quitter la session manager : "logout"

```
COM8 - PuTTY

TPSwitch# configure
TPSwitch(config)# user-name btssio plaintext Plcko380
Invalid input: user-name
TPSwitch(config)# password manager user-name btssio plaintext PlcKo380

DHCP-based image file download from a TFTP server is disabled when an operator
or manager password is set.

DHCP-based ACS URL setting for TR-69 is disabled when an operator or manager
password is set.

DHCP-based config file download from a TFTP server is disabled when an operator
or manager password is set.

The TFTP Server is disabled when an operator or manager password is set.
TPSwitch(config)# logout
Do you want to log out (y/n)? y
Do you want to save the current configuration (y/n)?
```

```
COM8 - PuTTY

TPSwitch# vlan 1
Invalid input: vlan
TPSwitch# configure
TPSwitch(config)# vlan 1
TPSwitch(vlan-1)# ip address 192.168.2.83/24
Invalid input: address
TPSwitch(vlan-1)# ip address 192.168.2.83
Invalid input: address
TPSwitch(vlan-1)# ip address 192.168.2.83/255.255.255.0
Invalid input: address
TPSwitch(vlan-1)# ip address 192.168.2.83/255.255.255.0
TPSwitch(vlan-1)# exit
TPSwitch(config)# ip default-gateway 192.168.2.1
TPSwitch(config)# exit
TPSwitch#
```

```
COM8 - PuTTY
Support URL      : http://www.arubanetworks.com/products/networking/
User Interface   : Improved

TPSwitch# configure
TPSwitch(config)# crypto key generate ssh rsa
Installing a new key pair.  If the key/entropy cache is
depleted, this could take up few minutes.

The installation of a new key pair is successfully completed.
TPSwitch(config)# ip ssh
TPSwitch(config)# ip ssh timeout 120
Invalid input: timeout
TPSwitch(config)# show ip host-public-key

SSH host public key:

ssh-rsa
AAAAB3NzaClyc2EAAAADAQABAAQDGRL9hlFGTdvg+HuAg1Xd+gkAqFtOq4MC9ZzCITDrSTIADate
qm5vIqUUXtkL8yl/yqg8jYwKE9NEO6a17Ip2M76B813ZERWBsS9UOa0Hf0Y/+IYAOfM5fWg2y6efSzeT
wpAvpMp42NCWvVztxasWjJ/zsC2TuI6cAtN3LdjAyc/XFFu6DCsZ1/jOwt/zhEPd5GG2nNVc702JRO/H
AWV7ICWX8TiGRu40UluZASRKQ+UUsLPFCv+NkDFG+Gq8a9hOfETztlwPHGirFuZnJ5fzoUMxMjiIj8pa
qwM6RziBOWj6ViA2utxSsxCtojFOKStj3Vb6K3NjhgE++If0Qq/PT

TPSwitch(config)# no
```

Etape de configuration sauvegarder par la commande "write memory" :

```
COM8 - PuTTY

Running configuration:

; J9775A Configuration Editor; Created on release #YA.16.06.0006
; Ver #13:44.00.04.19.02.13.98.82.34.61.18.28.f3.84.9c.63.ff.37.27:43
hostname "TPSwitch"
banner motd "as salam ua3leykoum\n"
no telnet-server
ip default-gateway 192.168.2.1
snmp-server community "public" unrestricted
vlan 1
  name "DEFAULT_VLAN"
  no untagged 2-12
  untagged 1,13-52
  ip address 192.168.2.83 255.255.255.0
  exit
vlan 2
  name "commercial"
  untagged 2-12
  tagged 48
  no ip address
  exit
no tftp server
MORE --, next page: Space, next line: Enter, quit: Control-C
```

Adresse IP VLAN 1 : 192.168.2.83



VLAN Info

Primary VLAN:

VLAN 1

Management VLAN:

NONE

Max VLANs:

256

GVRP:

Disabled

VLAN 1

Name: DEFAULT_VLAN

Status: Port Based

Jumbo: No

Voice: No

Untagged: 1,13-52

Tagged: None

Tagged (GVRP): None

Forbid: None

IP Config: Manual

IP Address: 192.168.2.83

IPv4 Default Gateway: 192.168.2.1

IPv4 Subnet Mask: 255.255.255.0

VLAN Table

ID ▲	Name	Status	IP Config	IP Address	Untagged	Tagged
1	DEFAULT_VLAN	Port Based	Manual	192.168.2.83	1,13-52	None
2	commercial	Port Based	Disabled		2-12	48