

Require ("module")


- Node is inbuilt
- Third Party modules
- Custom modules we write

Node module → write anonymous / named ~~new~~ functions

Node is all the modules follows Asyn pattern and error first pattern for the functions

```
SW • write ("message", (err) => {  
    Any pattern  
    error first pattern  
    if (err)  
        continue  
    }  
}
```

REQUEST object for
interacting btw two domain servers.

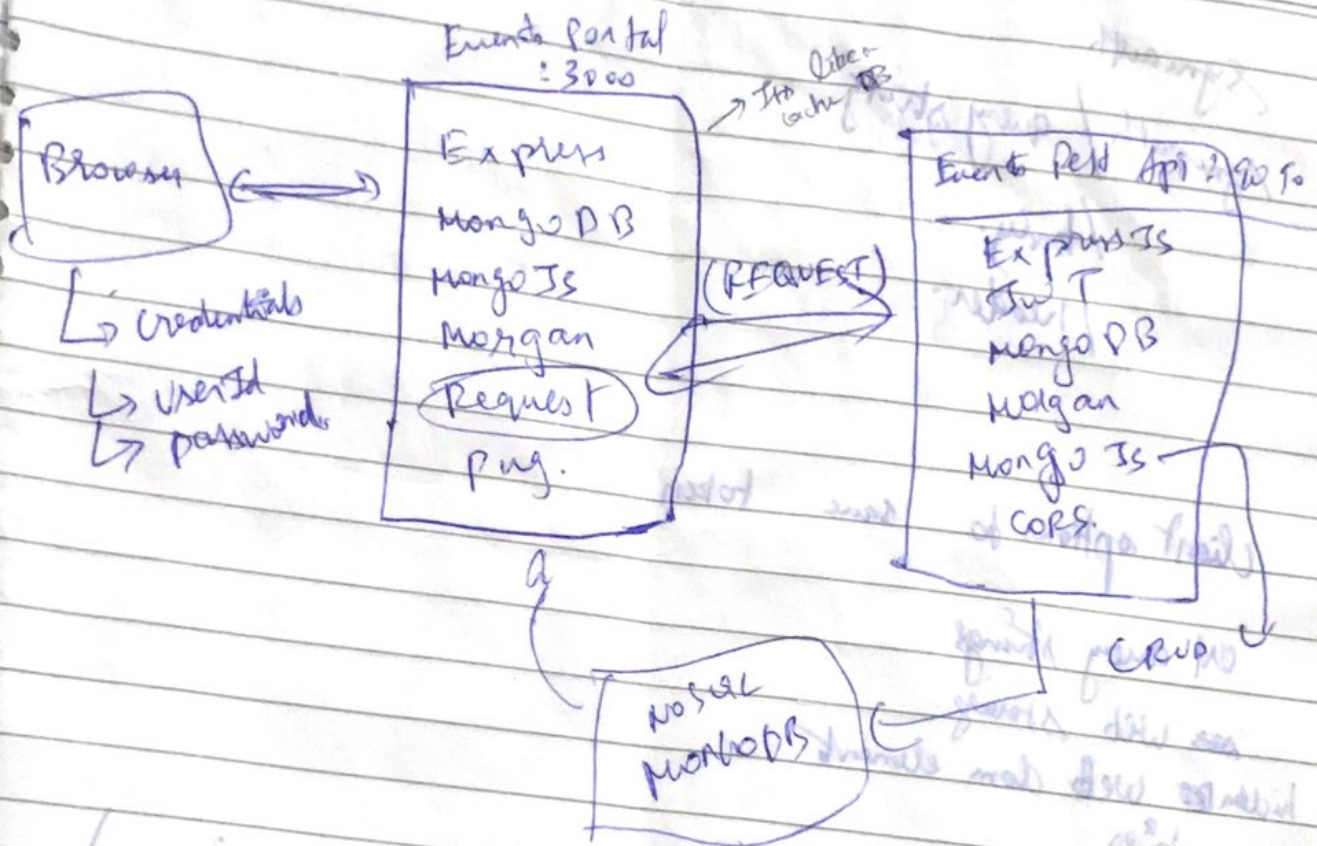

Mongo as a service so when windows started
it automatically starts the service.

module.exports global for export module