

Xiaoming Sharing|Share the github of the 8ms platform sigmastar SSD201/SSD202 open source framework

 原创

Kai

Mingxian

Posted at 2020-11-27 15:50:51

1372

Favorites


6

Article tags: github SSD201 8ms

copyright

Open source theme: 8ms sigmastar SSD201/SSD202

Open source address: <https://github.com/wireless-tag-com/8ms-sstar>

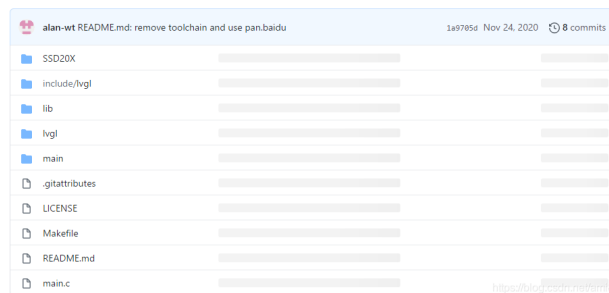

Address: www.8ms.xyz

1. Installation dependencies

The verified system is: ubuntu 16.04.7 64-bit system

```
sudo apt-get install subversion build-essential libncurses5-dev zlib1g-dev gawk git ccache \
  gettext libssl-dev xsltproc libxml-parser-perl \
  gengetopt default-jre-headless ocaml-nox sharutils textinfo
sudo dpkg --add-architecture i386
sudo apt-get update
sudo apt-get install zlib1g:i386 libstdc++6:i386 libc6:i386 libc6-dev-i386
```

2. Install toolchain

Download toolchain Link: <https://pan.baidu.com/s/1SUk1a-drbWo1tkHQzCgchg> Extraction code: 1o3d
decompress toolchain

```
sudo tar wt-gcc-arm-8.2-2018.08-x86_64-arm-linux-
gnullabihf.tag.gz -xvf -C /opt/
```

Set the environment variables, modify the ~/.profile file, and add the following line to the end of the file

```
PATH="/opt/gcc-arm-8.2-2018.08-x86_64-arm-linux-
gnullabihf/bin:$PATH"
```

Enabling environment variables manually

```
source ~/.profile
```

Test cross toolchain

```
arm-linux-gnueabi-gcc --version
```

compile

make

The library file is located in lib/liblvg1.so and the executable file is located in bin/demo

test

Upload the demo to the board (tftp or scp) through the network port, increase the executable permission, and run it. E.g

```
cd /tmp
tftp -g 192.168.1.111 -r demo
chmod +x demo
./demo
```

If the board does not have liblvg1.so, you can upload it manually first.

```
cd /usr/lib/
tftp -g 192.168.1.111 -r liblvg1.so
```



Kai Mingxian

focus on

1



3

6



Comment 3 You are not logged in, please [log](#) in to post or view comments

A cross-platform rapid prototyping tool platform for qui... 5407
8ms.xyz is a free cross-platform rapid prototyping tool platform for devel...

Qiming Cloud Sharing | Espressif ESP32-S3 Voice--Te... 178
作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...

启明智显分享|3.5寸串口屏应用如何对传统冰箱进行升级 31
启明智显专为智能产品提供一站式彩屏显示+连接+云端服务+APP软件开...

启明智显分享 | 4.3寸串口屏在户外便携式电源智能化应... 224
深圳市启明智显科技针对户外便携式电源智能化产品市场需求推出了基于...

启明智显分享|乐鑫ESP32-S3离线语音在86控制面板、... 511
启明智显基于乐鑫ESP32-S3与国产芯高效开发平台8ms(8ms.xyz)设计开...

启明智显分享 | 基于ESP32-S3的低成本86智能开关面... 2883
启明智显基于乐鑫ESP32-S3与国产芯高效开发平台8ms(8ms.xyz)设计开...

启明智显分享| 2.4寸旋钮串口屏在健身器材上的应用 6246
启明智显基于乐鑫ESP32-S3与国产芯高效开发平台8ms（8ms.xyz），...

启明智显分享| 关于ESP32-S3系列串口屏应用时配网... 4798
启明智显专为智能产品提供一站式彩屏显示+连接+云端服务+APP软件开...

启明智显分享| ESP32学习笔记参考--PWM(脉冲宽度调... 644
启明智显专为智能产品提供一站式彩屏显示+连接+云端服务+APP软件开...

启明智显分享 | 适用于两轮车仪表、智能小家电、充电... 4424
启明智显专为智能产品提供一站式彩屏显示+连接+云端服务+APP软件开...

- 启明云端分享|A133核心板SOM1309在喉镜方面的应用

248

启明云端基于全志A133平台开发的SOM1309可适用于消费平板，厨电面...
- 启明云端分享| ESP32学习笔记参考RTC_GPIO操作及...

578

作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...
- 启明云端分享|ESP32学习笔记参考GPIO口操作

402

作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...
- 启明云端分享| ESP32-S3 RGB点屏教程

1412

作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...
- 启明云端分享| ESP32-S3 + 480*480分辨率的2.1寸圆屏...

254

ESP32-S3 + 480*480分辨率的RGB接口2.1寸圆屏—磁编码旋钮方案全新...
- 元宵节快乐 | 启明云端邀您一起猜灯谜了

464

启明云端邀您一起猜灯谜了
- 启明云端分享| sigmstar SSD201/SSD202D/SSD210/S...

871

作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...
- 启明云端分享|ESP32-S3 的 USB 支持 USB Host 吗？

713

作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...
- 启明云端分享| 继ESP32-S3点屏480*480分辨率的2.1...

3427

继ESP32-S3点屏480*480分辨率的2.1寸屏后，目前在8ms平台又发布了...
- 启明云端分享| SSD201、SSD202D 红外接口调试参考

413

作为Espressif（乐鑫科技）大中华区合作伙伴及sigmastar（厦门星宸）V...

启明智显

企业

222	1万+	6343	33万+	
原创	周排名	总排名	访问	等级
3954	507	168	335	641
积分	粉丝	获赞	评论	收藏



私信

关注

Search blogger articles



热门文章

Exhibition Express | Qiming Cloud debuts at AWE2021: Look at the application, new technologies lead the intelligent upgrade of home appliances--Qiming Cloud's one-stop solution for WIFI\Bluetooth\smart screen wins attention; Look at the product--4-inch knob screen stunning AWE2021

24129

Consumption upgrade, color screen may become a new outlet in the home appliance industry market

22295

Qiming cloud sharing | 86 box serial screen burning instructions

8286

Problems that may be encountered during the use of ESP32-CAM

6322

Kai Mingxian sharing | 2.4-inch knob serial screen application on fitness equipment

6238

Category column

	Espressif ESP solut...	92 articles
	Android core board s...	4 articles
	SSD201 series dev...	43 articles
	8ms development to...	5 articles
	11	1 article

latest comment

Qiming Cloud Sharing | Following the ES...
qq_34855590: What should I do with the R
GB screen driver? I compiled it with the ...

Xiaoming Sharing | Iterative History of ...
Jade is not a weapon, a human being is no
t a talent without learning: to understand ...

Xiaoming sharing | LVGL debug log
KwongFai-Yeung: What is the meaning of s
tyle pot, and how to debug it?

Xiao Ming's sharing: SSD201/202 syste...
Azan 88: Mention to turn off the firewall

As a sigmastar agent - Qiming Cloud will...
m0_46388867: Qt is running, but no interfa
ce is displayed, do you know the reasor .

latest articles

Qiming Cloud Sharing | Espressif ESP32-S3
Voice--Text-to-Speech (TTS)

Kai Mingxian sharing | 3.5-inch serial screen
application how to upgrade traditional
refrigerators

Kai Mingxian Sharing | 4.3-inch serial
screen in outdoor portable power intelligent
application solution

25 articles in 2022 138 articles in 2021
59 articles in 2020

content