

Contents

locifilemanager-v2	1
Contents	1
Introduction	2
Requirements	2
Building from source	3
Installation and start program	4
Keyboard commands	5
Main application interface	6
Command explanation	7
Version history and download	14
Credits	15
License	16

locifilemanager-v2

File manager for the LOCI mass storage device on Oric Atmos — v2 rebuild using Oscar64.



Contents

- 1. [Introduction](#)
- 2. [Requirements](#)
- 3. [Building from source](#)
- 4. [Installation and start program](#)
- 5. [Keyboard commands](#)
- 6. [Main application interface](#)
- 7. [Command explanation](#)
- 8. [Version history and download](#)
- 9. [Credits](#)

10. [License](#)

Introduction

locifilemanager is a full-screen file manager for the [LOCI](#) mass storage device on the Oric Atmos home computer. It lets you browse, copy, move, delete, and rename files on LOCI-connected storage; mount and unmount disk, tape, and ROM images; and boot from mounted media.

This is version 2 — a complete rewrite using the [Oscar64](#) C compiler targeting the 6502A bare-metal (no ROM calls). The v1 CC65 implementation is at [locifilemanager](#).

Available in English and French.

Current status: Library infrastructure (charwin window library, keyboard scanner, full LOCI API) is complete and tested. The application rebuild is in progress. The keyboard commands, interface walkthrough and screenshots further down in this manual are ported from the v1 (CC65) version as a placeholder reference for the planned v2 behaviour, and will be replaced with v2 screenshots as the rebuild progresses.

For more information about the LOCI device itself, see the [LOCI User Manual](#).

Features:

- Browse both the internal storage of the LOCI and all connected USB mass storage devices
 - Two browser panes with two independently loaded directories
 - Copy and move files (not directories) between panes
 - Delete and rename files and directories
 - Create directories
 - Copy, move and delete based on a user-made selection of multiple files
 - Mount disk, tape, and ROM images
 - On exit, boot based on mounted images (disk > tape > ROM)
 - Browse inside a tape image to select a file on the tape to mount/boot
 - IJK joystick interface supported: browsing and all menu operations can be done via joystick
 - Both menu and keyboard driven
 - Source fully public, includes a LOCI API library for your own projects
-

Requirements

Hardware

- Oric Atmos
- [LOCI](#) mass storage device
- USB storage connected to LOCI

LOCI firmware

- Minimum LOCI firmware version: 0.2.5

- Firmware 0.3.0 or later is needed for the ability to create directories

For emulator testing

- [Oricutron](#) emulator

Note: LOCI hardware features (file access, directory listing, mount/unmount) require a real LOCI device. Oricutron does not emulate LOCI.

For building from source

Tool	Purpose	Install
Oscar64	C compiler for 6502	Build from source
Python 3	Tape image wrapper (mktap.py)	<code>sudo apt install python3</code>
pandoc	PDF documentation generation	<code>sudo apt install pandoc</code>
zip	Release archive	<code>sudo apt install zip</code>

Building from source

```
git clone https://github.com/xahmol/locifilemanager-v2
cd locifilemanager-v2
```

Target	Action
<code>make</code>	Build English app (build/locifm.tap)
<code>make LANG=FR</code>	Build French app (build/locifm_fr.tap)
<code>make all-langs</code>	Build all four tap images (EN+FR for app and demo)
<code>make run</code>	Build + launch EN app in Oricutron
<code>make libdemo</code>	Build library demo (build/libdemo.tap)
<code>make libdemo-run</code>	Build + launch EN demo in Oricutron
<code>make docs</code>	Regenerate PDF documentation from Markdown
<code>make zip</code>	Build all images + docs + release ZIP
<code>make usb</code>	Copy all tap images to USB stick (see below)
<code>make clean</code>	Remove build artefacts

USB transfer to real hardware

Copy tape images directly to a USB stick:

1. Copy `.env.example` to `.env` (`.env` is gitignored):

```
cp .env.example .env
```

2. Edit `.env` and set `USBPATH` to the directory on the USB stick:

Native Linux — path under `/media/`:

```
USBPATH = /media/yourname/USBSTICK/oric
```

WSL2 (Windows Subsystem for Linux 2) — no extra tools needed. Windows assigns the USB stick a drive letter (e.g. E:); WSL2 auto-mounts all Windows drives at /mnt/<letter>:

```
USBPATH = /mnt/e/oric
```

3. Plug in the USB stick and run:

```
make usb
```

This builds all four tap images and copies them to USBPATH.

Installation and start program

1. Copy locifm.tap (English) or locifm_fr.tap (French) to a location on the USB stick connected to your LOCI device.
2. Go to the LOCI user interface by pressing the red button on the LOCI. You should get the LOCI interface like this:



3. Go to the field to select tape images by pressing **T** (or navigate there with the cursor keys).
4. Press **SPACE** to go to the file browser.
5. Navigate to the location on the USB stick where you stored locifm.tap (or locifm_fr.tap).
6. Select it with **SPACE**.
7. Boot into the application by pressing **ESC**.

8. If the Auto load option of the LOCI is enabled, loading from tape starts automatically. If not, type CLOAD"" and press **RETURN**.
9. The program should now load and start.

If no LOCI is detected, or the connected LOCI has a firmware version lower than required (see [Requirements](#)), the program shows an error message and exits.

For details on how to operate your LOCI device, see the [LOCI User Manual](#).

Keyboard commands

In file browser pane:

Key	Description
Cursor Up / Down	Move down or up in the file browser pane
Cursor Left	Go to parent directory
Cursor Right	Go to main menu
RETURN	Perform action selected for RETURN button: Select, mount or launch a file.
ESC	Exit application and boot to mounted image(s)
.	Go to next available LOCI drive for the active pane
,	Go to previous available LOCI drive for the active pane
/	Switch the active pane to the other pane
\	Go to the root directory of the drive in the active pane
D	Page d own in the file browser pane
P	Page u p in the file browser pane
T	Go to t op: first entry in the file browser pane
B	Go to b ottom: last entry in the file browser pane
S	Toggle if file is s electe d or not.
A	Select a ll files in the active file browser pane
N	Select n one of the files, so deselect all, in file browser pane
I	I nverse selection in file browser pane
O	Toggle if directories are alphabetically s orte d or not
F	Select which F ilter to apply for showing directory entries or disable filtering.
C	C opy present file or all selected files from directory in active pane to directory in non-active pane
V	M ove present file or all selected files from directory in active pane to directory in non-active pane
DEL	D elete present file or directory (if empty)
G	Select t arge t disk drive for disk images to mount to.
R	R ename present file or directory
M	M ount present file to disk, tape or ROM.
U	Select which drive, tape or ROM should be u nmounted.
W	Start b rowse s ing inside a tape image from present .TAP file
E	Create n ew directory
H	Show h elp screen for keyboard commands

In main menu and pulldown menus


Key	Description
Cursor Up / Down	Move down or up in the pulldown menu options
Cursor Left / Right	Go to left or right in main menu.
RETURN	Select option.
ESC	Cancel (if allowed)

Joystick direction mapping to keyboard commands

The left, right, down, up joystick directions are translated to the corresponding cursor keys and invoke the same commands. The fire button invokes the same action as the RETURN key.

Main application interface

After application start, the main application interface looks similar to:

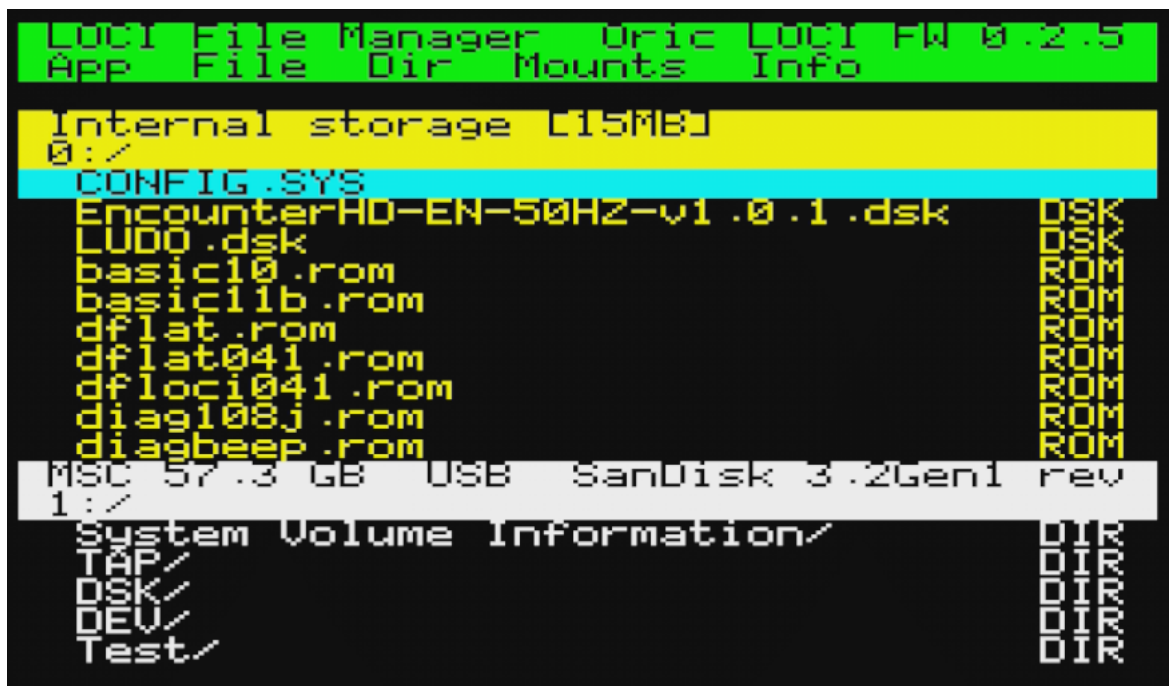

Top line of the screen is a header showing application name, followed by the identification and firmware version string of the connected LOCI device.

Second line is the main menu bar. Go there by pressing the **Cursor Right** key or push right on your joystick.

Below are two panes, both representing a directory on a LOCI provided storage drive ID. The pane shown in yellow is the active pane, white the non-active. First line of both panes is the name identification of the drive from which a directory is shown, second line shows the active path of the directory shown, of which the first number is the drive ID number. 0 is internal storage, 1 to 9 the USB mass storage devices connected to the LOCI.

Below are the directory entries, shown per page of 10. First the name, to the right the type:

- DSK: Disk image
- TAP: Tape image
- ROM: ROM image
- LCE: LOCI Executable (not yet implemented)
- DIR: Directory
- spaces: unknown type

In the active pane, in cyan the present entry is highlighted. This can be moved up and down by pressing cursor keys or joystick. Also page up/down is supported, just as go to top or bottom. Based on the selected present files all commands are executed. Reference is made to the [Keyboard commands](#) section above for available keyboard commands, see [Command explanation](#) for explanation of what all commands do and how they should be operated, sorted by the different main menu options.

Command explanation

App: Application options

```
App File Dir Mo
-Confirm: Once
Return: Select
[FI]lter: None
[SC]ort: Off
[ESC] Exit
```

Confirm

Confirm is a toggle that decides if an 'are you sure' popup is shown, to confirm either a delete or a copy with overwrite action, once or on every individual file separately. Default is Once.

This function can be reached via the menu only.

Return

```
Action for enter
Select option:
-Select
Mount
Launch
```


Selects which action should be performed when pressing RETURN:

- Select: Toggles if the file is selected or not on pressing **RETURN**, so **RETURN** will behave as the **S** key. Default option.
- Mount: File will be mounted on pressing **RETURN**, so **RETURN** will behave as the **M** key.
- Launch: File will be launched on pressing **RETURN**. This means that all other mounts will be unmounted, present file will be mounted, and application will be exited to boot to this mount.

RETURN in this case will behave as pressing first the **U** key for every active mount, then the **ESC** key.

This function can be reached via the menu only.

Filter

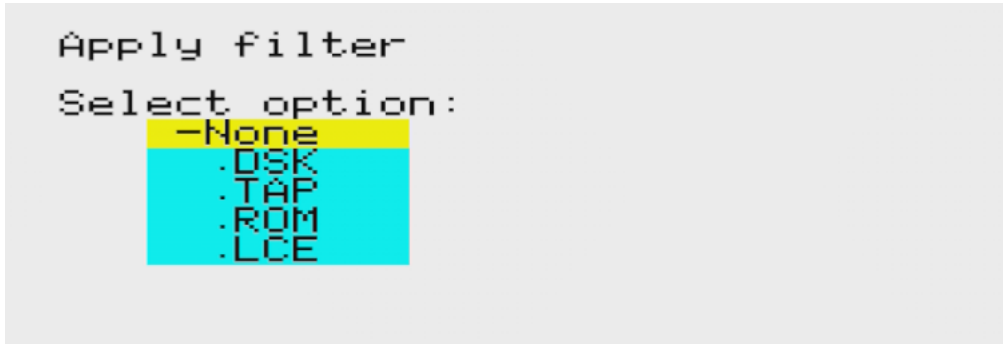

Selects which filter to apply when showing directories:

- None: No filter applied
- .DSK: Only .DSK disk images shown
- .TAP: Only .TAP tape images shown
- .ROM: Only .ROM rom images shown
- .LCE: Only LOCI Executables shown (not yet implemented as .LCE format is to be designed)

This function can be reached also by pressing the **F** key.


Sort

Toggle if sorting of directory entries is enabled or not.

NB: Sorting can be very slow on large directories, so beware of switching it on on those large directories. Also for this reason, default is Off.

This function can be reached also by pressing the **O** key.

Exit

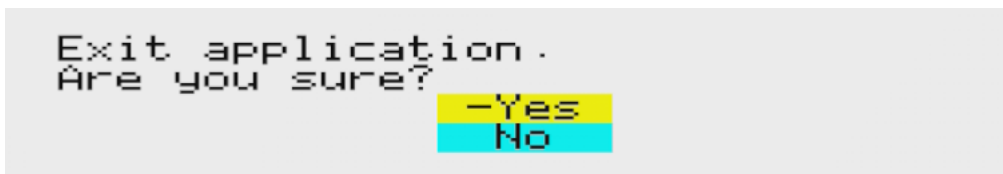

Application will exit and boot based on the active mounts (drive A > .TAP > ROM).


Autostarting from .TAP images is enabled.

This function can be reached also by pressing the **ESC** key.

File: File operations*Select toggle*

Toggles if presently highlighted file is selected or not. Selected files will be shown with a - before their name like in the screenshot below.

This function can be reached also by pressing the **S** key.

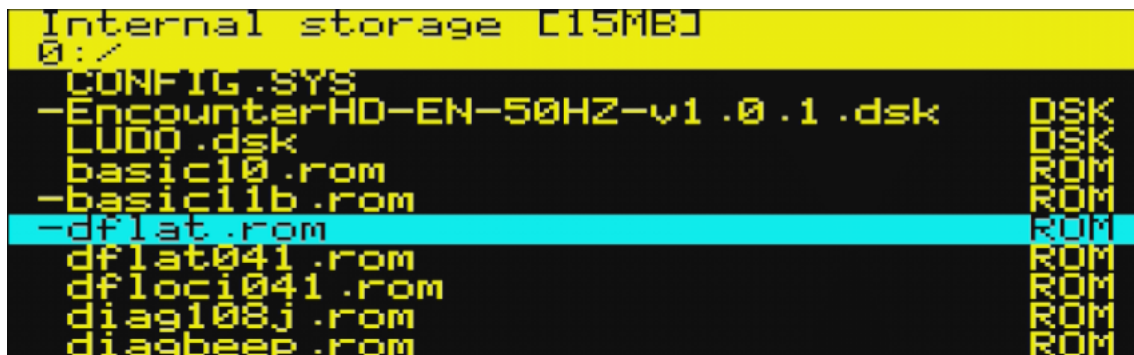*Select all*

Selects all files in the present pane. This function can be reached also by pressing the **A** key.

Select none

Deselects all files in the present pane. This function can be reached also by pressing the **N** key.

Inverse select

Inverses the selection of files in the present pane. This function can be reached also by pressing the **I** key.

Delete

Deletes the present file or directory. Or, if a selection of files is made, all selected files.

A popup will ask for confirmation (based on the application configuration setting for Confirm in the App menu, only once, or for every file), after which deletion will proceed. Press key to return.

This function will also delete a directory, but:

- A directory must be empty, otherwise an error message will be shown. Recursive directory delete is not (yet) implemented.
- Directories can not be selected, so deletion of directories has to be performed one by one.

This function can be reached also by pressing the **DEL** key.

```
Delete 1 files:  
LUDO .dsk
```

```
Delete file?
```

```
Name:  
LUDO .dsk
```

```
-Yes  
No
```

Rename

Renames the present file or directory.

A popup will appear to edit the name. Cursor keys and DEL key are supported in editing. Press RETURN to accept, ESC to cancel.

This function can be reached also by pressing the **R** key.

```
Rename file .  
Enter new name:  
EncounterHD-EN-50HZ-v1 .0 .1 .dsk■
```

Copy / Move

Copies or moves the present file. Or, if a selection of files is made, all selected files. Copying or moving directories with or without content is not (yet) implemented.

Copy or move will be performed from the directory in the active pane to the directory in the non-active pane. You can not copy or move to the same directory, in this case an error message will be shown:

```
Target dir same as active dir .  
Press key .
```

If file(s) with the same name already exist, a popup will ask for confirmation to overwrite the files in the target directory (based on the application configuration setting for Confirm in the App menu, only once, or for every file).

```

Copy 1 files to:
1:/Test/from0/

Copying file:
EncounterHD-EN-50HZ-v1.0.1.dsk

File exists. Overwrite?

Name:
EncounterHD-EN-50HZ-v1.0.1.dsk
  -Yes
  No

```

Otherwise a popup will appear showing copy or move progress. Pressing **ESC** can cancel file copying after finishing copying the present file. Mid-file copy cancellation is not (yet) implemented.

```

LOC1 File Manager 0ric LOC1 FW 0.3.1
App File Dir Mounts Info

MSC 57.3 GB USB SanDisk 3.2Gen1 rev
1:/Test/from0/
Empty directory.

Move 2 files to:
1:/Test/from0/

Processing file:
basic11b.com

Press ESC to cancel after next file.

```

This function can be reached also by pressing the **C** key for copy or **V** key for move.

Browse tape

Enables browsing within a .TAP tape image. Obviously only works if the present highlighted directory entry is identified as type TAP.

Selecting first mounts the tape image. This popup is shown, press key to continue:

```

hunchbk.tap for tape.
Press key.

```

Then the active pane of the browser will look like this:

```

Tape: hunchbk.tap
1: /TAP/
?HUNCHBACK?      $0501      487b BAS
HUNCH             $58A0      15312b BIN

```

First line now shows Tape: to indicate you are inside a tape image, followed by the name of the tape image. Second line is still the active path to the tape image.

As directory entries now the files within the tape image are shown, starting with the name (if any), followed by the start address and size, finally the detected tape: BAS for a BASIC file, BIN for all others.

Inside a tape the copy, delete and rename functions do not operate (not possible, or not (yet) implemented). Therefore selecting files also does not work.

Only thing that does work in browsing tape is moving to the desired file inside a tape by pressing **RETURN**. This will give this popup:

```

Moved to file on tape.
Press key.

```

Go back to the normal directory by pressing **Cursor Left** (or joystick left).

This function can be reached also by pressing the **W** key.

Dir: Directory navigation and operations

```

Dir~ Mounts Inf
-[ \ ] Go to root
[C LEFT] Back
Page [D]own
Page [U]p
[ ]op
[ ]ottom
N[ ]w dir

```

Go to root

Go to the root directory of the drive in the active pane. This function can be reached also by pressing the **** key.

Back

Go to the parent directory of the drive in the active pane. This function can be reached also by pressing the **Cursor Left** key.

Page down

Go to the next page of entries in the active pane. This function can be reached also by pressing the **D** key.

Page up

Go to the previous page of entries in the active pane. This function can be reached also by pressing the **P** key.

Top

Go to the first entry in the active pane. This function can be reached also by pressing the **T** key.

Bottom


Go to the last entry in the active pane. This function can be reached also by pressing the **B** key.

New dir

Create a new directory in the active pane from the active path.


This will give a popup to enter the dir name. Input the name (cursor keys and DEL key can be used for editing), press **RETURN** to accept and **ESC** to cancel.

This function can be reached also by pressing the **E** key.

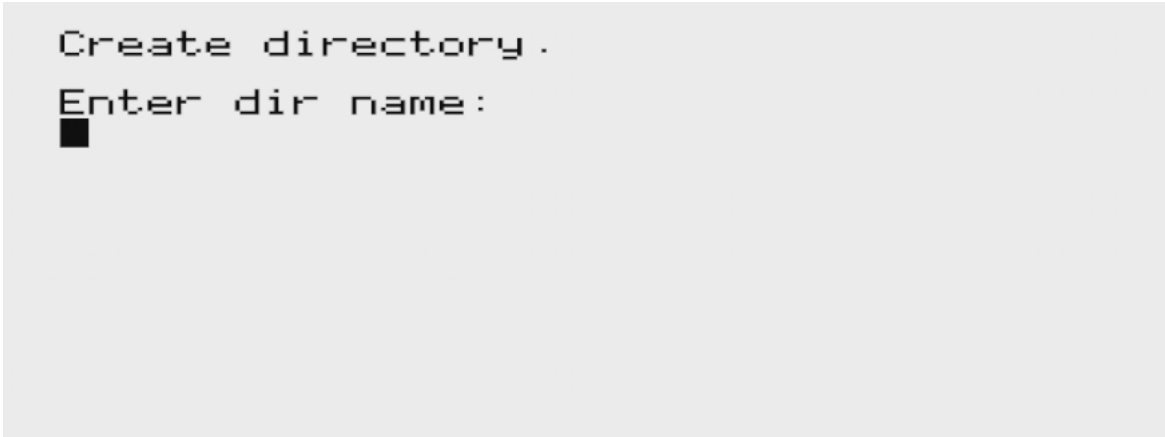

```
Create directory .  
Enter dir name:  
█
```

Info: Version information and help



```
nts Info  
-Version/credits  
Help
```

Version/credits

Shows two full-screen splashes. The first displays the "I Dream in 8 Bits" logo together with the application name, version (vMAJOR.MINOR.PATCH - YYYYMMDD-HHMMSS build timestamp) and credits; the second shows a QR code linking to the project's GitHub page. Press any key to advance to the next screen, and again to return to the application.

```
Version information and credits
LOCI File Manager
Written in 2025 by Xander Mol
version: v0.1.2 - 20250521-1548
Source, docs and credits at:
github.com/xahmol/locifilemanager
(C) 2025, IDreamtIn8bits.com
Press a key to continue.
```

Help

Shows a help screen for the keyboard commands.

```
LOCI File Manager Veric LOCI FW 0.3.1
Keyboard shortcuts help information
Curs Up/Do: Move up and down
Curs Left : Go to parent dir
Curs Right: Go to menu
RETURN    : Select/mount/launch
ESC       : Exit application
././      : Next/prev drive for pane
./        : Switch pane
./        : Go to root
D/P/T/B   : Page down/up, top/bottom
A/N/I     : Select toggle/all/none/inv
O          : Sort toggle
O/U       : Select filter to apply
O         : Copy/Move file(s)
DEL       : Delete file(s)/dir
O         : Select target drive mount
O         : Rename file/dir
O / U     : Mount/unmount
O         : Browse tape
O         : Create new directory
O         : Show this help screen
In main menu and pulldown menus
Curs keys : Menu navigation
ESC/RETURN: Cancel / Confirm
Press a key to continue
```

Version history and download

Version	Date	Notes
2.0.0	2026	Oscar64 rebuild — in development

Previous versions (v1, CC65)

The CC65-based v1 implementation remains available at [locifilemanager](#):

- <https://github.com/xahmol/locifilemanager/raw/refs/heads/main/BUILD/locifm.tap>

Version	Notes
0.1.2	Add move function
0.1.1	Bugfixes on tape browse and boot preference
0.1.0	First feature complete beta release

Credits

LOCI File Manager v2 File manager for the LOCI mass storage device for Oric Atmos Written in 2025-2026 by Xander Mol

<https://github.com/xahmol/locifilemanager-v2>

<https://www.idreamtin8bits.com/>

For information and documentation on the LOCI mass storage device:

- LOCI User Manual
<https://github.com/sodiumlightbaby/loci-hardware/wiki/LOCI-User-Manual>
- Sellers of my assembled LOCI device:
 - Raxiss: <https://www.raxiss.com/article/id/38-LOCI>

Code and resources from others used:

- LOCI ROM by Sodiumlightbaby, 2024
<https://github.com/sodiumlightbaby/loci-rom>
- Oscar64 cross compiler by drmortalwombat:
<https://github.com/drmortalwombat/oscar64>
- v1 (CC65) LOCI File Manager, the functional reference for v2:
<https://github.com/xahmol/locifilemanager>
- CC65 cross compiler, used by v1:
<https://cc65.github.io/>
- DraBrowse source code for inspiration and text input routine DraBrowse (db*) is a simple file browser. Originally created 2009 by Sascha Bader. Used version adapted by Dirk Jagdmann (doj)
<https://github.com/doj/dracopy>
- lib-ijk-egoist from oricOpenLibrary (for joystick support via Raxiss IJK interface) By Raxiss, (c) 2021
<https://github.com/iss000/oricOpenLibrary/tree/main/lib-ijk-egoist>
- forum.defence-force.org: For inspiration and advice while coding.

- Original windowing system code on Commodore 128 by unknown author.
- Tested using real hardware Oric Atmos plus LOCI

The code can be used freely as long as you retain a notice describing original source and author.

THE PROGRAMS ARE DISTRIBUTED IN THE HOPE THAT THEY WILL BE USEFUL, BUT WITHOUT ANY WARRANTY. USE THEM AT YOUR OWN RISK!

License

Copyright (C) 2025-2026 Xander Mol.

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, version 3.

See the [LICENSE](#) file for the full licence text.