AGILE DEVELOPMENT PROCESS AND DEVOPS LAB

NAME : ARUNIMA SANJEEV
REG NO : 23MIS0048

Step1 : Install Docker Desktop

Step2 Enable Kubernetes

Launch: Open Docker Desktop.

- Settings: Click the Gear Icon (top-right).
- Select: Click Kubernetes in the left sidebar.
- Check: Tick the Enable Kubernetes box.
- Confirm: Click Apply & Restart and then Install.

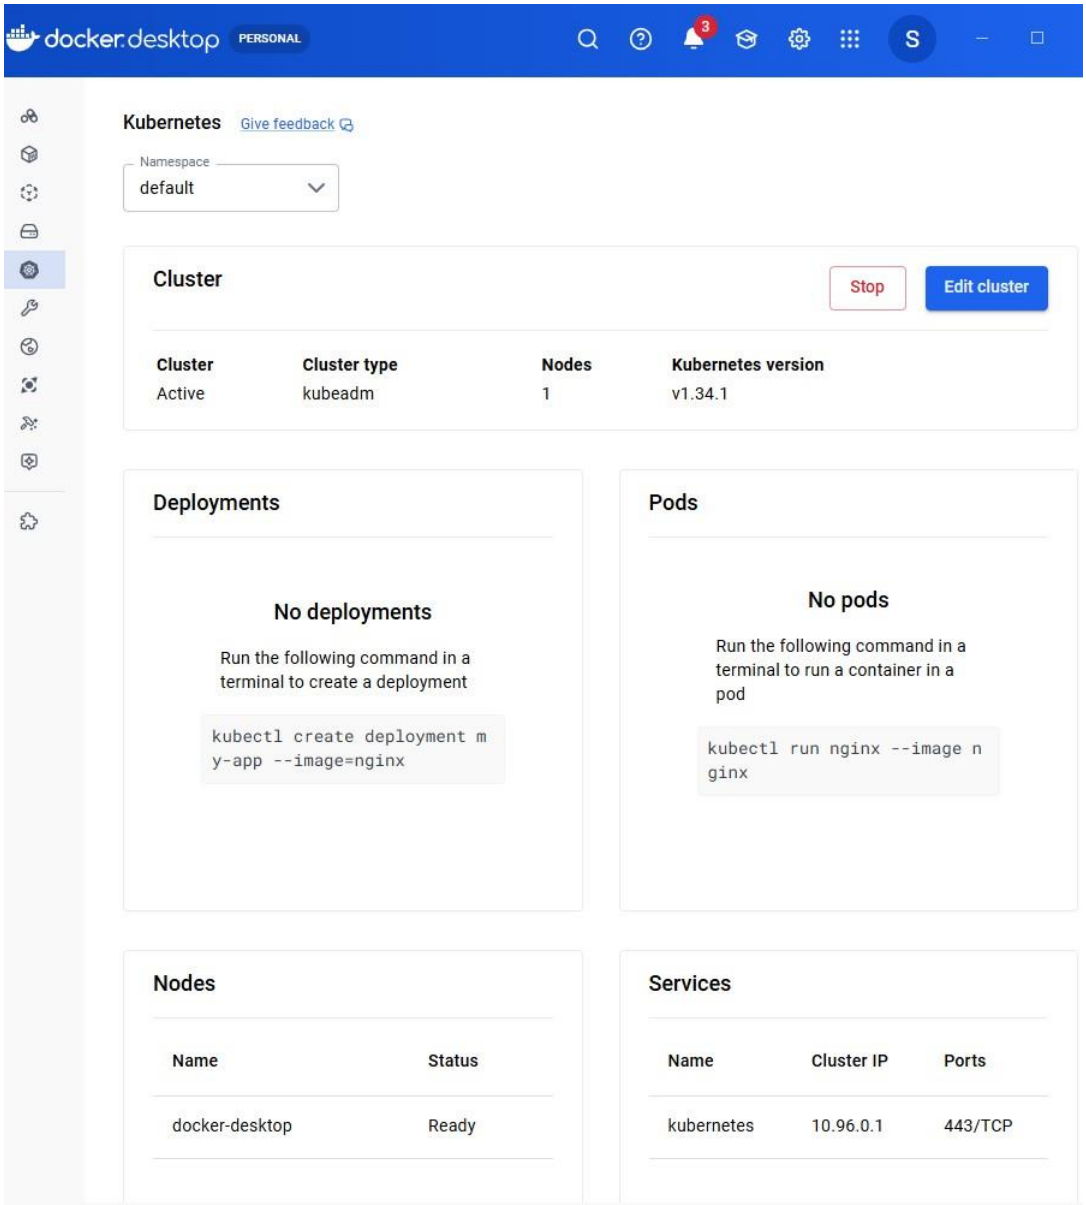

Step 3 : In Jenkin, enable two plugins (Docker and Docker Pipeline) and Install them

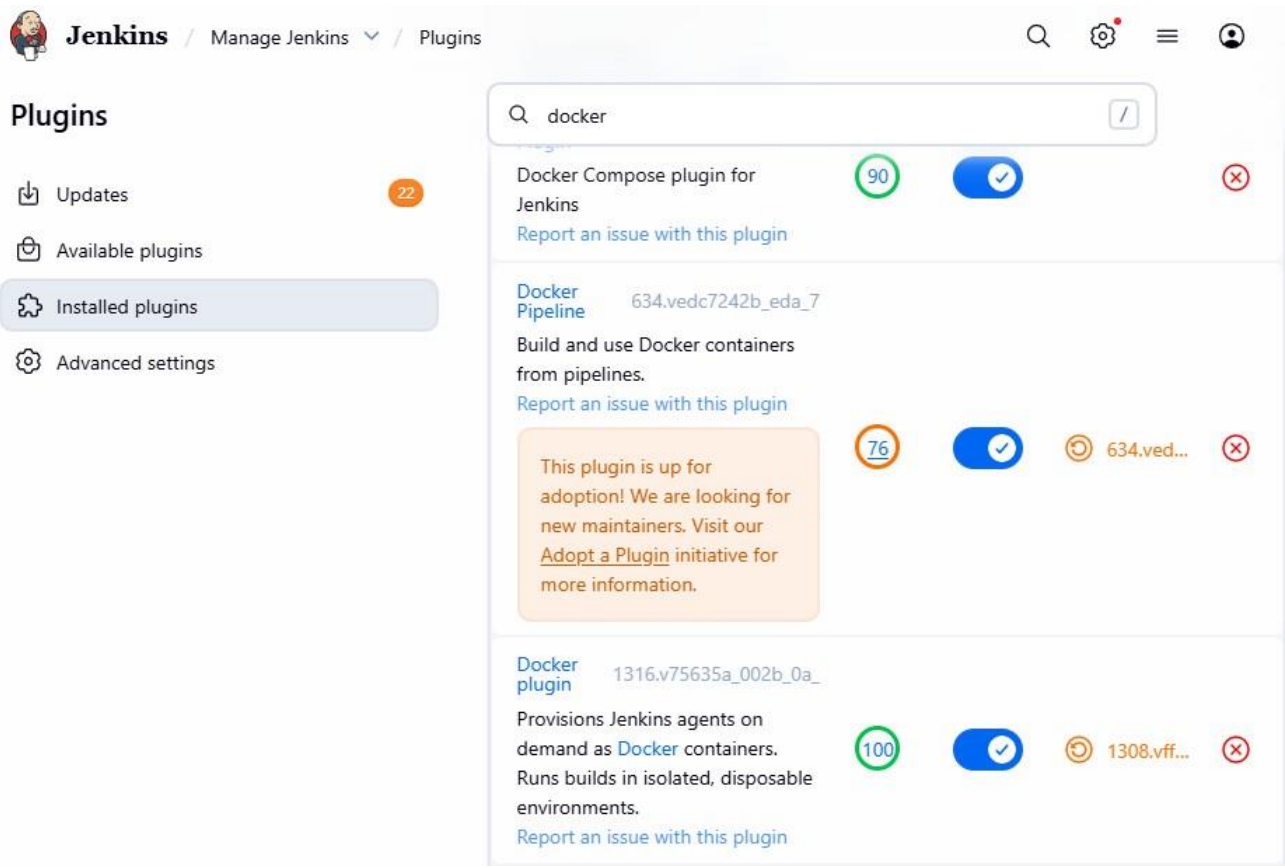

Step 4 : Create Simple Java Application

Create a folder in local machine: simple-java-app

Create Java File App.java

```
public class App {
        public static void main(String[] args) throws Exception {
                System.out.println("Java CI/CD Application Started...");
                while (true) {
                        Thread.sleep(5000);
                        System.out.println("Hello from Java CI/CD Pipeline!"); } } }
```

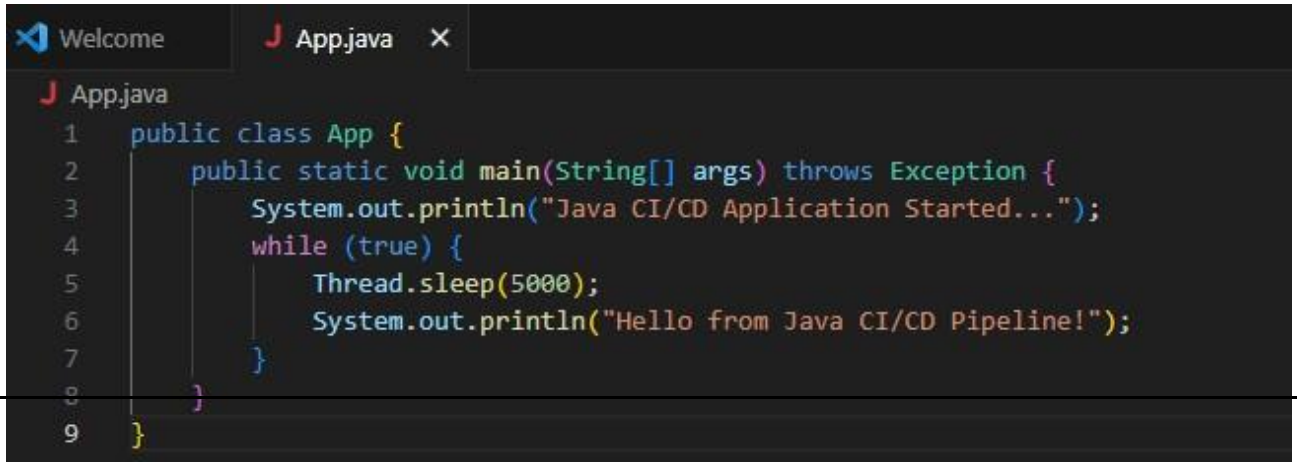

Create Maven File pom.xml

```xml
<project xmlns="http://maven.apache.org/POM/4.0.0"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
         http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>com.demo</groupId>
    <artifactId>simple-java-app</artifactId>
    <version>1.0</version>

    <build>
        <plugins>
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>3.10.1</version>
                <configuration>
                    <source>17</source>
                    <target>17</target>
                </configuration>
            </plugin>
        </plugins>
    </build>
</project>
```

Step 5 - Build Locally (Test)

Inside project folder: mvn clean package

```
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % mvn clean package
[INFO] Scanning for projects...
[INFO]
[INFO] -----------------------< com.demo:simple-java-app >-----------------------
[INFO] Building simple-java-app 1.0
[INFO]   from pom.xml
[INFO] --------------------------------[ jar ]---------------------------------
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.10.1/maven-compiler-plugin-3.10.1.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.10.1/maven-compiler-plugin-3.10.1.pom (13 kB
 at 51 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-plugins/34/maven-plugins-34.pom
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-plugins/34/maven-plugins-34.pom (11 kB at 396 kB/s)
Downloading from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.10.1/maven-compiler-plugin-3.10.1.jar
Downloaded from central: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-compiler-plugin/3.10.1/maven-compiler-plugin-3.10.1.jar (62 kB
 at 952 kB/s)
[INFO]
[INFO] --- clean:3.2.0:clean (default-clean) @ simple-java-app ---
[INFO]
[INFO] --- resources:3.3.1:resources (default-resources) @ simple-java-app ---
[WARNING] Using platform encoding (UTF-8 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory /Users/arunimasanjeev/Desktop/simple-java-app/src/main/resources
[INFO]
[INFO] --- compiler:3.10.1:compile (default-compile) @ simple-java-app ---
Downloading from central: https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-component-annotations/2.0.0/plexus-component-annotations-2.0.0.po
```

```
[INFO] No sources to compile
[INFO]
[INFO] --- resources:3.3.1:testResources (default-testResources) @ simple-java-app ---
[WARNING] Using platform encoding (UTF-8 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory /Users/arunimasanjeev/Desktop/simple-java-app/src/test/resources
[INFO]
[INFO] --- compiler:3.10.1:testCompile (default-testCompile) @ simple-java-app ---
[INFO] No sources to compile
[INFO]
[INFO] --- surefire:3.2.5:test (default-test) @ simple-java-app ---
[INFO] No tests to run.
[INFO]
[INFO] --- jar:3.4.1:jar (default-jar) @ simple-java-app ---
[WARNING] JAR will be empty - no content was marked for inclusion!
[INFO] Building jar: /Users/arunimasanjeev/Desktop/simple-java-app/target/simple-java-app-1.0.jar
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  2.192 s
[INFO] Finished at: 2026-04-08T23:06:02+05:30
[INFO] ------------------------------------------------------------------------
```

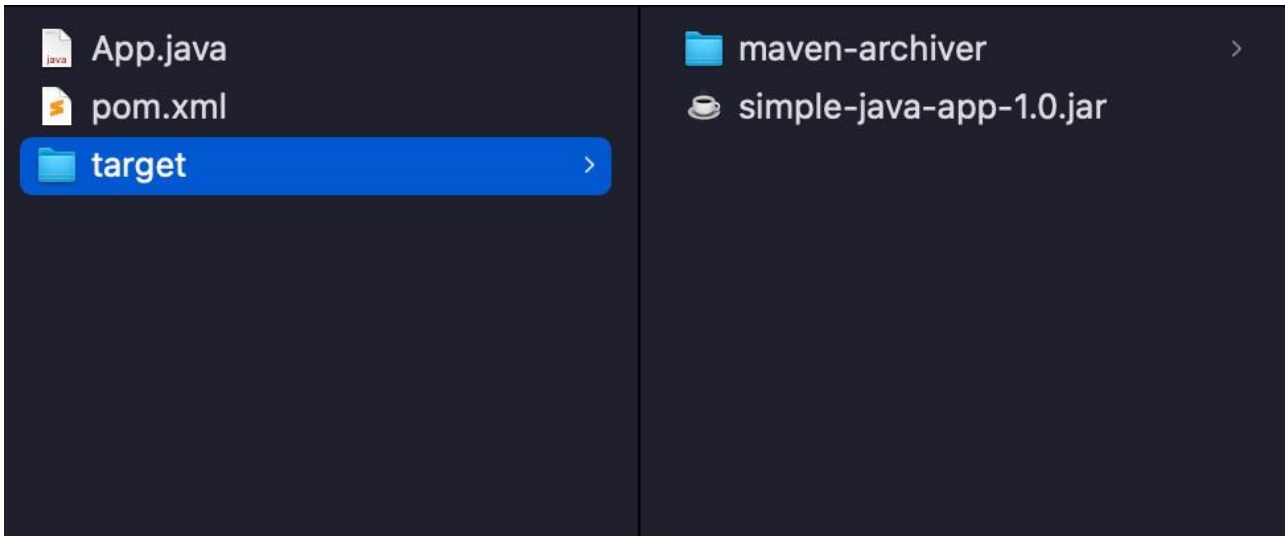

Step 6 - Create Dockerfile

Dockerfile

FROM eclipse-temurin:17-jdk WORKDIR /app

COPY target/simple-java-app-1.0.jar app.jar

CMD ["java", "-jar", "app.jar"]

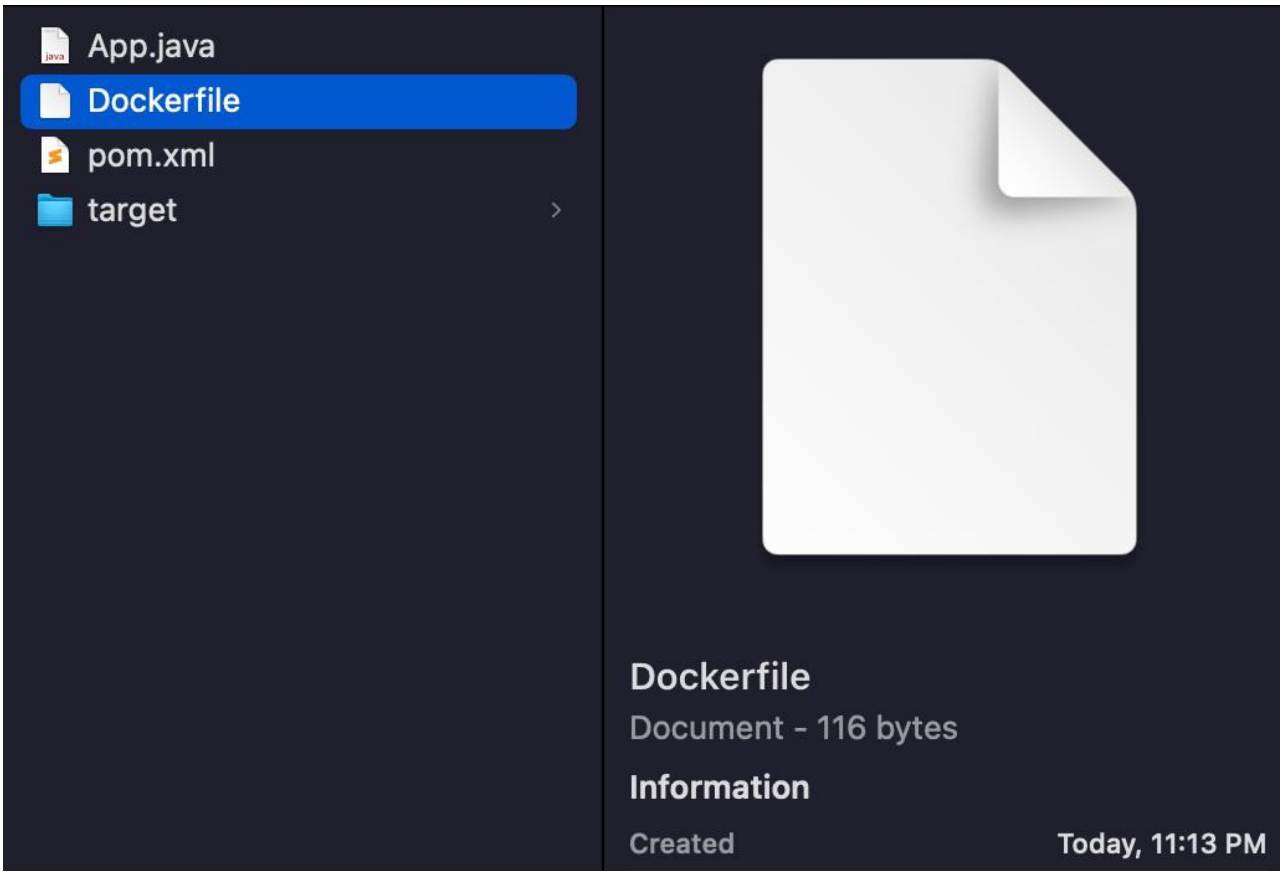

Step 7 - Push Code to GitHub (Before that create a public repository in the Github)

```
git init
git add .
git commit -m "Initial Java CI/CD commit
git branch -M main
git remote add origin https://github.com/your-reponame/simple-java-app.git
git push -u origin main
```

```
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % git init
Initialized empty Git repository in /Users/arunimasanjeev/Desktop/simple-java-app/.git/
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % git add .
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % git commit -m "Initial Java CI/CD commit"
[main (root-commit) 40be4b6] Initial Java CI/CD commit
 5 files changed, 42 insertions(+)
 create mode 100644 App.java
 create mode 100644 Dockerfile
 create mode 100644 pom.xml
 create mode 100644 target/maven-archiver/pom.properties
 create mode 100644 target/simple-java-app-1.0.jar
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % git branch -M main
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % it remote add origin https://github.com/ArunimaSanjeev/simple-java-app.git
zsh: command not found: it
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % git remote add origin https://github.com/ArunimaSanjeev/simple-java-app.git
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % git push -u origin main
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 8 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (9/9), 1.85 KiB | 1.85 MiB/s, done.
Total 9 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/ArunimaSanjeev/simple-java-app.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

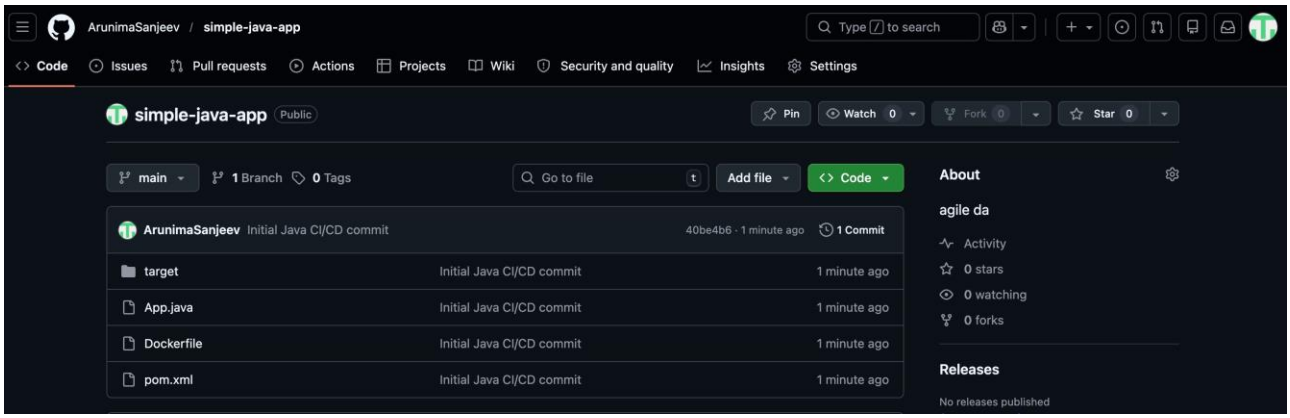

Step 8 - Create Kubernetes Deployment File deployment.yaml

```
apiVersion: apps/v1
kind: Deployment
metadata:
name: java-app
spec:
replicas: 2
selector:
matchLabels:
app: java-app
template:
metadata:
labels:
app: java-app
spec:
containers:
- name: java-app
image: /java-app:latest
---
apiVersion: v1
kind: Service
metadata:
name: java-service
spec:
type: NodePort
selector: app: java-app
ports:
- port: 80
 targetPort: 8080
nodePort: 30008
```

After creating it, Push it to GitHub:

```
git add deployment.yaml
git commit -m "Added Kubernetes deployment file"
git push
```

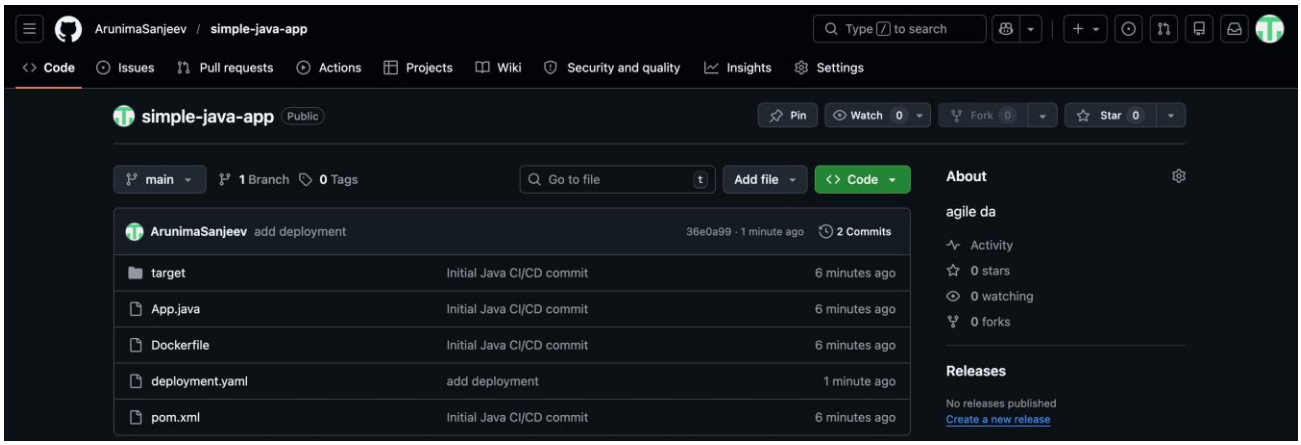

Step 9 - Configure Jenkins
Run Jenkins
Install Kubernetes CLI plugin

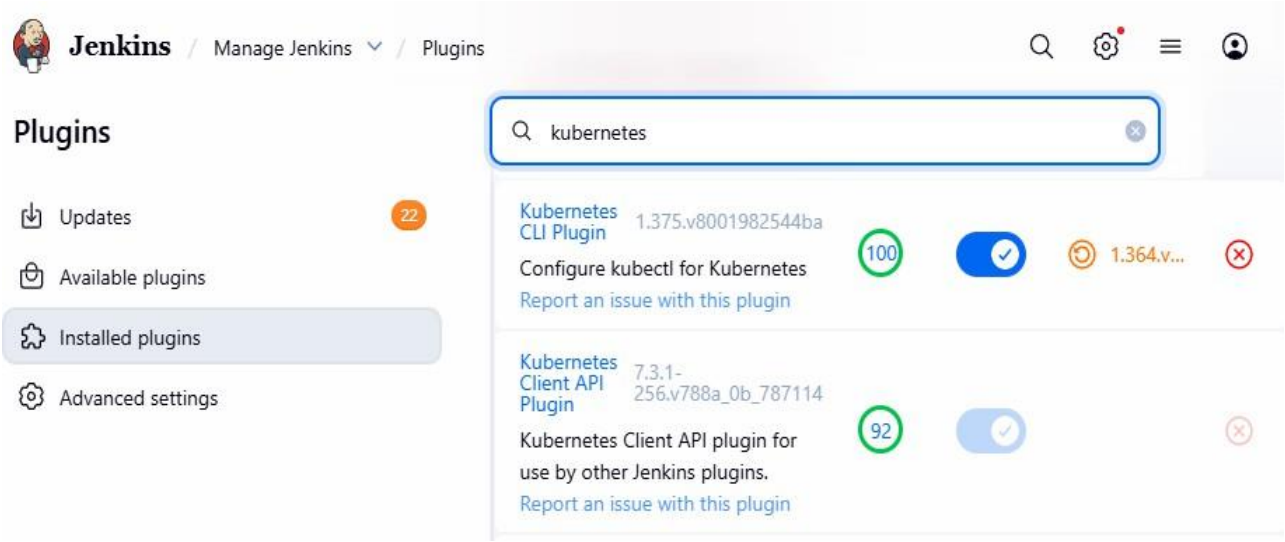

Step 10 - Add DockerHub Credentials
In CI/CD: 1. Jenkins builds Docker image
2. Jenkins pushes image to Docker Hub
3. Kubernetes pulls image from Docker Hub
Without credentials → Push will fail

Steps

Manage Jenkins
↓
Manage Credentials
↓
(System)
↓
Global credentials (unrestricted)
Add Credentials

Field	**Value**
Kind	Username with password
Scope	Global
Username	**your DockerHub username**
Password	**your DockerHub password**
ID	dockerhub-creds
Description	DockerHub Login

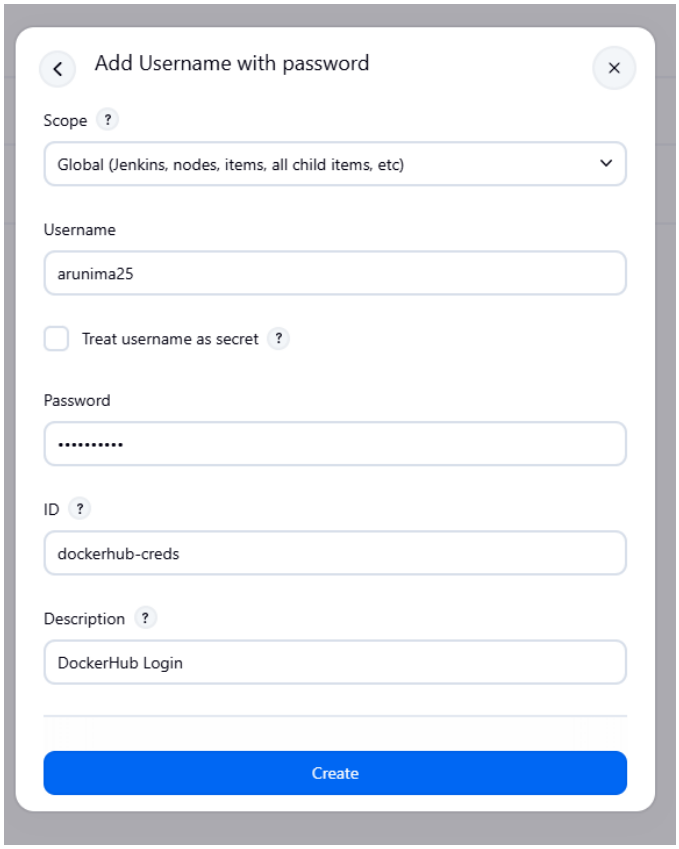

Step 11 - Create Jenkins Pipeline Job

N ew Item → Pipeline → Name: Java_CICD

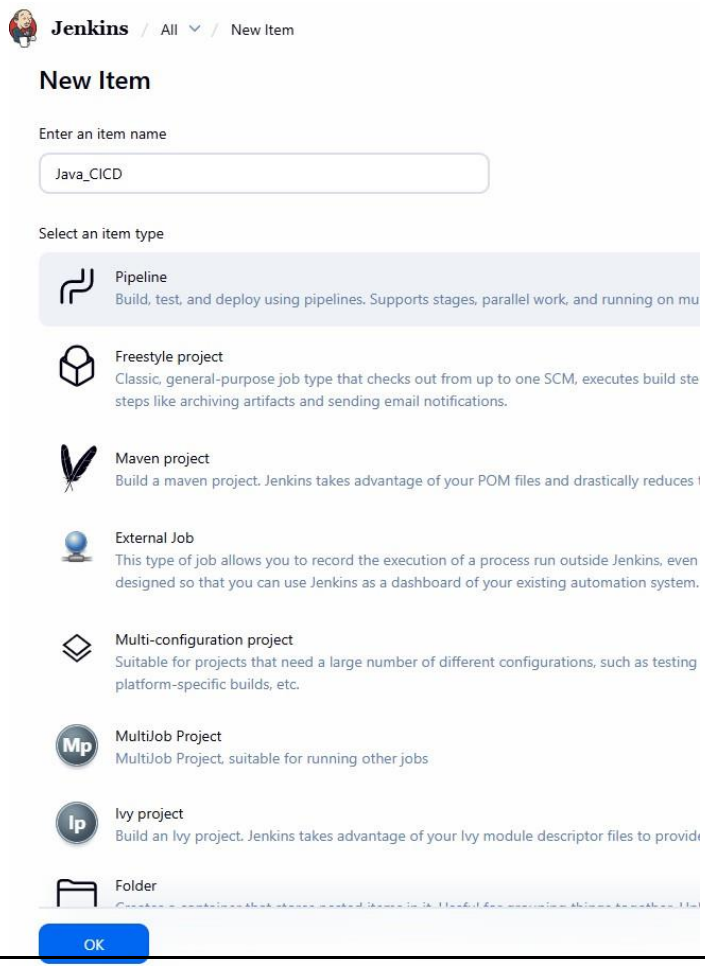

Step 11 - Create Jenkins Pipeline Job

New Item → Pipeline → Name: Java-CICD

```
pipeline {
    agent any

    environment {
        DOCKER_IMAGE = "arunima25/java-app:latest"
    }

    stages {
        stage('Clone Repository') {
            steps {
                git branch: 'main',
                    url: 'https://github.com/ArunimaSanjeev/simple_java_app.git'
            }
        }

        stage('Build with Maven') {
            steps {
                // If using Linux, change 'bat' to 'sh'
                bat 'mvn clean package'
            }
        }

        stage('Build Docker Image') {
            steps {
                bat "docker build -t %DOCKER_IMAGE% ."
            }
        }

        stage('Push to DockerHub') {
            steps {
                withCredentials([usernamePassword(
                    credentialsId: 'dockerhub-creds',
                    usernameVariable: 'DOCKER_USER',
                    passwordVariable: 'DOCKER_PASS'
                )]) {
                    bat """
                    docker login -u %DOCKER_USER% -p %DOCKER_PASS%
                    docker push %DOCKER_IMAGE%
                    """
                }
            }
        }
```

```
        stage('Deploy to Kubernetes') {
            steps {
                bat 'kubectl apply -f deployment.yaml'
            }
        }
    }

    post {
        success {
            echo 'CI/CD Pipeline executed successfully!'
        }
        failure {
            echo 'Pipeline failed. Please check logs.'
        }
    }
}
```

Script ?

```
pipeline {
  agent any
  environment {
  DOCKER_IMAGE = "arunima25/java-app:latest"
  }
  stages {
```

```
4e985483d507: Waiting
af0cae6e26c9: Waiting
b071e6d51002: Waiting
b071e6d51002: Waiting
4e985483d507: Layer already exists
af0cae6e26c9: Waiting
b071e6d51002: Waiting
b071e6d51002: Waiting
b071e6d51002: Waiting
309669e98e40: Pushed
b071e6d51002: Pushed
af0cae6e26c9: Pushed
latest: digest: sha256:88655921b2bce87c8ff82b090729daa394a961fb6665f50a6f854f0927682302 size: 856
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Deploy to Kubernetes)
[Pipeline] sh
+ kubectl apply -f deployment.yaml
deployment.apps/java-app created
service/java-service created
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] echo
CI/CD Pipeline executed successfully!
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

Click → Save → Build Now

Step 12 - Verify Docker and Kubernetes Deployment

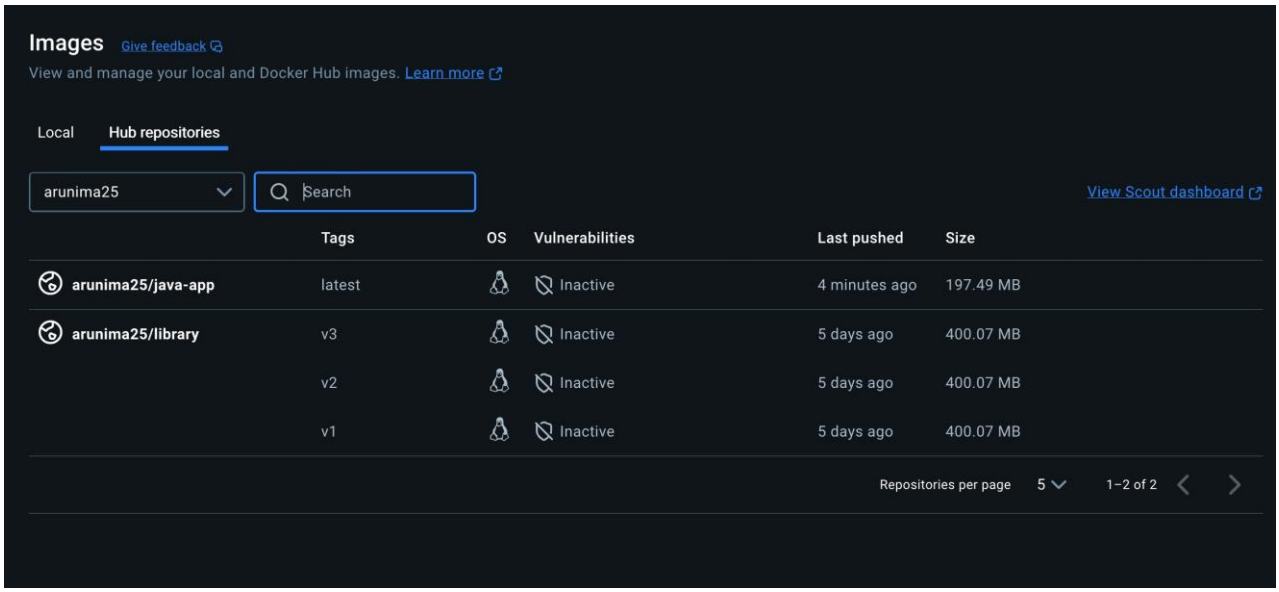

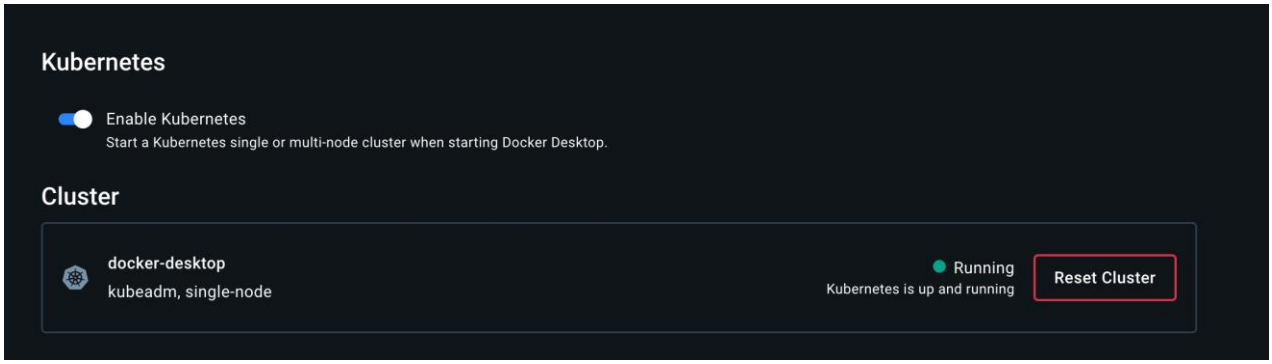


```
arunimasanjeev@Arunimas-MacBook-Air simple-java-app % kubectl get svc
NAME                 TYPE        CLUSTER-IP       EXTERNAL-IP   PORT(S)          AGE
java-service         NodePort    10.97.119.247    <none>        80:30008/TCP     7m21s
kubernetes           ClusterIP   10.96.0.1        <none>        443/TCP          177d
library-v1-service   NodePort    10.108.121.218   <none>        5001:30001/TCP   5d5h
library-v2-service   NodePort    10.104.174.130   <none>        5002:30002/TCP   5d5h
library-v3-service   NodePort    10.105.109.185   <none>        5003:30003/TCP   5d5h
staticwebapp-service NodePort    10.109.229.171   <none>        80:30080/TCP     177d
```

Spring Boot Project

Step 1: Install Tools

Install Java 17, Maven, Docker Desktop (enable Kubernetes), Jenkins, and Git.

Step 2: Create Spring Boot Project

pom.xml (important parts)

```
<parent>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-parent</artifactId>
  <version>3.2.5</version>
</parent>

<dependencies>
  <dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-web</artifactId>
  </dependency>
</dependencies>
```

App.java

```
@SpringBootApplication
public class App {
public static void main(String[] args) {
  SpringApplication.run(App.class, args);
} }
```

HelloController.java

```
@RestController
public class HelloController {
  @GetMapping("/")
  public String home() { return "App Running"; }
}
```

pom.xml | App.java .../demo | Dockerfile U | deployment.yar

pom.xml

```
<project xmlns="http://maven.apache.org/POM/4.0.0"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
         http://maven.apache.org/xsd/maven-4.0.0.xsd">

    <modelVersion>4.0.0</modelVersion>

    <groupId>com.demo</groupId>
    <artifactId>java-app</artifactId>
    <version>1.0</version>

    <parent>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-parent</artifactId>
        <version>3.2.5</version>
    </parent>

    <dependencies>
        <dependency>
            <groupId>org.springframework.boot</groupId>
            <artifactId>spring-boot-starter-web</artifactId>
        </dependency>
    </dependencies>
```

pom.xml | App.java .../demo | Dockerfile U | deployment.yaml

src > main > java > com > demo > App.java > Language Support for Java(TM) by Red Hat

```java
package com.demo;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication
public class App {

    Run | Debug | Run main | Debug main
    public static void main(String[] args) {
        SpringApplication.run(App.class, args);
    }
}
```

pom.xml | HelloController.java .../demo | Dockerfile U | de

src > main > java > com > demo > HelloController.java > Language Support for Java(

```java
package com.demo;

import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class HelloController {

    @GetMapping("/")
    public String home() {
        return "App Running";
    }
}
```

Step 3: Run Locally

mvn spring-boot:run

```
[INFO] ------------------------------[ jar ]-------------------------------
[INFO]
[INFO] >>> spring-boot:3.2.5:run (default-cli) > test-compile @ java-app >>>
[INFO]
[INFO] --- resources:3.3.1:resources (default-resources) @ java-app ---
[INFO] skip non existing resourceDirectory /Users/arunimasanjeev/Desktop/Spring Boot Project/src/main/resources
[INFO] skip non existing resourceDirectory /Users/arunimasanjeev/Desktop/Spring Boot Project/src/main/resources
[INFO]
[INFO] --- compiler:3.11.0:compile (default-compile) @ java-app ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] --- resources:3.3.1:testResources (default-testResources) @ java-app ---
[INFO] skip non existing resourceDirectory /Users/arunimasanjeev/Desktop/Spring Boot Project/src/test/resources
[INFO]
[INFO] --- compiler:3.11.0:testCompile (default-testCompile) @ java-app ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] <<< spring-boot:3.2.5:run (default-cli) < test-compile @ java-app <<<
[INFO]
[INFO]
[INFO] --- spring-boot:3.2.5:run (default-cli) @ java-app ---
[INFO] Attaching agents: []

  .   ____          _            __ _ _
 /\\ / ___'_ __ _ _(_)_ __  __ _ \ \ \ \
( ( )\___ | '_ | '_| | '_ \/ _` | \ \ \ \
 \\/  ___)| |_)| | | | | || (_| |  ) ) ) )
  '  |____| .__|_| |_|_| |_\__, | / / / /
 =========|_|==============|___/=/_/_/_/
 :: Spring Boot ::                (v3.2.5)

2026-04-11T22:03:01.190+05:30  INFO 83339 --- [           main] com.demo.App                          : Starting App using Java 17.0.17 with PID 83339
(/Users/arunimasanjeev/Desktop/Spring Boot Project/target/classes started by arunimasanjeev in /Users/arunimasanjeev/Desktop/Spring Boot Project)
2026-04-11T22:03:01.192+05:30  INFO 83339 --- [           main] com.demo.App                          : No active profile set, falling back to 1 defaul
t profile: "default"
2026-04-11T22:03:01.573+05:30  INFO 83339 --- [           main] o.s.b.w.embedded.tomcat.TomcatWebServer  : Tomcat initialized with port 8080 (http)
2026-04-11T22:03:01.578+05:30  INFO 83339 --- [           main] o.apache.catalina.core.StandardService   : Starting service [Tomcat]
2026-04-11T22:03:01.578+05:30  INFO 83339 --- [           main] o.apache.catalina.core.StandardEngine    : Starting Servlet engine: [Apache Tomcat/10.1.20
]
2026-04-11T22:03:01.608+05:30  INFO 83339 --- [           main] o.a.c.c.C.[Tomcat].[localhost].[/]       : Initializing Spring embedded WebApplicationCont
ext
2026-04-11T22:03:01.609+05:30  INFO 83339 --- [           main] w.s.c.ServletWebServerApplicationContext : Root WebApplicationContext: initialization comp
leted in 398 ms
2026-04-11T22:03:01.739+05:30  INFO 83339 --- [           main] o.s.b.w.embedded.tomcat.TomcatWebServer  : Tomcat started on port 8080 (http) with context
 path ''
2026-04-11T22:03:01.743+05:30  INFO 83339 --- [           main] com.demo.App                          : Started App in 0.741 seconds (process running f
or 0.916)
2026-04-11T22:05:07.635+05:30  INFO 83339 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/]       : Initializing Spring DispatcherServlet 'dispatch
erServlet'
2026-04-11T22:05:07.636+05:30  INFO 83339 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Initializing Servlet 'dispatcherServlet'
2026-04-11T22:05:07.643+05:30  INFO 83339 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Completed initialization in 7 ms
```

```
                : No active profile set, falling back to 1 default profile: "default"
2026-04-11T22:03:01.573+05:30  INFO 83339 --- [           main] o.s.b.w.embedded.tomcat.To
mcatWebServer  : Tomcat initialized with port 8080 (http)
2026-04-11T22:03:01.578+05:30  INFO 83339 --- [           main] o.apache.catalina.core.Sta
ndardService   : Starting service [Tomcat]
2026-04-11T22:03:01.578+05:30  INFO 83339 --- [           main] o.apache.catalina.core.Sta
ndardEngine    : Starting Servlet engine: [Apache Tomcat/10.1.20]
2026-04-11T22:03:01.608+05:30  INFO 83339 --- [           main] o.a.c.c.C.[Tomcat].[localh
ost].[/]       : Initializing Spring embedded WebApplicationContext
2026-04-11T22:03:01.609+05:30  INFO 83339 --- [           main] w.s.c.ServletWebServerAppl
icationContext : Root WebApplicationContext: initialization completed in 398 ms
2026-04-11T22:03:01.739+05:30  INFO 83339 --- [           main] o.s.b.w.embedded.tomcat.To
mcatWebServer  : Tomcat started on port 8080 (http) with context path ''
2026-04-11T22:03:01.743+05:30  INFO 83339 --- [           main] com.demo.App
                : Started App in 0.741 seconds (process running for 0.916)
2026-04-11T22:05:07.635+05:30  INFO 83339 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localh
ost].[/]       : Initializing Spring DispatcherServlet 'dispatcherServlet'
2026-04-11T22:05:07.636+05:30  INFO 83339 --- [nio-8080-exec-1] o.s.web.servlet.Dispatcher
Servlet        : Initializing Servlet 'dispatcherServlet'
2026-04-11T22:05:07.643+05:30  INFO 83339 --- [nio-8080-exec-1] o.s.web.servlet.Dispatcher
Servlet        : Completed initialization in 7 ms
^C[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  20:52 min
[INFO] Finished at: 2026-04-11T22:23:52+05:30
[INFO] ------------------------------------------------------------------------
```

Step 4: Docker

```
FROM eclipse-temurin:17-jdk
WORKDIR /app
COPY target/app.jar app.jar
ENTRYPOINT ["java","-jar","app.jar"]
```

pom.xml | Dockerfile ./ | deploy

Dockerfile

```
1  FROM eclipse-temurin:17-jdk
2  WORKDIR /app
3  COPY target/java-app-1.0.jar app.jar
4  ENTRYPOINT ["java","-jar","app.jar"]
```

```
docker build -t springboot-app .
docker run -p 8080:8080 springboot-app
```

```
arunimasanjeev@Arunimas-MacBook-Air Spring Boot Project % docker build -t springboot-app .
[+] Building 1.7s (8/8) FINISHED                                   docker:desktop-linux
 => [internal] load build definition from Dockerfile                                  0.0s
 => => transferring dockerfile: 189B                                                  0.0s
 => [internal] load metadata for docker.io/library/eclipse-temurin:17-jdk             1.3s
 => [internal] load .dockerignore                                                     0.0s
 => => transferring context: 2B                                                       0.0s
 => [1/3] FROM docker.io/library/eclipse-temurin:17-jdk@sha256:2ff0b91aaa4cb5dc35b4  0.0s
 => => resolve docker.io/library/eclipse-temurin:17-jdk@sha256:2ff0b91aaa4cb5dc35b4  0.0s
 => [internal] load build context                                                     0.0s
 => => transferring context: 145B                                                     0.0s
 => CACHED [2/3] WORKDIR /app                                                         0.0s
 => CACHED [3/3] COPY target/java-app-1.0.jar app.jar                                 0.0s
 => exporting to image                                                                0.1s
 => => exporting layers                                                               0.0s
 => => exporting manifest sha256:c717e87c4ae9324861849f2c3bf69c0438688d36688ad4bb50  0.0s
 => => exporting config sha256:cc31a6f94794ecc8bcff8b3de4f783fa4388963bc34a2f1ff34a  0.0s
 => => exporting attestation manifest sha256:aac30a6932759131d06845971512bdcba93dfc  0.1s
 => => exporting manifest list sha256:d1bbf0f1e9c460326a3e3b4837716df447d9697f8dd55  0.0s
 => => naming to docker.io/library/springboot-app:latest                              0.0s
 => => unpacking to docker.io/library/springboot-app:latest                           0.0s

View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/0uw0ecirfmakx12gs4mzlv65k
```

Step 5: Kubernetes

deployment.yaml

```
apiVersion: apps/v1
kind: Deployment
metadata:
name: springboot-app
spec:
replicas: 1
template:
 spec:
  containers:
  - name: app
    image: springboot-app
    imagePullPolicy: Never
```

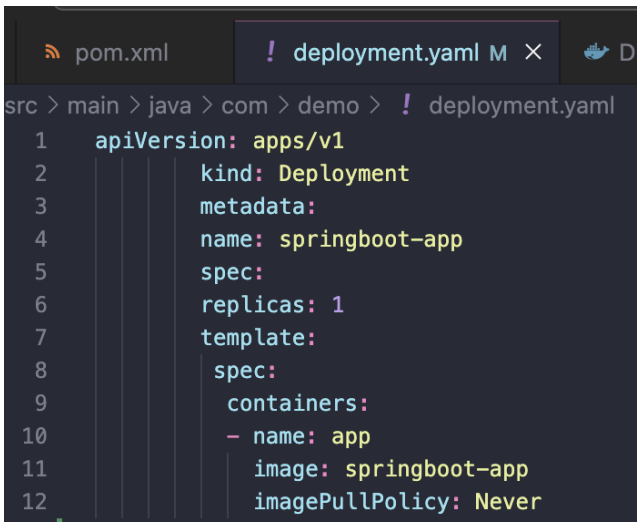

Step 6: GitHub

```
git init
git add .
git commit -m "init"
git push origin main
```

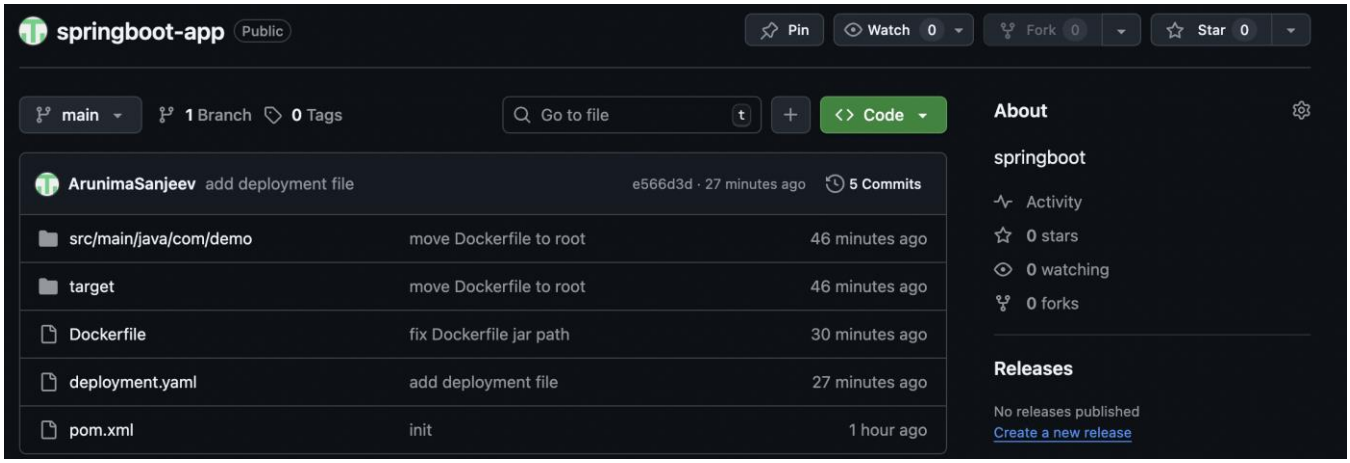

Step 7: Jenkins Pipeline

```
pipeline {
 agent any
 stages {
  stage('Build') { steps { sh 'mvn clean package' } }
  stage('Docker') { steps { sh 'docker build -t app .' } }
  stage('Deploy') { steps { sh 'kubectl apply -f deployment.yaml' } }
} }
```

```
#5 DONE 0.0s

#6 [1/3] FROM docker.io/library/eclipse-temurin:17-jdk@sha256:2ff0b91aaa4cb5dc35b4760c37fe064390a486dcd90b361caa72b55d598601f3
#6 resolve docker.io/library/eclipse-temurin:17-jdk@sha256:2ff0b91aaa4cb5dc35b4760c37fe064390a486dcd90b361caa72b55d598601f3 0.0s done
#6 DONE 0.0s

#7 [2/3] WORKDIR /app
#7 CACHED

#8 [3/3] COPY target/java-app-1.0.jar app.jar
#8 DONE 0.0s

#9 exporting to image
#9 exporting layers 0.0s done
#9 exporting manifest sha256:695bacd76eb7bc19011c9c84480e0d4e1e28a3925bf9610e5a28e5af597bd202 done
#9 exporting config sha256:7625eb7e8fdafd1ddeae7573f52dd7f17a93d3d6efda01605931619eebb87faa done
#9 exporting attestation manifest sha256:a0d16a777d73f7dfa6d9b041200aa11ecc89b5d26e80ea9107e0e841d8546446 done
#9 exporting manifest list sha256:9acfe74312317ea1adeb6b7c7f02eb87b4ac3d94bfc3a666966e1b6142abaf47
#9 exporting manifest list sha256:9acfe74312317ea1adeb6b7c7f02eb87b4ac3d94bfc3a666966e1b6142abaf47 done
#9 naming to docker.io/library/app:latest done
#9 unpacking to docker.io/library/app:latest 0.0s done
#9 DONE 0.1s

View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/mw7vm9ve98pf3xzhsztm5d089
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Deploy)
[Pipeline] sh
+ kubectl apply -f deployment.yaml
deployment.apps/springboot-app created
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

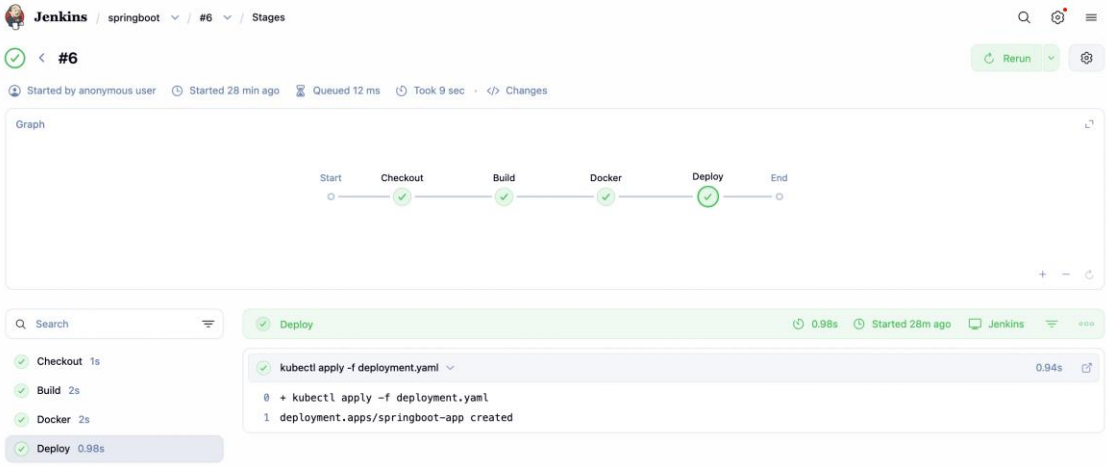

Step 8: Webhook Add webhook in GitHub:
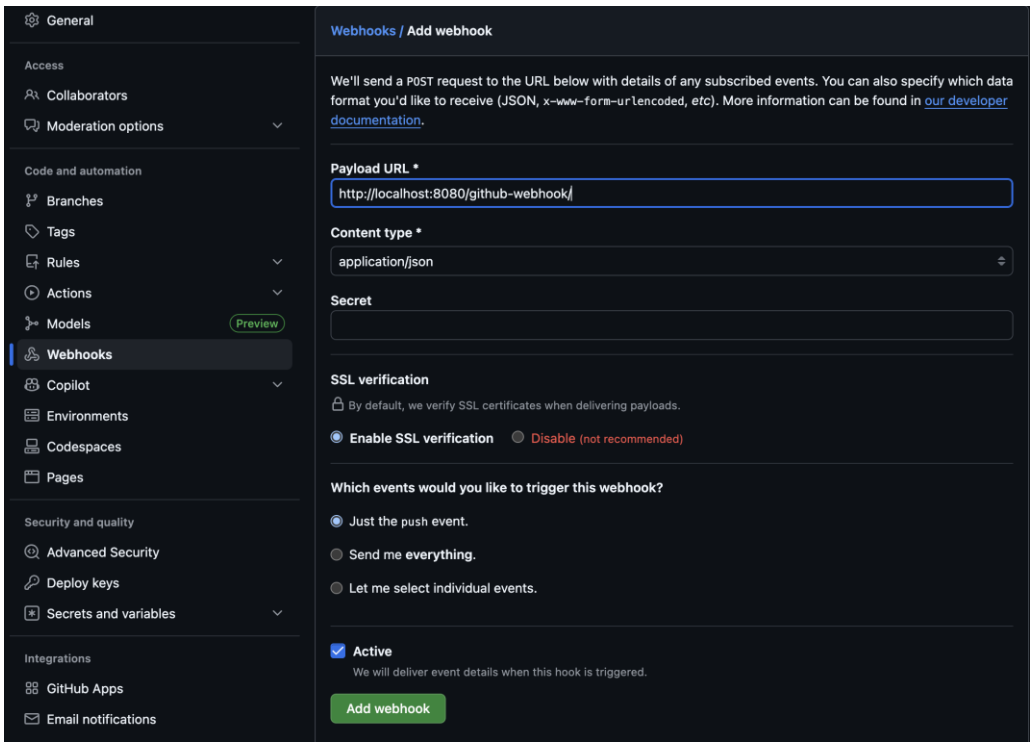
http://:8080/github-webhook/