

Exercise 1- Logging Error messages and Warning levels

LoggingExample.java

```
package com.example;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class LoggingExample {

    private static final Logger logger =
        LoggerFactory.getLogger(LoggingExample.class);


    public static void main(String[] args) {

        logger.error("This is an error message");

        logger.warn("This is a warning message");

    }

}
```

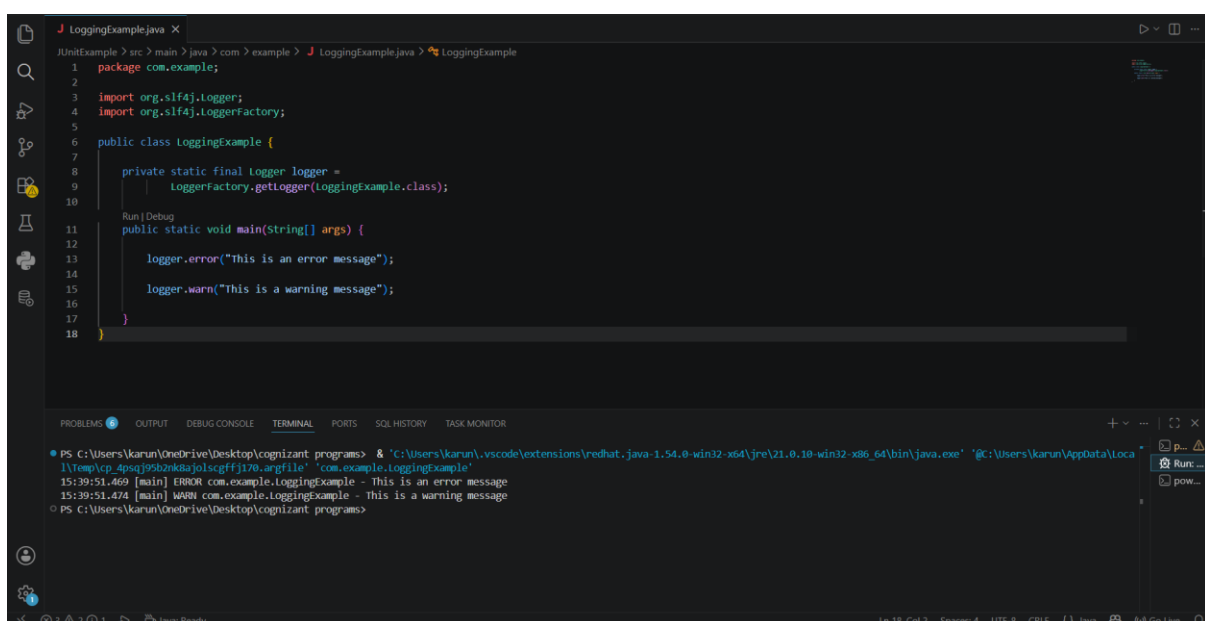

The screenshot shows a code editor with the following Java code:

```
1 package com.example;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5
6 public class LoggingExample {
7
8     private static final Logger logger =
9         LoggerFactory.getLogger(LoggingExample.class);
10
11     public static void main(String[] args) {
12
13         logger.error("This is an error message");
14
15         logger.warn("This is a warning message");
16
17     }
18 }
```

Below the code editor, the terminal output shows the execution of the program:

```
PS C:\Users\karun\OneDrive\Desktop\cognizant programs> java -cp .\src\main\java\com\example LoggingExample
15:39:51.469 [main] ERROR com.example.LoggingExample - This is an error message
15:39:51.474 [main] WARN com.example.LoggingExample - This is a warning message
PS C:\Users\karun\OneDrive\Desktop\cognizant programs>
```

