

# S3 Bucket

aws Services Search [Alt+S] Global Subramani Palanisamy

Amazon S3 > Buckets > Create bucket

## Create bucket [Info](#)

Buckets are containers for data stored in S3. [Learn more](#)

### General configuration

AWS Region  
Asia Pacific (Mumbai) ap-south-1

Bucket name [Info](#)  
ArunBucket

Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)

Copy settings from existing bucket - optional  
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

aws Services Search [Alt+S] Global Subramani Palanisamy

## Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning  
☐ Disable  
☒ Enable

### Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

[Add tag](#)

### Default encryption [Info](#)

aws Services Search [Alt+S] Global Subramani Palanisamy

Successfully created bucket "taskifybucket"

To upload files and folders, or to configure additional bucket settings, choose [View details](#).

Amazon S3 > Buckets

**Account snapshot**

Storage lens provides visibility into storage usage and activity trends. [Learn more](#)

[View Storage Lens dashboard](#)

[General purpose buckets](#) [Directory buckets](#)




### General purpose buckets (1) [Info](#)

Buckets are containers for data stored in S3. [Learn more](#)

[Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

< 1 > [Filter](#)

Name	AWS Region	Access	Creation date
<input type="radio"/> taskifybucket	Asia Pacific (Mumbai) ap-south-1	Bucket and objects not public	January 21, 2024, 20:03:27

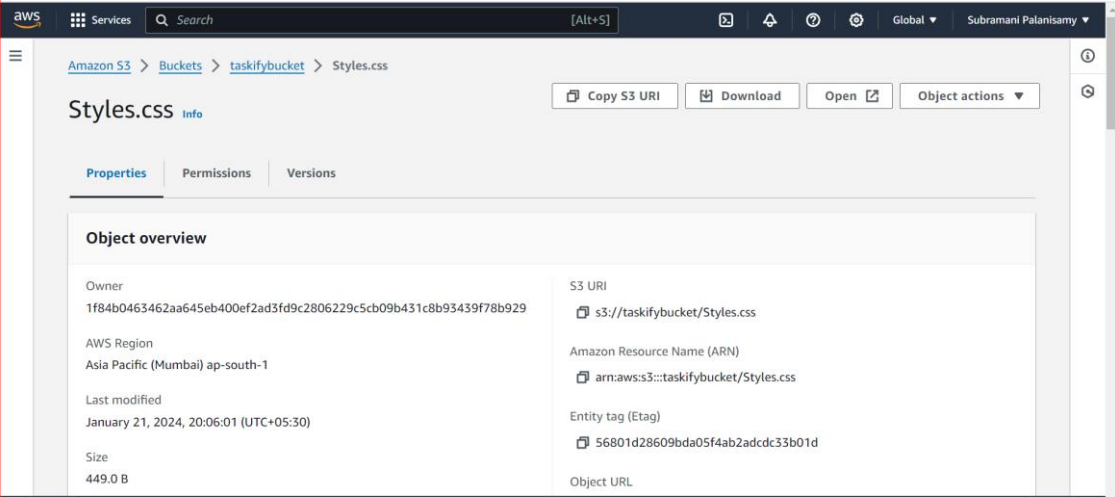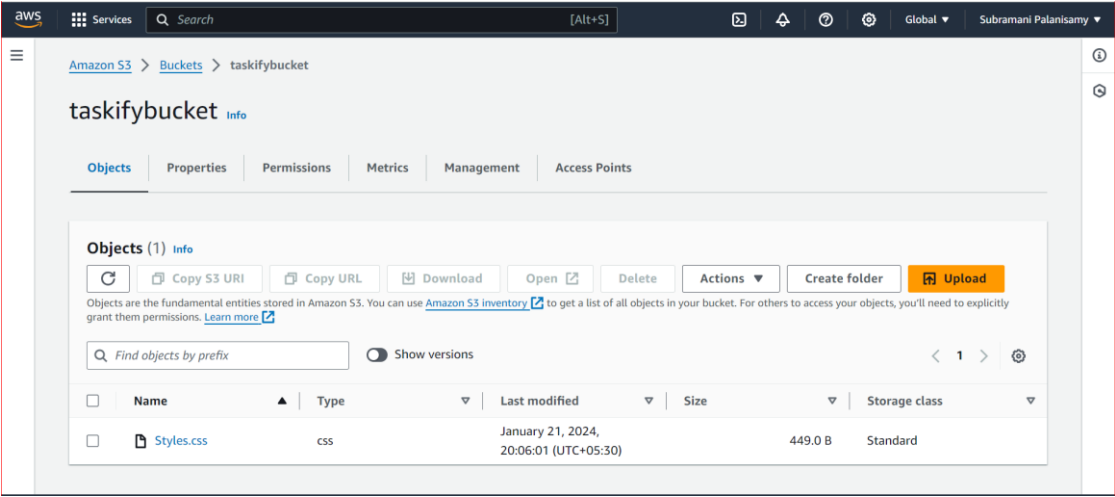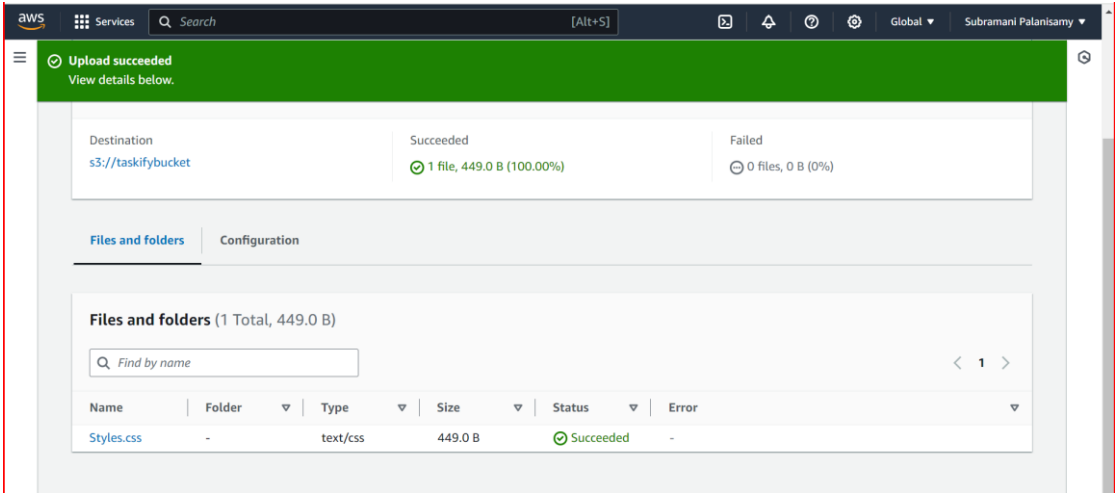

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
<?xml version="1.0" encoding="UTF-8" ?>
<Error>
  <Code>AccessDenied</Code>
  <Message>Access Denied</Message>
  <RequestId>8264W5H5W5Z47XA</RequestId>
  <HostId>9Asj+rF3acurj5gOmU6z1PYdN5G75cGiyMDe9JUn1hsd9873Ucu13hT04PbPLYP3L-JOHlIap58kg=</HostId>
</Error>
```

aws

Services

Search

[Alt+S]

Global

Subramani Palanisamy

☑ Successfully deleted objects

View details below.

Source

s3://taskifybucket

Successfully deleted

☑ 1 object, 449.0 B

Failed to delete

0 objects

Failed to delete

Configuration

☑ Failed to delete (0)

Find objects by name

Name

Folder

Type

Last modified

Size

Error

No objects failed to delete.

aws

Services

Search

[Alt+S]

Global

Subramani Palanisamy

☑ Successfully deleted bucket "taskifybucket"

Storage

# Amazon S3

## Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

Pricing

With S3, there are no minimum fees. You only pay

How it works