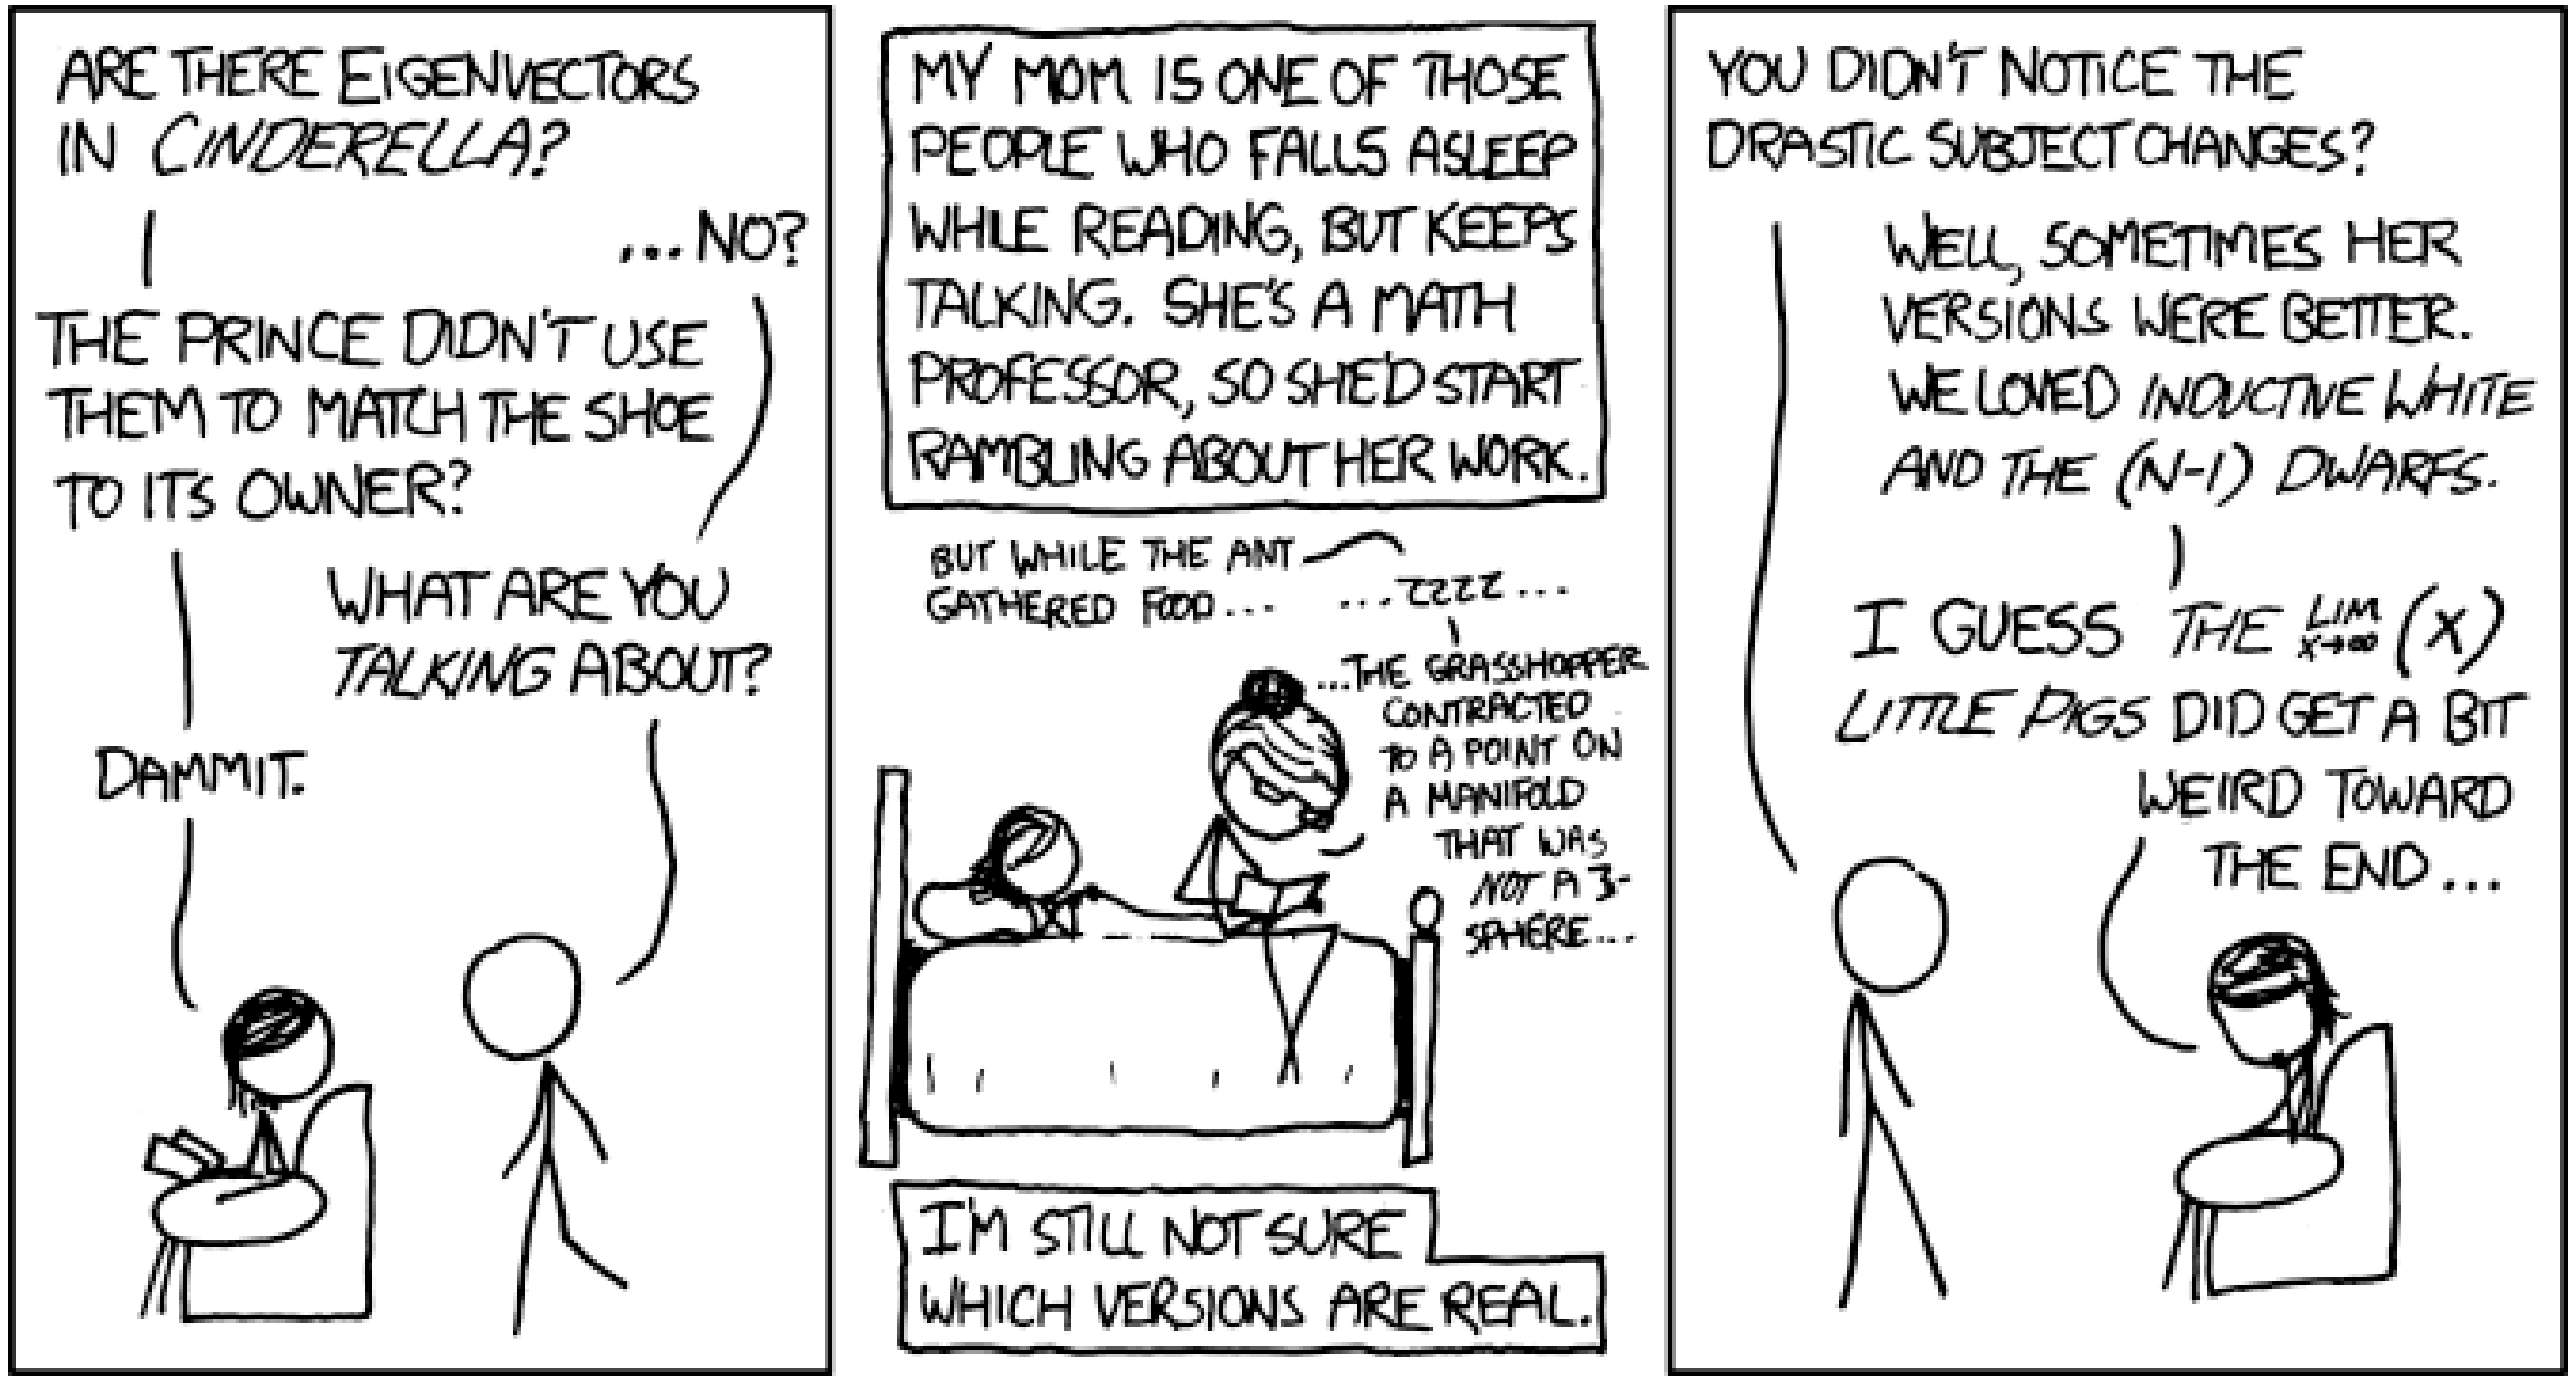

https://xkcd.com/872/

Classic Mechs EP2.1: Recap of one essential matrix math

Coe College

Classic Mechs EP2.1: Recap of one essential matrix math

Learning objectives

1) We will learn/review the basic rules of matrix multiplication, dot product.

2) We will cover two applications:

- Linear transformation & coordinate transformation

- Derive state-space from Newtonian mech to pave the way to…

solve matrix systems of equation with *eigenvalues and eigenvectors*

```python
import numpy as np
np.dot (A,x)
```
or
```python
A @ x
```

Matrix multiplication, dot product

2x2 example:

$$M3 = M1 \times M2 = \begin{bmatrix} a_1 & b_1 \\ c_1 & d_1 \end{bmatrix} \bullet \begin{bmatrix} a_2 & b_2 \\ c_2 & d_2 \end{bmatrix} = \begin{bmatrix} a_1 \times a_2 + b_1 \times c_2 & a_1 \times b_2 + b_1 \times d_2 \\ c_1 \times a_2 + d_1 \times c_2 & c_1 \times b_2 + d_1 \times d_2 \end{bmatrix}$$

Generalization:

$$P_{i,j} = \sum_{k=1}^{n} Q_{i,k} \bullet R_{k,j}$$

$$P = \begin{bmatrix} Q_{11}R_{11} + Q_{12}R_{21} + \cdots + Q_{1n}R_{n1} & Q_{11}R_{12} + Q_{12}R_{22} + \cdots + Q_{1n}R_{n2} & \cdots & Q_{11}R_{1q} + Q_{12}R_{2q} + \cdots + Q_{1n}R_{nq} \\ Q_{21}R_{11} + Q_{22}R_{21} + \cdots + Q_{2n}R_{n1} & Q_{21}R_{12} + Q_{22}R_{22} + \cdots + Q_{2n}R_{n2} & \cdots & Q_{21}R_{1q} + Q_{22}R_{2q} + \cdots + Q_{2n}R_{nq} \\ \vdots & \vdots & \ddots & \vdots \\ Q_{m1}R_{11} + Q_{m2}R_{21} + \cdots + Q_{mn}R_{n1} & Q_{m1}R_{12} + Q_{m2}R_{22} + \cdots + Q_{mn}R_{n2} & \cdots & Q_{m1}R_{1q} + Q_{m2}R_{2q} + \cdots + Q_{mn}R_{nq} \end{bmatrix}$$

Matrix element indexing: [i, k]

Row # **Column #**

COE COLLEGE

The dot product application: linear transformation and coordinate transformation

Unfortunately, no one can be told what the Matrix is. You have to see it for yourself.

-Morpheus

https://youtu.be/kYB8IZa5AuE?si=su9SausqkmoxiRoU

$\vec{x}$: Every single vector in space

$$\underset{\vec{x}'\ \text{Output vector}}{[\quad]} = \underset{\textbf{A}\ \text{matrix}}{[\qquad\qquad]}\ \underset{\vec{x}\ \text{Input vector}}{[\quad]}$$



$$\begin{array}{cc} \hat{\imath} & \hat{\jmath} \\ \end{array}$$
$$\begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

Recall: any vector can be described with basis vectors $\hat{\imath}$ and $\hat{\jmath}$.

How do we describe a linear transformation mathematically without tracking every single point in space?

COE COLLEGE

The dot product application: linear transformation and coordinate transformation

> Unfortunately, no one can be told what the Matrix is. You have to see it for yourself.
>
> -Morpheus

https://youtu.be/kYB8IZa5AuE?si=su9SausqkmoxiRoU

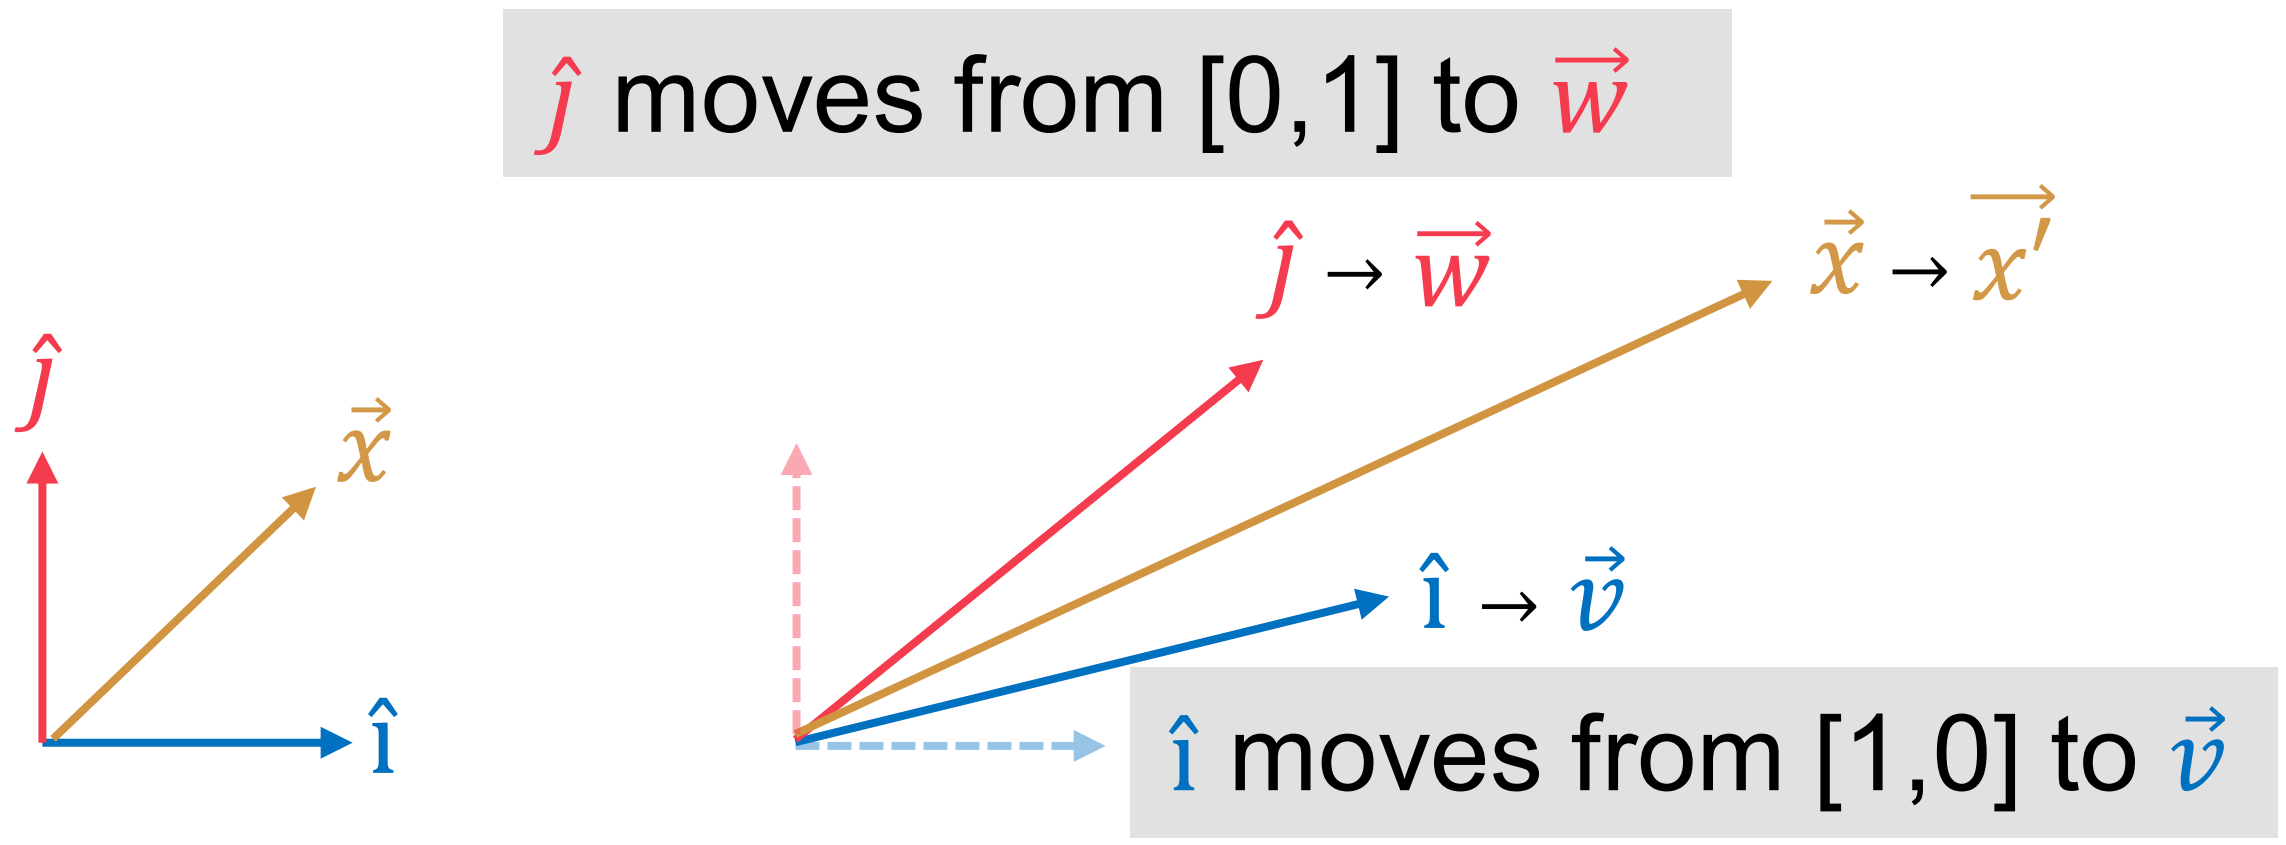

$$\begin{array}{cc} \hat{\imath} & \hat{\jmath} \end{array} \qquad \begin{array}{cc} \vec{v} & \vec{w} \end{array}$$

$$\begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \to \begin{bmatrix} \vec{v} & \vec{w} \end{bmatrix}$$

A matrix

$$\underline{x'} = \underline{\underline{A}}\, \underline{x}$$

COE COLLEGE

The dot product application: linear transformation and coordinate transformation

A 90° Counter-Clockwise Rotation:

- $\hat{\imath}$ moves from $[1, 0]$ to $[0, 1]$.
- $\hat{\jmath}$ moves from $[0, 1]$ to $[-1, 0]$.
- The resulting rotation matrix is: $\begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}$.

A Shear Transformation:

- $\hat{\imath}$ remains fixed at $[1, 0]$.
- $\hat{\jmath}$ leans over to $[1, 1]$.
- The resulting shear matrix is: $\begin{bmatrix} 1 & 1 \\ 0 & 1 \end{bmatrix}$.

Also Euler rotations:

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix} \cdot \begin{bmatrix} x \\ y \end{bmatrix}$$

Rotation of î

Rotation of $\hat{\jmath}$

COE COLLEGE

More example of coordinate transformation:

Sequential Euler rotations in 3D: $\mathbf{v}_{final} = \mathbf{R}_z(\psi) \cdot \mathbf{R}_x(\theta) \cdot \mathbf{R}_z(\phi) \cdot \mathbf{v}_{initial}$

$$\mathbf{R}_z(\phi) = \begin{bmatrix} \cos\phi & -\sin\phi & 0 \\ \sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \mathbf{R}_y(\theta) = \begin{bmatrix} \cos\theta & 0 & \sin\theta \\ 0 & 1 & 0 \\ -\sin\theta & 0 & \cos\theta \end{bmatrix} \quad \mathbf{R}_x(\psi) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\psi & -\sin\psi \\ 0 & \sin\psi & \cos\psi \end{bmatrix}$$

Might be an interesting read: loss of degree of freedom (DOF) and gimbal lock: https://en.wikipedia.org/wiki/Gimbal_lock.

Bonus: describe kinetic energy (T) in metric tensor format

2D Cartesian Coordinates (x, y)

$$T = \frac{1}{2}m(\dot{x}^2 + \dot{y}^2)$$

$$\downarrow$$

$$T = \frac{1}{2}m\begin{bmatrix}\dot{x} & \dot{y}\end{bmatrix}\begin{bmatrix}1 & 0\\0 & 1\end{bmatrix}\begin{bmatrix}\dot{x}\\\dot{y}\end{bmatrix}$$

metric tensor g

2D Polar Coordinates (r,θ)

$$T = \frac{1}{2}m(\dot{r}^2 + r^2\dot{\theta}^2)$$

$$\downarrow$$

$$T = \frac{1}{2}m\begin{bmatrix}\dot{r} & \dot{\theta}\end{bmatrix}\begin{bmatrix}1 & 0\\0 & r^2\end{bmatrix}\begin{bmatrix}\dot{r}\\\dot{\theta}\end{bmatrix}$$

3D Cylindrical Coordinates(r,θ,z)

$$T = \frac{1}{2}m(\dot{r}^2 + r^2\dot{\theta}^2 + \dot{z}^2)$$

$$\downarrow$$

$$T = \frac{1}{2}m\begin{bmatrix}\dot{r} & \dot{\theta} & \dot{z}\end{bmatrix}\begin{bmatrix}1 & 0 & 0\\0 & r^2 & 0\\0 & 0 & 1\end{bmatrix}\begin{bmatrix}\dot{r}\\\dot{\theta}\\\dot{z}\end{bmatrix}$$

This is how we get metric tensor: $g = J^T J$,

where $J = \begin{bmatrix}\frac{\partial x}{\partial r} & \frac{\partial x}{\partial \theta}\\ \frac{\partial y}{\partial r} & \frac{\partial y}{\partial \theta}\end{bmatrix}$

COE COLLEGE

The dot product application: state-space

Sigle harmonic oscillators*:

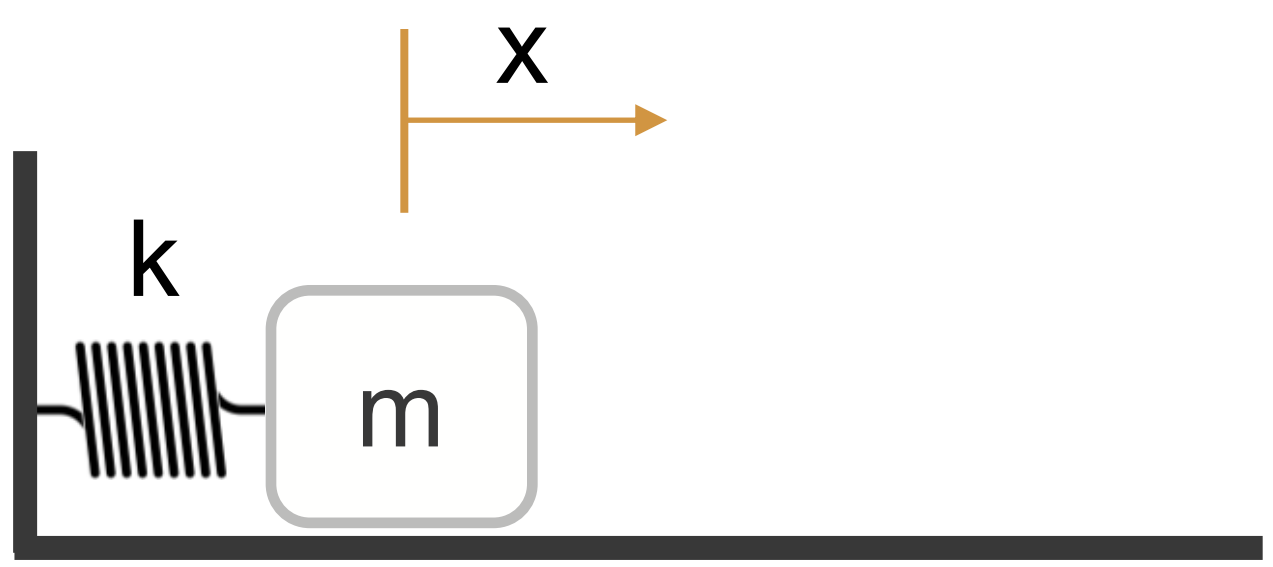

2nd order linear DE

$$\ddot{x} = -\frac{k}{m}x$$

A system of coupled
1st order linear DEs

$$\dot{x} = v$$

$$\dot{v} = -\frac{k}{m}x$$

$$\begin{bmatrix} \dot{x} \\ \dot{v} \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -\frac{k}{m} & 0 \end{bmatrix} \begin{bmatrix} x \\ v \end{bmatrix}$$

WHY?

https://youtube.com/shorts/AqME_OqamWQ

COE COLLEGE

*Assuming: no friction, no air resistance

The dot product application: state-space

Sigle harmonic oscillators:

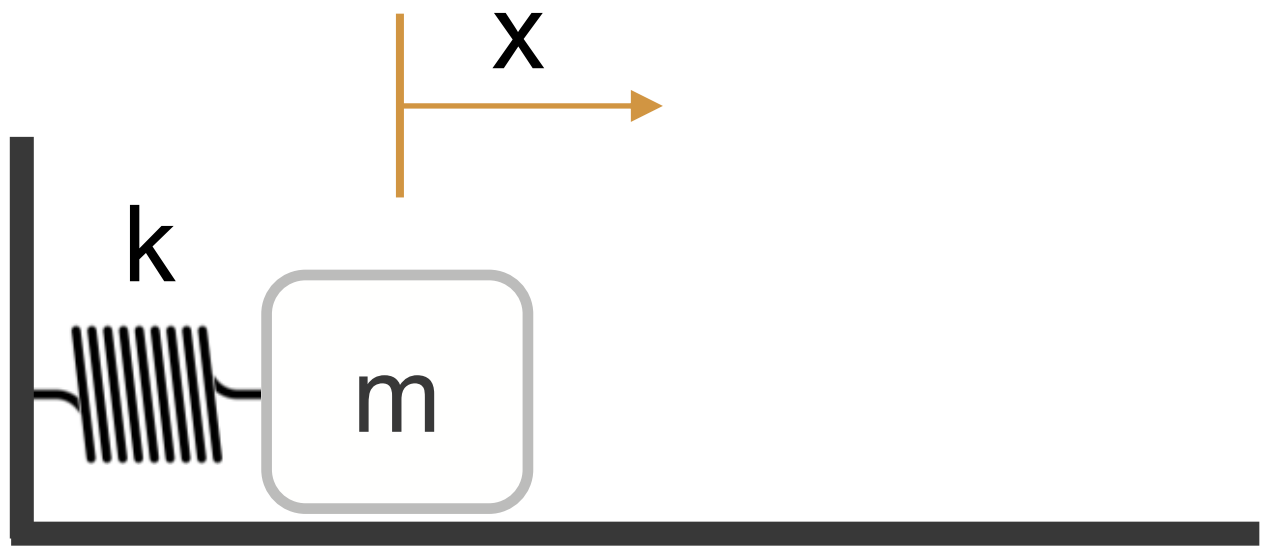

$$\dot{x} = v$$

$$\dot{v} = -\frac{k}{m}x$$

$$\begin{bmatrix}\dot{x}\\ \dot{v}\end{bmatrix} = \begin{bmatrix}0 & 1\\ -\frac{k}{m} & 0\end{bmatrix}\begin{bmatrix}x\\ v\end{bmatrix}$$

Double harmonic oscillators case A:

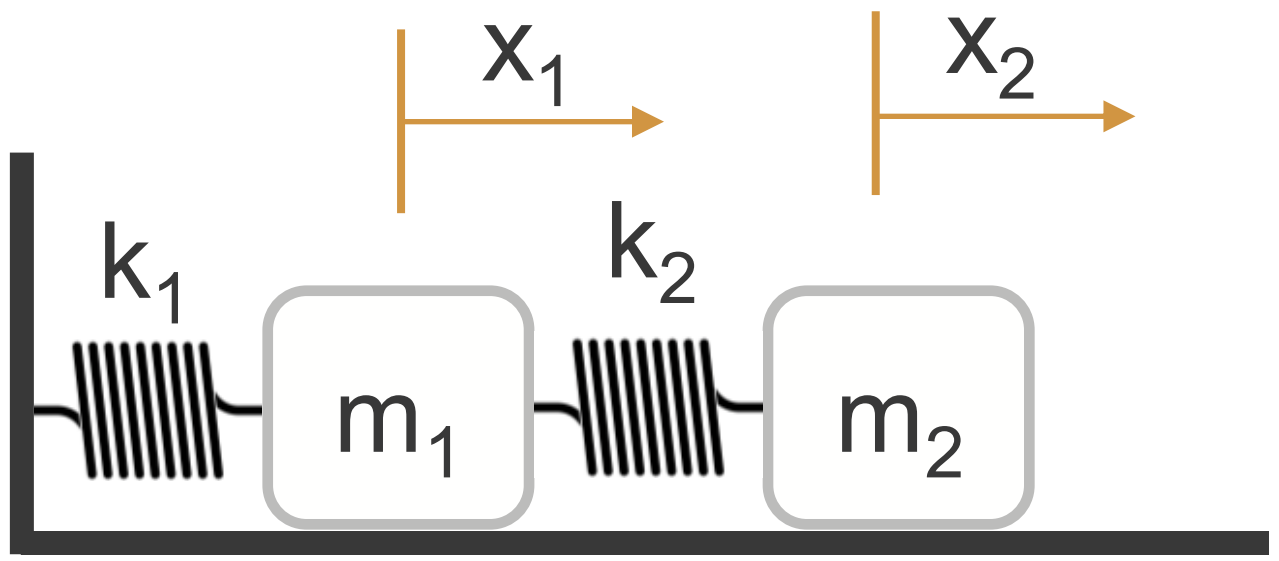

$$m_1\ddot{x}_1 = -k_1x_1 + k_2(x_2 - x_1)$$

$$m_2\ddot{x}_2 = -k_2(x_2 - x_1)$$

$$\begin{bmatrix}\dot{x}_1\\ \dot{v}_1\\ \dot{x}_2\\ \dot{v}_2\end{bmatrix} = \begin{bmatrix}0 & 1 & 0 & 0\\ -\frac{k_1+k_2}{m_1} & 0 & \frac{k_2}{m_1} & 0\\ 0 & 0 & 0 & 1\\ \frac{k_2}{m_2} & 0 & -\frac{k_2}{m_2} & 0\end{bmatrix}\begin{bmatrix}x_1\\ v_1\\ x_2\\ v_2\end{bmatrix}$$

Double harmonic oscillators case B:

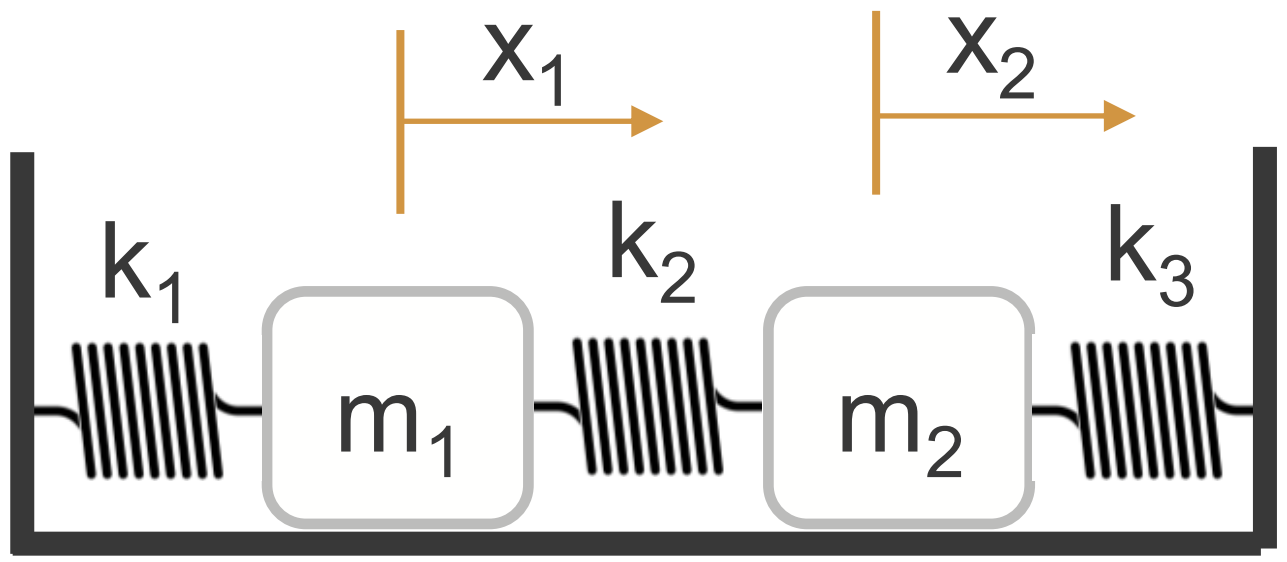

**Assuming: no friction, no air resistance*

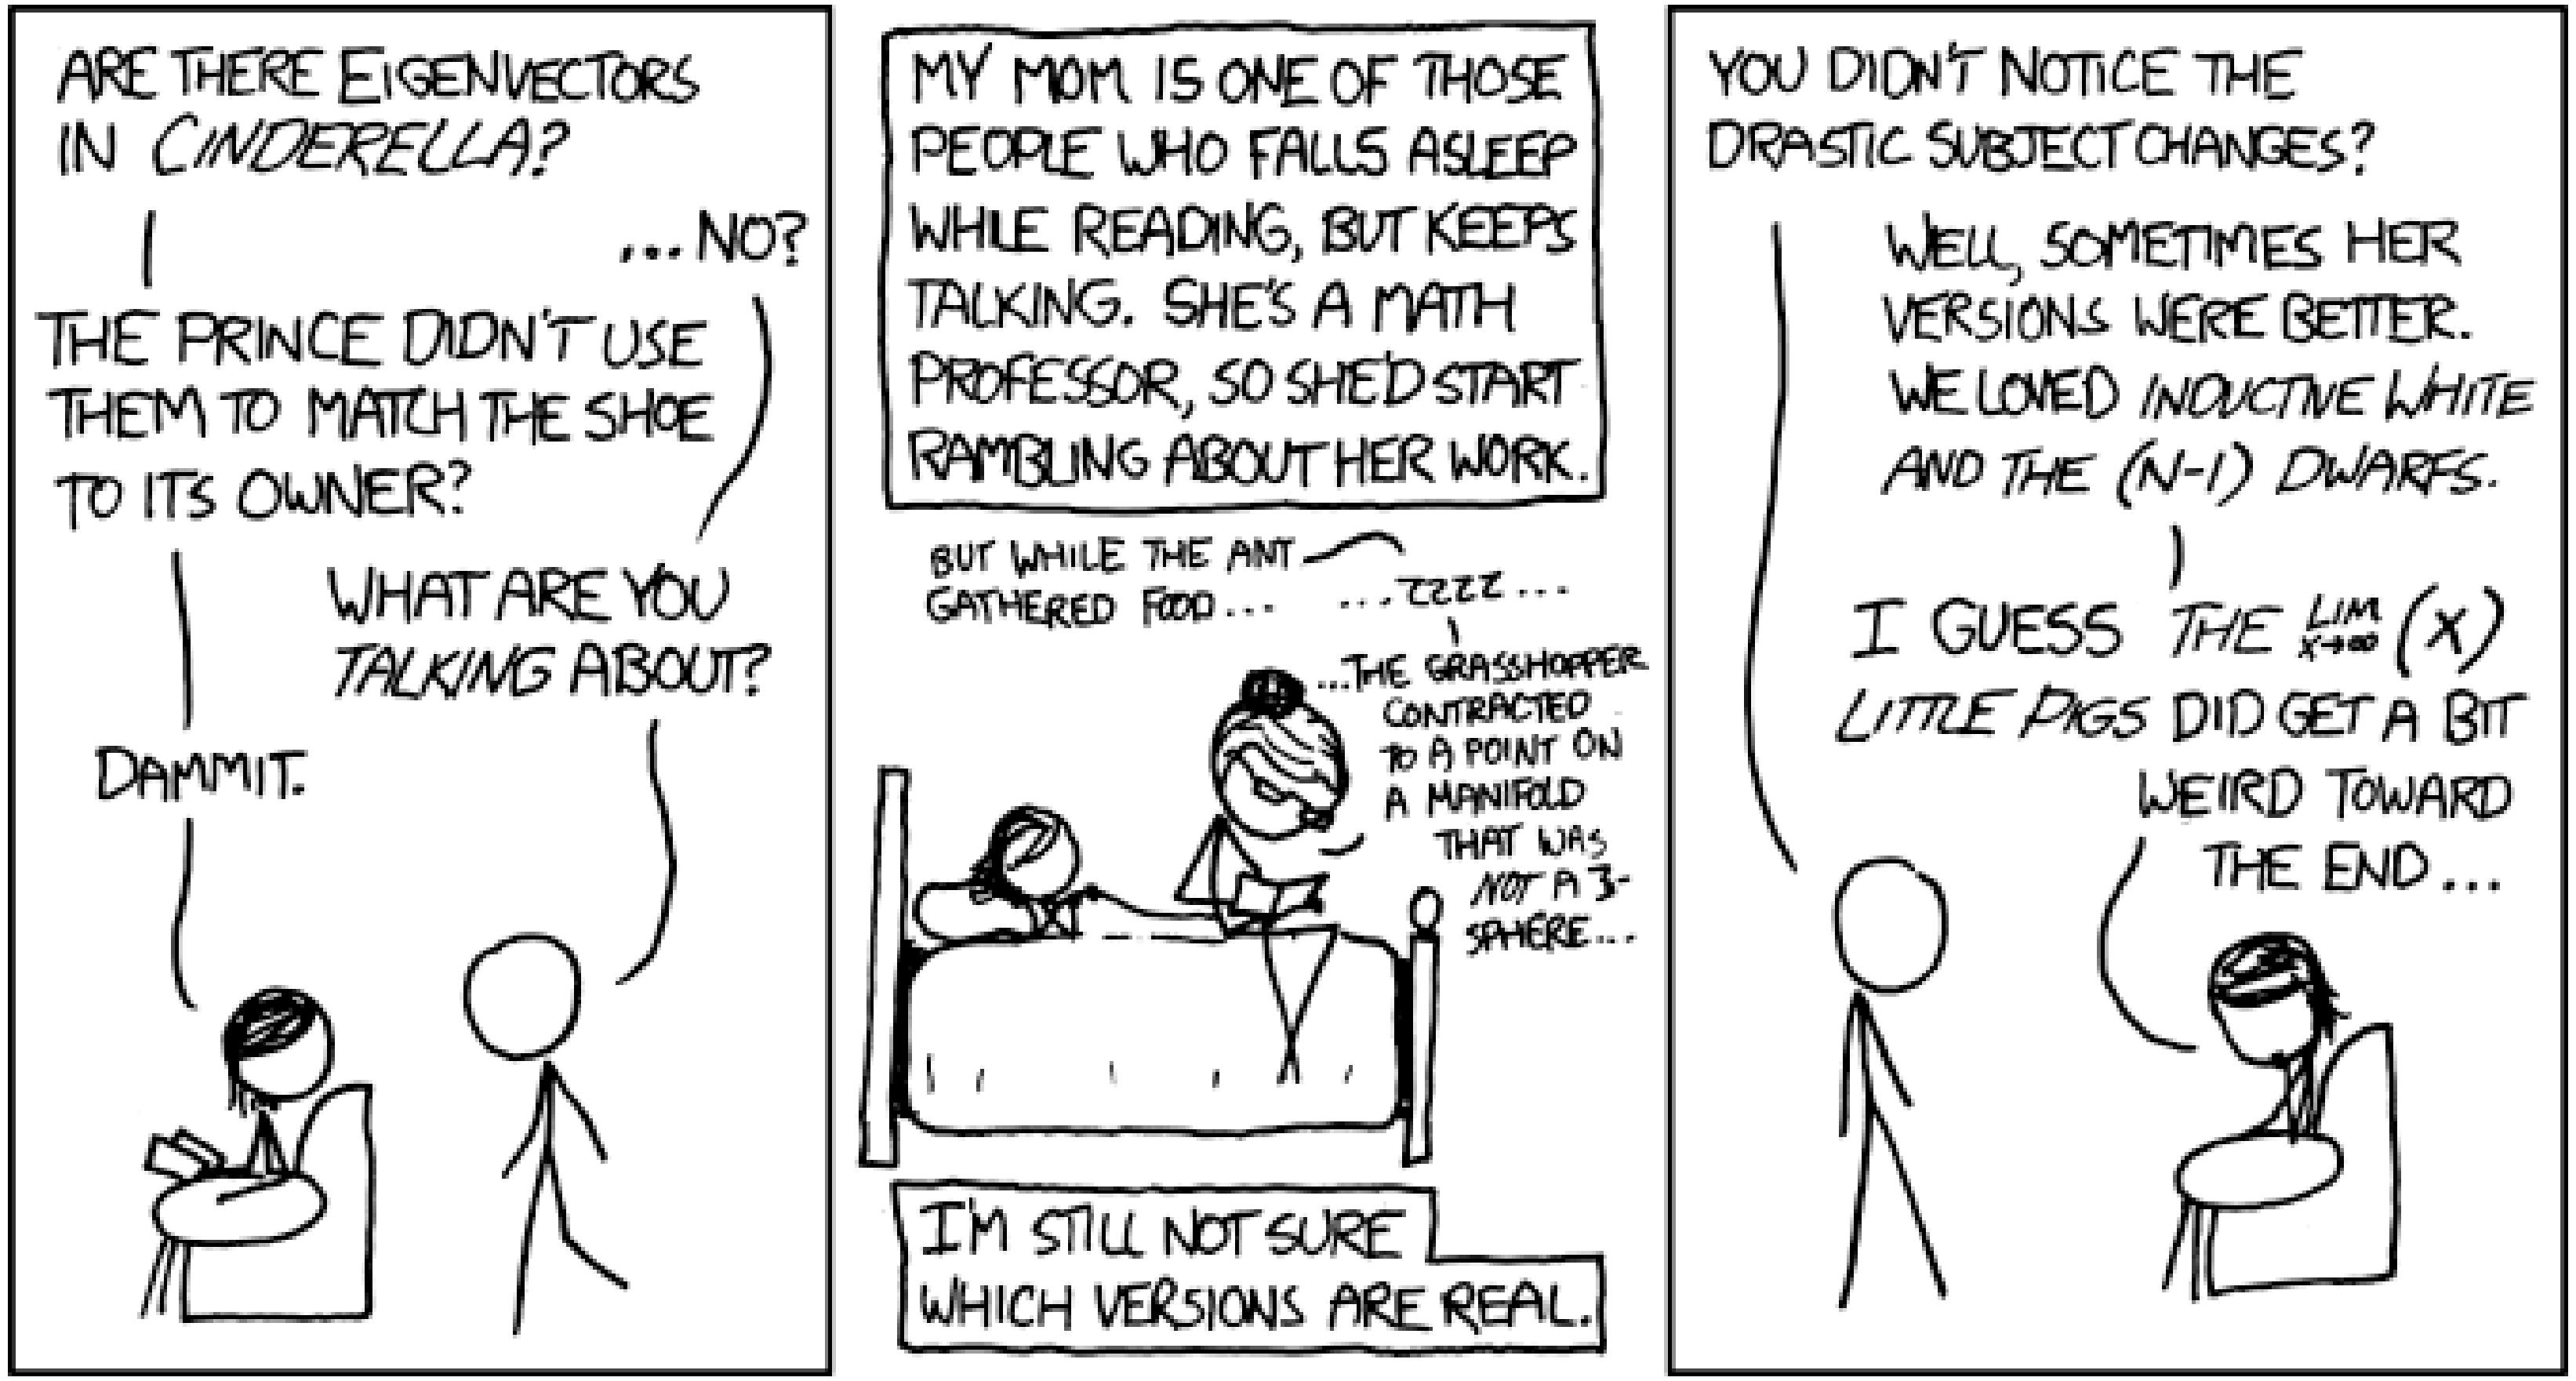

https://xkcd.com/872/

Classic Mechs EP2.2: Recap of some essential ODE math

COE COLLEGE

Classic Mechs EP2.2: Recap of one essential ODE math

Learning objectives

1) We will learn/review Euler's formula (proof via Taylor series?)

2) We will learn/review two ways of solving harmonic oscillator ($e^{-\lambda t}$, and $e^{\underline{\underline{A}}t}x(0)$)

3) We will then work on damped harmonic oscillator with the same approach

4) Then we try to solve some easy examples of 2nd order ODE

to pave the way to…

solve high order ODE with *<u>eigenvalues and eigenvectors</u>*

COE COLLEGE