



Task on S3

1. Create an S3 bucket and upload some objects to S3.

- Login to AWS Console
- Search → S3
- Created new bucket name my-bucket-arun435

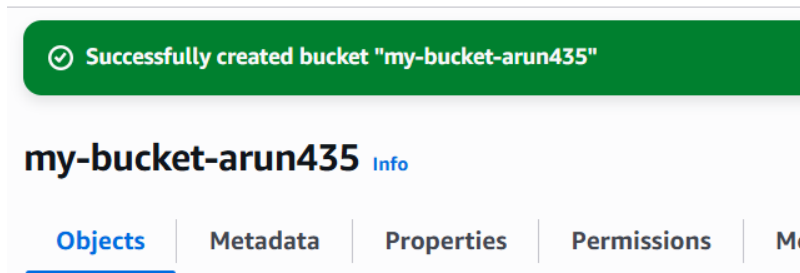


- Uploaded file in the bucket

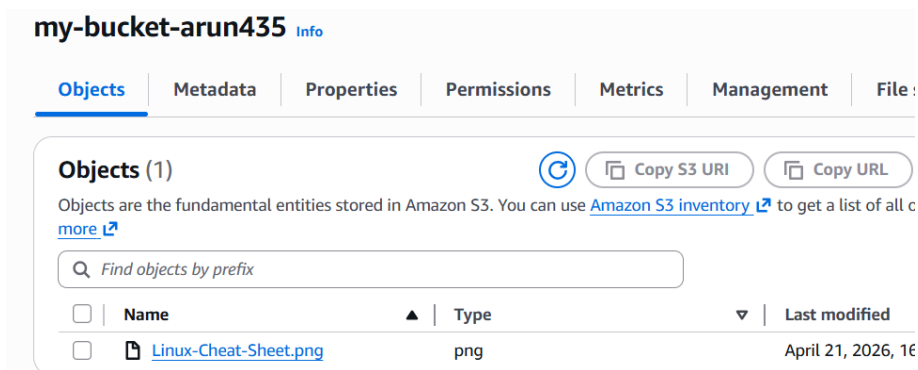

2. Deploy a static website in the S3 bucket.

- Created bucket and open it in properties static website hosting enable

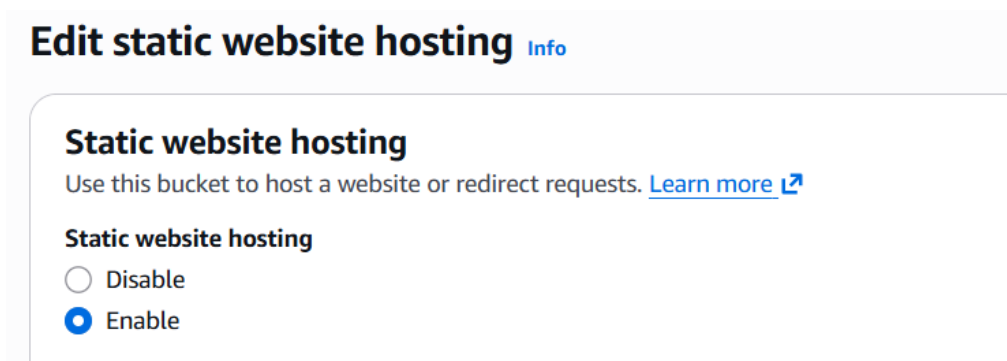

- In Gitbash Aws configured and created new file as index.html
- In that data and save it
- Aws s3 cp index.html send this to my created bucket files

```

Arunsaï@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ aws configure
AWS Access Key ID [*****ZJWD]: AKIA5QKV7AB35ARMCV7X
AWS Secret Access Key [*****IeHb]: 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
Default region name [us-east-1]: us-east-1
Default output format [json]: json

Arunsaï@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ vi index.html

Arunsaï@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ cat index.html
<!DOCTYPE html>
<html>
<head>
  <title>My S3 Website</title>
</head>
<body>
  <h1>Hello Arun</h1>
  <p>This is my first website</p>
</body>
</html>

Arunsaï@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ aws s3 cp index.html s3://my-bucket-arun435/
upload: .\index.html to s3://my-bucket-arun435/index.html

```

- In static website hosting we can get link

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

📌 We recommend using AWS Amplify Hosting for static website hosting

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. [Learn more](#)

S3 static website hosting

Enabled

Hosting type

Bucket hosting

✅ Bucket website endpoint copied

When you configure your bucket as a static website, the website is available at the AWS Region-specific endpoint.

<http://my-bucket-arun435.s3-website-us-east-1.amazonaws.com>

- Successfully we can see the output


← → ↻ ⚠ Not secure my-bucket-arun435.s3-website-us-east-1.amazonaws.com

Hello Arun


This is my first website

3. Enable cross-region replication on S3 buckets.

- 2 buckets created from 2 different regions
- Versioning Enabled

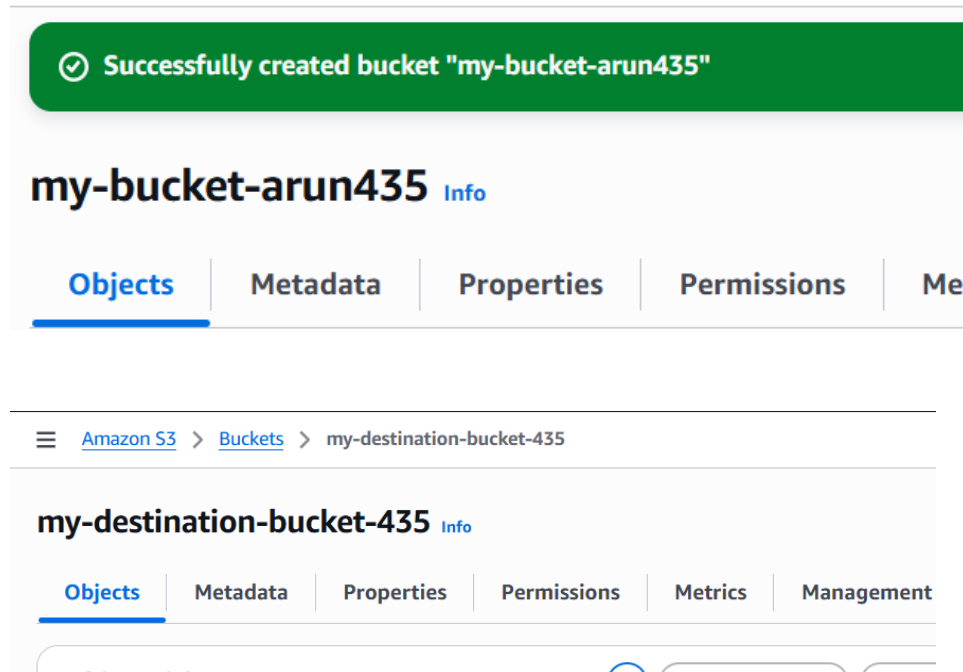

- Replication Rule Configured Created replication rule in source bucket
- Rule applied to all objects and Selected destination bucket

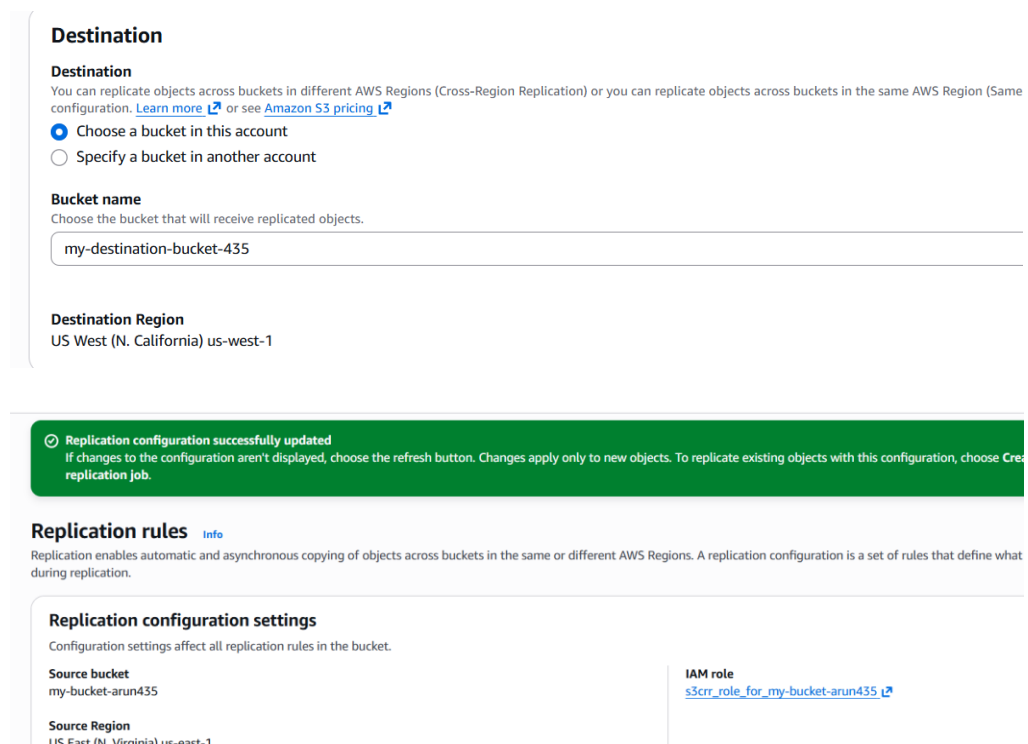

- Added new file in 1st bucket to check replicate

Upload succeeded
For more information, see the Files and folders table.

Upload: status

After you navigate away from this page, the following information is no longer available.

Summary

Destination s3://my-bucket-arun435	Succeeded 1 file, 1.7 KB (100%)
--	---

Files and folders | Configuration

Files and folders (1 total, 1.7 KB)

Find by name

Name	Folder	Type
Git-Commands	-	-

- In my destination bucket the file is replicated Successfully

Amazon S3 > Buckets > my-destination-bucket-435

my-destination-bucket-435 Info

Objects (1)

Copy S3 URI | Copy URL | Download | Open | Delete | Actions

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 Inventory](#) to get a list of all objects in your bucket to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

Name	Type	Last modified	Size
Git-Commands	-	April 21, 2026, 18:29:31 (UTC+05:30)	

4. Configure a bucket policy so only the Admin user can see the objects of the S3 bucket.

- Created IAM user AdminUser
- Attached policy Administrator Access

User created successfully
You can view and download the user's password and email instructions for signing in to the AWS Management Console.

[View user](#)

Step 1: Specify user details
Step 2: Set permissions
Step 3: Review and create
Step 4: **Retrieve password**

Retrieve password
You can view and download the user's password below or email users instructions for signing in to the AWS Management Console. The password is displayed below.


Console sign-in details

Console sign-in URL
<https://928430096503.signin.aws.amazon.com/console>


User name
AdminUser

Console password
***** [Show](#)

- Added bucket policy to: my-bucket-arun435
- Policy allows access only to Admin user:

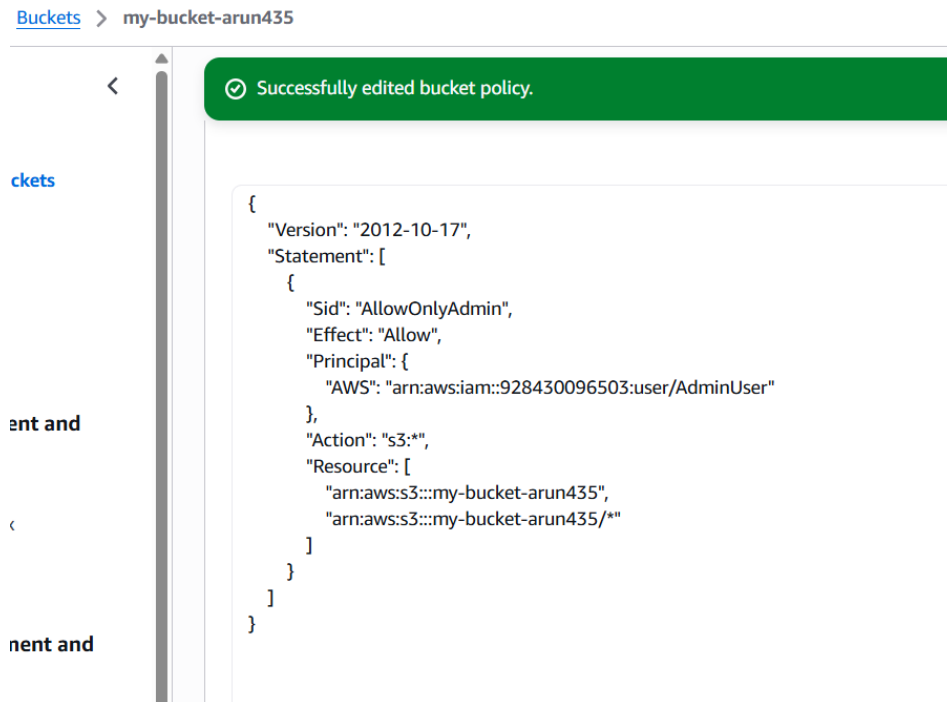

- Permissions enable for Block public access

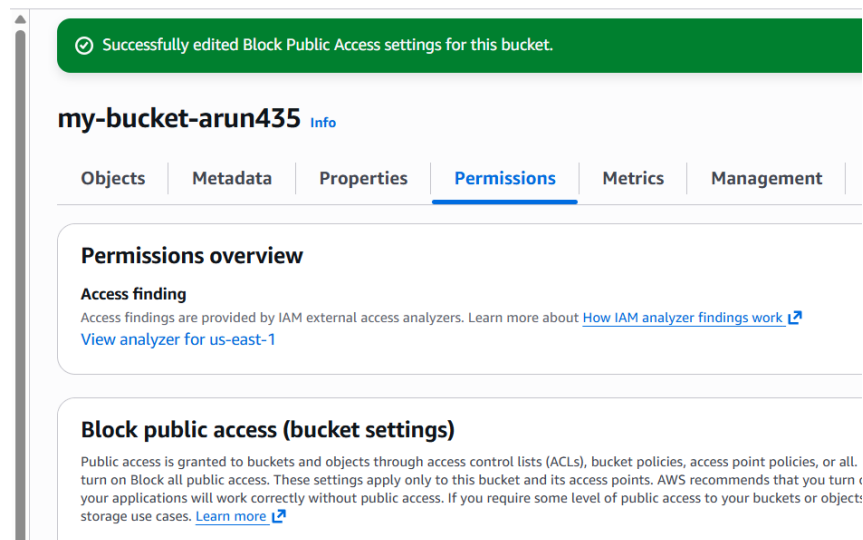

- We can see the Access Denied

403 Forbidden

- Code: AccessDenied
- Message: Access Denied
- RequestId: HJ7Y4GXEJS5FB7HH
- HostId: SF0sjmxxPheGdxVhkciZmV6KYrybZRtuNfrIT6SLmff7FxZmDyMZ+/sGLWeluLMN3J8sP3I2ZJ9Iv3oz2r3Vnka/HV1vIphd

5. Set up lifecycle policies to automatically transition or delete objects based on specific criteria.

- **Lifecycle Rule Created**
- **Named as Auto-archive-deleted**

≡ [Amazon S3](#) > [Buckets](#) > [my-bucket-arun435](#) > [Lifecycle configuration](#)

Create lifecycle rule [Info](#)

Lifecycle rule configuration

Lifecycle rule name

Auto-Archive-Delete

Up to 255 characters

Choose a rule scope

☐ Limit the scope of this rule using one or more filters

☒ Apply to all objects in the bucket

- In Lifecycle Rule actions enabled

Lifecycle rule actions

Choose the actions you want this rule to perform.

☒ Transition current versions of objects between storage classes
This action will move current versions.

☐ Transition noncurrent versions of objects between storage classes
This action will move noncurrent versions.

☐ Expire current versions of objects

☐ Permanently delete noncurrent versions of objects

☒ Delete expired object delete markers or incomplete multipart uploads
These actions are not supported when filtering by object tags or object size.

- **Transition Rule Configured**
Transition current versions of objects After 30 days

Transition current versions of objects between storage classes

Choose transitions to move current versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects are created and are consecutively applied. [Learn more](#)

Choose storage class transitions

Standard-IA

Days after object creation

30

[Remove](#)

[Add transition](#)

- **Expiration & Cleanup Settings**
 - 1.Delete expired object delete markers
 2. Delete incomplete multipart uploads

Lifecycle configuration

To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration rules run once per day.

Default minimum object size for transitions
All storage classes 128K

Lifecycle rules (1)

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class.

Find lifecycle rules by name

	Lifecycle rule name	Status	Scope	Current version action
☐	Auto-Archive-Delete	Enabled	Entire bucket	Transition to Standard-IA

- **Lifecycle Execution Flow**
- Day 0 Object uploaded
- Day 30 Object moves to Standard-IA
- Cleanup Removes unused/incomplete uploads automatically

Review transition and expiration actions

Current version actions

Day 0

- Objects uploaded

↓

Day 30

- Objects move to Standard-IA

Noncurrent versions actions

Day 0

No actions defined.

Delete expired object delete markers or incomplete multipart uploads

Expired object delete markers
Delete expired object delete markers

Incomplete multipart uploads
Delete after 30 days

6. Push some objects to S3 using the AWS CLI.

- Pushed some objects using AWS CLI
- Using command below

```
Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ aws s3 cp index.html s3://my-bucket-arun435/ --content-type text/html
upload: .\index.html to s3://my-bucket-arun435/index.html

Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ aws s3 cp . s3://my-bucket-arun435/ --recursive
upload: .\AdminUser_credentials.csv to s3://my-bucket-arun435/AdminUser_credentials.csv
upload: .\20491950_Form16_2024.pdf to s3://my-bucket-arun435/20491950_Form16_2024.pdf
upload: .\AWS VPC -02.pdf to s3://my-bucket-arun435/AWS VPC -02.pdf
upload: .\AWS CLOUD.pdf to s3://my-bucket-arun435/AWS CLOUD.pdf
upload: .\AWS-427.pdf to s3://my-bucket-arun435/AWS-427.pdf
```

- We can see in my bucket some objects are there

my-bucket-arun435 Info

[Objects](#) [Metadata](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [File systems - new](#) [Access Points](#)

Objects (54)

[Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix ☐ Show versions

☐	Name	Type	Last modified	Size
☐	20251228_121004.jpg	jpg	April 21, 2026, 19:37:47 (UTC+05:30)	
☐	20251228_152407.jpg	jpg	April 21, 2026, 19:37:47 (UTC+05:30)	
☐	20491950_Form16_2024.pdf	pdf	April 21, 2026, 19:37:47 (UTC+05:30)	

7. Write a Bash script to create an S3 bucket.

- Wrote a bash script to create new bucket

```
#!/bin/bash

echo "Enter Bucket name:"
read BUCKET_NAME

aws s3api create-bucket://$BUCKET_NAME

echo "Bucket $BUCKET_NAME created"

~
~
~
~
~
```

- Give me permissions to created bucket and run it

```
Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ vi create-bucket.sh

Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ chmod 755 create-bucket.sh

Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ ./create-bucket.sh
Enter Bucket name:
my-bucket-arun733
Creating bucket...
{
  "Location": "/my-bucket-arun733-1776782998",
  "BucketArn": "arn:aws:s3:::my-bucket-arun733-1776782998"
}
Bucket my-bucket-arun733-1776782998 created successfully

Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$
```

- Check in S3 the new bucket created

Buckets

[General purpose buckets](#) [All AWS Regions](#) [Directory buckets](#)

General purpose buckets (5) [Info](#)

 [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

	Name	AWS Region	Creation
☐	cross-account-demo-bucket145	US East (N. Virginia) us-east-1	April 20, : (UTC+05:
☐	my-bucket-arun733-1776782998	US East (N. Virginia) us-east-1	April 21, : (UTC+05:

8. Upload a 1 GB file to S3 using the CLI.

- Created a 1 GB file using command:
`dd if=/dev/zero of=1GBfile.bin bs=1M count=1024`
- File Uploaded Using CLI

```
MINGW64/c/Users/LENOVO/Downloads
Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ aws s3 ls
2026-04-20 17:47:51 cross-account-demo-bucket145
2026-04-21 20:20:01 my-bucket-arun733-1776782998
2026-04-21 18:23:04 my-destination-bucket-435
2026-04-15 20:45:35 my-vpc-flowlogs-bucket-123
2026-04-15 21:32:26 my-vpc-flowlogs-bucket-456

Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$ aws s3 cp 1GBfile.bin s3://my-bucket-arun733-1776782998/
upload: .\1GBfile.bin to s3://my-bucket-arun733-1776782998/1GBfile.bin

Arunsai@DESKTOP-N6MPCBS MINGW64 ~/Downloads
$
```

- Verified in the bucket to check 1gb file update

my-bucket-arun733-1776782998 [Info](#)

[Objects](#) [Metadata](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [File systems - new](#) [Access Points](#)

Objects (1) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access you to explicitly grant them permissions. [Learn more](#)

☐	Name	Type	Last modified	Size	Storage class
☐	1GBfile.bin	bin	April 21, 2026, 20:38:48 (UTC+05:30)	1.0 GB	Standard