

Designing a URL Shortening service like TinyURL

Let's design a URL shortening service like TinyURL. This service will provide short aliases redirecting to long URLs.

Similar services: bit.ly, goo.gl, qlink.me, etc.

Difficulty Level: Easy

We'll cover the following



- 1. Why do we need URL shortening?
- 2. Requirements and Goals of the System
- 3. Capacity Estimation and Constraints
- 4. System APIs
- 5. Database Design
 - Database Schema:
- 6. Basic System Design and Algorithm
 - a. Encoding actual URL
 - b. Generating keys offline
- 7. Data Partitioning and Replication
- 8. Cache
- 9. Load Balancer (LB)
- 10. Purging or DB cleanup

- 11. Telemetry

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#).

- 12. Security and Permissions

Got it!

≡ 1 Why do we need URL shortening



#

URL shortening is used to create shorter aliases for long URLs. We call these shortened aliases “short links.” Users are redirected to the original URL when they hit these short links. Short links save a lot of space when displayed, printed, messaged, or tweeted. Additionally, users are less likely to mistype shorter URLs.

For example, if we shorten this page through TinyURL:

```
https://www.educative.io/collection/page/5668639101419520/564905022  
5344512/5668600916475904/  
(https://www.educative.io/collection/page/5668639101419520/56490502  
25344512/5668600916475904/)
```

We would get:

```
http://tinyurl.com/jlg8zpc (http://tinyurl.com/jlg8zpc)
```

The shortened URL is nearly one-third the size of the actual URL.

URL shortening is used to optimize links across devices, track individual links to analyze audience, measure ad campaigns’ performance, or hide affiliated original URLs.

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#).

If you haven’t used tinyurl.com (http://tinyurl.com) before, please try creating a new shortened URL and spend some time going through the various options their service offers. This will help you a lot in understanding



2. Requirements and Goals of the System

#



You should always clarify requirements at the beginning of the interview. Be sure to ask questions to find the exact scope of the system that the interviewer has in mind.

Our URL shortening system should meet the following requirements:

Functional Requirements:

1. Given a URL, our service should generate a shorter and unique alias of it. This is called a short link. This link should be short enough to be easily copied and pasted into applications.
2. When users access a short link, our service should redirect them to the original link.
3. Users should optionally be able to pick a custom short link for their URL.
4. Links will expire after a standard default timespan. Users should be able to specify the expiration time.

Non-Functional Requirements:

1. The system should be highly available. This is required because, if our service is down, all the URL redirections will start failing.

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) and [Terms of Service](#).

2. URL redirection should happen in real-time with minimal latency.
3. Shortened links should not be guessable (not predictable).

Got it!

Extended Requirements:



1. Analytics; e.g., how many times a redirection happened?
2. Our service should also be accessible through REST APIs by other services.

3. Capacity Estimation and Constraints

#

Our system will be read-heavy. There will be lots of redirection requests compared to new URL shortenings. Let's assume a 100:1 ratio between read and write.

Traffic estimates: Assuming, we will have 500M new URL shortenings per month, with 100:1 read/write ratio, we can expect 50B redirections during the same period:

$$100 * 500M \Rightarrow 50B$$

What would be Queries Per Second (QPS) for our system? New URLs shortenings per second:

$$500 \text{ million} / (30 \text{ days} * 24 \text{ hours} * 3600 \text{ seconds}) = \sim 200 \text{ URLs/s}$$

Considering 100:1 read/write ratio, URLs redirections per second will be:


$$100 * 200 \text{ URLs/s} = 20K/s$$

Storage estimates: Let's assume we store every URL shortening request (and associated shortened link) for 5 years. Since we expect to have 500M new URLs every month, the total number of objects we expect to store will be 30 billion:

Got it!



$$500 \text{ million} * 5 \text{ years} * 12 \text{ months} = 30 \text{ billion}$$



Let's assume that each stored object will be approximately 500 bytes (just a ballpark estimate—we will dig into it later). We will need 15TB of total storage:

$$30 \text{ billion} * 500 \text{ bytes} = 15 \text{ TB}$$

URL Shortenings per month	500	million
Total years	5	
URL object size	500	Bytes
Total Files	30	billion
Total Storage	15	TB

Bandwidth estimates: For write requests, since we expect 200 new URLs every second, total incoming data for our service will be 100KB per second:

$$200 * 500 \text{ bytes} = 100 \text{ KB/s}$$

For read requests, since every second we expect ~20K URLs redirections, total outgoing data for our service would be 10MB per second:

$$20\text{K} * 500 \text{ bytes} = \sim 10 \text{ MB/s}$$

Memory estimates: If we want to cache some of the hot URLs that are frequently accessed, how much memory will we need to store them? If we follow the 80-20 rule, meaning 20% of URLs generate 80% of traffic, we would like to cache these 20% hot URLs.

Get it!

$20K * 3600 \text{ seconds} * 24 \text{ hours} = \sim 1.7 \text{ billion}$

To cache 20% of these requests, we will need 170GB of memory.

$0.2 * 1.7 \text{ billion} * 500 \text{ bytes} = \sim 170GB$

One thing to note here is that since there will be many duplicate requests (of the same URL), our actual memory usage will be less than 170GB.

**** High-level estimates:**** Assuming 500 million new URLs per month and 100:1 read:write ratio, following is the summary of the high level estimates for our service:

New URLs	200/s
URL redirections	20K/s
Incoming data	100KB/s
Outgoing data	10MB/s
Storage for 5 years	15TB
Memory for cache	170GB

4. System APIs

#

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) (</privacy>) to learn more.




Once we've finalized the requirements, it's always a good idea to

define the system APIs. This should explicitly state what is expected



from the system.



We can have SOAP or REST APIs to expose the functionality of our service. Following could be the definitions of the APIs for creating and deleting URLs:

```
createURL(api_dev_key, original_url, custom_alias=None, user_name=None, expire_date=None)
```

Parameters:

api_dev_key (string): The API developer key of a registered account. This will be used to, among other things, throttle users based on their allocated quota.

original_url (string): Original URL to be shortened.

custom_alias (string): Optional custom key for the URL.

user_name (string): Optional user name to be used in the encoding.

expire_date (string): Optional expiration date for the shortened URL.

Returns: (string)

A successful insertion returns the shortened URL; otherwise, it returns an error code.

```
deleteURL(api_dev_key, url_key)
```

Where “url_key” is a string representing the shortened URL to be retrieved; a successful deletion returns ‘URL Removed’.

How do we detect and prevent abuse? A malicious user can put us out of business by consuming all URL keys in the current design. To prevent abuse, we can limit users via their api_dev_key. Each api_dev_key can be limited to a certain number of URL creations and redirections per some time period (which may be set to a different duration per developer key).

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) to learn more.

5. Database Design



Got it!



Defining the DB schema in the early stages of the interview



would help to understand the data flow among various components and later would guide towards data partitioning.

A few observations about the nature of the data we will store:

1. We need to store billions of records.
2. Each object we store is small (less than 1K).
3. There are no relationships between records—other than storing which user created a URL.
4. Our service is read-heavy.

Database Schema:

We would need two tables: one for storing information about the URL mappings and one for the user's data who created the short link.

URL	
PK	Hash: varchar(16)
	OriginalURL: varchar(512)
	CreationDate: datetime
	ExpirationDate: datetime
	UserID: int

User	
PK	UserID: int
	Name: varchar(20)
	Email: varchar(32)
	CreationDate: datetime
	LastLogin: datetime


What kind of database should we use? Since we anticipate storing billions of rows, and we don't need to use relationships between objects – a NoSQL store like DynamoDB (https://en.wikipedia.org/wiki/Amazon_DynamoDB), Cassandra (https://en.wikipedia.org/wiki/Apache_Cassandra) or Riak

(<https://en.wikipedia.org/wiki/Riak>) is a better choice. A NoSQL choice would also be easier to scale. Please see SQL vs NoSQL

(<https://www.educative.io/collection/page/5668639101419520/5649050225344512/5728116278296576/>) for more details.

Got it!

Basic System Design and Algorithm



#

The problem we are solving here is how to generate a short and unique key for a given URL.

In the TinyURL example in Section 1, the shortened URL is “http://tinyurl.com/jlg8zpc” (http://tinyurl.com/jlg8zpc%E2%80%9D). The last seven characters of this URL is the short key we want to generate. We’ll explore two solutions here:

a. Encoding actual URL

We can compute a unique hash (e.g., MD5 (https://en.wikipedia.org/wiki/MD5) or SHA256 (https://en.wikipedia.org/wiki/SHA-2), etc.) of the given URL. The hash can then be encoded for display. This encoding could be base36 ([a-z ,0-9]) or base62 ([A-Z, a-z, 0-9]) and if we add ‘+’ and ‘/’ we can use Base64 (https://en.wikipedia.org/wiki/Base64#Base64_table) encoding. A reasonable question would be, what should be the length of the short key? 6, 8, or 10 characters?

Using base64 encoding, a 6 letters long key would result in $64^6 = \sim 68.7$ billion possible strings.

Using base64 encoding, an 8 letters long key would result in $64^8 = \sim 281$ trillion possible strings.

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) ([privacy](#)) to learn more.

With 68.7B unique strings, let’s assume six letter keys would suffice for our system.

Got it!

If we use the MD5 algorithm as our hash function, it'll produce a 128-bit hash value. After base64 encoding, we'll get a string having more than 21 characters (since each base64 character encodes 6 bits of the hash value). Now we only have space for 8 characters per short key; how will we choose our key then? We can take the first 6 (or 8) letters for the key. This could result in key duplication; to resolve that, we can choose some other characters out of the encoding string or swap some characters.

What are the different issues with our solution? We have the following couple of problems with our encoding scheme:


1. If multiple users enter the same URL, they can get the same shortened URL, which is not acceptable.
2. What if parts of the URL are URL-encoded? e.g.,
`http://www.educative.io/distributed.php?id=design`
(`http://www.educative.io/distributed.php?id=design`), and
`http://www.educative.io/distributed.php%3Fid%3Ddesign`
(`http://www.educative.io/distributed.php%3Fid%3Ddesign`) are identical except for the URL encoding.

Workaround for the issues: We can append an increasing sequence number to each input URL to make it unique and then generate its hash. We don't need to store this sequence number in the databases, though. Possible problems with this approach could be an ever-increasing sequence number. Can it overflow? Appending an increasing sequence number will also impact the performance of the service.

Another solution could be to append the user id (which should be unique) to the input URL. However, if the user has not signed in, we would have to ask the user to choose a uniqueness key. Even after this, if we have a conflict, we have to keep generating a key until we get a unique one.

[Policy_\(\(/privacy\)\)](#) to learn more.

Got it!

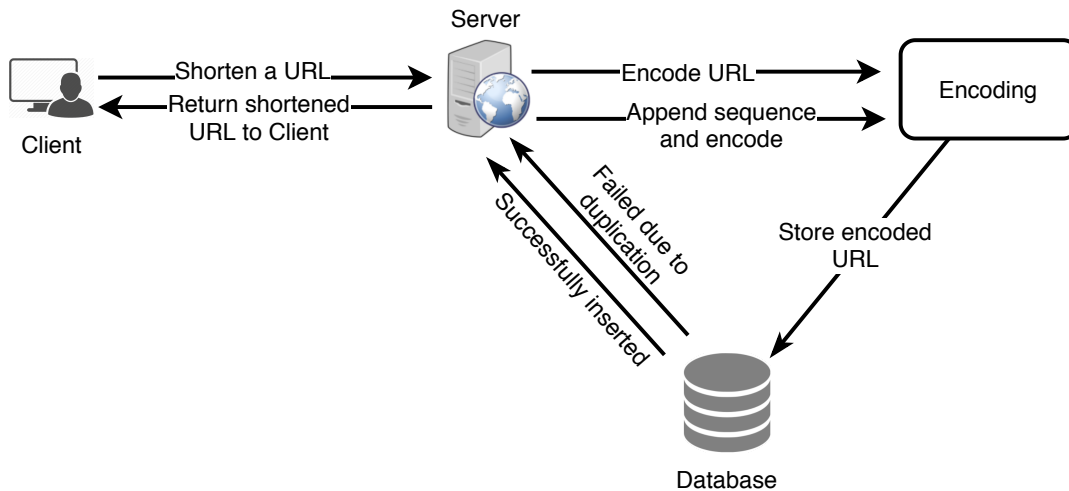

Request flow for shortening of a URL

1 of 9



b. Generating keys offline

We can have a standalone **Key Generation Service (KGS)** that generates random six-letter strings beforehand and stores them in a database (let's call it key-DB). Whenever we want to shorten a URL, we will take one of the already-generated keys and use it. This approach will make things quite simple and fast. Not only are we not encoding the URL, but we won't have to worry about duplications or collisions. KGS will make sure all the keys inserted into key-DB are unique

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#).

Can concurrency cause problems? As soon as a key is used, it should be marked in the database to ensure that it is not used again. If there are multiple servers reading keys concurrently, we might get a scenario where

Get it!

two or more servers try to read the same key from the database. How can we solve this concurrency problem?



Servers can use KGS to read/mark keys in the database. KGS can use two tables to store keys: one for keys that are not used yet, and one for all the used keys. As soon as KGS gives keys to one of the servers, it can move them to the used keys table. KGS can always keep some keys in memory to quickly provide them whenever a server needs them.

For simplicity, as soon as KGS loads some keys in memory, it can move them to the used keys table. This ensures each server gets unique keys. If KGS dies before assigning all the loaded keys to some server, we will be wasting those keys—which could be acceptable, given the huge number of keys we have.

KGS also has to make sure not to give the same key to multiple servers. For that, it must synchronize (or get a lock on) the data structure holding the keys before removing keys from it and giving them to a server.

What would be the key-DB size? With base64 encoding, we can generate 68.7B unique six letters keys. If we need one byte to store one alpha-numeric character, we can store all these keys in:

$$6 \text{ (characters per key)} * 68.7\text{B (unique keys)} = 412 \text{ GB.}$$

Isn't KGS a single point of failure? Yes, it is. To solve this, we can have a standby replica of KGS. Whenever the primary server dies, the standby server can take over to generate and provide keys.


Can each app server cache some keys from key-DB? Yes, this can surely speed things up. Although, in this case, if the application server dies before consuming all the keys, we will end up losing those keys. This can be acceptable since we have 68B unique six-letter keys. We can ensure you get the best experience on our website. Please review our [Privacy Policy](#) ([/privacy](#)) to learn more.

Got it!

How would we perform a key lookup? We can look up the key in our database to get the full URL. If it's present in the DB, issue an "HTTP 302 Redirect" status back to the browser, passing the stored URL in the "Location" field of the request. If that key is not present in our system, issue an "HTTP 404 Not Found" status or redirect the user back to the homepage.



Should we impose size limits on custom aliases? Our service supports custom aliases. Users can pick any 'key' they like, but providing a custom alias is not mandatory. However, it is reasonable (and often desirable) to impose a size limit on a custom alias to ensure we have a consistent URL database. Let's assume users can specify a maximum of 16 characters per customer key (as reflected in the above database schema).

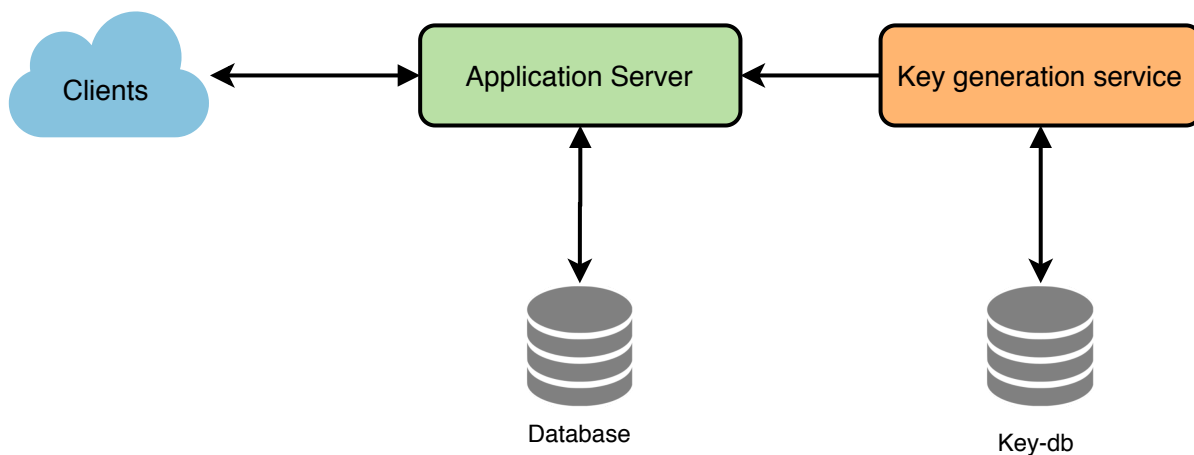




High level system design for URL shortening

7. Data Partitioning and Replication

#

To scale out our DB, we need to partition it so that it can store information about billions of URLs. We need to develop a partitioning scheme that would divide and store our data into different DB servers.

Got it!

 **a. Range Based Partitioning:** We can store URLs in separate partitions based on the hash key's first letter. Hence we save all the URLs starting with the letter 'A' (and 'a') in one partition, save those that start with the letter 'B' in another partition, and so on. This approach is called range-based partitioning. We can even combine certain less frequently occurring letters into one database partition. We should come up with a static partitioning scheme to always store/find a URL in a predictable manner.  

The main problem with this approach is that it can lead to unbalanced DB servers. For example, we decide to put all URLs starting with the letter 'E' into a DB partition, but later we realize that we have too many URLs that start with the letter 'E.'


b. Hash-Based Partitioning: In this scheme, we take a hash of the object we are storing. We then calculate which partition to use based upon the hash. In our case, we can take the hash of the 'key' or the short link to determine the partition in which we store the data object.

Our hashing function will randomly distribute URLs into different partitions (e.g., our hashing function can always map any 'key' to a number between [1...256]). This number would represent the partition in which we store our object.



This approach can still lead to overloaded partitions, which can be solved using Consistent Hashing

(<https://www.educative.io/collection/page/5668639101419520/5649050225344512/5709068098338816/>).

8. Cache

 We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) (</privacy>) to learn more.

Got it!

☰ We can cache URLs that are frequently accessed. We can use some off-the-shelf solution like Memcached (<https://en.wikipedia.org/wiki/Memcached>),  

which can store full URLs with their respective hashes. Before hitting backend storage, the application servers can quickly check if the cache has the desired URL.

How much cache memory should we have? We can start with 20% of daily traffic and, based on clients' usage patterns, we can adjust how many cache servers we need. As estimated above, we need 170GB memory to cache 20% of daily traffic. Since a modern-day server can have 256GB memory, we can easily fit all the cache into one machine. Alternatively, we can use a couple of smaller servers to store all these hot URLs.


Which cache eviction policy would best fit our needs? When the cache is full, and we want to replace a link with a newer/hotter URL, how would we choose? Least Recently Used (LRU) can be a reasonable policy for our system. Under this policy, we discard the least recently used URL first. We can use a Linked Hash Map (<https://docs.oracle.com/javase/7/docs/api/java/util/LinkedHashMap.html>) or a similar data structure to store our URLs and Hashes, which will also keep track of the URLs that have been accessed recently.

To further increase the efficiency, we can replicate our caching servers to distribute the load between them.

How can each cache replica be updated? Whenever there is a cache miss, our servers would be hitting a backend database. Whenever this happens, we can update the cache and pass the new entry to all the cache replicas. Each replica can update its cache by adding the new entry. If a replica already has that entry, it can simply ignore it.

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) (</privacy>) to learn more.

Got it!

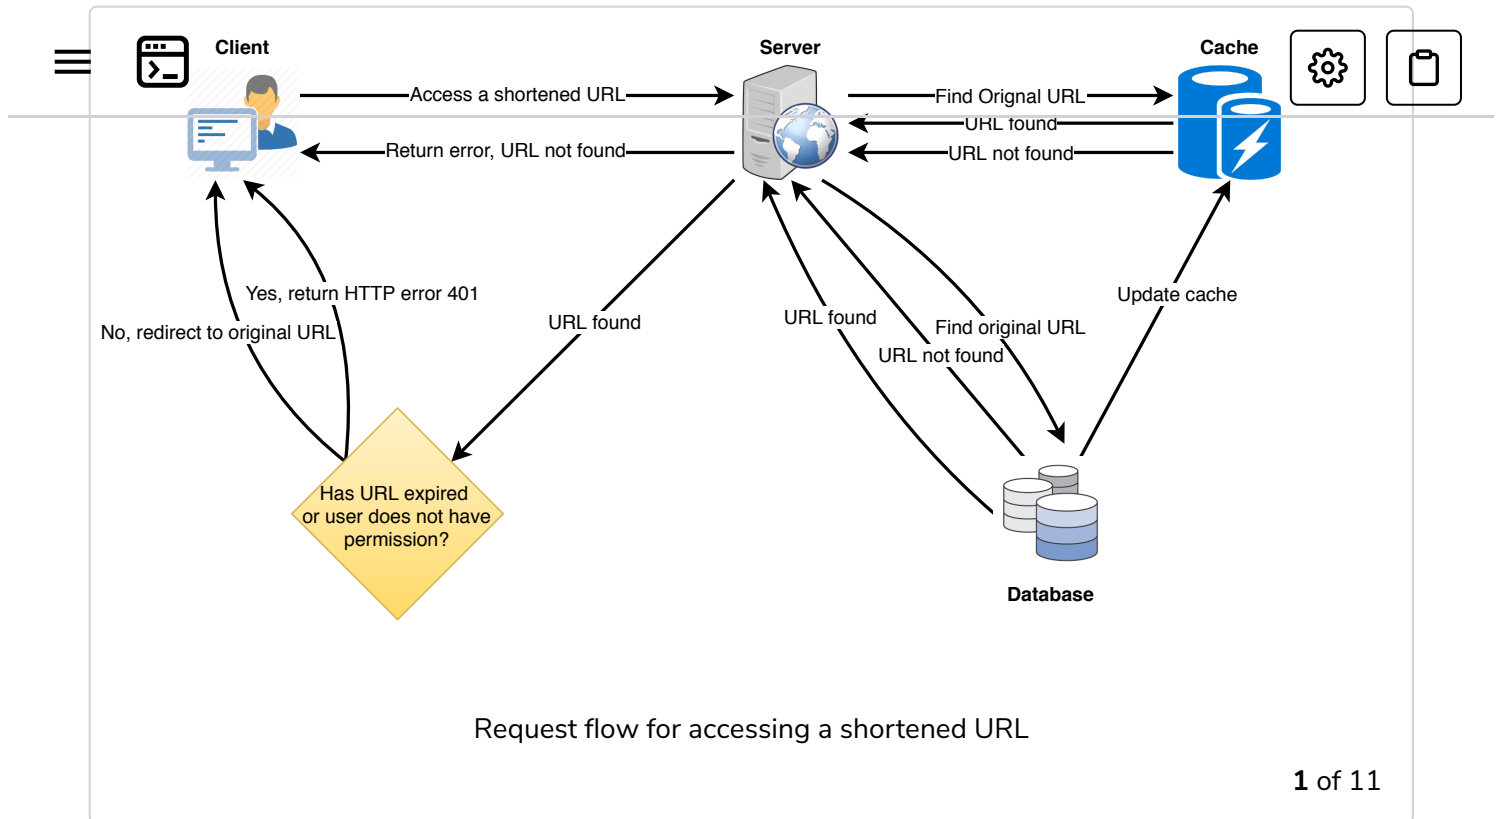

9. Load Balancer (LB)


#

We can add a Load balancing layer at three places in our system:

1. Between Clients and Application servers
2. Between Application Servers and database servers
3. Between Application Servers and Cache servers

Initially, we could use a simple Round Robin approach that distributes incoming requests equally among backend servers. This LB is simple to implement and does not introduce any overhead. Another benefit of this approach is that if a server is dead, LB will take it out of the rotation and will stop sending any traffic to it.

Got it!



A problem with Round Robin LB is that we don't take the server load into consideration. If a server is overloaded or slow, the LB will not stop sending new requests to that server. To handle this, a more intelligent LB solution can be placed that periodically queries the backend server about its load and adjusts traffic based on that.

10. Purging or DB cleanup

#


Should entries stick around forever, or should they be purged? If a user-specified expiration time is reached, what should happen to the link?

If we chose to actively search for expired links to remove them, it would put a lot of pressure on our database. Instead, we can slowly remove expired links and do a lazy cleanup. Our service will ensure that only expired links will be deleted, although some expired links can live longer but will never be returned to users.

- Whenever a user tries to access an expired link, we can delete the link and return an error to the user.
- A separate Cleanup service can run periodically to remove expired links from our storage and cache. This service should be very lightweight and can be scheduled to run only when the user traffic is expected to be low.
- We can have a default expiration time for each link (e.g., two years).
- After removing an expired link, we can put the key back in the key-DB to be reused.
- Should we remove links that haven't been visited in some length of

time, say six months? This could be tricky. Since storage is getting cheap, we can decide to keep links forever. [Click here to learn more.](#)

Got it!

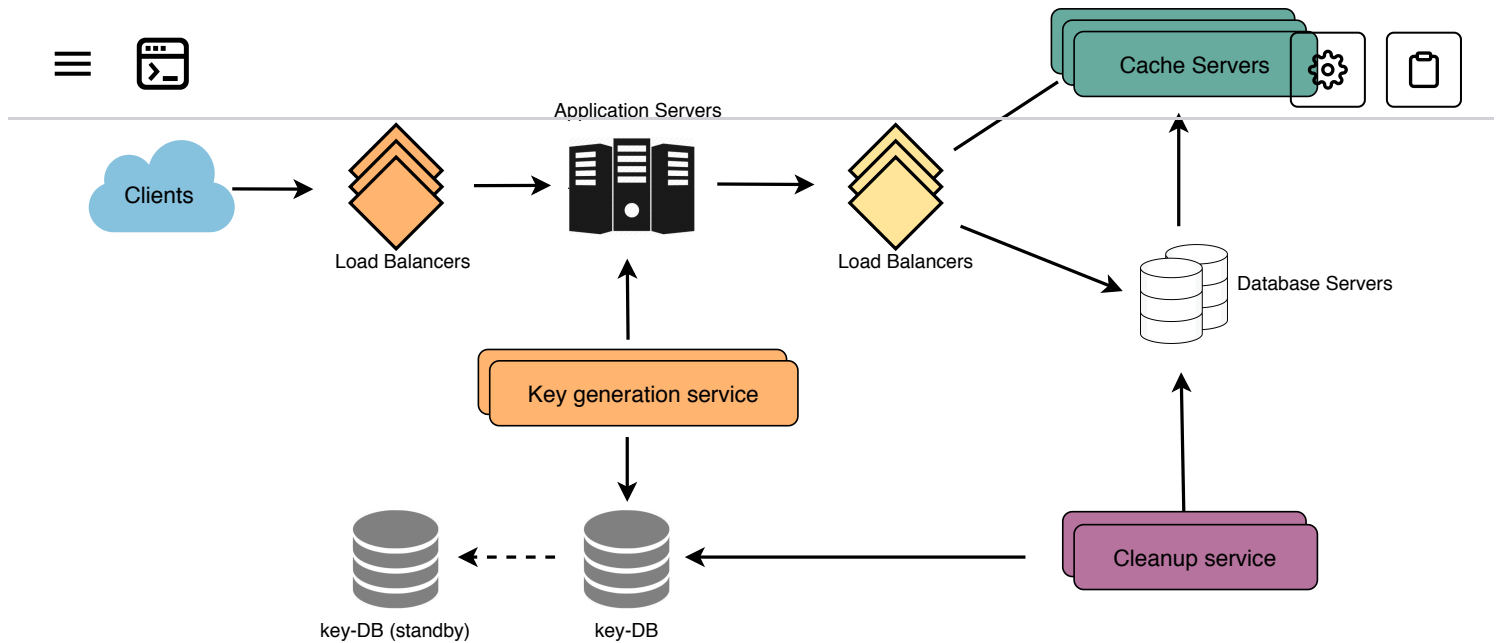

Detailed component design for URL shortening

11. Telemetry

#

How many times a short URL has been used, what were user locations, etc.?

How would we store these statistics? If it is part of a DB row that gets updated on each view, what will happen when a popular URL is slammed with a large number of concurrent requests?

Some statistics worth tracking: country of the visitor, date and time of access, web page that referred the click, browser, or platform from where the page was accessed.

12. Security and Permissions

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy \(/privacy\)](#) to learn more.

Can users create private URLs or allow a particular set of users to access a URL?

Got it!

We can store the permission level (public/private) with each URL in the database. We can also create a separate table to store UserIDs that have permission to see a specific URL. If a user does not have permission and tries to access a URL, we can send an error (HTTP 401) back. Given that we are storing our data in a NoSQL wide-column database like Cassandra, the key for the table storing permissions would be the 'Hash' (or the KGS generated 'key'). The columns will store the UserIDs of those users that have permission to see the URL.

[← Back](#)[Next →](#)[System Design Interviews: A step by s...](#)[Designing Pastebin](#)☒ [Mark as Completed](#)[Report an Issue](#)[Ask a Question](#)https://discuss.educative.io/tag/designing-a-url-shortening-service-like-tinyurl__system-design-problems__grokking-the-system-design-interview

We use cookies to ensure you get the best experience on our website. Please review our [Privacy Policy](#) to learn more.

[Got it!](#)