


Mixed decode: append, attend twice, then merge

The new token joins the BF16 tail before either attention call.

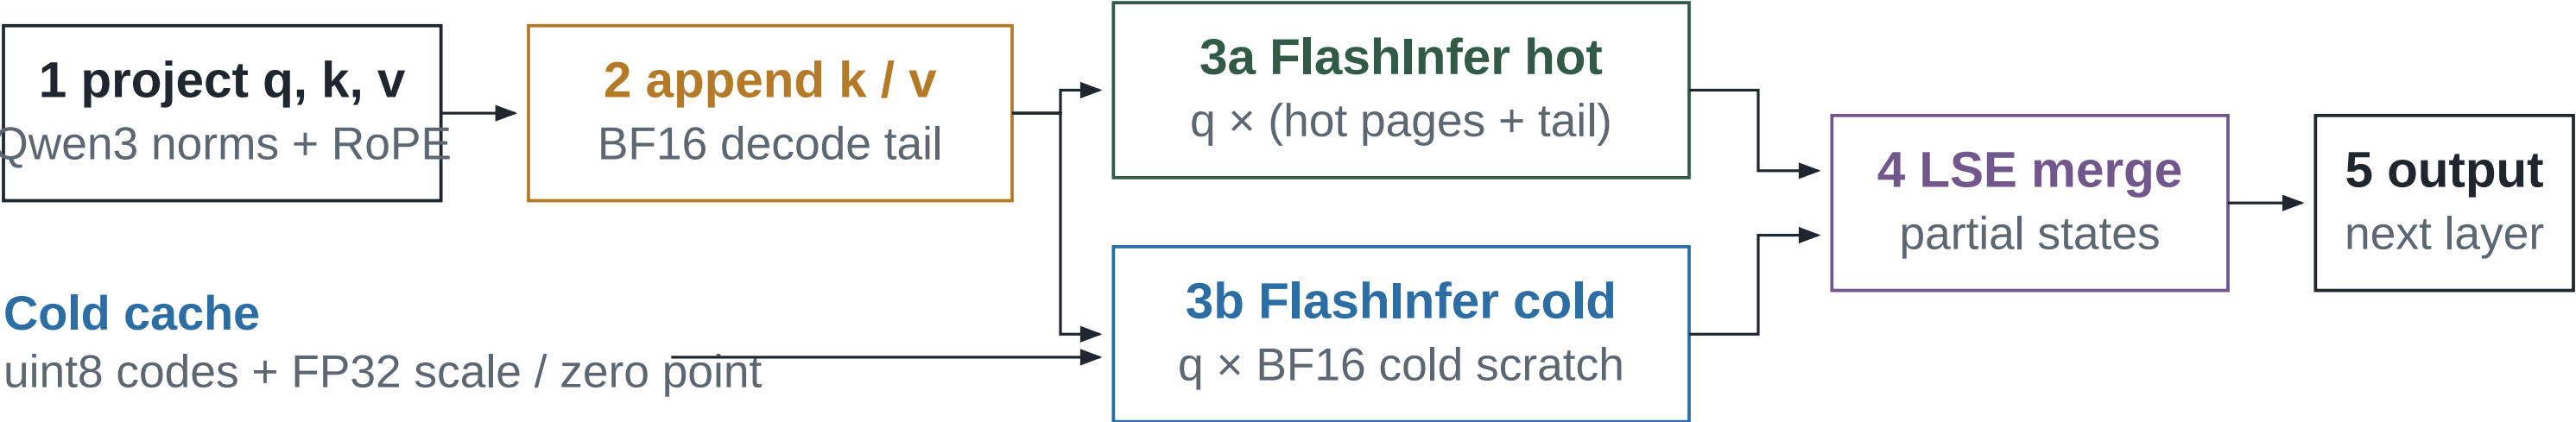

Cold cache

uint8 codes + FP32 scale / zero point

The sequence length is committed after all layers; the loop then advances one token.

Request-lifetime allocations

