
HDOC Day-75

1. Assign explicit values starting from 10 in an enumeration and print them. Input: Nil, Output: A=10, B=11, C=12

Code

```
#include <stdio.h>
enum Values {
A = 10,
B,
C
};
int main() {
 printf("A=%d, B=%d, C=%d\n", A, B, C);
 return 0;
}
```

Output

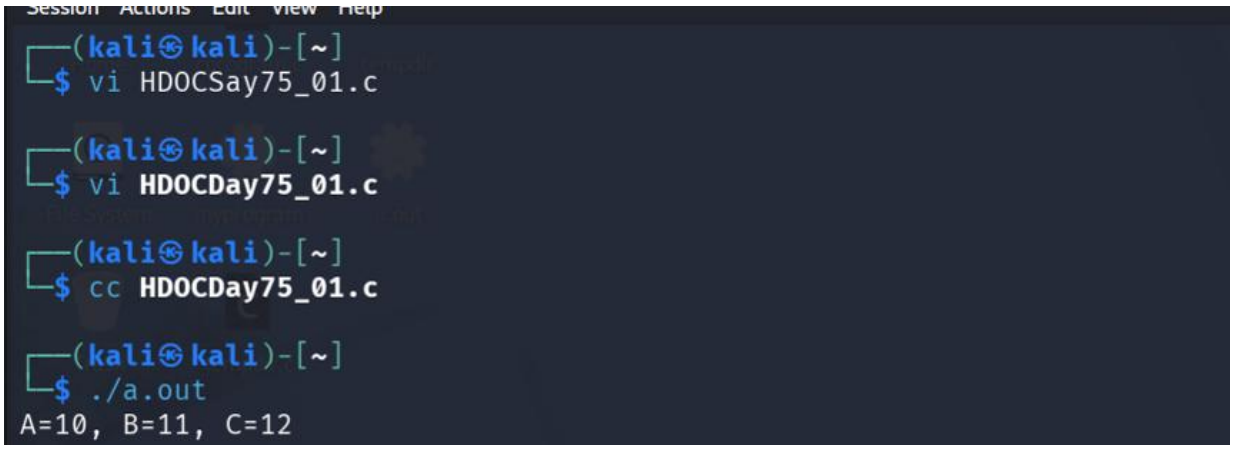

2. Use enumeration to represent menu choices (ADD, SUBTRACT, MULTIPLY) and perform operations using switch. Input: ADD 10 20, Output: 30

Code

```
#include <stdio.h>
#include <string.h>
enum Menu {
   ADD,
   SUBTRACT,
   MULTIPLY
};
int main() {
   char choice[20];
   int a, b;
   enum Menu operation;
   scanf("%s %d %d", choice, &a, &b);
   if (strcmp(choice, "ADD") == 0)
      operation = ADD;
   else if (strcmp(choice, "SUBTRACT") == 0)
      operation = SUBTRACT;
   else if (strcmp(choice, "MULTIPLY") == 0)
      operation = MULTIPLY;
   else {
```

```
        printf("Invalid choice\n");
    switch (operation) {
        case ADD:
            printf("%d\n", a + b);
            break;
        case SUBTRACT:
            printf("%d\n", a - b);
            break;
        case MULTIPLY:
            printf("%d\n", a * b);
            break;
    }
    return 0;
}
```

Output

