




初始化屏
Initialisation Screen

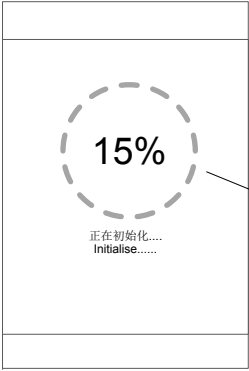

默认首页
Default Main Page

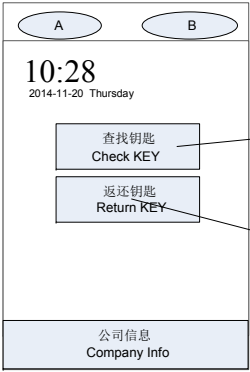

查找钥匙
Check KEY

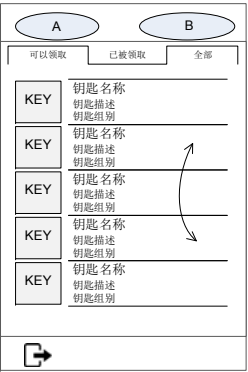


用户返还钥匙界面
User Return KEY Screen



登录键盘
Login Keyboard



默认首页 Default Main Page

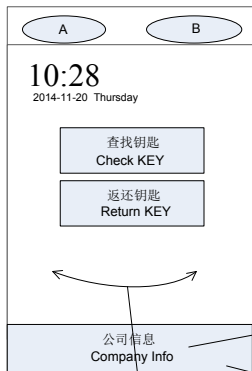

小图标根据状态显示:
SAM是否有用
Mini ICON display live:
SAM in use



小图标根据状态显示:
Wifi, LAN, 充电操作, 电
池操作
Mini ICON display live:
Wifi, LAN, AC operate,
Battery Operate

固定位置, 客户可以下载自己
公司的LOGO, 或名称;
触摸此公司LOGO会打开公司
介绍界面

Fixed Position, Customer can
import their own LOGO or
Company Name;
Touch here will link to open a
company intro screen

Missing:

- 1) Login Mode Setting
- 2) Sound type, alarm, error, not return, mechanical jam, etc.
- 3) error code
- 4) exception prompt
- 5) define common key and special key
- 6) User usage time setting



滑动首页1回将出现第2页用户
更换密码界面以便本人可以更
改密码 (注: 包括管理员也可
以在本界面更换密码)


Slide 1 time from Main screen
(2nd page) will show User
change password screen
allowing user to change their
own password
(note: must also support
Admin to change password
from this screen)

如果存有用户照片, 当用户输
入用户名称后便可显示出来
If database already have
users photo, when user name
is enter, the user photo can
display

选项框
Option bar

退出图标 (回到首页)
EXIT icon (back to main page,
or exit)


公司信息界面

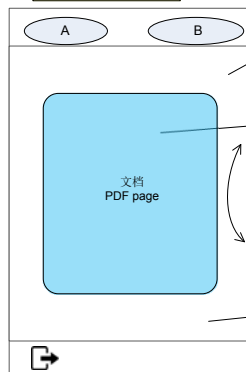

采用默认背景
Use default Background

显示公司的介绍内容 (可以用PDF
导入), 信息包括:
1) 公司的简单介绍内容;
2) 负责的管理员信息, 如名字,
部门, 联系号码, 照片等;
Company introduction page (can
import via pdf file):
1) Company brief intro
2) Responsible Admin staff info,
includes name, dept, contact nos,
photo, etc.

如果超过限时没有触屏动作就退出
If no touch action within default
time, exit to main page







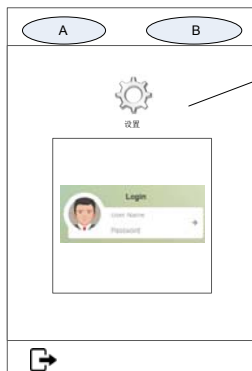


滑动首页2回将出现第3页管理
员登录窗口以便进入“设置”
界面


Slide 2 times from Main
screen (3rd page) will show
Admin Login screen to enter
"Setting" page

查找钥匙

Check KEY

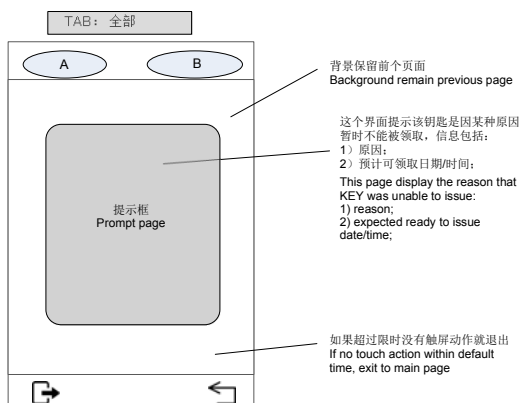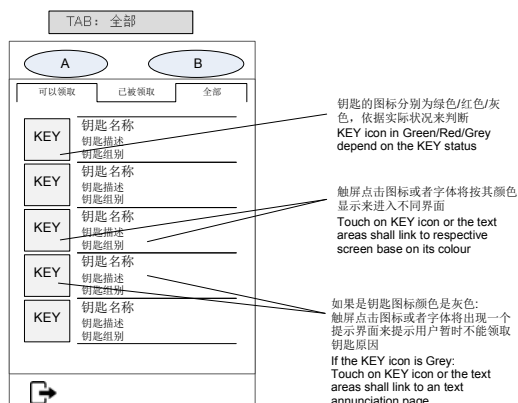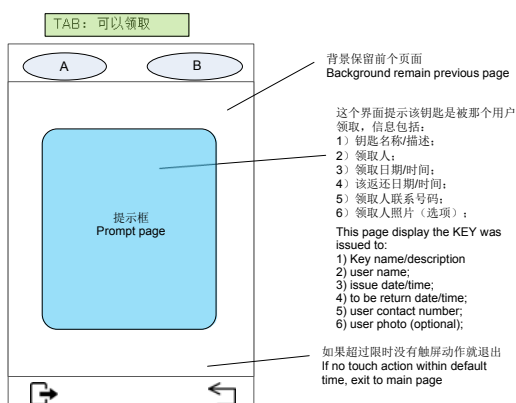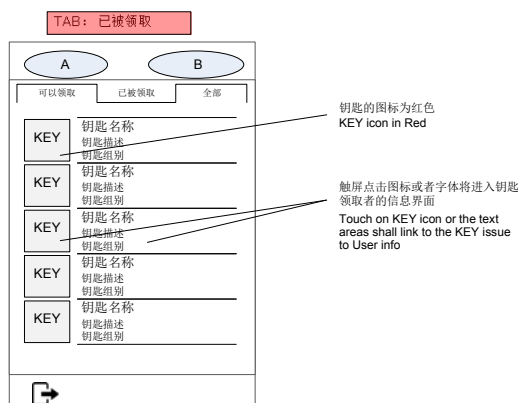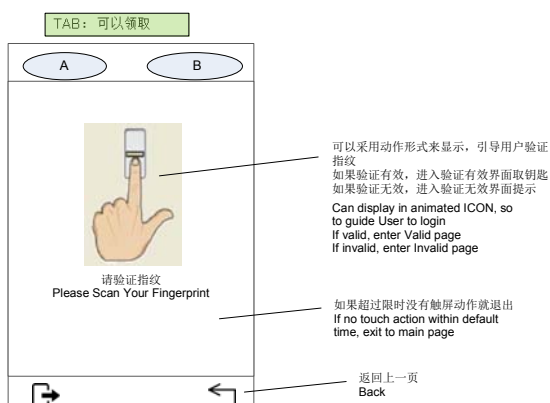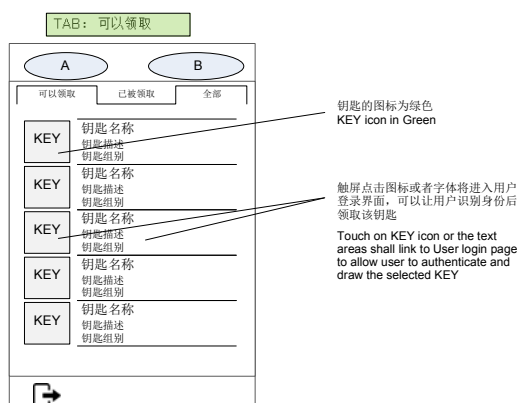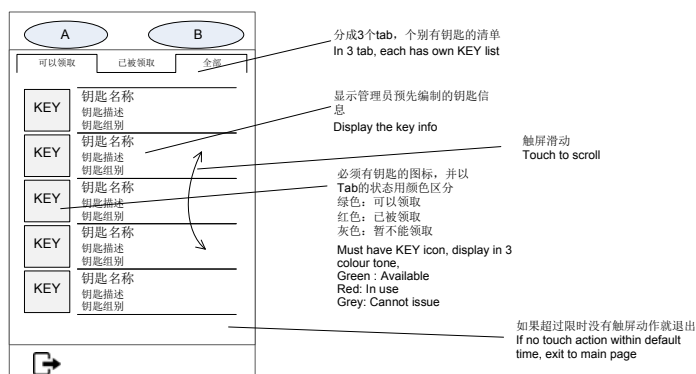

用户登录
User Login

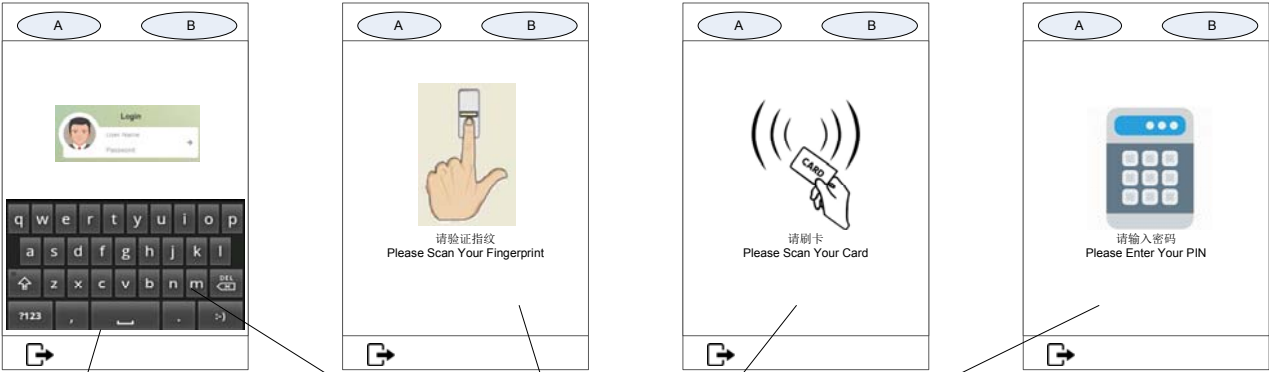


键盘只限用英文字母和数字。
Only require to show english
character and number keypad

根据管理员设置登录模式来弹出登录的界面，
如果验证有效，进入选钥匙界面
如果验证无效，进入无效界面提示
Display accord to Admin staff setting of Login
mode.
If valid, enter KEY select page
If invalid, enter Invalid page to alert

用户选钥匙界面

User Draw KEY Screen

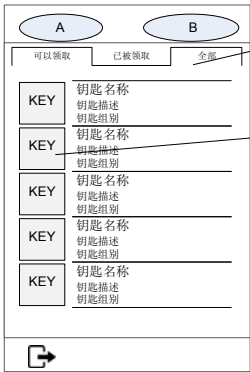


分成3个tab, 只显示该用户权限允许的所有钥匙的清单
In 3 tab, only display the user authorise KEY list

必须有钥匙的图标, 并以Tab的状态用颜色区分
绿色: 可以领取
红色: 已被领取
灰色: 暂不能领取
Must have KEY icon, display in 3 colour tone.
Green : Available
Red: In use
Grey: Cannot issue




可以采用环形动作显示, 以0%-100%来提示用户稍候
Can display in circular animated ICON, from 0%-100% to inform user to wait for KEY

当达到80%-100%之间并在钥匙孔确认钥匙ID后, 显示以下字体:
“钥匙正在准备中, 请稍候”
When the display in between 80%-100%, and verify the KEY ID at the key RFID slot, display following text:
“KEY is in progress, please wait.....”

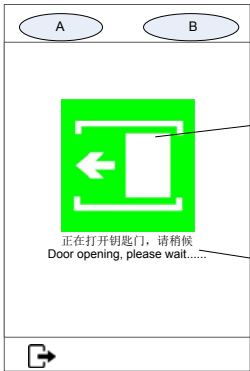


钥匙准备好后, 显示滑门动作图标, 提示用户等候
When KEY is ready, show the animated sliding door ICON to inform User to wait

滑动门在滑动中, 出现闪动提示语
This flashing text appear after the sliding door is moving

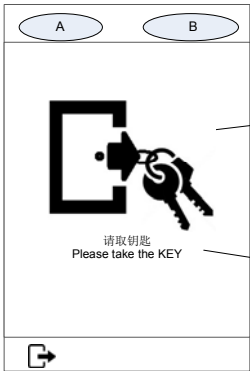


滑动门开完停止后, 出现提示语提示用户取钥匙
When sliding door fully open, display the text message to inform User to take the KEY

出现闪动提示语
This flashing text appear

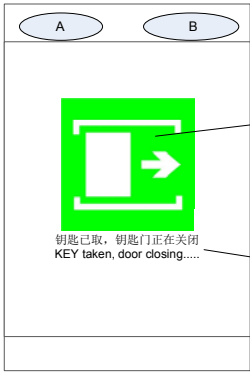

检测到钥匙取走后, 显示滑动门关门动作图标
When detected KEY is taken, show the animated sliding door closed ICON

滑动门在关的过程中, 出现闪动提示语
This text appear while the sliding door closing, must be flashing text

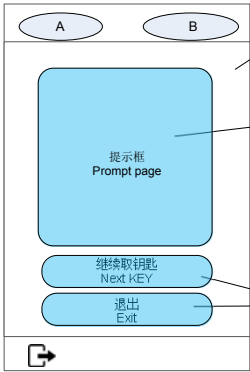

采用默认背景
Use default Background

这个界面提示此钥匙已被本用户领取, 信息包括:
1) 钥匙名称/描述
2) 领取人;
3) 领取日期/时间;
4) 该返回日期/时间;
5) 领取人联系号码;
6) 领取人照片 (选项);
This page display the KEY has issued to this user:
1) Key name/description
2) user name;
3) issue date/time;
4) to be return date/time;
5) user contact number;
6) user photo (optional);

同时显示此按钮允许用户领取另一把钥匙或结束退出
At the same time, display this button to allow user to draw next KEY or Exit

初始化屏

Initialisation Screen




此界面是只限于每次开机后出现的初始化界面，采用环形动作显示，以0%-100%来提示用户等待初始化完成


This screen only appear whenever device power switch on.Can display in circular animated ICON, from 0%-100% to inform user to wait for initialisation to complete

用户返还钥匙界面








User Return KEY Screen

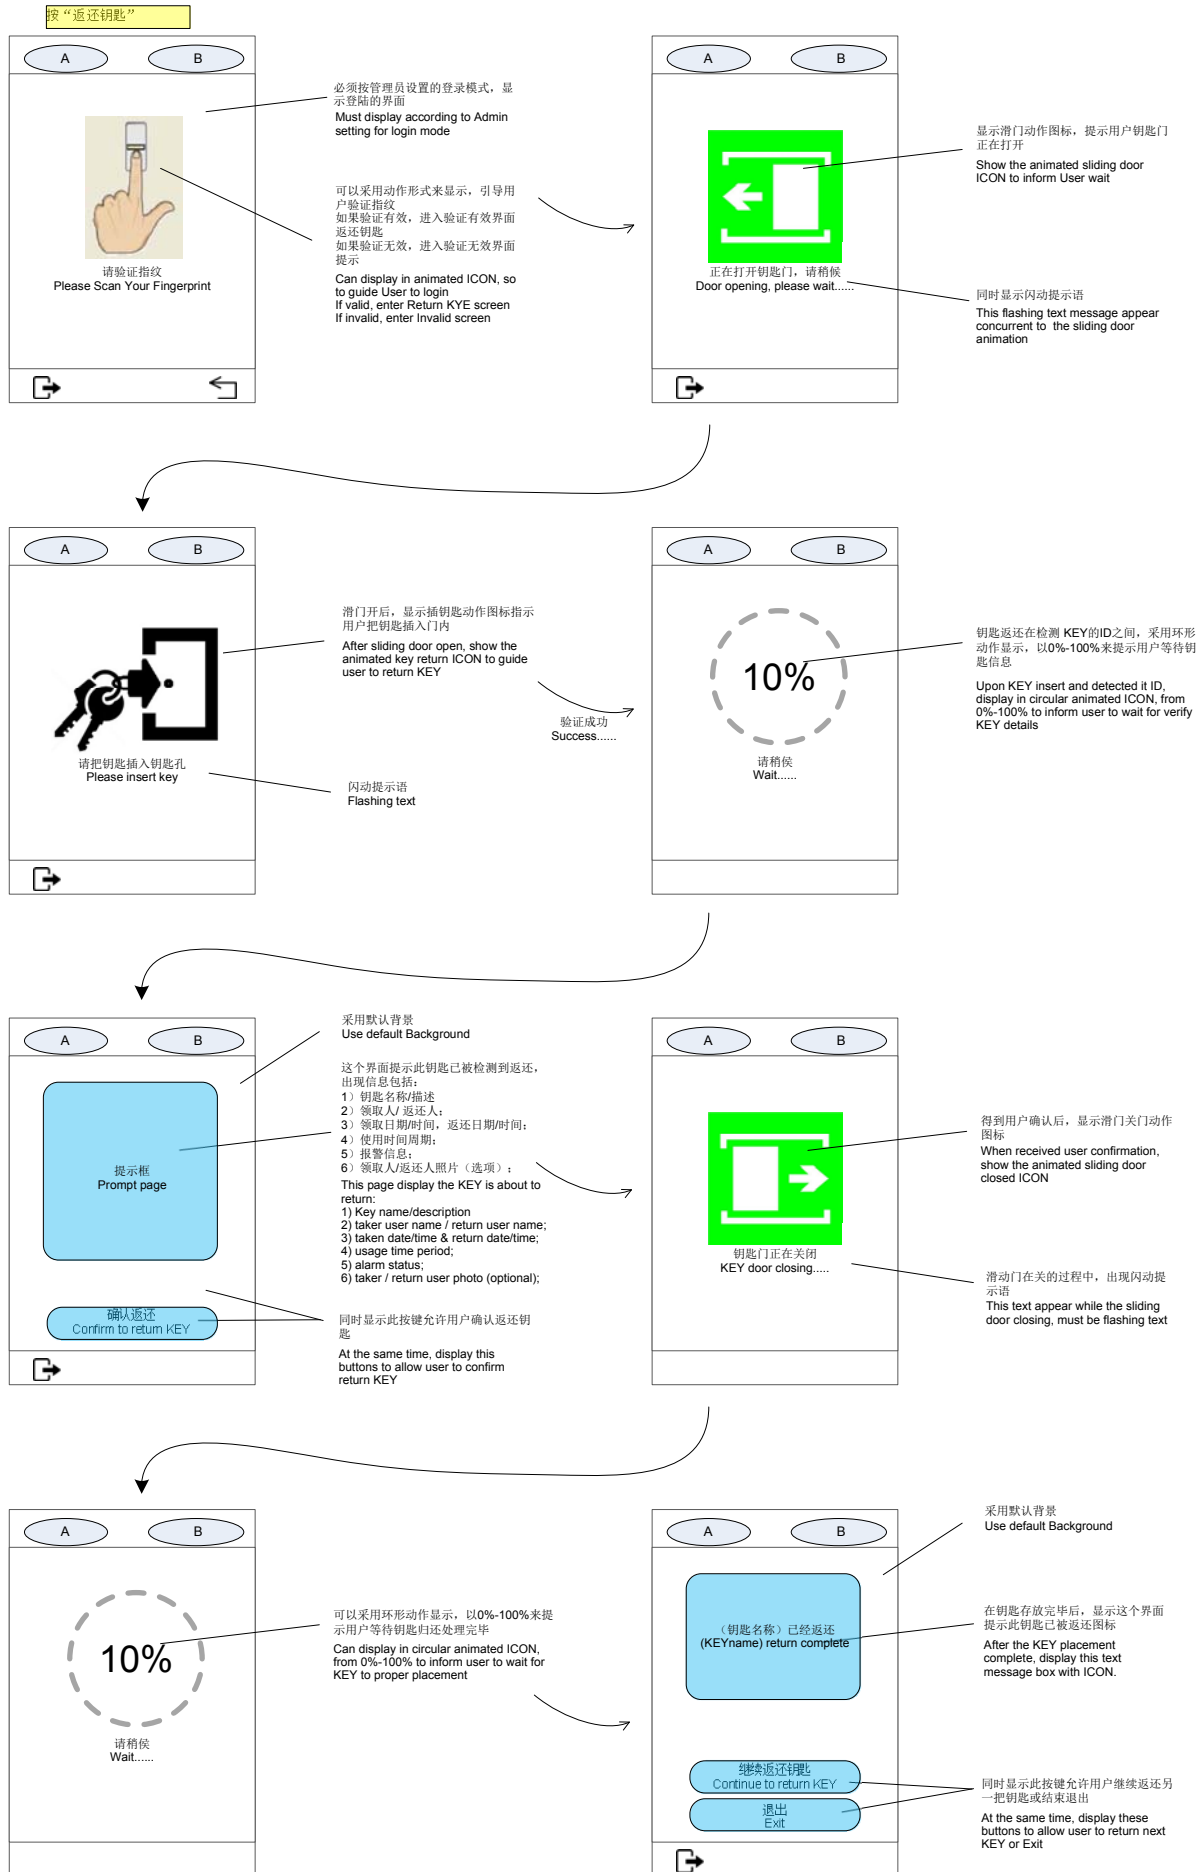

读取钥匙的ID信息
Read KEY info

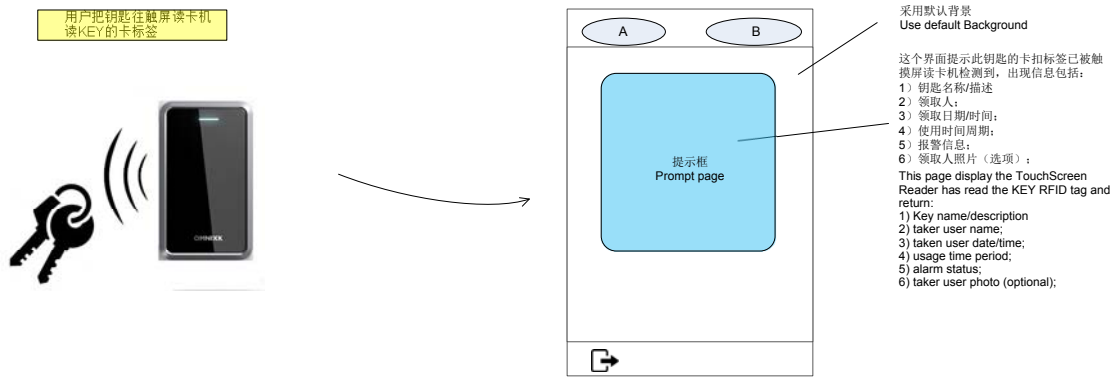


管理员界面
Admin Screen

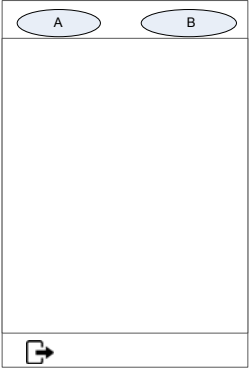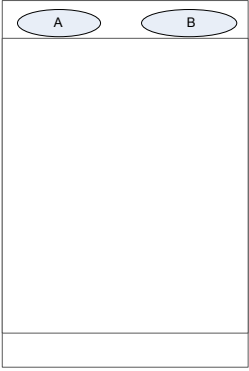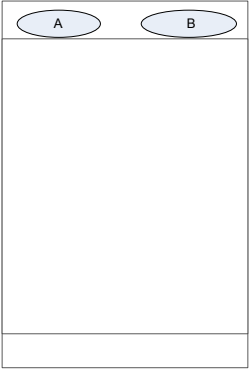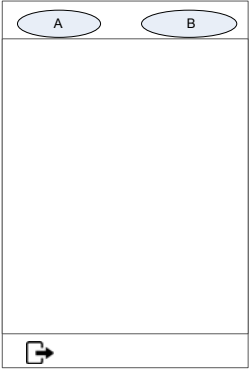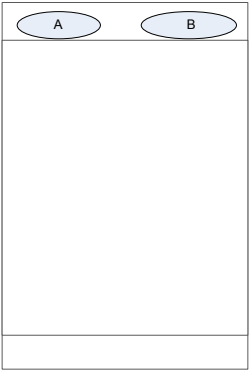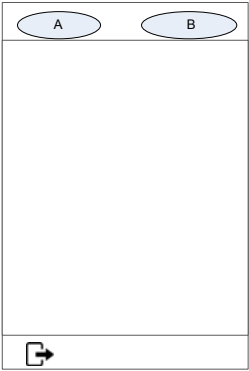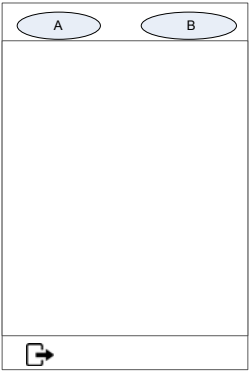

钥匙存放界面

Key Configure Screen

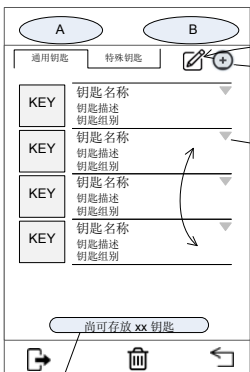

提示框，只需显示一阵3-5秒时间就行
This prompt appear to show user the remaining available nos of key to save

按此三角形图标扩展钥匙信息如下
This triangle ICON expand the KEY details as follow



按编辑也出现一样的界面，除了KEY-ID不能改（灰色）外，所有的信息都在并可以更改。
This Edit ICON show similar page, KEY-ID is grey cannot be changed, all other can be change and updated

按新增键出现添加表如下
This Add ICON appear KEY adding form as follow

Form fields for adding a new key:

- KEY name
- KEY Tag ID
- KEY description
- KEY group
- KEY nos.
- Time Operate

Below the form are two buttons: 通用钥匙 Common and 特殊钥匙 Special.

如果是在
去SaveKEY界面
goto SaveKEY screen
保存后重新回到钥匙表
Save and return to KEY List page

填表时出现键盘如下:
Fill form appear keyboard



按图案图标出现如下提示在图案图标上
This Picture ICON appear below prompt superimpose onto the Picture ICON

Take photo
Select from Gallery

KEY nos.


这个上下键允许框内的数目增或减从1-5把

This Up/Down button to increase or decrease the nos in the combo box. From 1-5


Time Operate

按时区图标出现时区设置界面
This Timezone ICON will show time access setting page


用户返还钥匙界面
User Return KEY Screen

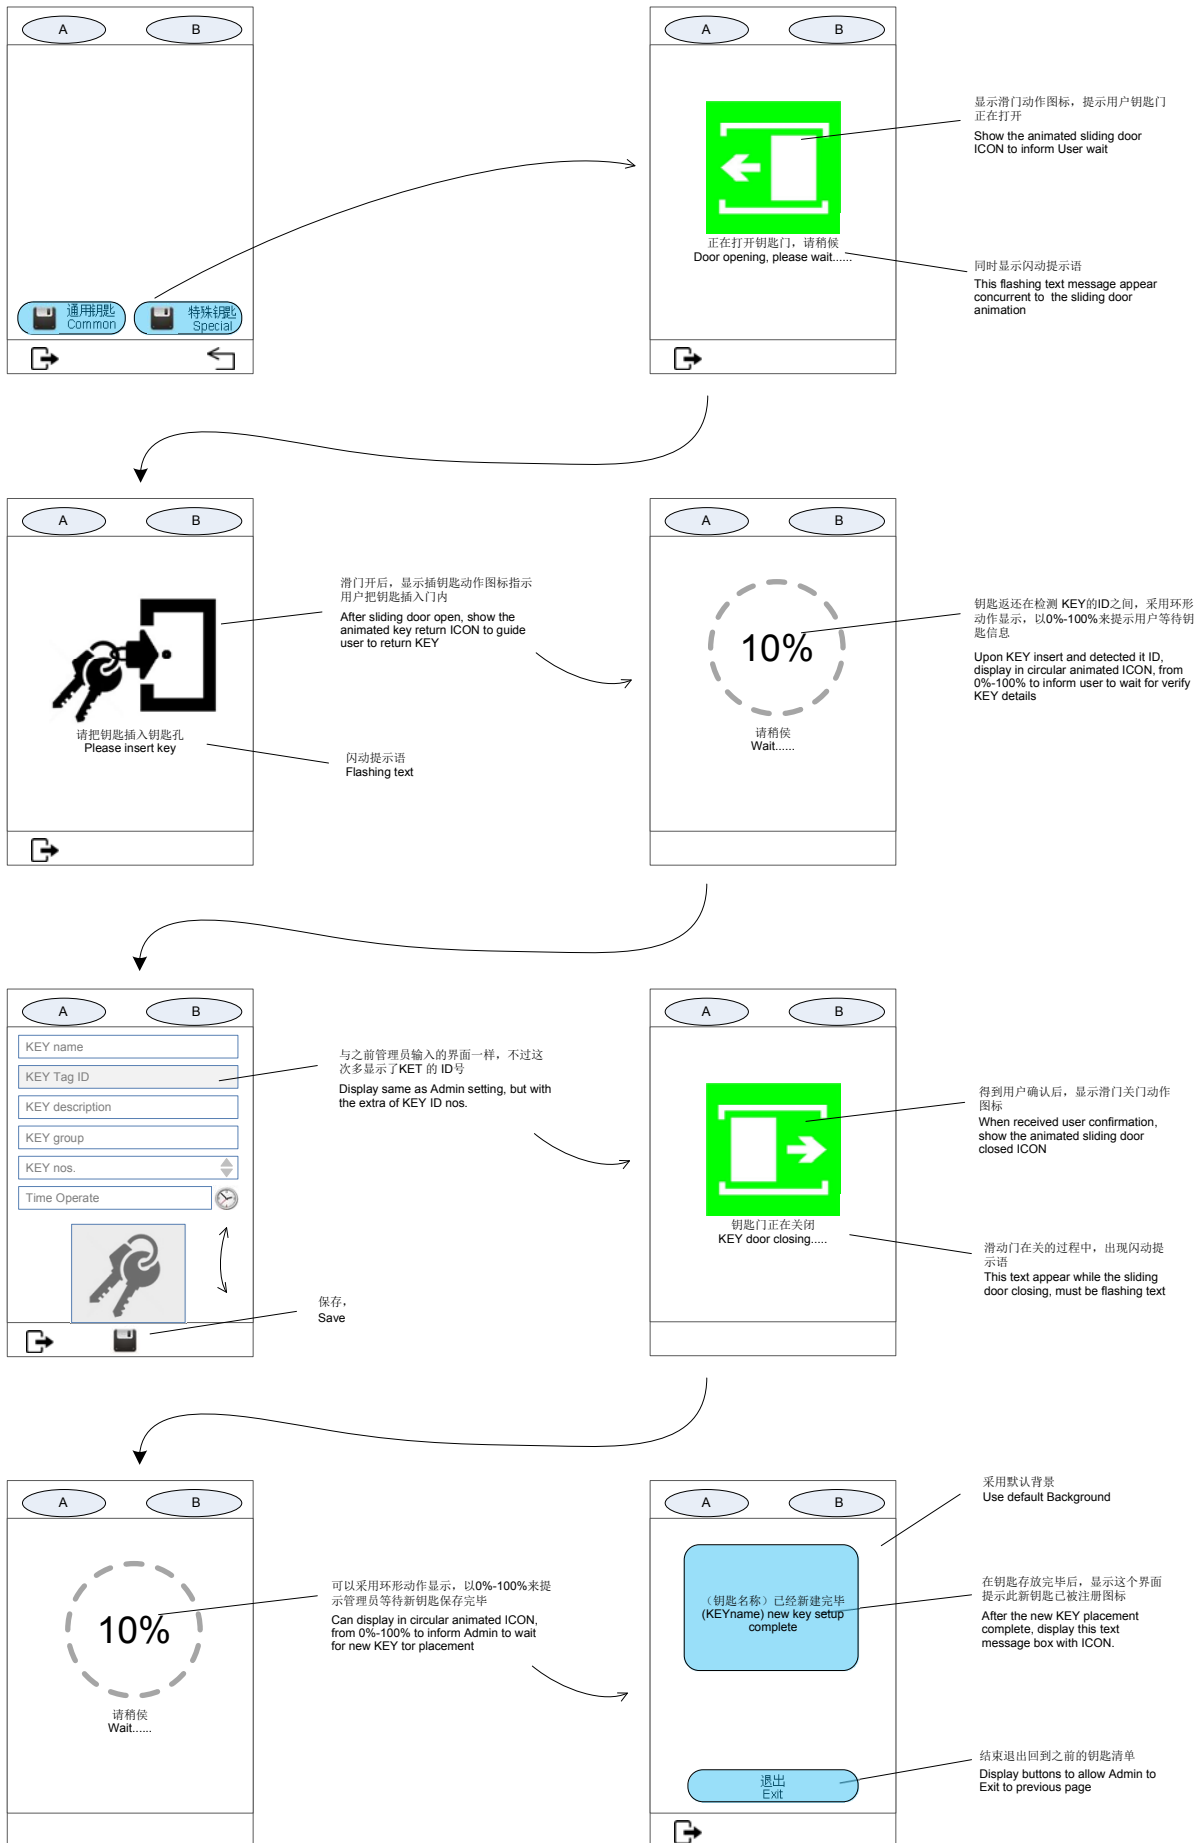

设置用户界面
Setting User Screen

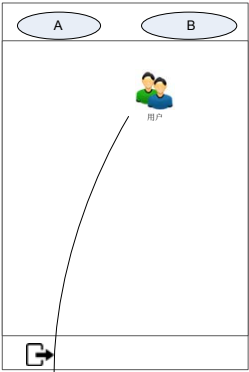

按编辑也出现一样的界面，所有的信息都在并可以更改。
This Edit ICON show similar page, all fields can be change and updated

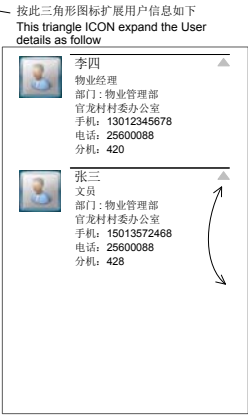

按新增键出现添加表如下
This Add ICON appear USER adding form as follow

User name
User Bio Info
User Card/Tag ID
User PIN
Company
Dept
Title
Handphone
Tel
Ext.

填表时出现键盘如下：
Fill form appear keyboard



按图案图标出现如下提示在图案图标上。
This Picture ICON appear below prompt superimpose onto the Picture ICON

Take photo
Select from Gallery

可以加上以下的内容
Can add in below fields

Personal Identity card no.
Staff code/ID:
Address
Address
Postal Code

User Card/Tag ID

按刷卡图标出现提示要刷卡的界面，可以是动画形式
This Flash card ICON will show a request to flash a card page, can be animated file


User Bio Info

按指纹图标出现提示要用户按指纹的界面，可以是动画形式
This Bio-Info ICON will show a request to scan user fingerprint, can be animated file



在 + 或 的选项
保存后重新回到用户表
Save and return to User List page

设置权限界面
Access Right Screen

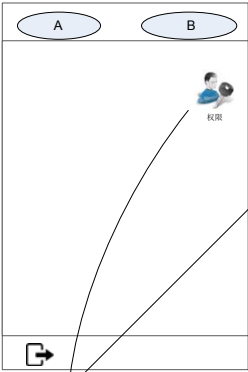

首次点击权限图标将出现已经设置好的用户列表，不过因为没有分配领取钥匙，因此必须是显示“可领取0把钥匙”。

如没有设置用户，此表应该是清空的。管理员可以按“新增”来设置个别用户的钥匙权限。

First time activate this Access Rights ICON will show the user list page. However since there is no assign of KEYS the list display as “Authorise to take 0 keys” .

If there is no User setting, then this page shall be blank.

The Admin can press the “NEW” ICON to assign User to KEYS access rights.



按编辑也出现一样的界面，所有的信息都在并可以更改。

This Edit ICON show similar page, all fields can be change and updated



按此三角形图标扩展用户权限信息如下

This triangle ICON expand the User Access Rights details as follow

按新增键出现添加表如下

This Add ICON appear Access Rights adding form as follow



点击便出现钥匙清单，可让管理员选择分配给用户

This Select ICON will show the KEY List page to allow Admin to select the keys access rights assign to user.

在还没有分配时此列表应该是清空的


Before giving access rights, this list page should be blank

点击这个钥匙图标可以链接打开钥匙信息表

Press this KEY ICON will direct to KEY Info page


语言和输入界面

Language & Input Screen

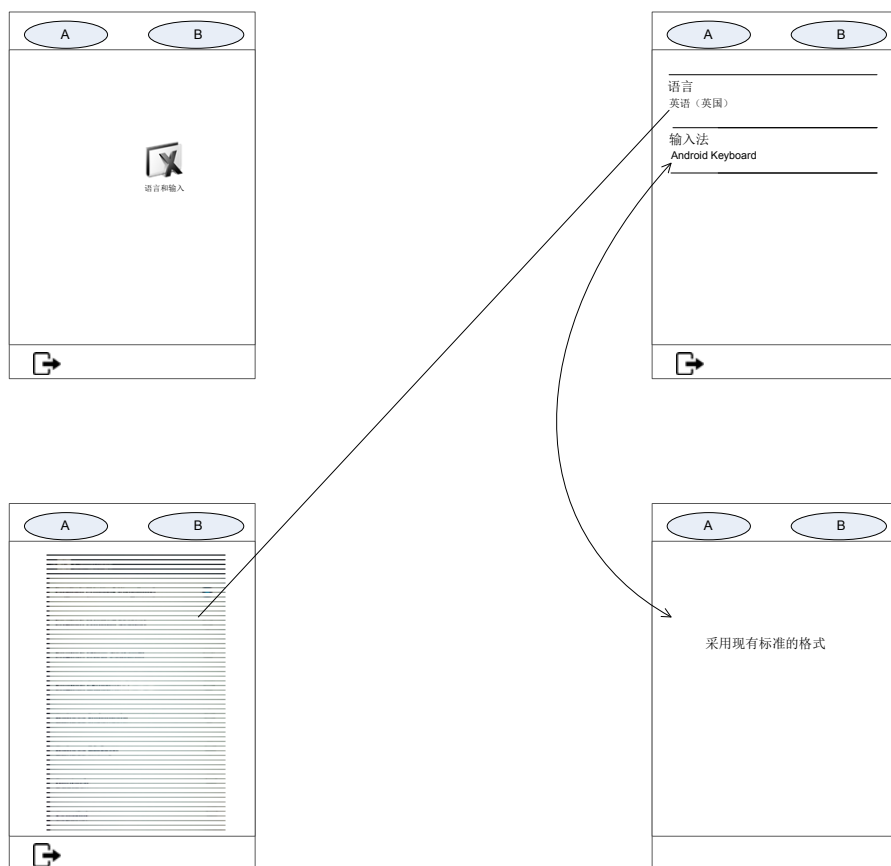


网络和无线界面

Network & Wifi Screen

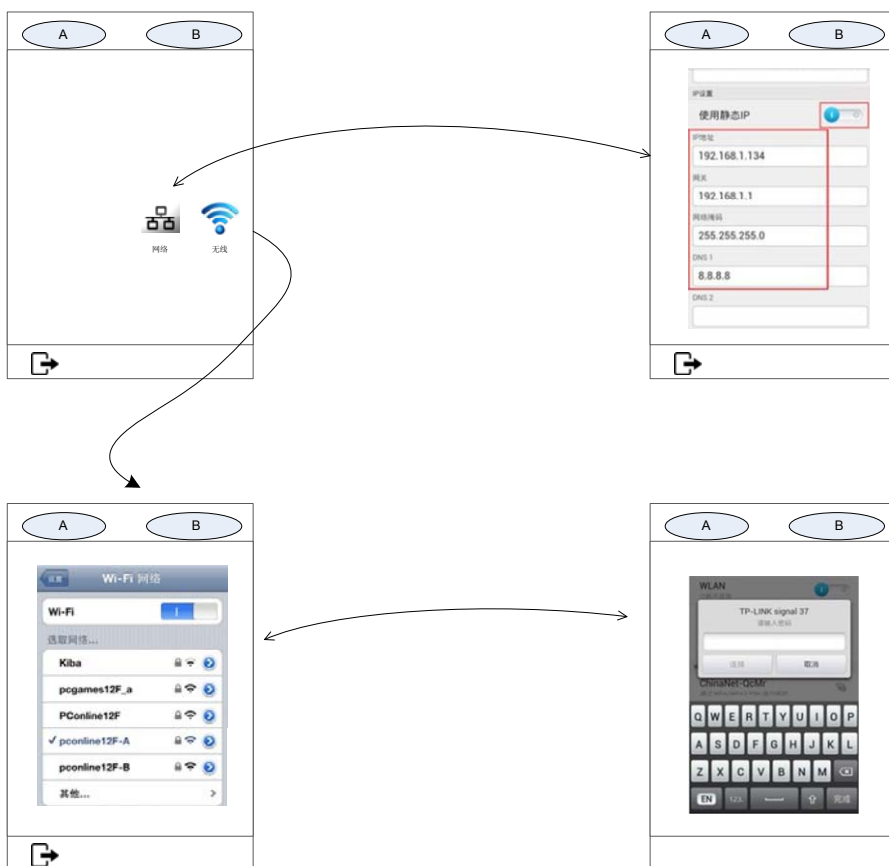


摄像机和声音界面
Camera & Sound Screen

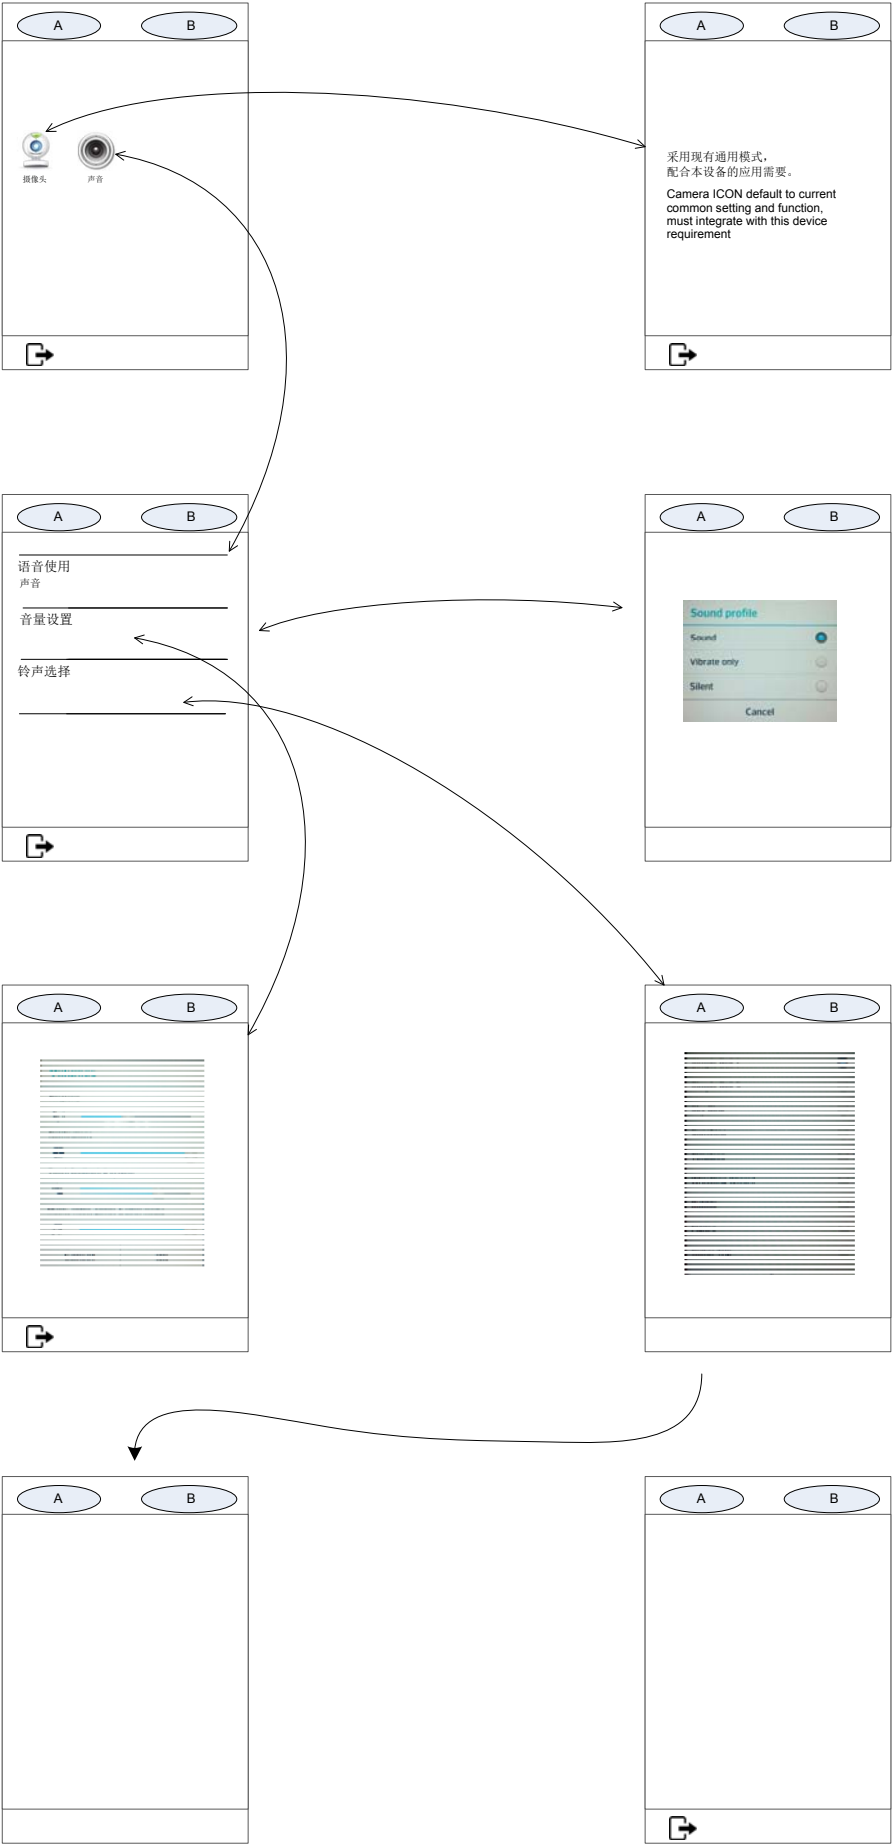

数据导出和事件日志界面

Export & Event Screen

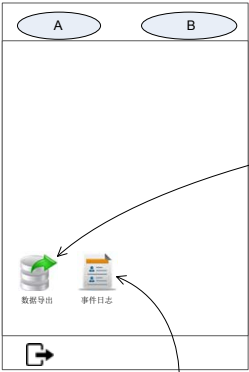

The 'Export & Event Screen' configuration panel includes the following sections:

- 导出方式 (Export Method):** A toggle switch labeled 'ON' is turned on. Below it are radio buttons for 'WIFI' (selected) and 'USB'.
- 导出格式 (Export Format):** Radio buttons for 'PDF' (selected), 'EXCEL', and 'TXT'.
- 导出内容 (Export Content):** Checkboxes for '钥匙事件记录' (Key Event Record) and '用户表' (User Table), both of which are checked.

此处只有在导出ON才显示
This section only appear when export ON

再继续添加内容
This section export the content, add more contents

The 'Event Log' screen displays a table of key events. At the top, there is a filter bar with a dropdown menu labeled '按钥匙' (By Key) and a button labeled '按用户' (By User). Below the filter bar, the table is divided into sections for 'YESTERDAY' and '2014-Nov-22'. Each section contains a list of key events with columns for '钥匙名称' (Key Name), '用户名称' (User Name), and '领取时间 / 返还时间' (Pickup / Return Time). The table is color-coded: green for normal events and red for alarm events.

按钥匙
按用户
警报事件 (此选项只按钥匙显示)

根据不同的选择来显示, 同时也可以以不同的颜色来区分
绿色: 正常
红色: 警报
Display according to selection.
Can display in colour mode,
Green : Normal
Red: Alarm