

Brain Tumor Detection using AI

Name of Authors:

Aryan Jadhav
Mihir Prasad
Soham Mane
Sharvari Jadhav
Shweta Ahire

Name of Institute:

Vishwakarma Institute of Technology

Abstract:

Cancer is one of the leading problems in the world today. There are about 18.1 million cancer patients in the world today. Cancer can be difficult to detect in the early stages. We can use Artificial Intelligence to find out patterns in the reports of patients in the early stages and help in the prevention of cancerous tumors from growing any further. Artificial intelligence is a computer program or algorithm that uses past data to make future predictions. It teaches itself how to analyze and interpret data, which helps machine learning algorithms may pick up on patterns that are not readily discernable to the human eye or brain. As these algorithms are exposed to more new data, their ability to learn and interpret the data improves. Researchers have also used deep learning, a type of machine learning, in cancer imaging applications. Deep learning refers to algorithms that classify information in ways much to the human brain does. Deep learning tools use “artificial neural networks” that mimic how our brain cells take in, process, and react to signals from the rest of our body. Research on AI for cancer imaging: Studies suggest that AI has the potential to improve the speed, accuracy, and reliability with which doctors answer those questions. But what scientists are most excited about is the potential for AI to go beyond what humans can currently do themselves. AI can “see” things that we humans can’t, and can find complex patterns

and relationships between very different kinds of data. Deep learning, a subset of machine learning, involves artificial neural networks that mimic the human brain's processing. AI in cancer imaging has shown potential to improve speed, accuracy, and reliability in diagnosis, offering capabilities beyond human capacity to identify complex patterns and relationships in diverse data types.

Items/Keywords:

- Artificial intelligence
- Cancerous tumor
- Machine Learning Algorithms
- Neural Networks
- Deep learning

Introduction :

There is a very large group of people, whose exact numbers are unknown but they continue to increase, who are diagnosed with a type of brain tumors called secondary brain tumor. Early detection is always likely to accelerate the process of controlling and eliminating the tumor at early stages, with the help of highly efficient

clinical imaging devices. Meanwhile, patients who suffer from brain tumors face the problem of MRI machines inability to precisely detect and classify the brain tumor, which could lead to physical complications that cause disability. A brain tumor is the evolution of abnormal cells in the brain. Most brain tumors are called primary brain tumors, that is to say they are constructed in the brain and are not expanded from other area. Tumors may constitute and remain in one location, or may be invasive and spread into adjacent tissues. Tumors are classified either into benign (non- cancerous) or malignant (cancerous). Thus, it is difficult to call any brain tumor "benign", because both kinds can cause serious problems. Despite the rapid growth in brain tumor segmentation approaches, there are still many challenges in this field. Automatic segmentation of brain images has a critical role in decreasing the burden of manual labeling and increasing robustness of brain tumor diagnosis. Secondary brain tumors, a rising concern, lack precise early detection due to limitations in MRI machines. These tumors, evolving from abnormal brain cells, are classified as primary (constructed in the brain) or secondary (expanded from other areas). The challenges in brain tumor segmentation persist despite rapid advancements. Automatic segmentation of brain images plays a crucial role in reducing manual labeling burdens and enhancing the robustness of brain tumor diagnosis.

Contents:

Cancer is one of the leading problems in the world today. There are about 18.1 million cancer patients in the world today. Cancer can be difficult to detect in the early stages. We can use Artificial Intelligence to find out patterns in the reports of patients in the early stages and help in the prevention of cancerous tumors from growing any further.

Artificial intelligence is a computer program or algorithm that uses past data to make future predictions. It teaches itself how to analyze and interpret data, which helps machine learning algorithms pick up on patterns that are not readily discernible to the human eye or brain. As these algorithms are exposed to more new data, their ability to learn and interpret the data improves. Researchers have also used deep learning, a type of machine learning, in cancer imaging applications. Deep learning refers to algorithms that classify information in ways much as the human brain does. Deep learning tools use “artificial neural networks” that mimic how our brain cells take in, process, and react to signals from the rest of our body. Research on AI for cancer imaging: Studies suggest that AI has the potential to improve the speed, accuracy, and reliability with which doctors answer those questions. But what scientists are most excited about is the potential for AI to go beyond what humans can currently do themselves. AI can “see” things that we humans can’t, and can find complex patterns and relationships between very different kinds of data.

AI can “see” things that we humans can’t, and can find complex patterns and relationships between very different kinds of data. AI can be more reliable when it comes to identifying if a tumor is cancerous or not. The accuracy of AI is reliable enough to be used in real life. This can help radiologists with the identification of tumors. This can also help the doctors, as AI can help to identify some specific features or symptoms of the tumor. This can further help doctors to learn about Cancer.

As a result, the radiology department has gained prominence in the study of brain tumors using imaging methods. Many studies have looked at the causes of brain tumors, but the results have not been conclusive. FCM helps to increase

accuracy. Amato et al. structured PC-assisted recognition using mathematical morphological reconstruction (MMR) for the initial analysis of brain tumors. Test results show the high accuracy of the segmented images while significantly reducing the time of calculation. A classification of neural deep learning systems was proposed for identifying brain tumors. Discrete wavelet transformation (DWT), excellent extraction methods, and main component analysis (PCA) were applied to the classifier here, and performance evaluation was highly acceptable across all performance measurements. In , a new classifier system was developed for brain tumor detection. The proposed system achieved 92.31% of accuracy. In , a method was suggested for classifying the brain MRI images using an advanced machine learning approach and brain structure analytics. To identify the separated brain regions, this technique provides greater accuracy and finds the ROI of the affected area. Researchers in [proposed a strategy to recognize MR brain tumors using a hybrid approach incorporating DWT transform for feature extraction, a genetic algorithm to reduce the number of features, and to support the classification of brain tumors by vector machine (SVM). Specific segmentation concepts include region-based segmentation edge-based techniques and thresholding techniques for the detection of cancer cells from normal cells. The common classification method is based on the Neural Network Classifiers, SVM Classifier, and Decision Classifier. In, a brain tumor detection method was developed using the GMDSWS-MEC model. The result shows high accuracy and less time to detect tumors.

Cancer is the leading cause of death in the world. This disease is characterized by the development of abnormal cells that divide uncontrollably and have the ability to infiltrate and destroy normal body tissue. Cancer often

has the ability to spread throughout your body. Signs and symptoms caused by cancer will vary depending on what part of the body is affected. Some general signs and symptoms associated with, but not specific to, cancer, include:

- Fatigue.
- Lump or area of thickening that can be felt under the skin.
- Weight changes, including unintended loss or gain.
- Changes in bowel or bladder habits


Cancer is caused by changes (mutations) to the DNA within cells. The DNA inside a cell is packaged into a large number of individual genes, each of which contains a set of instructions telling the cell what functions to perform, as well as how to grow and divide. Errors in the instructions can cause the cell to stop its normal function and may allow a cell to become cancerous. This is how cancer is formed in the body.

The technique used for making this model work is CNN (Convolutional Neural Network). The different stages by which CNN is applied to the dataset are:


1. First, the required packages are imported.
2. Then the folder where the dataset is stored is imported.
3. Image reading is done after that it is labeled (such as 0 for benign and 1 for malicious) and then the reports are stored in the data frame.
4. Then the size of the image is changed to 224*224 and the shape of the image is.
5. Image normalization is a complete training dataset and a validation dataset was used for evaluating the model.
6. Then the accuracy of the model is evaluated using the test images.
7. The loss graph and the accuracy graph are plotted. The entire implementation is done using python 3.8 and is executed on Google Colaboratory and the model is stored in Google Drive

Epoch	Test Loss	Validation Loss
0	150	120
1	60	240
2	30	460
3	60	160
4	15	200
5	10	140
6	20	410
7	15	320
8	20	210
9	10	260


When the model is applied to the testing data set for 10 epochs, a validation accuracy of 82.86% is obtained and the validation loss is also less. As seen in figure 3, when the model is applied to the validation, then a high loss is obtained but once applied to the testing set, the loss gradually decreases with the increasing number of epochs.

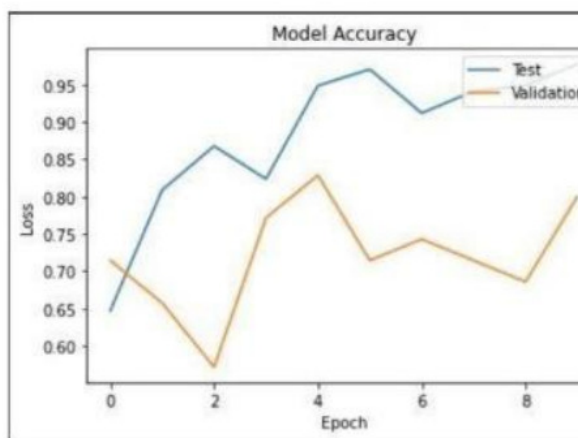


The accuracy of the convolutional neural network model achieved after applying it to the testing set was 97.79%. with a very minimal loss with increasing epochs. The difference in model accuracy can be seen between the validation dataset and the training dataset. System architecture:

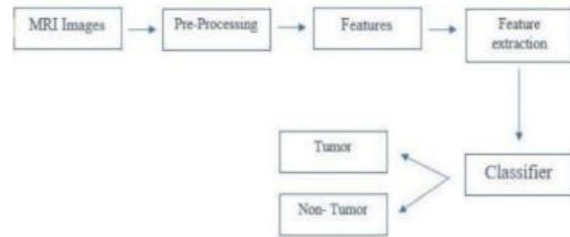


ER Diagram:

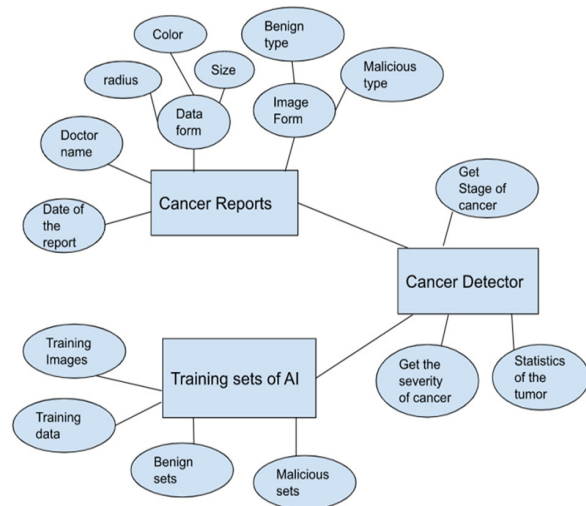

4

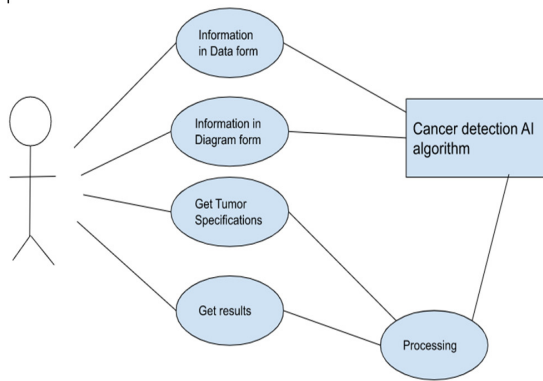


Activity Diagram

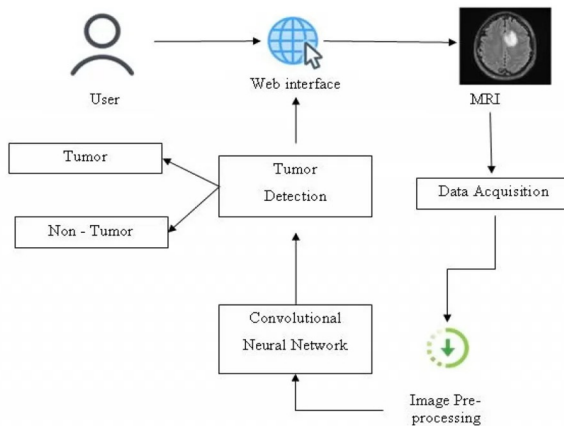


Data Flow Diagram:

Level 0

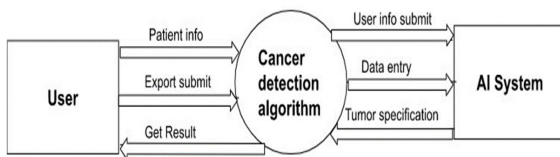

Level 1

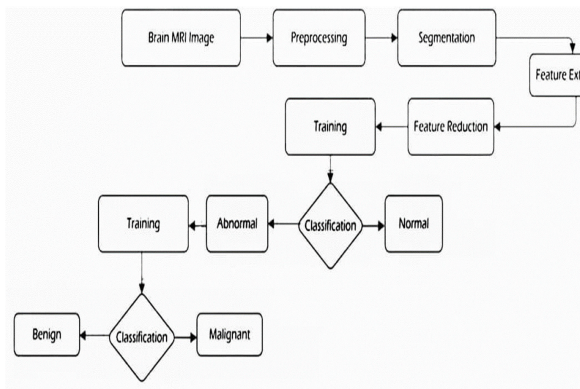

Conclusion:

There are various machine learning algorithms that can be used to predict the state of a tumor based on MRI scans. One popular algorithm is the convolutional neural network (CNN), which is a type of deep learning algorithm.

To train a CNN for tumor classification, a dataset of labeled MRI scans is required. The dataset should include examples of both benign and malignant tumors, as well as images with various levels of complexity and quality. The CNN is then trained on the dataset, with the goal of minimizing the error between the predicted and actual tumor classification.

Overall, using a CNN algorithm to predict the state of a tumor from MRI scans can provide doctors with a reliable and accurate tool for diagnosis and treatment planning.

Exploration of various machine learning algorithms, with a particular focus on the Convolutional Neural Network (CNN), unveils a promising avenue for tumor prediction from MRI scans. The CNN, as a deep learning algorithm, showcases its efficacy in training on a diverse dataset, providing healthcare professionals with a reliable and accurate tool for cancer diagnosis and treatment planning.

Reference:

- IEEE Xplore, 2022: Active Contour Neural Network Identifying MRI Image Edge Computing Methods Deep Learning Bone Cancer Detection
- Sinthia P and K. Sujatha, "A novel approach to detect the bone cancer using K-means algorithm and edge detection method", ARPN Journal of Engineering and applied science,11(13), July 2016.
- Kishor Kumar Reddy, Anisha P R, Raju G V S, "A novel approach for detecting the tumor size and bone cancer stage using region growing algorithm", International Conference on Computational Intelligence and Communication Networks, 2015.
- Maduri Avula, Narasimha Prasad Lakkakula, Murali Prasad raja, "Bone cancer detection from MRI scan imagery using Mean Pixel Intensity, Asia modeling symposium,2014.
- Abdulmuhssin Binhssan, "Enchondroma tumor Detection", International journal of advanced research in computer and communication Engineering, 4(6), june 2015.
- IEEE Xplore, 2022: Pancreatic Cancer Detection using Machine and Deep Learning Techniques
- Taylor, J., and J. Knight. "Endocrine system 6: pancreas, stomach, small intestine and liver." Nursing Times (2021): 46-50.
- Bagur, Alexandre Triay, et al. "Pancreas MRI segmentation into head, body, and tail enables regional quantitative analysis of heterogeneous disease." medRxiv (2021).
- Garg, Sushil Kumar, and Suresh T. Chari. "Early detection of pancreatic cancer." Current opinion in gastroenterology 36.5 (2020): 456-461.
- Kenner, Barbara, et al. "Artificial Intelligence and Early Detection of Pancreatic Cancer: 2020 Summative Review." Pancreas 50.3 (2021): 251.
- Mustaqeem, A. Javed, and T. Fatima, "An Efficient Brain Tumor Detection Algorithm Using Watershed & Thresholding Based Segmentation," International Journal of Image, Graphics and Signal Processing (IJIGSP), vol. 4, p. 34, 2012.
- Q. Wang, "HMRF-EM-image: implementation of the hidden markov random field model and its expectation-maximization algorithm," arXiv preprint arXiv:1207.3510, 2012