

Code

```
import React, { useState } from "react";
import "./App.css";

function GuestPage() {
  const flights = [
    {
      id: 1,
      airline: "Air India",
      from: "Kolkata",
      to: "Delhi",
      price: "₹5,200",
    },
    {
      id: 2,
      airline: "IndiGo",
      from: "Mumbai",
      to: "Bangalore",
      price: "₹4,100",
    },
    {
      id: 3,
      airline: "SpiceJet",
      from: "Chennai",
      to: "Hyderabad",
      price: "₹3,600",
    },
  ];

  return (
    <div>
      <h2>Welcome Guest</h2>
      <h3>Available Flights</h3>
      <table>
        <thead>
          <tr>
            <th>Airline</th>
            <th>From</th>
            <th>To</th>
            <th>Fare</th>
          </tr>
        </thead>
        <tbody>
          {flights.map((flight) => (
            <tr>
              <td>{flight.airline}</td>
              <td>{flight.from}</td>
              <td>{flight.to}</td>
              <td>{flight.price}</td>
            </tr>
          )
        )}
      </tbody>
    </table>
    </div>
  );
}
```

```
        <tr key={flight.id}>
          <td>{flight.airline}</td>
          <td>{flight.from}</td>
          <td>{flight.to}</td>
          <td>{flight.price}</td>
        </tr>
      )}
    </tbody>
  </table>

  <p className="note">
    Login to book your tickets.
  </p>
</div>

);
}
```

```
function UserPage() {
  const flights = [
    {
      id: 1,
      airline: "Air India",
      from: "Kolkata",
      to: "Delhi",
      price: "₹5,200",
    },
    {
      id: 2,
      airline: "IndiGo",
      from: "Mumbai",
      to: "Bangalore",
      price: "₹4,100",
    },
    {
      id: 3,
      airline: "SpiceJet",
      from: "Chennai",
      to: "Hyderabad",
      price: "₹3,600",
    },
  ],
  return (
    <div>
      <h2>Welcome User</h2>
      <h3>Book Your Flight</h3>
```

```

<table>
  <thead>
    <tr>
      <th>Airline</th>
      <th>From</th>
      <th>To</th>
      <th>Fare</th>
      <th>Action</th>
    </tr>
  </thead>

  <tbody>
    {flights.map((flight) => (
      <tr key={flight.id}>
        <td>{flight.airline}</td>
        <td>{flight.from}</td>
        <td>{flight.to}</td>
        <td>{flight.price}</td>
        <td>
          <button
            onClick={() =>
              alert(`Ticket booked for ${flight.airline}!`)
            }
          >
            Book Ticket
          </button>
        </td>
      </tr>
    )
  )}
  </tbody>
</table>
</div>
);
}

```

```

function App() {
  const [loggedIn, setLoggedIn] = useState(false);

  return (
    <div className="container">
      <h1>✈️ Ticket Booking App</h1>

      <div className="buttons">
        {!loggedIn ? (
          <button onClick={() => setLoggedIn(true)}>
            Login
          " ...

```

```
      </button>
    ) : (
      <button onClick={() => setLoggedIn(false)}>
        Logout
      </button>
    )}
  </div>


  {loggedIn ? <UserPage /> : <GuestPage />}
</div>

);
}

export default App;
```

Output

Login Page

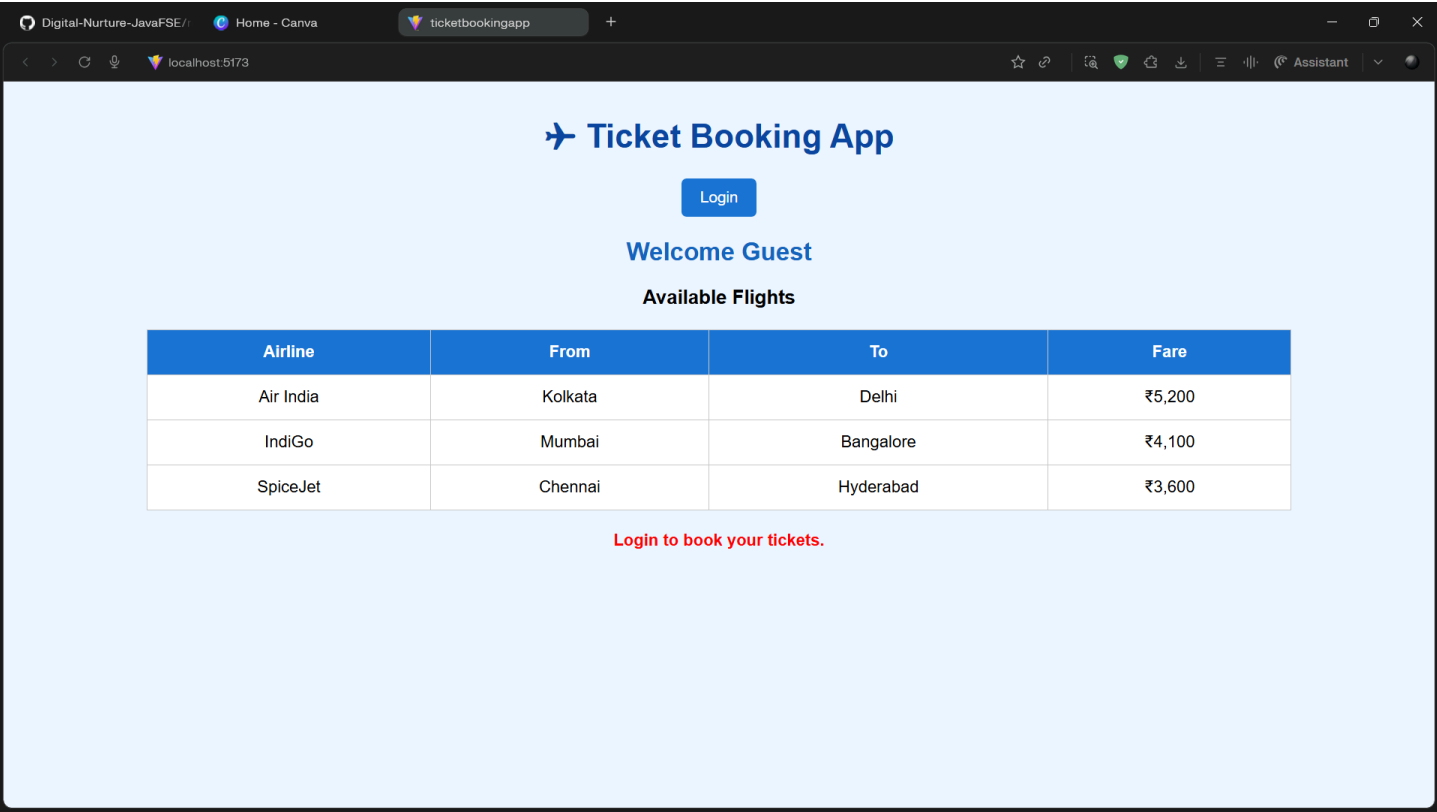

Logout page

