

Git 1

Git commands --

git init → initializes a empty repository in the current working directory.


git version → Shows the git version that is installed in our system .

git config --global user.name → configure git with username

git config --global user.email → configure git with email

git config --global --list → shows all working usernames in the project

Output

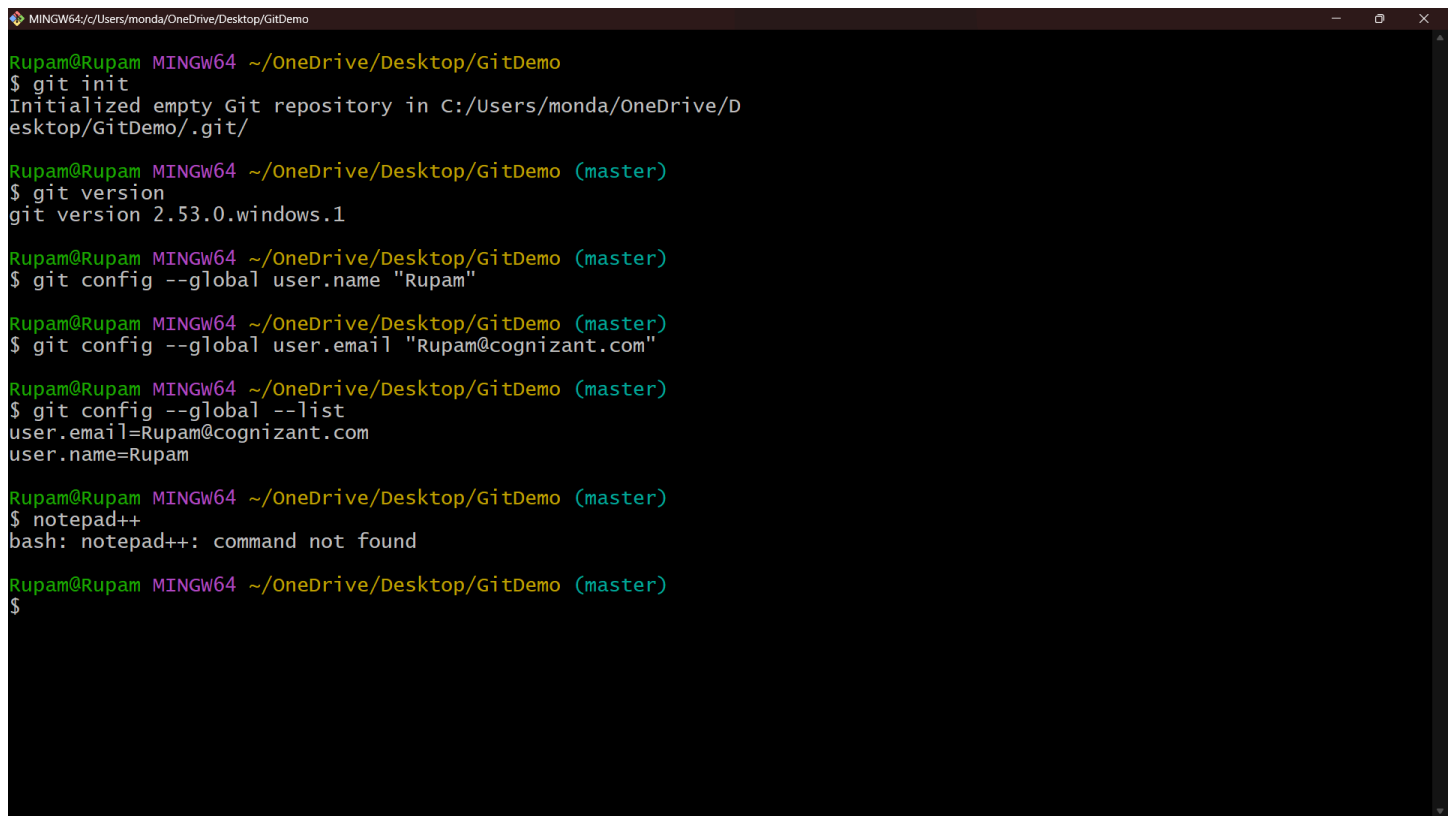

```
MINGW64/c:/Users/monda/OneDrive/Desktop/GitDemo
Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo
$ git init
Initialized empty Git repository in C:/Users/monda/OneDrive/Desktop/GitDemo/.git/

Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git version
git version 2.53.0.windows.1

Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git config --global user.name "Rupam"

Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git config --global user.email "Rupam@cognizant.com"

Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git config --global --list
user.email=Rupam@cognizant.com
user.name=Rupam

Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ notepad++
bash: notepad++: command not found

Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$
```