


Git 2

.gitignore - > A **.gitignore** file tells Git which files and folders it should **ignore** and **not track**.

In this hands on we created a **sample.log** and a **log file** , we created a **.gitignore** file and added those two files in **gitignore file** .

So , as a result **git status** command shows that **sample.log** and **log file** is ignored by the git . if we push it to Gitlab it will not push by the git .

Output

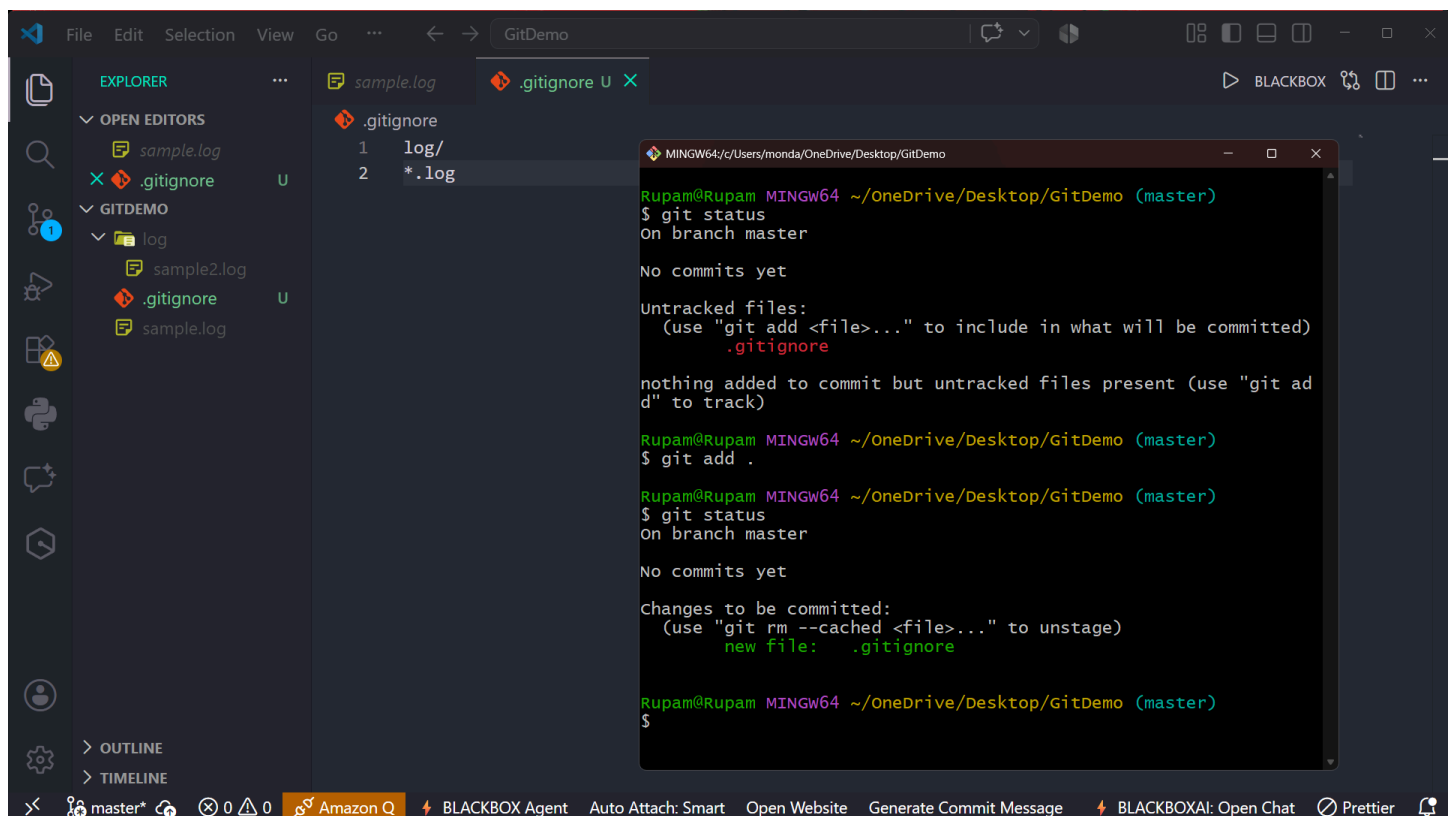

The screenshot shows the Visual Studio Code interface with the Explorer sidebar on the left. The Explorer shows a project named 'GitDemo' with a 'log' folder containing 'sample2.log' and 'sample.log', and a '.gitignore' file. The main editor area shows the content of the '.gitignore' file:

```
1 log/  
2 *.log
```

Overlaid on the editor is a terminal window titled 'MINGW64: c:/Users/monda/OneDrive/Desktop/GitDemo'. It displays the output of the following commands:

```
Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)  
$ git status  
On branch master  
  
No commits yet  
  
Untracked files:  
  (use "git add <file>..." to include in what will be committed)  
    .gitignore  
  
nothing added to commit but untracked files present (use "git add" to track)  
  
Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)  
$ git add .  
  
Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)  
$ git status  
On branch master  
  
No commits yet  
  
changes to be committed:  
  (use "git rm --cached <file>..." to unstage)  
    new file:   .gitignore  
  
Rupam@Rupam MINGW64 ~/OneDrive/Desktop/GitDemo (master)  
$
```