


Hello World RESTful Web Service

Code

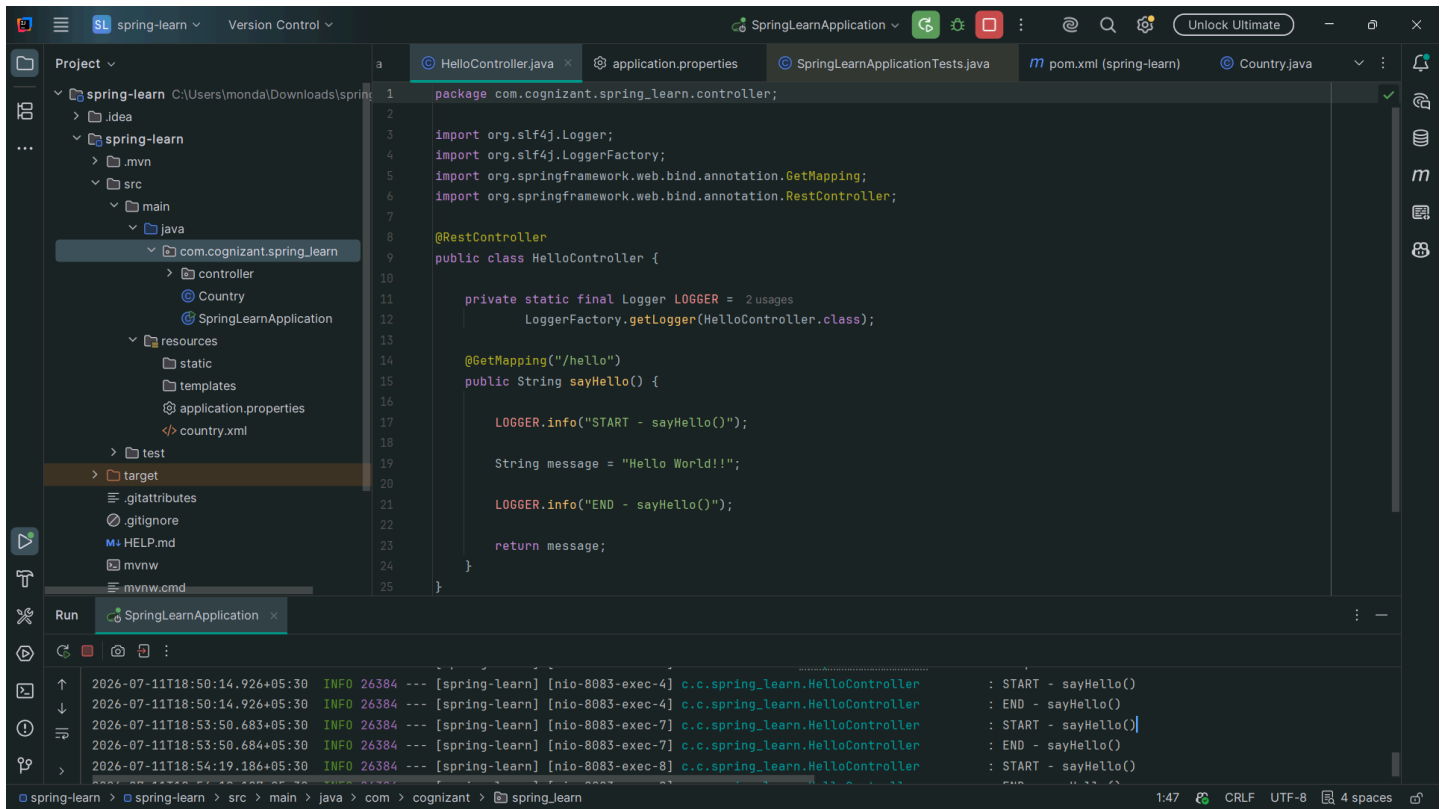


The screenshot shows an IDE with the following components:

- Project Explorer:** Shows the project structure for 'spring-learn'. The 'src/main/java/com/cognizant/spring_learn/controller' package is expanded, showing 'Country.java' and 'HelloController.java'.
- Code Editor:** Displays the code for 'HelloController.java'. The code is as follows:

```
1 package com.cognizant.spring_learn.controller;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5 import org.springframework.web.bind.annotation.GetMapping;
6 import org.springframework.web.bind.annotation.RestController;
7
8 @RestController
9 public class HelloController {
10
11     private static final Logger LOGGER = 2 usages
12         LoggerFactory.getLogger(HelloController.class);
13
14     @GetMapping("/hello")
15     public String sayHello() {
16
17         LOGGER.info("START - sayHello()");
18
19         String message = "Hello World!!";
20
21         LOGGER.info("END - sayHello()");
22
23         return message;
24     }
25 }
```
- Run Console:** Shows the output of the application. The output is as follows:

```
2026-07-11T18:50:14.926+05:30 INFO 26384 --- [spring-learn] [nio-8083-exec-4] c.c.spring_learn.HelloController : START - sayHello()
2026-07-11T18:50:14.926+05:30 INFO 26384 --- [spring-learn] [nio-8083-exec-4] c.c.spring_learn.HelloController : END - sayHello()
2026-07-11T18:53:50.683+05:30 INFO 26384 --- [spring-learn] [nio-8083-exec-7] c.c.spring_learn.HelloController : START - sayHello()
2026-07-11T18:53:50.684+05:30 INFO 26384 --- [spring-learn] [nio-8083-exec-7] c.c.spring_learn.HelloController : END - sayHello()
2026-07-11T18:54:19.186+05:30 INFO 26384 --- [spring-learn] [nio-8083-exec-8] c.c.spring_learn.HelloController : START - sayHello()
```

output

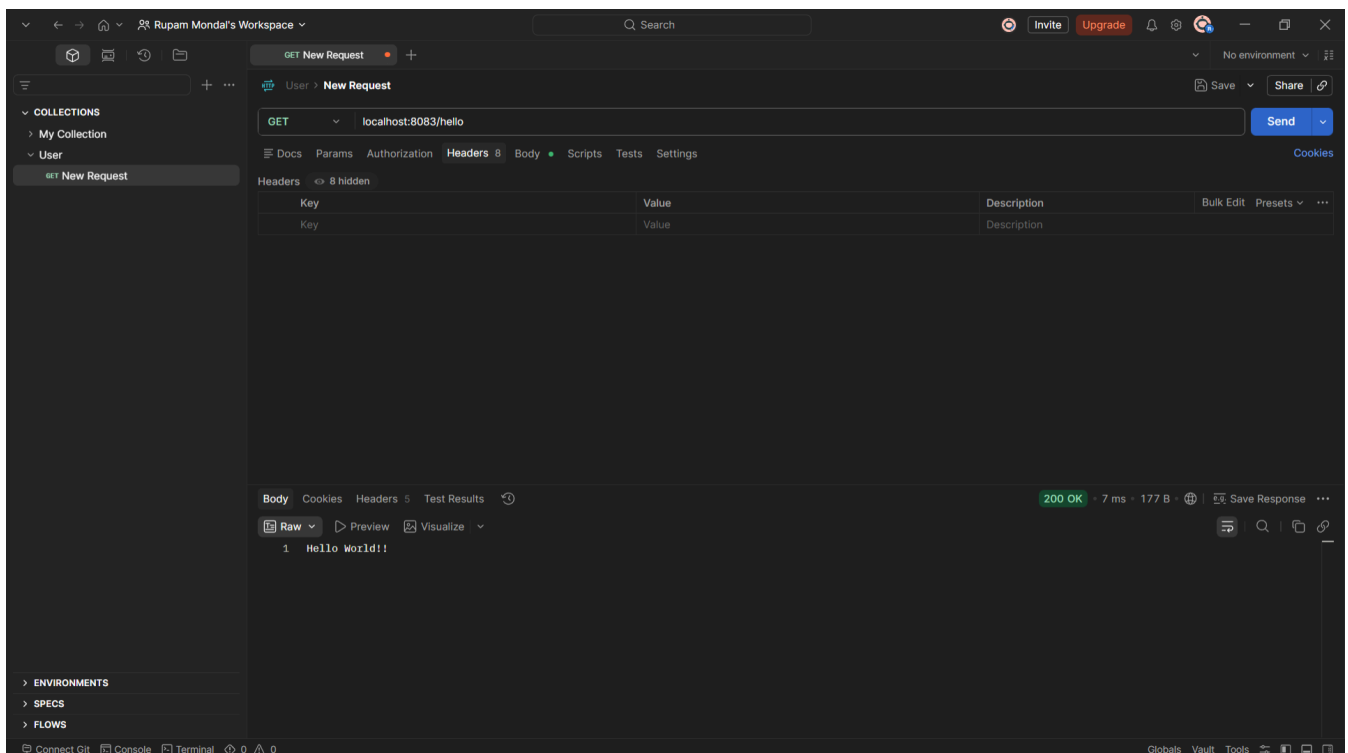

SME

. What is @RestController?

@RestController

- Marks the class as a REST Controller.
- Combines:
 - @Controller
 - @ResponseBody
- Returns data directly in the HTTP response body instead of rendering a view.

2. What is @GetMapping("/hello")?

@GetMapping("/hello")

Maps an HTTP **GET** request to the sayHello() method.

Example:

GET /hello

calls

sayHello()

3. Request Flow

Browser/Postman

|

GET /hello

|

DispatcherServlet

|

HelloController

|
sayHello()

|
returns

|
Hello World!!

HTTP Headers in Chrome

1. Open:

http://localhost:8083/hello

1. Press **F12**.
2. Open the **Network** tab.
3. Refresh the page.
4. Click the **hello** request.

Typical request headers:

GET /hello HTTP/1.1

Host: localhost:8083

User-Agent: Mozilla/5.0

Accept: text/html

Typical response headers:

HTTP/1.1 200 OK

Content-Type: text/plain;charset=UTF-8

Content-Length: 13

Date: Thu, 09 Jul 2026

HTTP Headers in Postman

After clicking **Send**, select the **Headers** tab.

Typical response headers:

Header	Value
Content-Type	text/plain;charset=UTF-8
Content-Length	13
Date	Current Date
Connection	keep-alive

Status:

200 OK