

# Report

	reads_b_dbg_k_40
# contigs (>= 0 bp)	4
# contigs (>= 1000 bp)	0
# contigs (>= 5000 bp)	0
# contigs (>= 10000 bp)	0
# contigs (>= 25000 bp)	0
# contigs (>= 50000 bp)	0
Total length (>= 0 bp)	1157
Total length (>= 1000 bp)	0
Total length (>= 5000 bp)	0
Total length (>= 10000 bp)	0
Total length (>= 25000 bp)	0
Total length (>= 50000 bp)	0
# contigs	1
Largest contig	668
Total length	668
Reference length	1000
GC (%)	52.10
Reference GC (%)	52.00
N50	668
NG50	668
N90	668
NG90	-
auN	668.0
auNG	446.2
L50	1
LG50	1
L90	1
LG90	-
# misassemblies	0
# misassembled contigs	0
Misassembled contigs length	0
# local misassemblies	0
# scaffold gap ext. mis.	0
# scaffold gap loc. mis.	0
# unaligned mis. contigs	0
# unaligned contigs	0 + 0 part
Unaligned length	0
Genome fraction (%)	66.800
Duplication ratio	1.000
# N's per 100 kbp	0.00
# mismatches per 100 kbp	0.00
# indels per 100 kbp	0.00
Largest alignment	668
Total aligned length	668
NA50	668
NGA50	668
NA90	668
NGA90	-
auNA	668.0
auNGA	446.2
LA50	1
LGA50	1
LA90	1
LGA90	-

All statistics are based on contigs of size >= 500 bp, unless otherwise noted (e.g., "# contigs (>= 0 bp)" and "Total length (>= 0 bp)" include all contigs).

## Misassemblies report


	reads_b_dbg_k_40
# misassemblies	0
# contig misassemblies	0
# c. relocations	0
# c. translocations	0
# c. inversions	0
# scaffold misassemblies	0
# s. relocations	0
# s. translocations	0
# s. inversions	0
# misassembled contigs	0
Misassembled contigs length	0
# local misassemblies	0
# scaffold gap ext. mis.	0
# scaffold gap loc. mis.	0
# unaligned mis. contigs	0
# mismatches	0
# indels	0
# indels (<= 5 bp)	0
# indels (> 5 bp)	0
Indels length	0

All statistics are based on contigs of size  $\geq 500$  bp, unless otherwise noted (e.g., "# contigs ( $\geq 0$  bp)" and "Total length ( $\geq 0$  bp)" include all contigs).

## Unaligned report


	reads_b_dbg_k_40
# fully unaligned contigs	0
Fully unaligned length	0
# partially unaligned contigs	0
Partially unaligned length	0
# N's	0

All statistics are based on contigs of size  $\geq 500$  bp, unless otherwise noted (e.g., "# contigs ( $\geq 0$  bp)" and "Total length ( $\geq 0$  bp)" include all contigs).

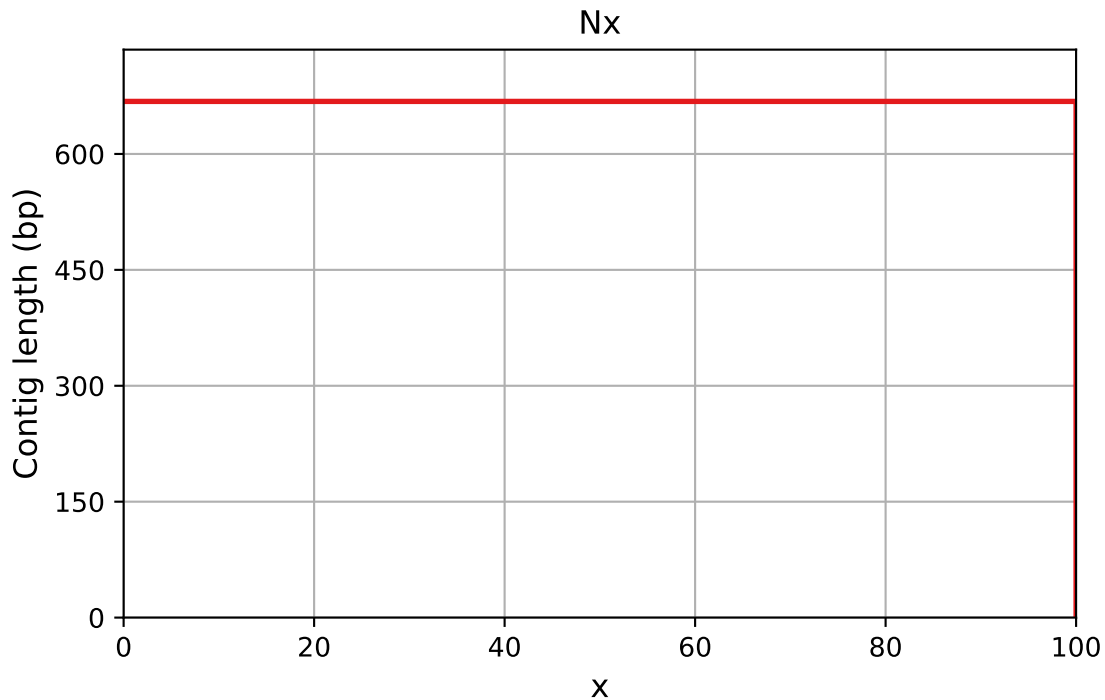


reads\_b\_dbg\_k\_40


NGx

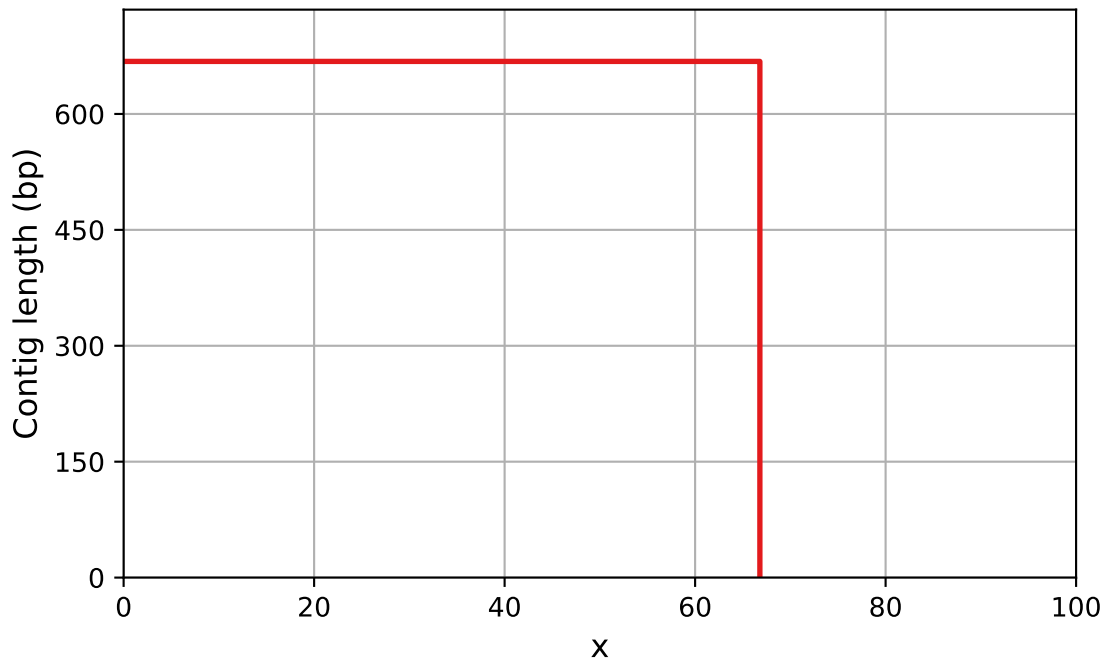

reads\_b\_dbg\_k\_40

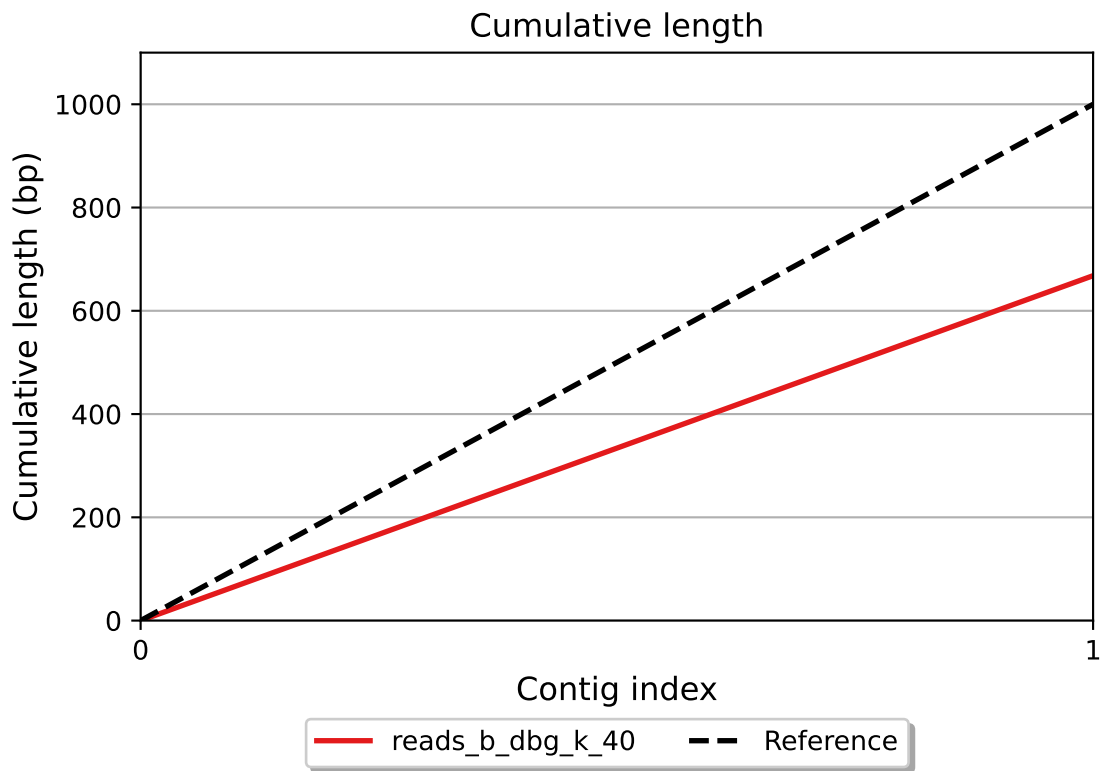


# GC content

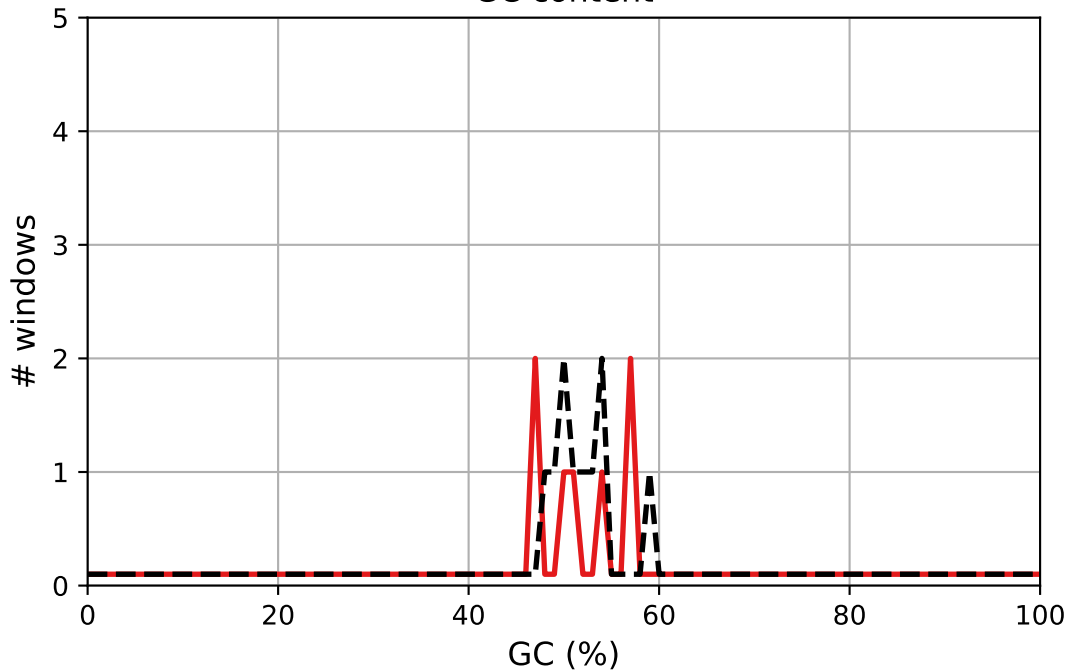

— reads\_b\_dbg\_k\_40    - - Reference


reads\_b\_dbg\_k\_40 GC content

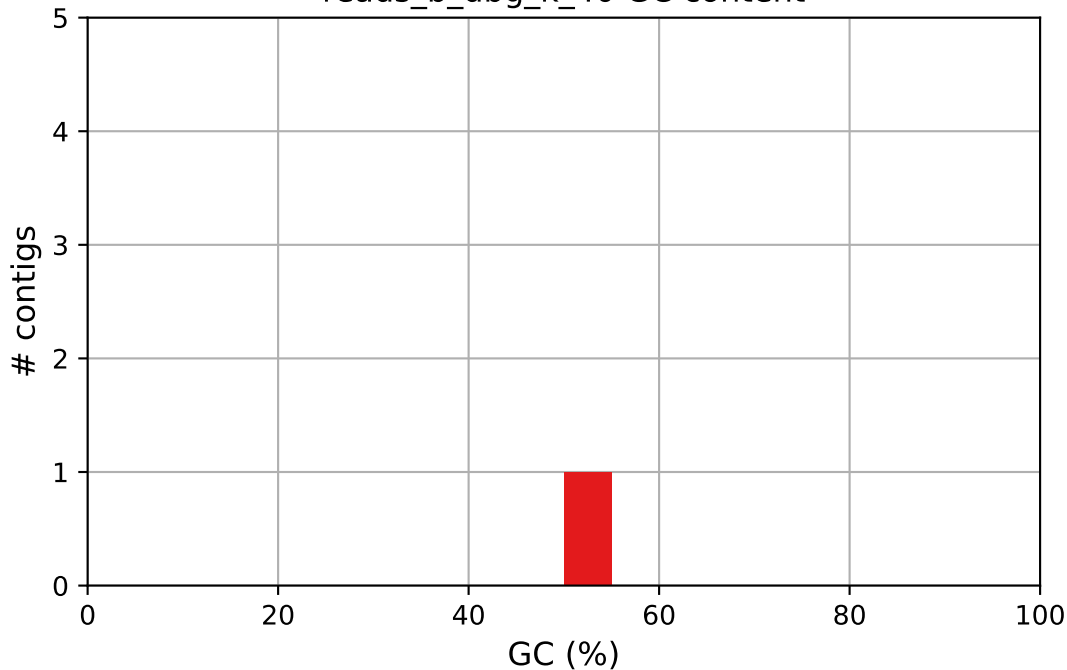


reads\_b\_dbg\_k\_40




## Misassemblies

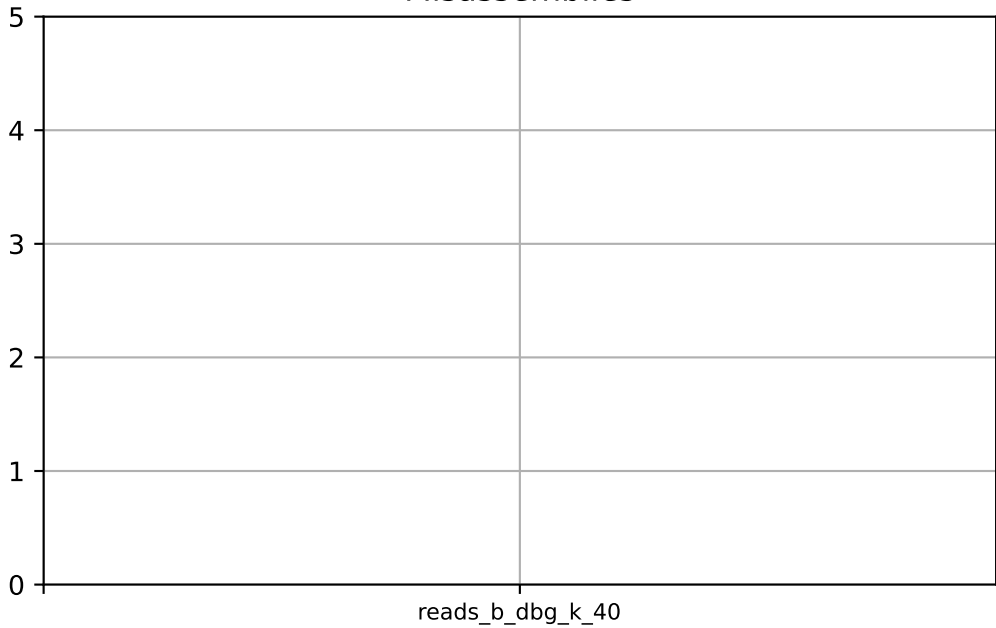


FRCurve (misassemblies)

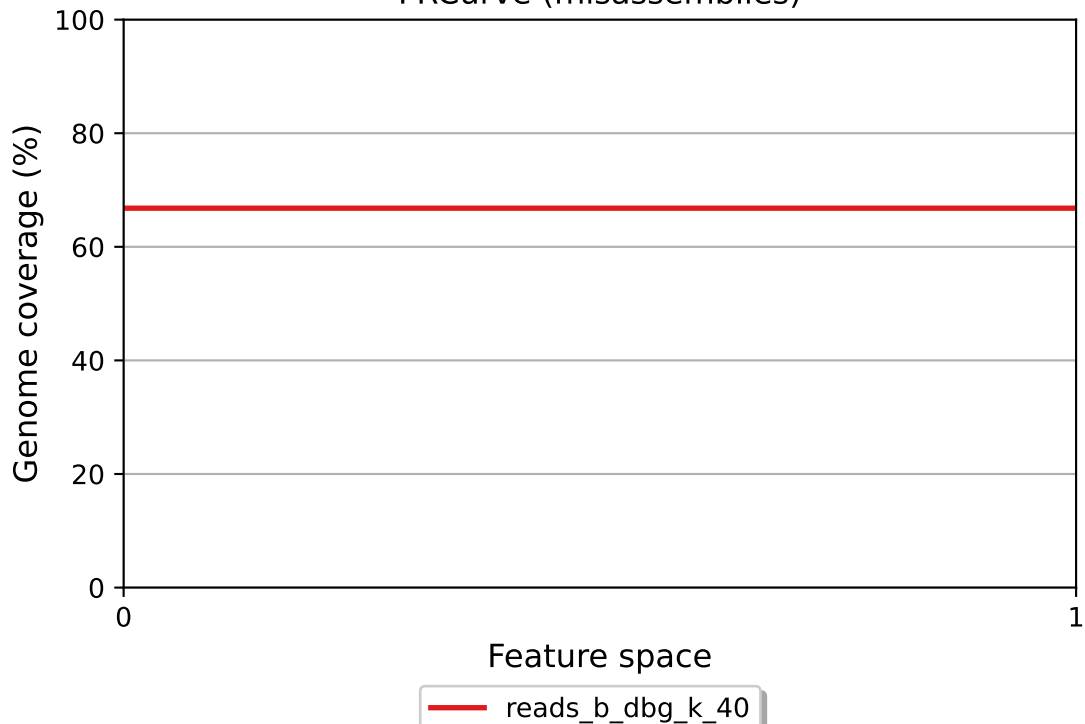

Cumulative length (aligned contigs)

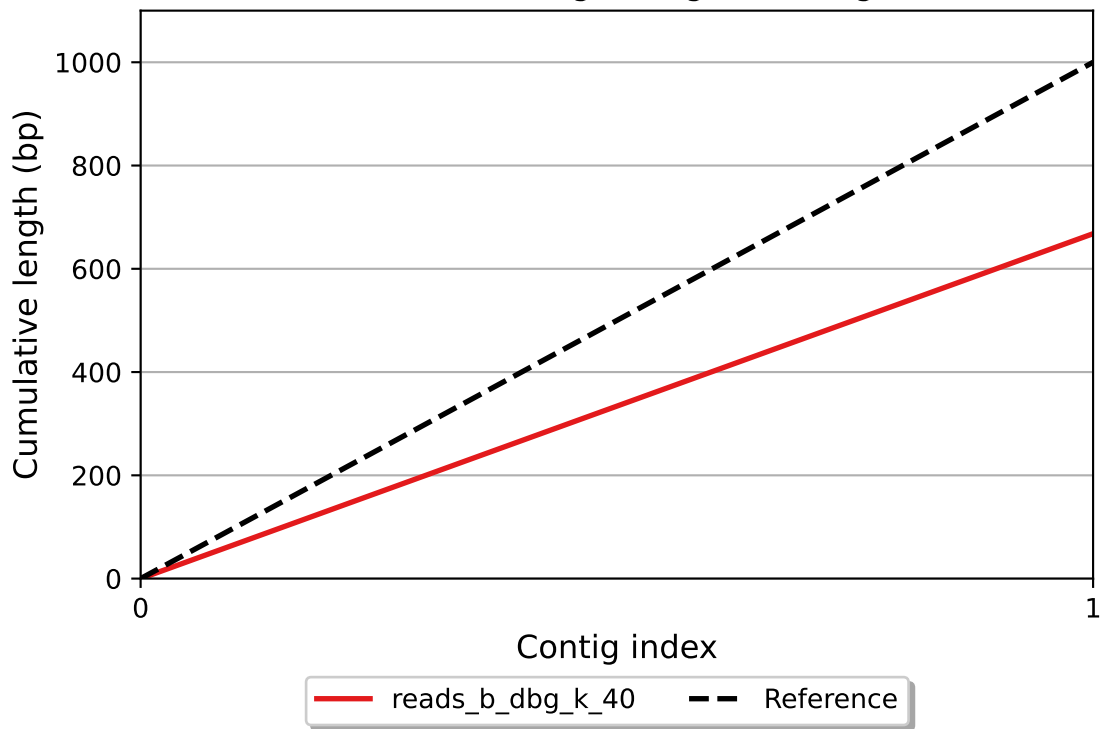


NAx

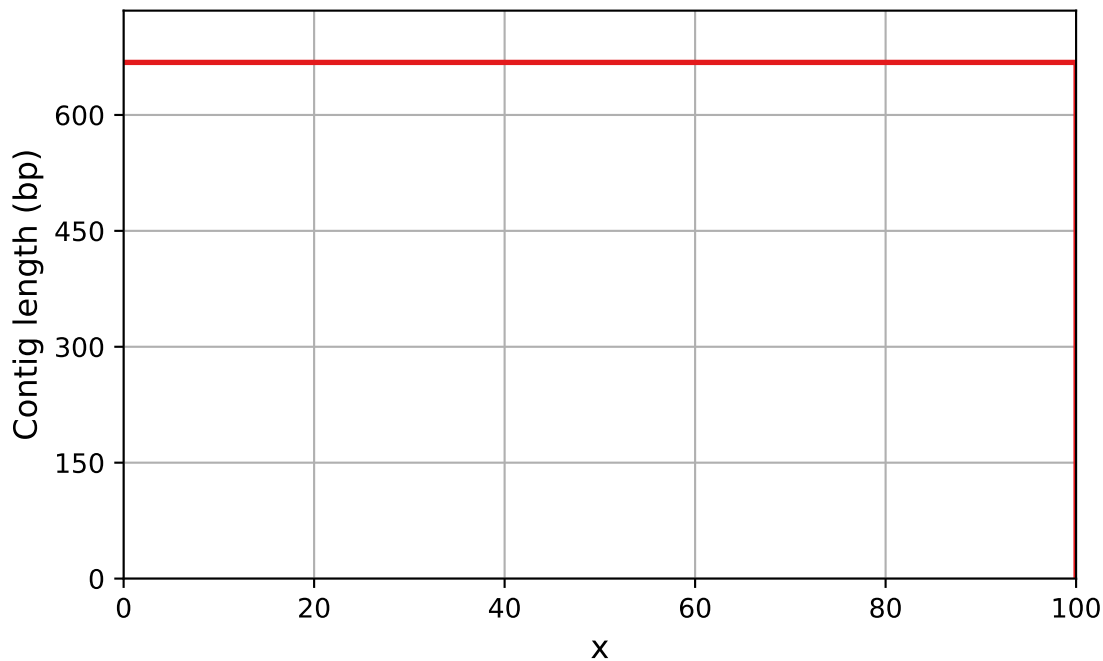

reads\_b\_dbg\_k\_40

# NGAx

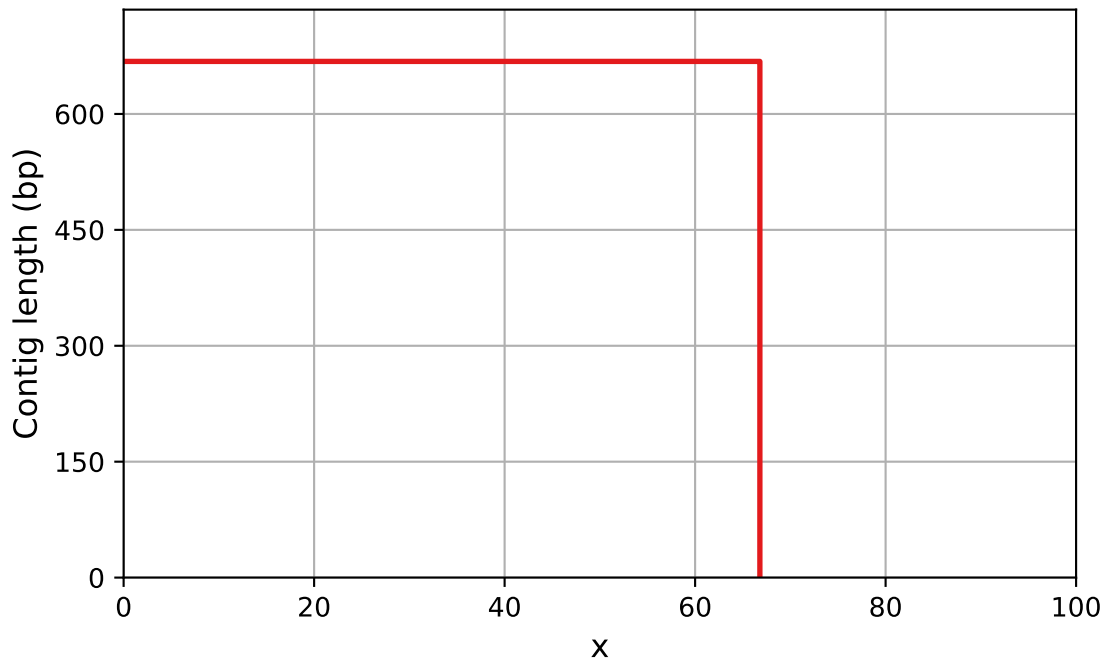

reads\_b\_dbg\_k\_40