



Week 02 Task-04

Linux Fundamentals, Commands, Files and Permissions

CandidateName: Asad Ali

Reference Number: TBS-INT-2026-445

Submission Date: 25|8|2026

Submitted To: TechBiz Security

Table of Contents

Executive Summary	3
Scope	3
Tool Used	3
Command 1	3
Command 2	3
Command: ls	3
Command 3	4
Command 4	4
Command 5	5
Command 6	5
Command 7	6
Command 8	6
Command 9	7
Command 10	7
Command 11	8
Command 12	9
Command 13	10
Command 14	10
Command 15	11
Command 16	11
Command 17	12
Command 18	12
Command 19	13
Command 20	14
Tryhackme Room Linux Fundamentals	15
Youtube Video Linux Course	16
Youtube Video Understanding Linux File Permissions	16
Conclusion	16

Executive Summary

This task is dedicated to develop fundamental linux command line skills which are crucial for cybersecurity professionals as Linux is widely used in penetration testing, security operations, system administration, and digital forensics. During this task, I practiced commonly used Linux commands to gain hands-on experience with file and directory management, system navigation, permissions, process management, system information, and other essential command-line operations.

Scope

This task strengthened my understanding of fundamental Linux commands and improved my ability to work effectively with the Kali Linux terminal. The practical experience gained provides a solid foundation for further cybersecurity-related tasks such as enumerating skills, reconnaissance, vapt.

Tool Used

Kali Linux

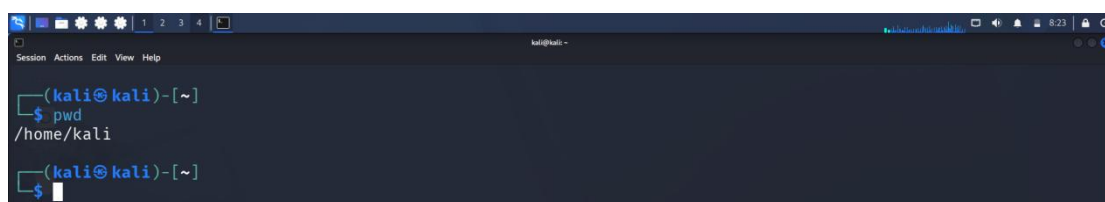
Command 1

Command: pwd

Purpose

pwd command is use to print the current working directory.

Execution of command

A screenshot of a Kali Linux terminal window. The window has a dark blue background and a title bar that says "kali@kali -". The terminal shows the prompt "(kali@kali)-[~]" followed by the command "pwd" being entered. The output of the command is "/home/kali". The prompt is then shown again as "(kali@kali)-[~]" with a cursor at the end.

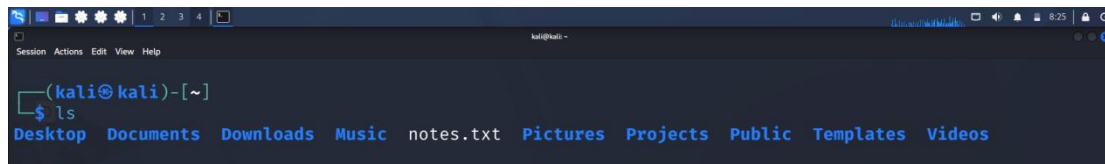
Command 2

Command: ls

Purpose

ls command is use to list all files and folders of current directory.

Execution of command



```
(kali㉿kali)-[~]  
$ ls  
Desktop  Documents  Downloads  Music  notes.txt  Pictures  Projects  Public  Templates  Videos
```

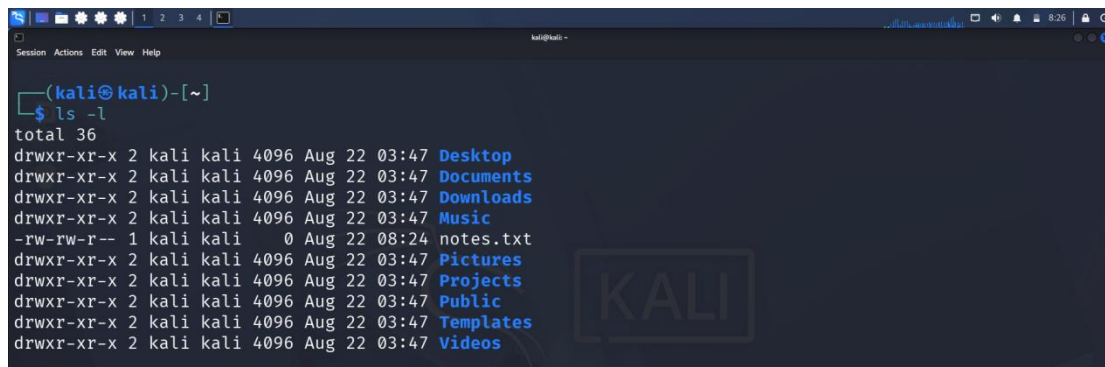
Command 3

Command: ls -l

Purpose

ls -l command is use to list the permission that files and folders have in the current directory.

Execution of command



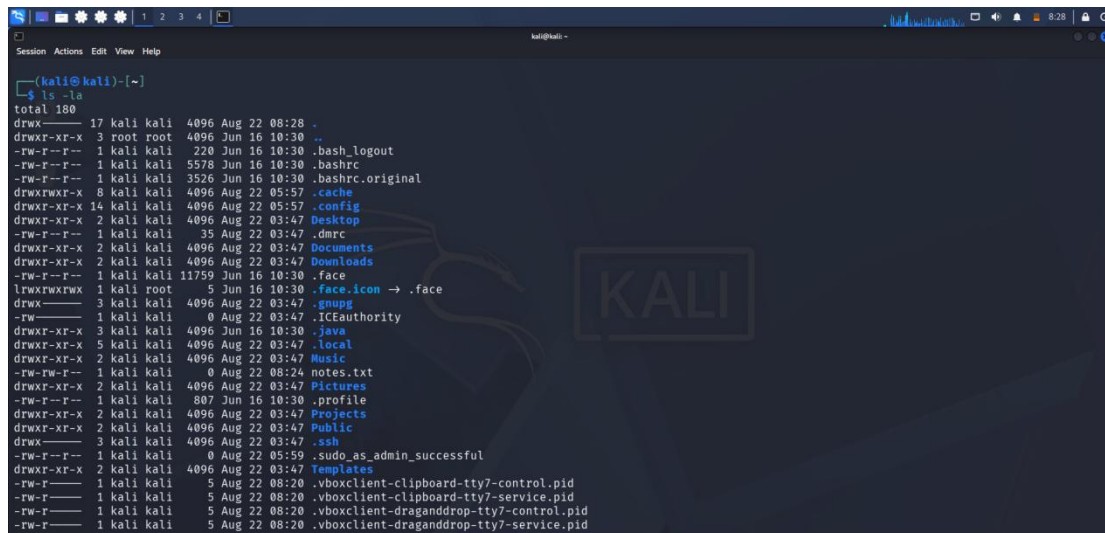
```
(kali㉿kali)-[~]  
$ ls -l  
total 36  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Desktop  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Documents  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Downloads  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Music  
-rw-rw-r-- 1 kali kali 0 Aug 22 08:24 notes.txt  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Pictures  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Projects  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Public  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Templates  
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Videos
```

Command 4

Command: ls -la

Purpose: This command is use to list all files and directories in the current folder, including hidden files. Hidden files are identified by a dot (.)

Execution of command



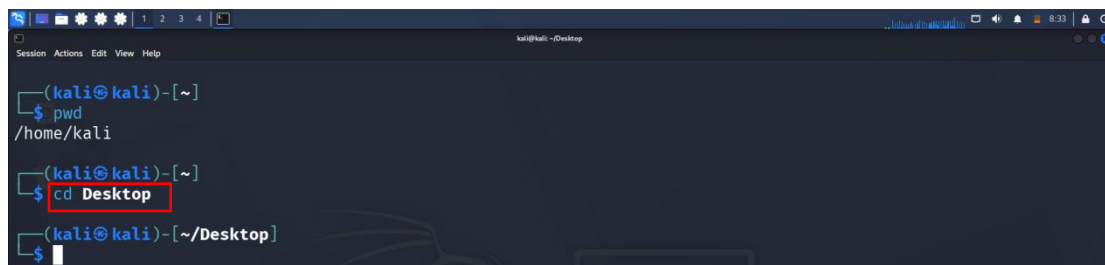
```
(kali@kali)-[~]
$ ls -la
total 180
drwxr-xr-x 17 kali kali 4096 Aug 22 08:28 .
drwxr-xr-x 3 root root 4096 Jun 16 10:30 ..
-rw-r--r-- 1 kali kali 228 Jun 16 10:30 .bash_logout
-rw-r--r-- 1 kali kali 5578 Jun 16 10:30 .bashrc
-rw-r--r-- 1 kali kali 3526 Jun 16 10:30 .bashrc.original
drwxr-xr-x 8 kali kali 4096 Aug 22 05:57 .cache
drwxr-xr-x 14 kali kali 4096 Aug 22 05:57 .config
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Desktop
-rw-r--r-- 1 kali kali 35 Aug 22 03:47 .dmrc
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Documents
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Downloads
-rw-r--r-- 1 kali kali 11759 Jun 16 10:30 .face
lrwxrwxrwx 1 kali root 5 Jun 16 10:30 .face.icon -> .face
drwxr-xr-x 3 kali kali 4096 Aug 22 03:47 .gnupg
-rw-r--r-- 1 kali kali 0 Aug 22 03:47 .ICEauthority
drwxr-xr-x 3 kali kali 4096 Jun 16 10:30 .java
drwxr-xr-x 5 kali kali 4096 Aug 22 03:47 .local
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Music
-rw-rw-r-- 1 kali kali 0 Aug 22 08:24 notes.txt
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Pictures
-rw-r--r-- 1 kali kali 807 Jun 16 10:30 .profile
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Projects
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Public
drwxr-xr-x 3 kali kali 4096 Aug 22 03:47 .ssh
-rw-r--r-- 1 kali kali 0 Aug 22 05:59 .sudo_as_admin_successful
drwxr-xr-x 2 kali kali 4096 Aug 22 03:47 Templates
-rw-r--r-- 1 kali kali 5 Aug 22 08:20 .vboxclient-clipboard-tty7-control.pid
-rw-r--r-- 1 kali kali 5 Aug 22 08:20 .vboxclient-clipboard-tty7-service.pid
-rw-r--r-- 1 kali kali 5 Aug 22 08:20 .vboxclient-draganddrop-tty7-control.pid
-rw-r--r-- 1 kali kali 5 Aug 22 08:20 .vboxclient-draganddrop-tty7-service.pid
```

Command 5

Command: `cd`

Purpose: This command is use to change the directory

Execution of command



```
(kali@kali)-[~]
$ pwd
/home/kali

(kali@kali)-[~]
$ cd Desktop

(kali@kali)-[~/Desktop]
$
```

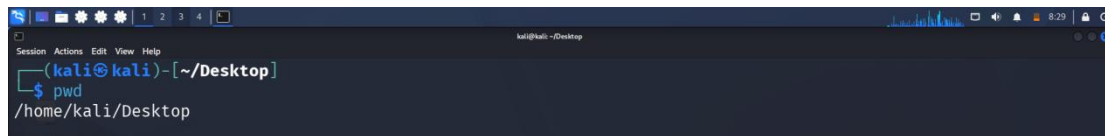
Command 6

Command: `cd ..`

Purpose: This command is use to navigate back one directory level from the current directory.

Execution of command

Currently I am in desktop directory

A terminal window titled 'kali@kali - ~/Desktop' showing the command 'pwd' being executed. The output is '/home/kali/Desktop'.

```
(kali@kali)~[~/Desktop]
$ pwd
/home/kali/Desktop
```

Go back to /home/kali directory type **cd ..**

A terminal window titled 'kali@kali -' showing the command 'cd ..' being executed. The output is '/home/kali'.

```
(kali@kali)~[~/Desktop]
$ cd ..

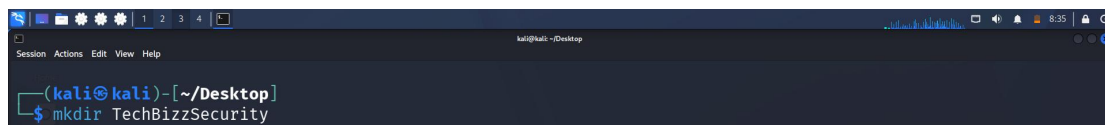
(kali@kali)~[~]
$ pwd
/home/kali
```

Command 7

Command: mkdir

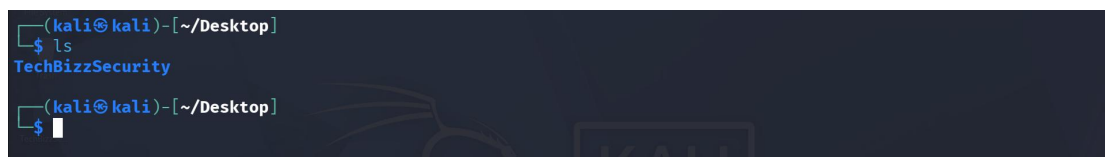
Purpose: This command is use to make a empty directory.

Execution of command

A terminal window titled 'kali@kali - ~/Desktop' showing the command 'mkdir TechBizzSecurity' being executed.

```
(kali@kali)~[~/Desktop]
$ mkdir TechBizzSecurity
```

Verification Command : ls

A terminal window titled 'kali@kali - ~/Desktop' showing the command 'ls' being executed. The output is 'TechBizzSecurity'.

```
(kali@kali)~[~/Desktop]
$ ls
TechBizzSecurity

(kali@kali)~[~/Desktop]
$
```

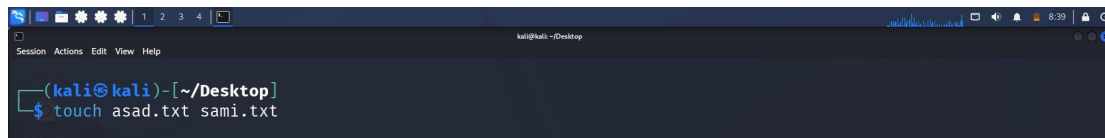
Using ls command we have verified folder is created successfully

Command 8

Command: touch

Purpose: This command is use to create empty files

Execution of command



```
(kali@kali)-[~/Desktop]
$ touch asad.txt sami.txt
```

Verification Command: Command is **ls** that verifies files are created using touch command or not



```
(kali@kali)-[~/Desktop]
$ ls
asad.txt sami.txt TechBizzSecurity
```

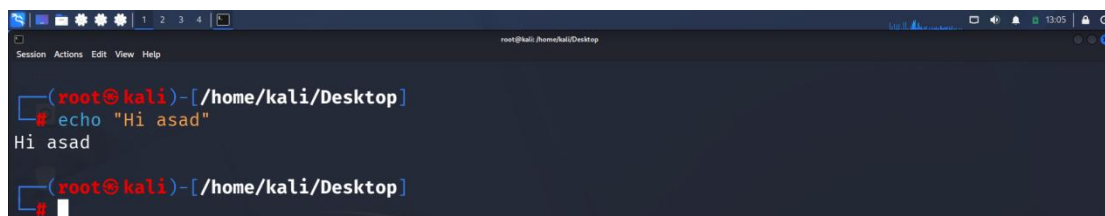
As verified from above Figure both files asad.txt and sami.txt are successfully created using **touch** command.

Command 9

Command: echo

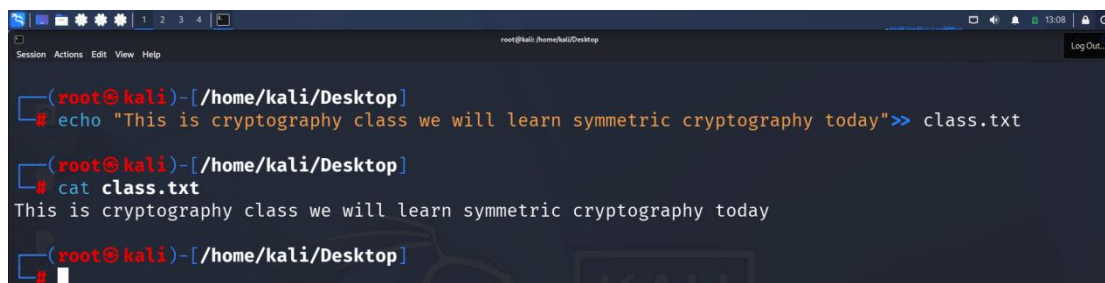
Purpose: This command is use to display the content directly to terminal standard output. It is also use to write content in file

Execution of command



```
(root@kali)-[/home/kali/Desktop]
# echo "Hi asad"
Hi asad
```

Second example of Echo command



```
(root@kali)-[/home/kali/Desktop]
# echo "This is cryptography class we will learn symmetric cryptography today">> class.txt
# cat class.txt
This is cryptography class we will learn symmetric cryptography today
```

Command 10

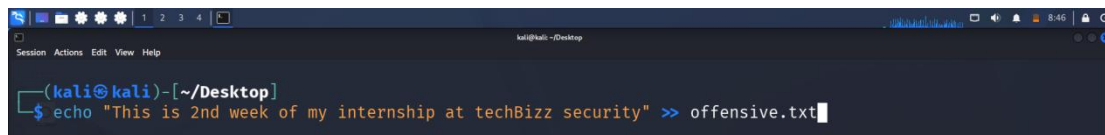
Command: cat

Purpose: This command is use to read the content of file

Execution of command

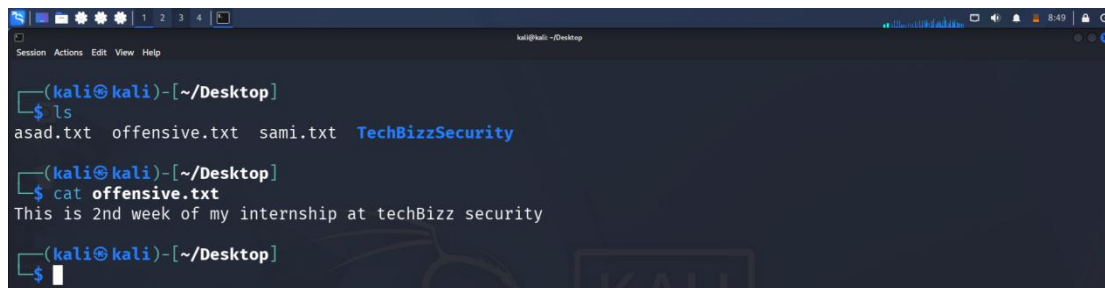
To demonstrate the functionality of cat command that it can read file content first there is a need to create a file with content.

Creating File

A terminal window titled 'kali@kali - ~/Desktop' with a menu bar (Session, Actions, Edit, View, Help). The prompt is '(kali@kali)-[~/Desktop]'. The command 'echo "This is 2nd week of my internship at techBizz security" >> offensive.txt' is entered and executed, creating a file named 'offensive.txt'.

Note: File can also be created using nano editor then write some thing in file

Demonstration of cat command

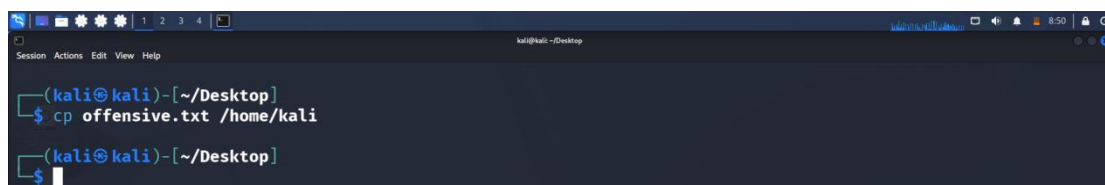
A terminal window titled 'kali@kali - ~/Desktop' with a menu bar (Session, Actions, Edit, View, Help). The prompt is '(kali@kali)-[~/Desktop]'. The command 'ls' is entered, showing a list of files: 'asad.txt', 'offensive.txt', 'sami.txt', and 'TechBizzSecurity'. Then, the command 'cat offensive.txt' is entered, displaying the file's content: 'This is 2nd week of my internship at techBizz security'. The prompt is now '\$'.

Command 11

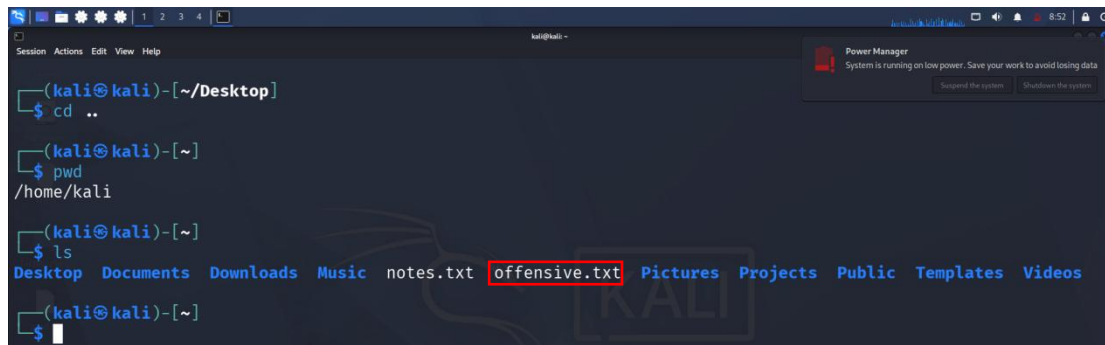
Command: cp

Purpose: This command is use to copy the files and folders

Execution of command

A terminal window titled 'kali@kali - ~/Desktop' with a menu bar (Session, Actions, Edit, View, Help). The prompt is '(kali@kali)-[~/Desktop]'. The command 'cp offensive.txt /home/kali' is entered and executed. The prompt is now '\$'.

To verify file is copied from desktop to kali folder lets navigate back to kali folder.

A terminal window on a Kali Linux system. The user is in the Desktop directory (~/.Desktop) and has run 'cd ..' to move to the home directory (~). They then run 'pwd' showing '/home/kali' and 'ls' showing a list of files: Desktop, Documents, Downloads, Music, notes.txt, offensive.txt, Pictures, Projects, Public, Templates, and Videos. The file 'offensive.txt' is highlighted with a red box. A 'Power Manager' notification is visible in the top right corner.

```
(kali@kali)-[~/Desktop]
$ cd ..

(kali@kali)-[~]
$ pwd
/home/kali

(kali@kali)-[~]
$ ls
Desktop Documents Downloads Music notes.txt offensive.txt Pictures Projects Public Templates Videos

(kali@kali)-[~]
$
```

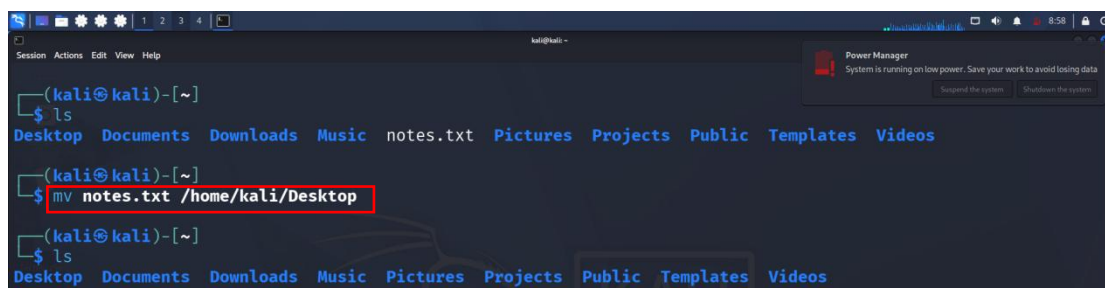
As seen in the above Image file named **offensive.txt** is successfully copied from desktop folder to kali folder.

Command 12

Command: mv

Purpose: This command is use to move files from one folder into another folder It is use to rename a folder.

Execution of command

A terminal window on a Kali Linux system. The user is in the home directory (~) and runs 'ls' showing the same file list as the previous image. They then run 'mv notes.txt /home/kali/Desktop', with the command highlighted by a red box. After running the command, they run 'ls' again, and 'notes.txt' is no longer in the list. A 'Power Manager' notification is visible in the top right corner.

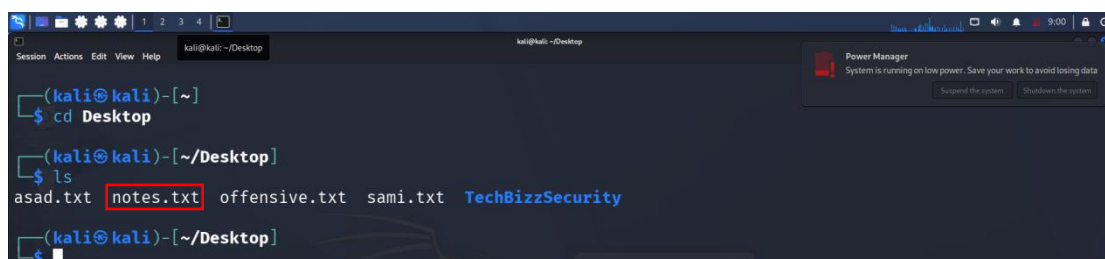
```
(kali@kali)-[~]
$ ls
Desktop Documents Downloads Music notes.txt Pictures Projects Public Templates Videos

(kali@kali)-[~]
$ mv notes.txt /home/kali/Desktop

(kali@kali)-[~]
$ ls
Desktop Documents Downloads Music Pictures Projects Public Templates Videos

(kali@kali)-[~]
$
```

As File is moved from kali folder to desktop folder to verify navigate to Desktop folder using command **cd Desktop**. Then type command **ls**.

A terminal window on a Kali Linux system. The user is in the Desktop directory (~/.Desktop) and runs 'cd Desktop'. They then run 'ls', showing a list of files: asad.txt, notes.txt, offensive.txt, sami.txt, and TechBizzSecurity. The file 'notes.txt' is highlighted with a red box. A 'Power Manager' notification is visible in the top right corner.

```
(kali@kali)-[~/Desktop]
$ cd Desktop

(kali@kali)-[~/Desktop]
$ ls
asad.txt notes.txt offensive.txt sami.txt TechBizzSecurity

(kali@kali)-[~/Desktop]
$
```

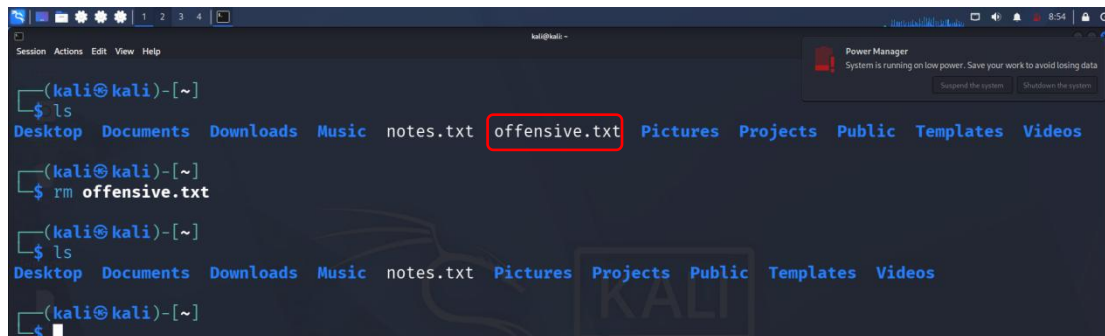
File is successfully moved from kali folder to desktop Folder shown in above Image.

Command 13

Command: rm

Purpose: This command is use to remove file

Execution of command

A terminal window on a Kali Linux system. The prompt is (kali@kali)-[~]. The user enters 'ls' and the output shows various files and folders, with 'offensive.txt' highlighted by a red box. The user then enters 'rm offensive.txt'. After another 'ls' command, 'offensive.txt' is no longer in the list, confirming its removal.

```
(kali@kali)-[~]  
$ ls  
Desktop Documents Downloads Music notes.txt offensive.txt Pictures Projects Public Templates Videos  
(kali@kali)-[~]  
$ rm offensive.txt  
(kali@kali)-[~]  
$ ls  
Desktop Documents Downloads Music notes.txt Pictures Projects Public Templates Videos  
(kali@kali)-[~]  
$
```

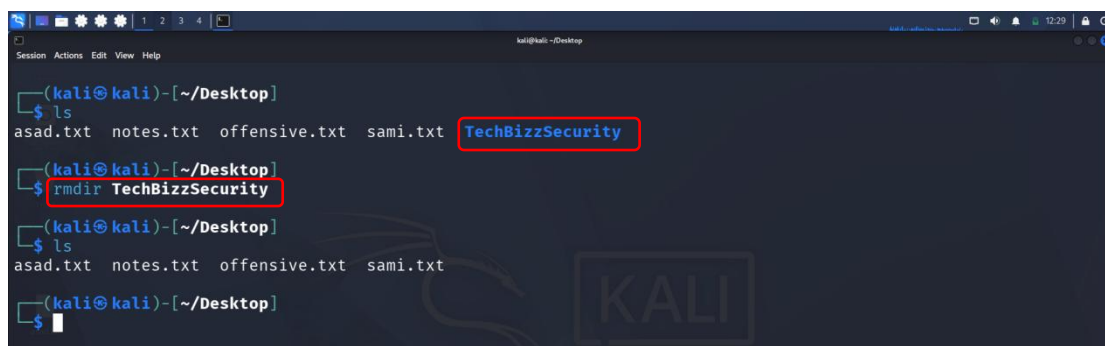
As seen in the above Figure File named **offensive.txt** is successfully removed using **rm** command. In above picture it is confirmed that file is removed using **ls** command after typing rm command.

Command 14

Command: rmdir

Purpose: This command is use to remove the empty folder

Execution of command

A terminal window on a Kali Linux system, showing the Desktop directory. The prompt is (kali@kali)-[~/Desktop]. The user enters 'ls' and the output shows several files and folders, with 'TechBizzSecurity' highlighted by a red box. The user then enters 'rmdir TechBizzSecurity'. After another 'ls' command, 'TechBizzSecurity' is no longer in the list, confirming its removal.

```
(kali@kali)-[~/Desktop]  
$ ls  
asad.txt notes.txt offensive.txt sami.txt TechBizzSecurity  
(kali@kali)-[~/Desktop]  
$ rmdir TechBizzSecurity  
(kali@kali)-[~/Desktop]  
$ ls  
asad.txt notes.txt offensive.txt sami.txt  
(kali@kali)-[~/Desktop]  
$
```

rmdir command removes the folder we can check confirm this by typing **ls** in the same working directory as shown in Figure above.

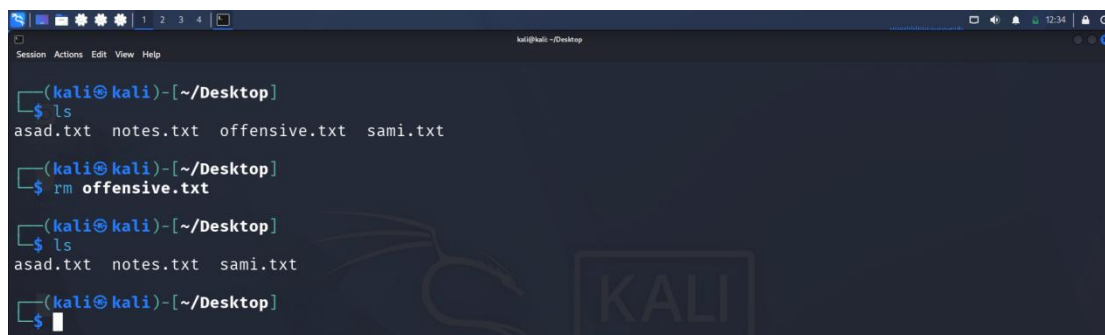
Command 15

Command: clear

Purpose: This command is use to clear the terminal

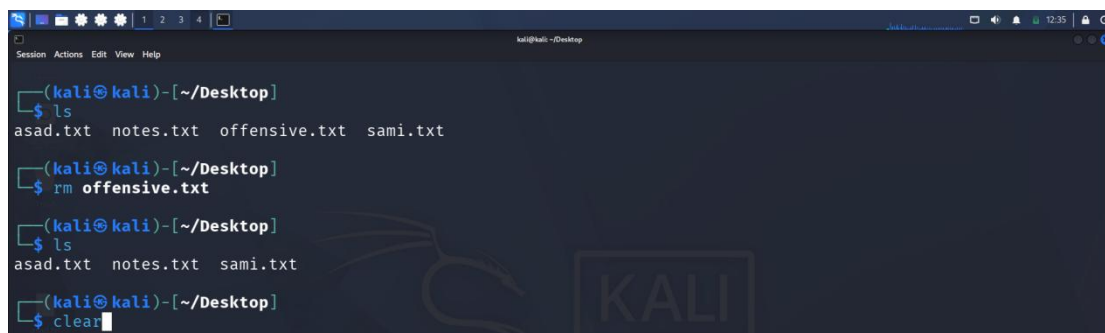
Execution of command

Before **clear** command terminal was not clear.

A terminal window titled 'kali@kali - ~/Desktop' showing the execution of 'ls' and 'rm offensive.txt' commands. The output of 'ls' is 'asad.txt notes.txt offensive.txt sami.txt'. The terminal is cluttered with the previous command's output and the prompt is at the end of the line.

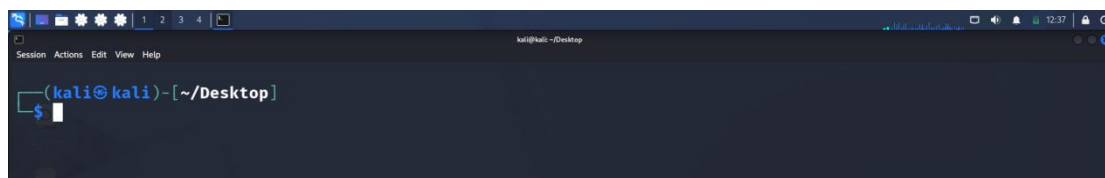
```
(kali@kali)-[~/Desktop]
$ ls
asad.txt  notes.txt  offensive.txt  sami.txt
(kali@kali)-[~/Desktop]
$ rm offensive.txt
(kali@kali)-[~/Desktop]
$ ls
asad.txt  notes.txt  sami.txt
(kali@kali)-[~/Desktop]
$
```

After writing **clear** command.

A terminal window titled 'kali@kali - ~/Desktop' showing the execution of 'clear' command. The terminal is now clear, with only the prompt visible at the end of the line.

```
(kali@kali)-[~/Desktop]
$ ls
asad.txt  notes.txt  offensive.txt  sami.txt
(kali@kali)-[~/Desktop]
$ rm offensive.txt
(kali@kali)-[~/Desktop]
$ ls
asad.txt  notes.txt  sami.txt
(kali@kali)-[~/Desktop]
$ clear
```

Terminal is clear after **clear** command.

A terminal window titled 'kali@kali - ~/Desktop' showing the execution of 'clear' command. The terminal is now clear, with only the prompt visible at the end of the line.

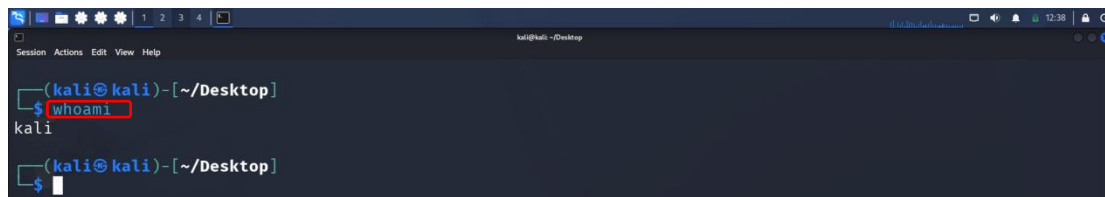
```
(kali@kali)-[~/Desktop]
$
```

Command 16

Command: whoami

Purpose: This command is use to print the current logged-in user

Execution of command

A terminal window titled 'kali@kali - /Desktop' showing the execution of the 'whoami' command. The prompt is '(kali@kali)-[~/Desktop]' and the command 'whoami' is entered and executed, resulting in the output 'kali'.

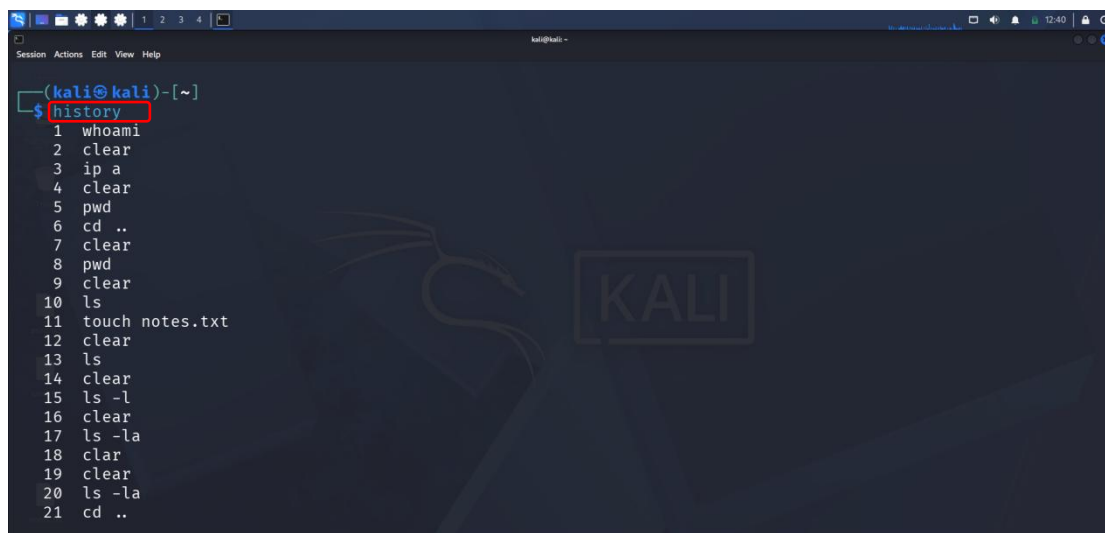
```
(kali@kali)-[~/Desktop]
$ whoami
kali
(kali@kali)-[~/Desktop]
$
```

Command 17

Command: history

Purpose: This command is use to check the previous commands used in a terminal

Execution of command

A terminal window titled 'kali@kali -' showing the output of the 'history' command. The prompt is '(kali@kali)-[~]' and the command 'history' is entered and executed, displaying a list of 21 commands. A 'KALI' logo is visible in the background.

```
(kali@kali)-[~]
$ history
1  whoami
2  clear
3  ip a
4  clear
5  pwd
6  cd ..
7  clear
8  pwd
9  clear
10 ls
11 touch notes.txt
12 clear
13 ls
14 clear
15 ls -l
16 clear
17 ls -la
18 clar
19 clear
20 ls -la
21 cd ..
```

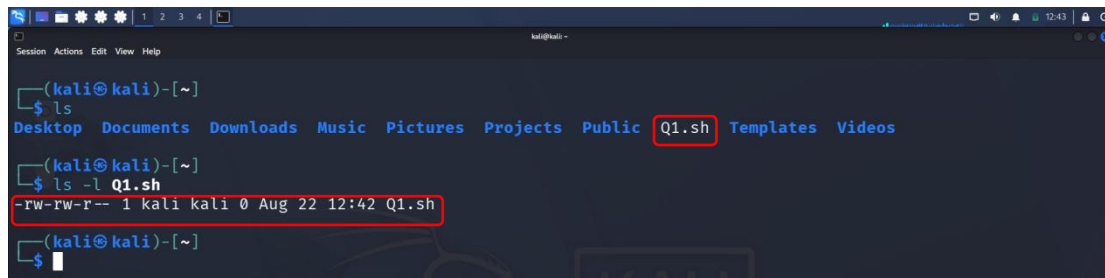
Command 18

Command: chmod

Purpose: This command is use to change the permission of file

Execution of command

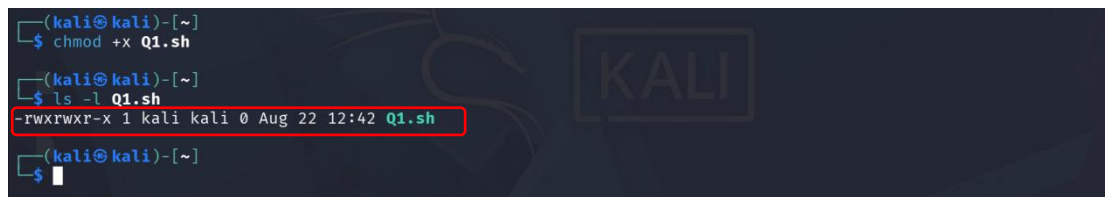
Before Changing the permission of file

A terminal window on a Kali Linux system. The user is in the home directory (~). They run 'ls' and see a file named 'Q1.sh' in the 'Public' directory. Then they run 'ls -l Q1.sh' and the output is '-rw-rw-r-- 1 kali kali 0 Aug 22 12:42 Q1.sh'. The permissions '-rw-rw-r--' are highlighted with a red box.

```
(kali@kali)-[~]
$ ls
Desktop Documents Downloads Music Pictures Projects Public Q1.sh Templates Videos
(kali@kali)-[~]
$ ls -l Q1.sh
-rw-rw-r-- 1 kali kali 0 Aug 22 12:42 Q1.sh
(kali@kali)-[~]
$
```

As it is clearly seen in the above figure that Q1.sh file has only read and write permission note executable permission.

After Changing the permission of file.

A terminal window on a Kali Linux system. The user runs 'chmod +x Q1.sh'. Then they run 'ls -l Q1.sh' and the output is '-rwxrwxr-x 1 kali kali 0 Aug 22 12:42 Q1.sh'. The permissions '-rwxrwxr-x' are highlighted with a red box.

```
(kali@kali)-[~]
$ chmod +x Q1.sh
(kali@kali)-[~]
$ ls -l Q1.sh
-rwxrwxr-x 1 kali kali 0 Aug 22 12:42 Q1.sh
(kali@kali)-[~]
$
```

Now File has executable permission also shown in above figure. Chmod +x was executed to upgrade relative permission only and execute privileges without overriding the files existing read/write policies.

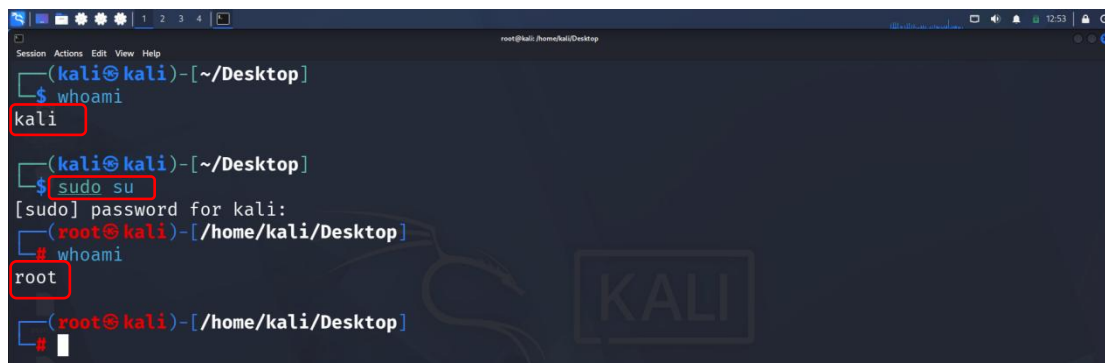
Command 19

Command: sudo

Purpose: This command is use to assign root privileges to user or changing from normal user to root user.

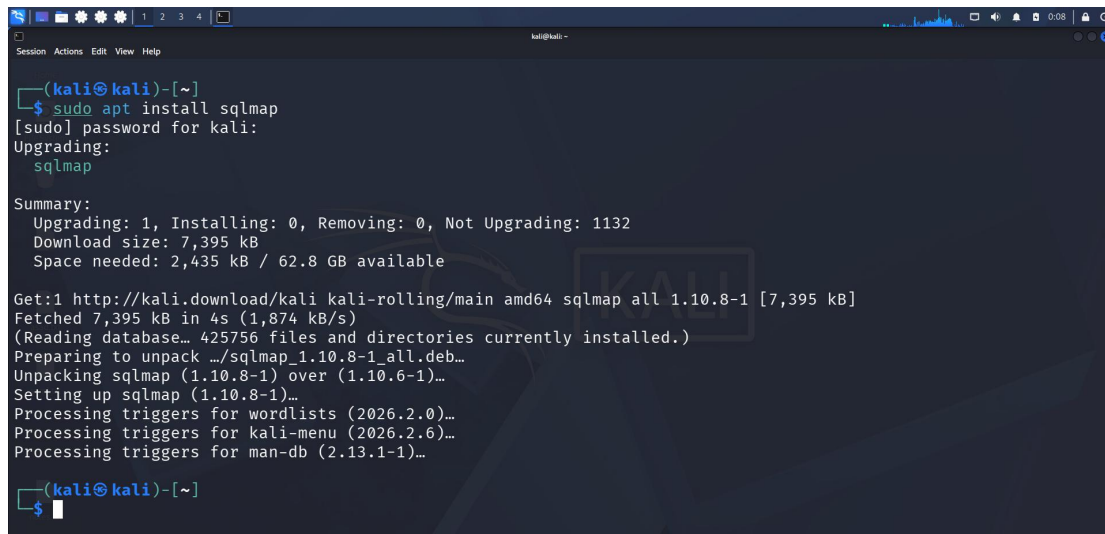
Execution of command

Switching from normal user to root user command **sudo su**.

A terminal window on a Kali Linux system. The user is in the Desktop directory. They run 'whoami' and the output is 'kali'. Then they run 'sudo su'. A password prompt appears. After entering the password, they run 'whoami' and the output is 'root'. The prompts and the 'sudo su' command are highlighted with red boxes.

```
root@kali: /home/kali/Desktop
(kali@kali)-[~/Desktop]
$ whoami
kali
(kali@kali)-[~/Desktop]
$ sudo su
[sudo] password for kali:
(root@kali)-[/home/kali/Desktop]
# whoami
root
(root@kali)-[/home/kali/Desktop]
#
```

It is clearly seen in the above image that first user is normal user **kali**. Then user switched from **kali** to **root** by typing command **sudo su**. Whenever we type sudo with any command that means do the work with **admin user** privileges.

A terminal window on a Kali Linux system showing the installation of sqlmap. The user runs 'sudo apt install sqlmap'. The terminal displays the password prompt, the package being upgraded, a summary of the installation (1132 packages to be upgraded, 7,395 kB download size, 2,435 kB space needed), and the progress of the installation, including fetching the package, reading the database, and unpacking the files.

```
(kali@kali)~]$ sudo apt install sqlmap
[sudo] password for kali:
Upgrading:
  sqlmap

Summary:
  Upgrading: 1, Installing: 0, Removing: 0, Not Upgrading: 1132
  Download size: 7,395 kB
  Space needed: 2,435 kB / 62.8 GB available

Get:1 http://kali.download/kali kali-rolling/main amd64 sqlmap all 1.10.8-1 [7,395 kB]
Fetched 7,395 kB in 4s (1,874 kB/s)
(Reading database... 425756 files and directories currently installed.)
Preparing to unpack ../sqlmap_1.10.8-1_all.deb...
Unpacking sqlmap (1.10.8-1) over (1.10.6-1)...
Setting up sqlmap (1.10.8-1)...
Processing triggers for wordlists (2026.2.0)...
Processing triggers for kali-menu (2026.2.6)...
Processing triggers for man-db (2.13.1-1)...

(kali@kali)~]$
```

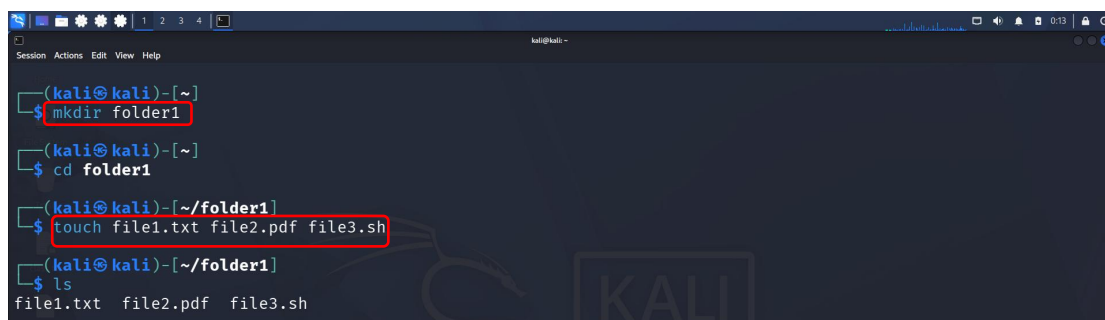
Command 20

Command: `rm -r`

Purpose: This command is used to delete a directory having content means a directory having files not empty

Execution of command

First we need to create a directory with some files .

A terminal window on a Kali Linux system showing the creation of a directory and files. The user runs 'mkdir folder1', then 'cd folder1', and then 'touch file1.txt file2.pdf file3.sh'. The 'ls' command is used to list the files, showing 'file1.txt', 'file2.pdf', and 'file3.sh'. The commands 'mkdir folder1' and 'touch file1.txt file2.pdf file3.sh' are highlighted with red boxes in the original image.

```
(kali@kali)~]$ mkdir folder1
(kali@kali)~]$ cd folder1
(kali@kali)~/folder1]$ touch file1.txt file2.pdf file3.sh
(kali@kali)~/folder1]$ ls
file1.txt  file2.pdf  file3.sh
```

In the above figure we have created a folder having three files **file1.txt** , **file2.pdf** **file3.sh**.

```
(kali㉿kali)-[~/folder1]
$ cd ..

(kali㉿kali)-[~]
$ ls
Desktop  Documents  Downloads  folder1  Music  Pictures  Projects  Public  Q1.sh  Templates  Videos

(kali㉿kali)-[~]
$ rm -r folder1

(kali㉿kali)-[~]
$ ls
Desktop  Documents  Downloads  Music  Pictures  Projects  Public  Q1.sh  Templates  Videos

(kali㉿kali)-[~]
$
```

In the above figure it is seen that folder1 is present then we write command **rm -r folder1** then again we check by **ls** command now there is no folder named **folder1**.

Tryhackme Room Linux Fundamentals



Youtube Video Linux Course

The screenshot shows a YouTube video player with the title "linux basics for hackers beginner". The video content displays a terminal window with the following output:

```
top - 02:08:31 up 1:34, 2 users, load average: 0.04, 0.06, 0.01
Tasks: 196 total, 1 running, 195 sleeping, 0 stopped, 0 zombie
%Cpu(s): 0.4 us, 0.4 sy, 0.0 ni, 99.2 id, 0.0 wa, 0.0 hi, 0.0 si, 0.0 st
MiB Mem : 4518.4 total, 3033.3 free, 722.2 used, 763.0 buff/cache
MiB Swap: 975.0 total, 975.0 free, 0.0 used, 3535.0 avail Mem
```

PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	MEM	TIME+	COMMAND
604	root	20	0	584600	229264	81664	S	2.3	5.0	1:10.40	Xorg
1333	kali	20	0	421392	93992	74792	S	1.7	2.0	0:18.11	qterminal
979	kali	20	0	1212544	89916	64368	S	0.3	1.9	0:33.83	xfwm4
1031	kali	20	0	212804	34192	18748	S	0.3	0.7	0:37.63	panel-13-cpugra
1033	kali	20	0	359404	27512	19900	S	0.3	0.6	0:24.06	panel-15-genmon
1112	kali	20	0	292680	39900	29920	S	0.3	0.9	0:10.49	vmtoolsd
22213	root	20	0	10548	3988	3180	R	0.3	0.1	0:00.57	top
1	root	20	0	166160	11400	8468	S	0.0	0.2	0:02.89	systemd
2	root	20	0	0	0	0	S	0.0	0.0	0:00.03	kthreadd
3	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	rcu_gp
4	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	rcu_par_gp
6	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	kworker/0:0H
8	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	
9	root	20	0	0	0	0	S	0.0	0.0	0:00.00	

Below the terminal output, there is a text overlay in Hindi: "आ जाएगा जो डायरेक्ट बता रहा है हमें कि Looking for Ethical? कितनी मेमोरी? Call us at : +918561089567 or visit www.wscubetech.com".

The video player interface shows the channel "WScube Cyber Security" with 467k subscribers. The video has 7.1k likes and is titled "Linux Full Course for Beginners in 2 HOURS - 2025 Edition".

Youtube Video Understanding Linux File Permissions

The screenshot shows a YouTube video player with the title "linux file permissions chnage mod explained". The video content displays a terminal window with the following output:

```
[paul@centos01 ~]$ ll
total 8
drwxr--r--. 2 root root 22 Aug 4 11:29 ndir
drwxr-xr-x. 2 root root 22 Aug 4 11:29 rdir
-rw-r--rw-. 1 root root 32 Aug 4 14:24 rfile.txt
-rwxrw-r--. 1 paul paul 31 Aug 4 11:49 script.sh
drwxr-xr-x. 2 paul paul 45 Aug 4 14:27 testdir
[paul@centos01 ~]$
[paul@centos01 ~]$ chmod 000 script.sh
[paul@centos01 ~]$ ll
total 8
drwxr--r--. 2 root root 22 Aug 4 11:29 ndir
drwxr-xr-x. 2 root root 22 Aug 4 11:29 rdir
-rw-r--rw-. 1 root root 32 Aug 4 14:24 rfile.txt
-----: नंबर हो गया सो स्क्रिप्ट ए करेता है script.sh
drwxr-xr-x. 2 paul paul 45 Aug 4 14:27 testdir
[paul@centos01 ~]$
```

The video player interface shows the channel "M Prashant" with 184k subscribers. The video has 2k likes and is titled "Linux File Permissions For Beginners [HINDI] | Linux CHMOD Command".

Conclusion

This task helped me to enhanced my proficiency in linux command line operations and helped me to comfortable with kali linux terminal. This task is a baseline for future cyber security work because linux commands are important in this field.

