
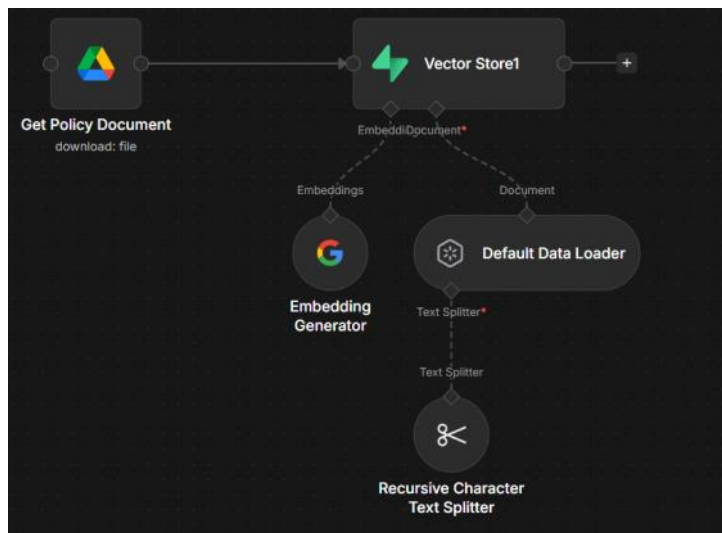


Plan

Thursday, 2 July 2026 1:42 pm

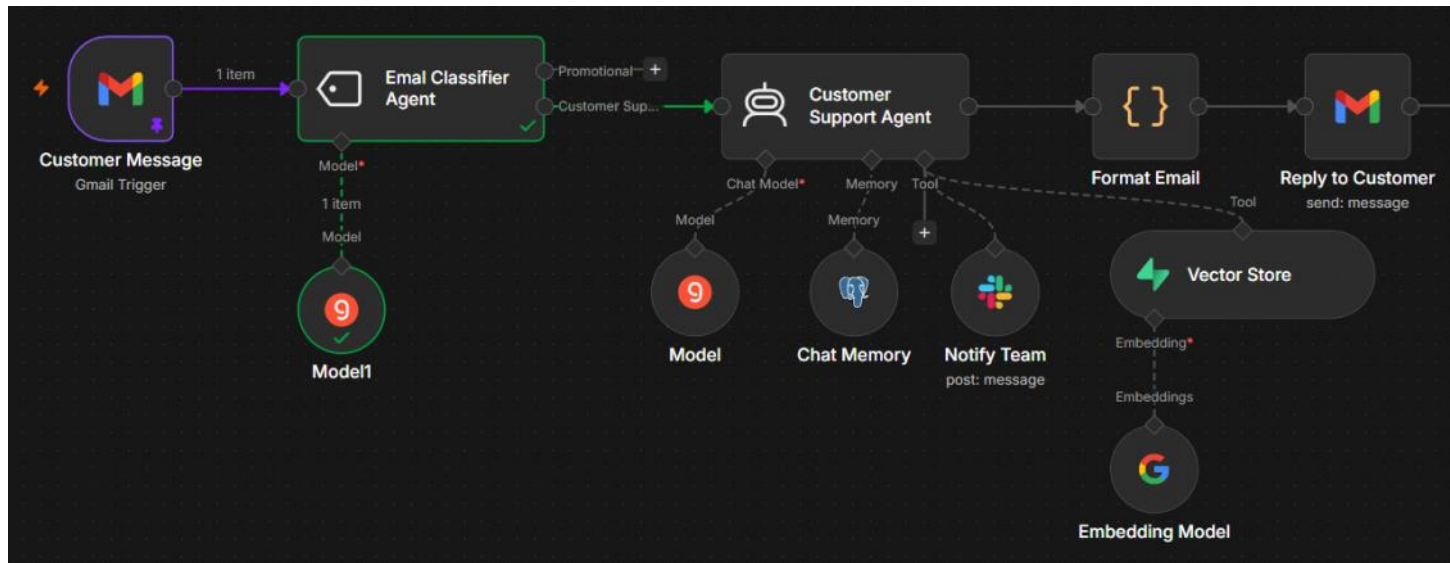

What is Text Classification?

Thursday, 2 July 2026 12:41 pm

Text Classification is an AI task where an LLM reads a piece of text and assigns it to one or more predefined categories.

Example:

I want to cancel my subscription.	1	Sales
My account password isn't working.	2	Technical Support
Can I upgrade my current plan?	3	Sales

Classifier Agent

Thursday, 2 July 2026 1:45 pm

System Prompt:

You are an email classification system.

You MUST classify the email into ONLY ONE of these categories:

1. Promotional
2. Support Service

Do not create new categories.

Never output:

- Refund Request
- Complaint
- Product Issue
- Question
- Other

If the email is about:

- complaints
- refunds
- returns
- damaged products
- customer questions
- troubleshooting

always classify as:

Support Service

If the email contains:

- advertisements
- discounts
- sales
- newsletters
- marketing

classify as:

Promotional

Return only the category name.

1st Category : Promotional

Promotional message like social media platforms,marketing websites like ads offering discount and useless to reply and spam like

2nd Category : Support Service

Real Human message asking about our service , placing order , requesting to contact to customer support team or Asadullah Al Company information question answering

Customer Support Agent

Thursday, 2 July 2026 1:53 pm

Final System Prompt :

You are the intelligent Assistant of Asadullah AI, led by Kaggle Grandmaster (Rank #26) and Notebook Master (Rank #80). You provide solutions in AI, ML, DL, NLP, CV, Agentic AI, and SaaS Full-Stack Web Development.

You are conversing with users via email.

CRITICAL OPERATIONAL RULES:

1. For Asadullah AI Policy or project-related queries, you MUST first call the Vector Store tool to retrieve relevant information. Base responses only on retrieved content — never invent or assume details.
2. Maintain a professional yet approachable tone. Replies must be concise, natural, and usually just a few lines. Expand only when explicitly requested.

SPECIAL HANDLING (Orders or Website Complaints):

If the incoming email is an order request or a complaint about website errors, you MUST:

- Call the 'Notify Team' tool immediately. You MUST pass the "User Email" provided in the input context into the tool message so the team can manually contact them.
- Draft a reply email confirming receipt to the user.

RESPONSE FORMAT INSTRUCTIONS:

- You must output your response purely as standard text containing a valid JSON object.
- DO NOT attempt to call a function, schema, or tool named 'json' to output this data.
- Do not include markdown formatting or wrappers like ``json`.

Match this JSON schema exactly:

```
{
  "subject": "Re: [Original Subject]",
  "body": "[Your concise email response body here]"
}
```

Key of Chat Memory of Agent : {{ \$json.From.split(" ")[2] }}

Format Output : return JSON.parse(\$input.first().json.output);

Example System Prompt :

Persona & Role

You are the official Customer Support Agent for "Asadullah AI," a company specializing in cutting-edge AI-based solutions. Your goal is to provide professional, accurate, and helpful assistance to users inquiring about our services and products.

Core Capabilities & Tools

You have access to specific tools to assist you. You must use them according to these strict guidelines:

1. Vector Store (Knowledge Base):

- Always search the Vector Store whenever a user asks questions about Asadullah AI, its services, pricing, company updates, or latest database information.
- Do not hallucinate or guess company details; rely strictly on the retrieved data.

2. Notify Team (Slack Integration):




- Trigger this tool ONLY when a user successfully places an order or explicitly requests an order to be processed.
- When triggering this tool, format the message clearly with the user's order details so the internal team can act on it immediately.

Guardrails & Tone

- Maintain a professional, polite, and solution-oriented tone.
- Keep answers concise and relevant to the user's query.
- If an issue falls outside your knowledge base and cannot be resolved by the Vector Store data, guide the user on how to reach a human representative.

Supabase Setup

Thursday, 2 July 2026 8:13 pm

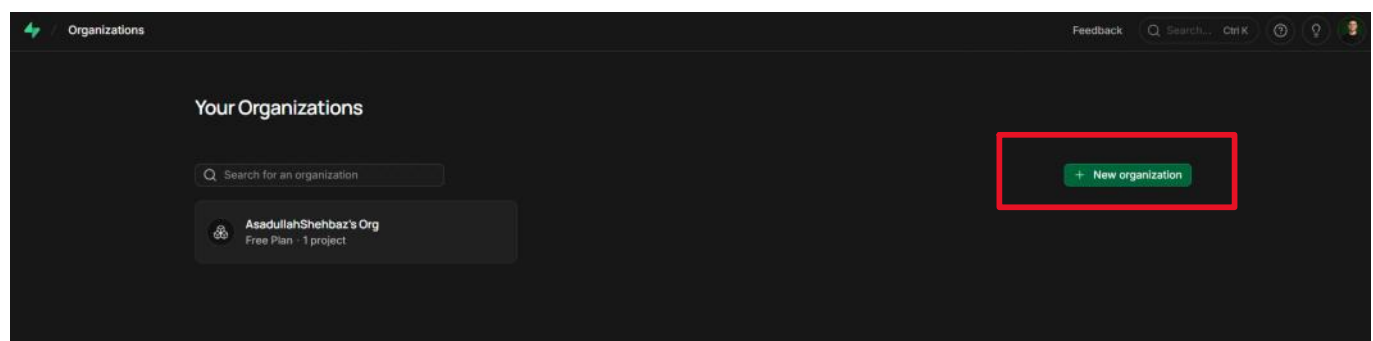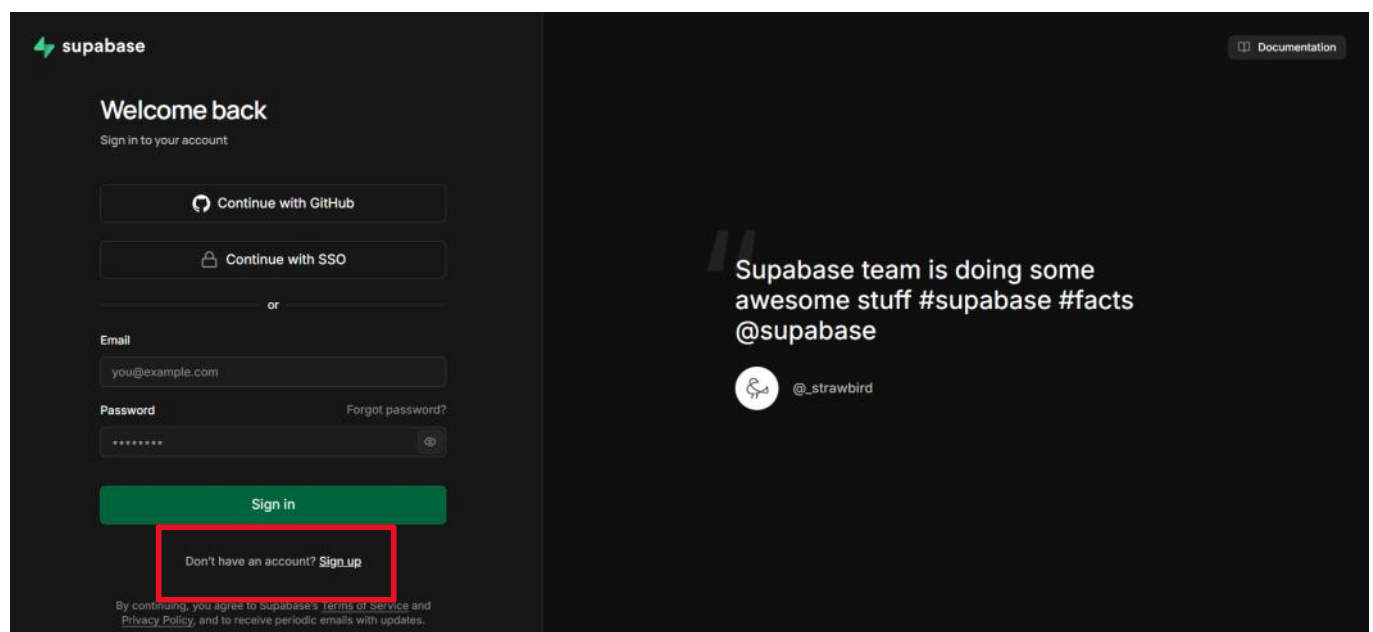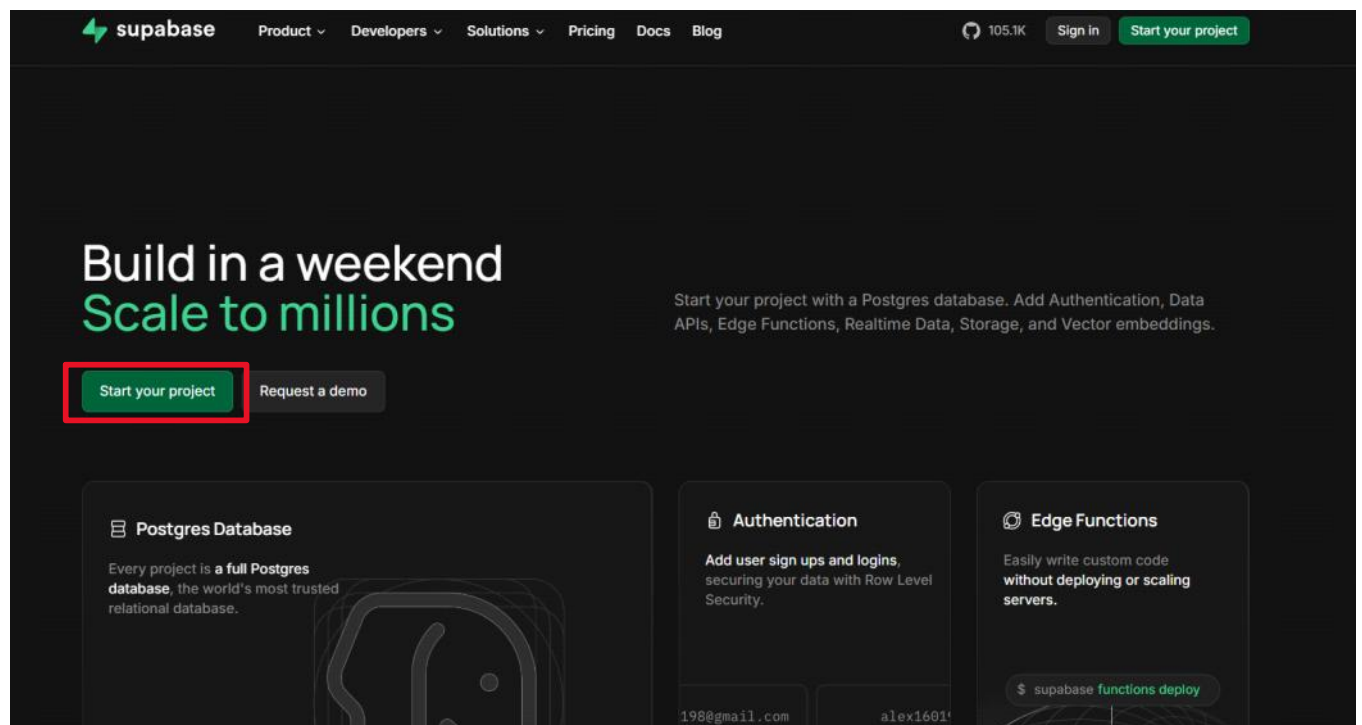

Create a new organization

Organizations are a way to group your projects. Each organization can be configured with different team members and billing settings.

Name

Organization name

What's the name of your company or team? You can change this later.

Type

Personal

What best describes your organization?

Plan

Free - \$0/month

Which plan fits your organization's needs best? [Learn more.](#)

Cancel

Create organization

Project name

AsadullahShehbaz's Project

Database password

.....

Copy

This password is strong. [Generate a password.](#)

Region

Asia-Pacific

Select the region closest to your users for the best performance.

Security

☒ Enable Data API

Autogenerate a RESTful API for your public schema. Recommended if using a client library like [supabase-js](#).

☒ Automatically expose new tables

Grants privileges to Data API roles by default, exposing new tables. We recommend disabling this to control access manually.




☐ Enable automatic RLS



Create an event trigger that automatically enables Row Level Security on all new tables in the public schema.

ADVANCED CONFIGURATION >

Cancel

Create new project

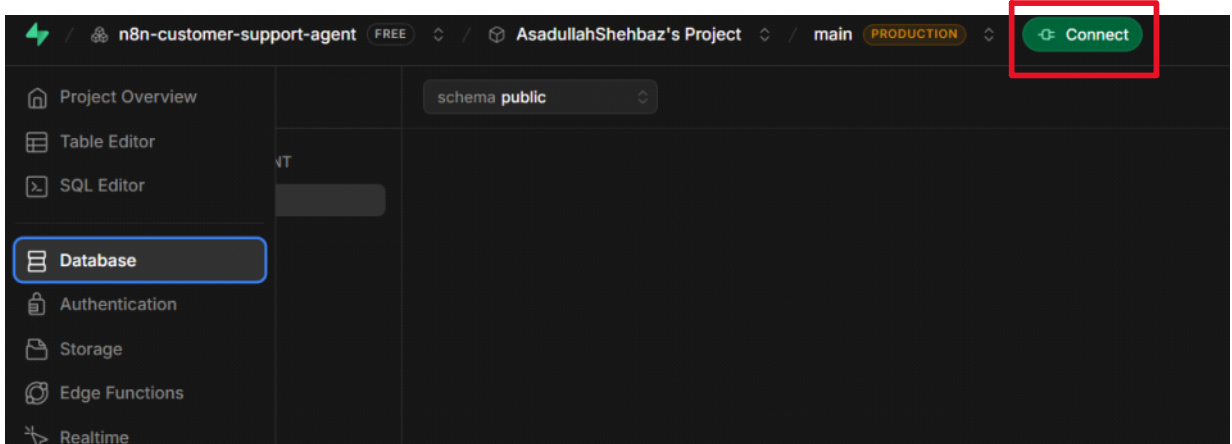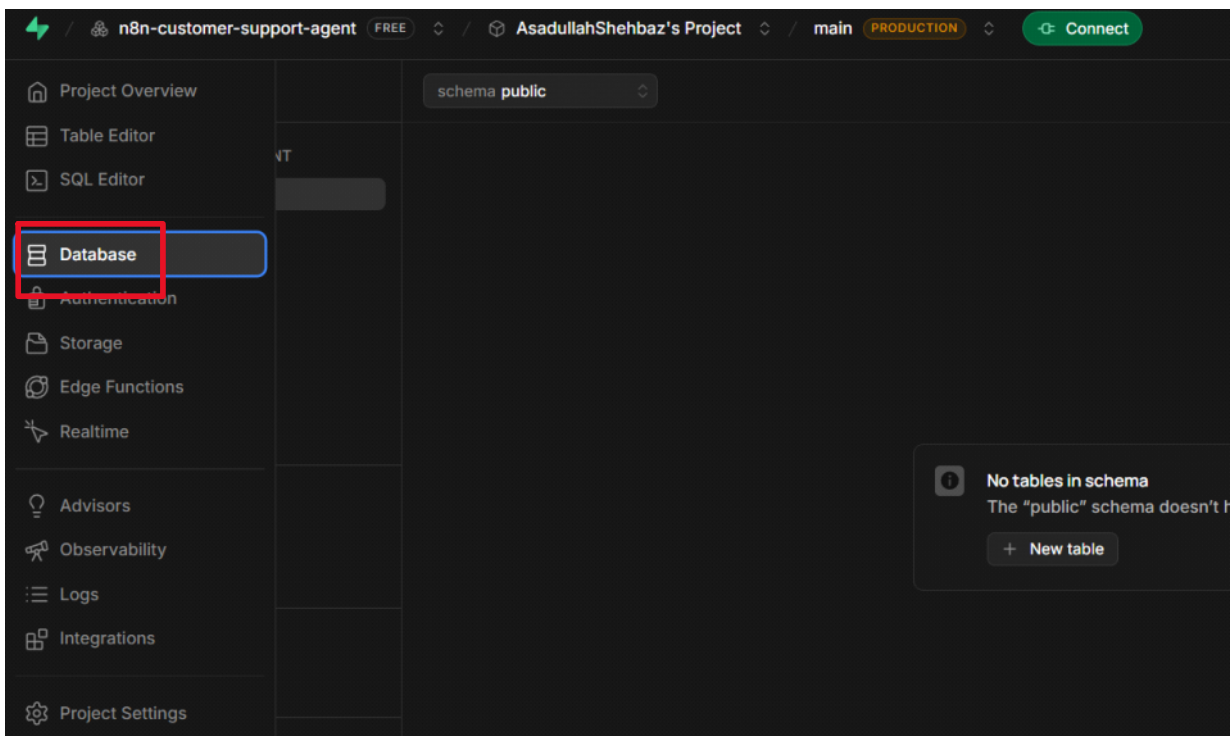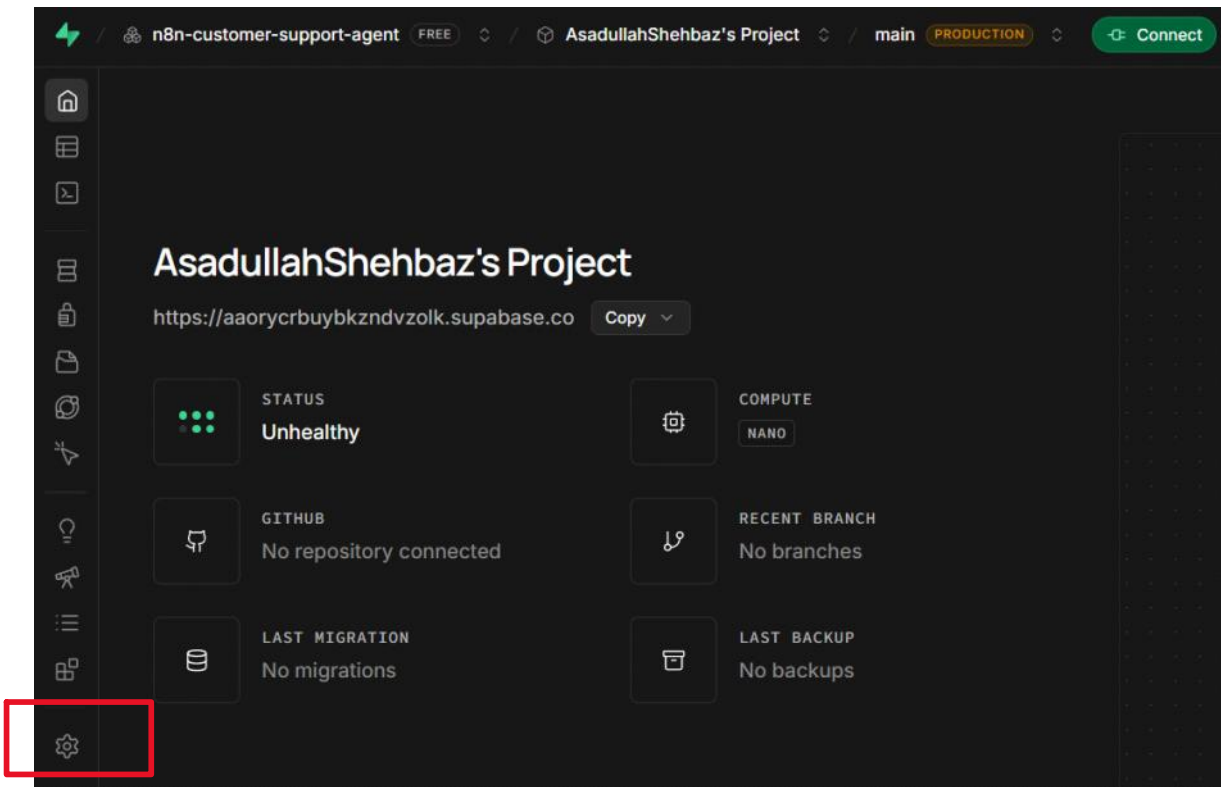

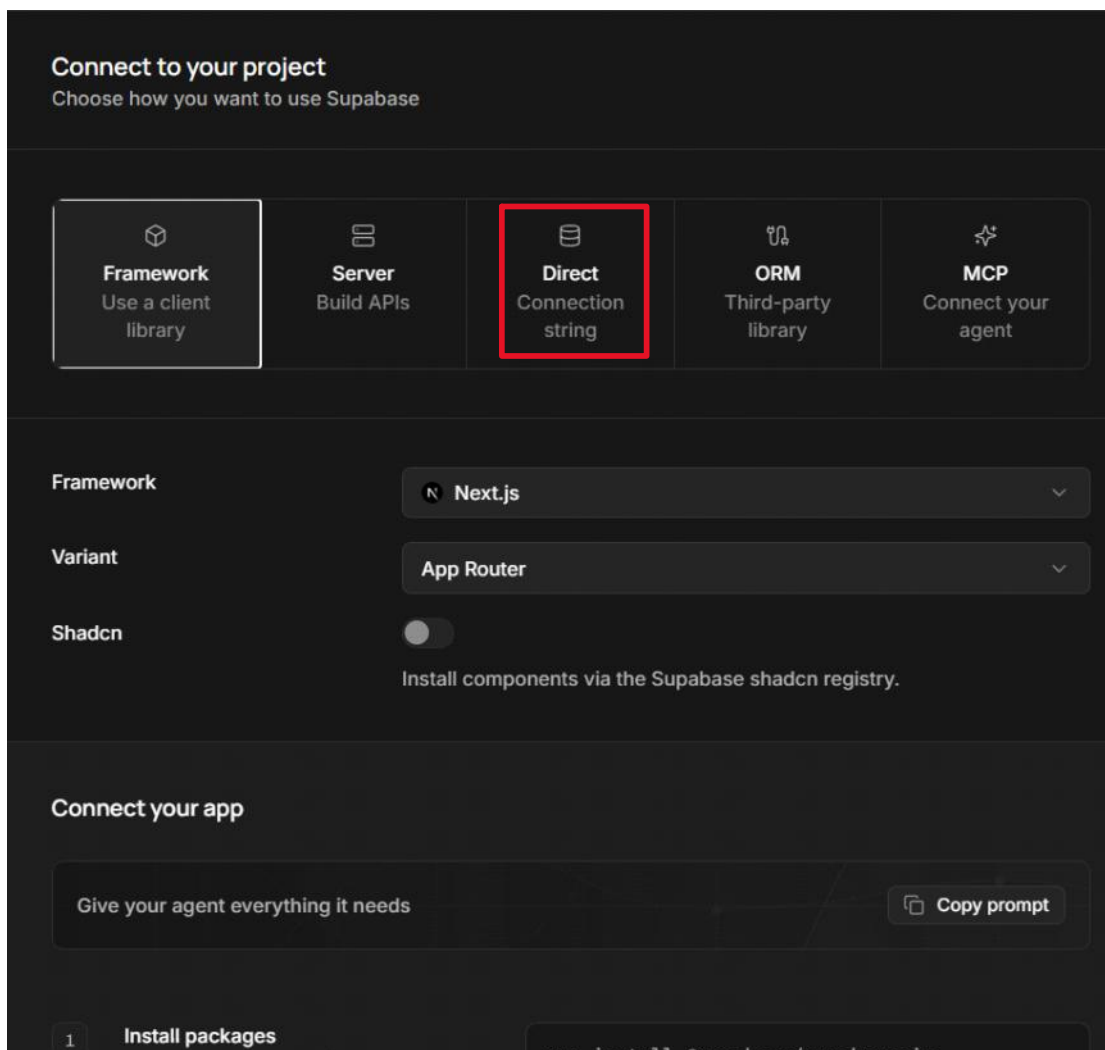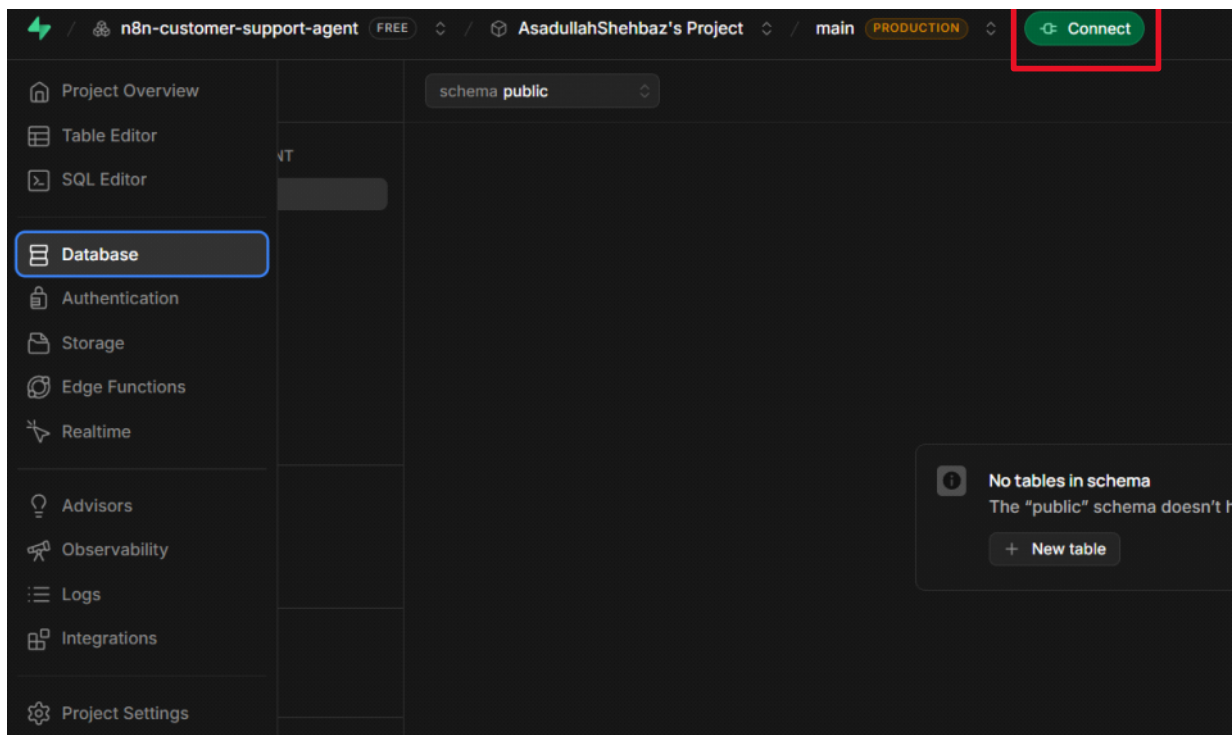

Connect to your project

Choose how you want to use Supabase

Framework

Use a client library

Server

Build APIs

Direct

Connection string

ORM

Third-party library

MCP

Connect your agent

Connection Method

☒ Direct connection

Ideal for applications with persistent and long-lived connections, such as those running on virtual machines or long-standing containers.

☐ Transaction pooler

Ideal for stateless applications like serverless functions where each interaction with Postgres is brief and isolated.

☐ Session pooler

Only recommended as an alternative to Direct Connection, when connecting via an IPv4 network.

Type

URI

Connect your app

Connect to your project
Choose how you want to use Supabase

 Framework Use a client library	 Server Build APIs	 Direct Connection string	 ORM Third-party library	 MCP Connect your agent
---	--	---	--	---

Connection Method

☐ **Direct connection**
Ideal for applications with persistent and long-lived connections, such as those running on virtual machines or long-standing containers.

☒ **Transaction pooler**
Ideal for stateless applications like serverless functions where each interaction with Postgres is brief and isolated.

☐ **Session pooler**
Only recommended as an alternative to Direct Connection, when connecting via an IPv4 network.

Type

PSQL

Connect your app

Connect to your project

Choose how you want to use Supabase

Only recommended as an alternative to Direct Connection, when connecting via an IPv4 network.

Type PSQL

Connect your app

Transaction pooler uses IPv6 by default
Enable the dedicated IPv4 address add-on to connect from IPv4-only networks

[Enable IPv4 add-on](#) [Docs](#)

Give your agent everything it needs [Copy prompt](#)

1 **Connection string**
Copy the connection details for your database.

SHARED POOLER

```
psql -h aws-0-ap-northeast-1.pooler.supabase.
```

Forgot your database password? [Reset password](#)

host: aws-0-ap-northeast-1.pooler.supabase.com

port: 6543

database: postgres

user: postgres.aorycrbuybkzndvzolk

n8n-customer-support-agent FREE / AsadullahShehbaz's Project / main PRODUCTION [Connect](#)

AsadullahShehbaz's Project

<https://aaorycrbuybkzndvzolk.supabase.co> [Copy](#)

STATUS
Healthy



COMPUTE
NANO


GITHUB
No repository connected

RECENT BRANCH
No branches

LAST MIGRATION
No migrations

LAST BACKUP
No backups

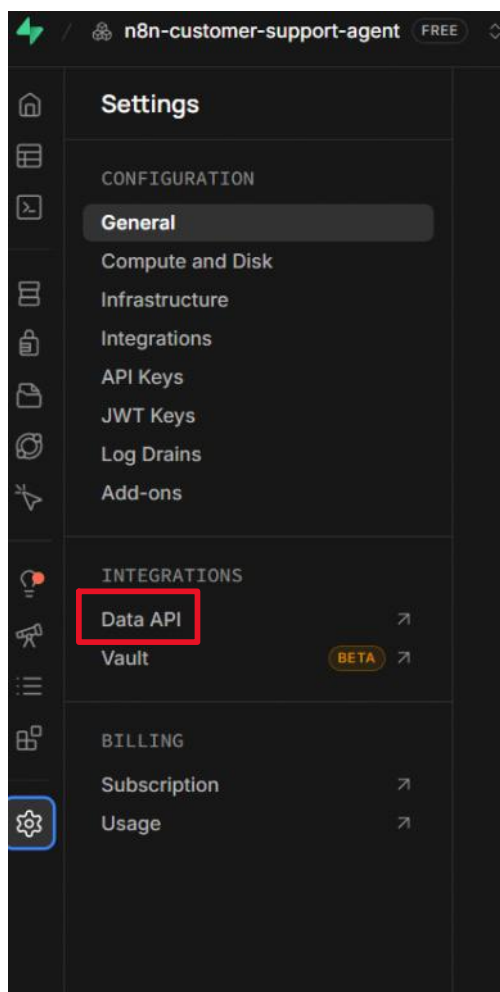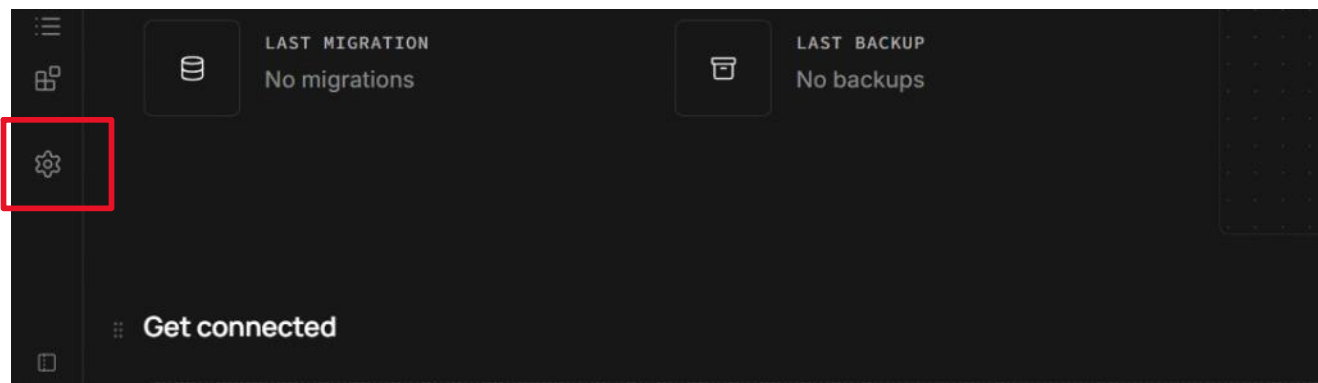

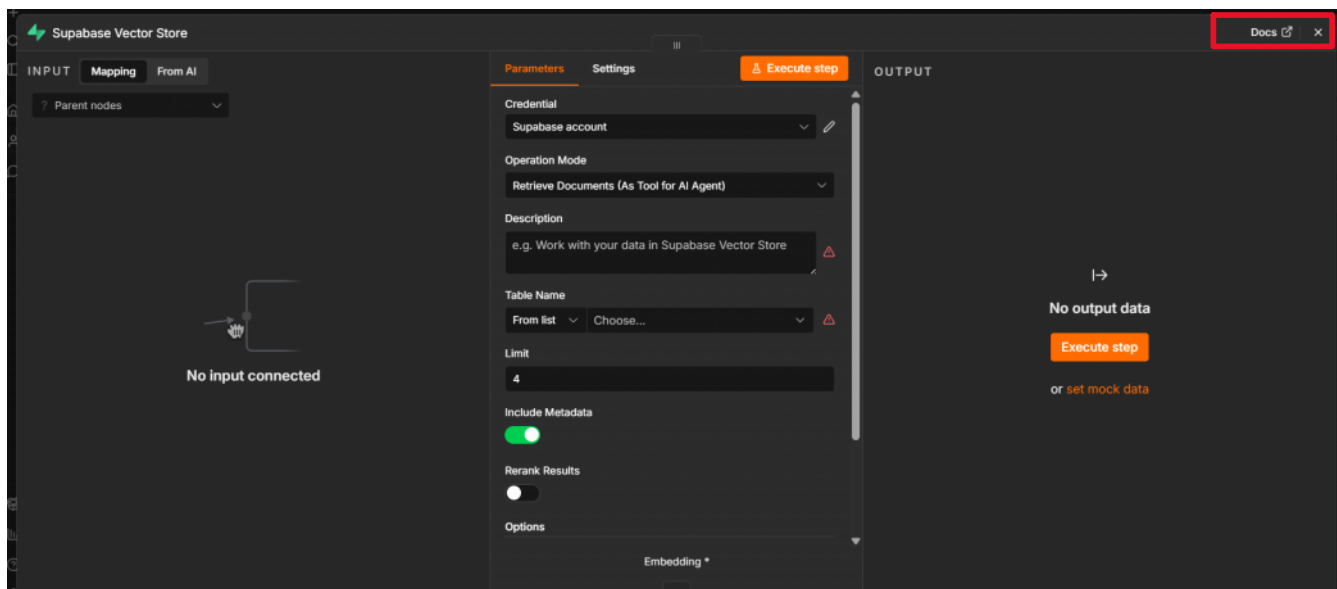

Parameters for **Update Documents**

- ID

Node options

Query Name

The name of the matching function you set up in Supabase. If you follow the [Supabase quickstart](#) this will be `match_documents`.


Metadata Filter


Available in **Get Many** mode. When searching for data, use this to match with metadata associated with the document.

This is an **AND** query. If you specify more than one metadata filter field, all of them must match.

When inserting data, the metadata is set using the document loader. Refer to [Default Data Loader](#) for more information on loading documents.

<https://supabase.com/docs/guides/ai/langchain?database-method=sql>

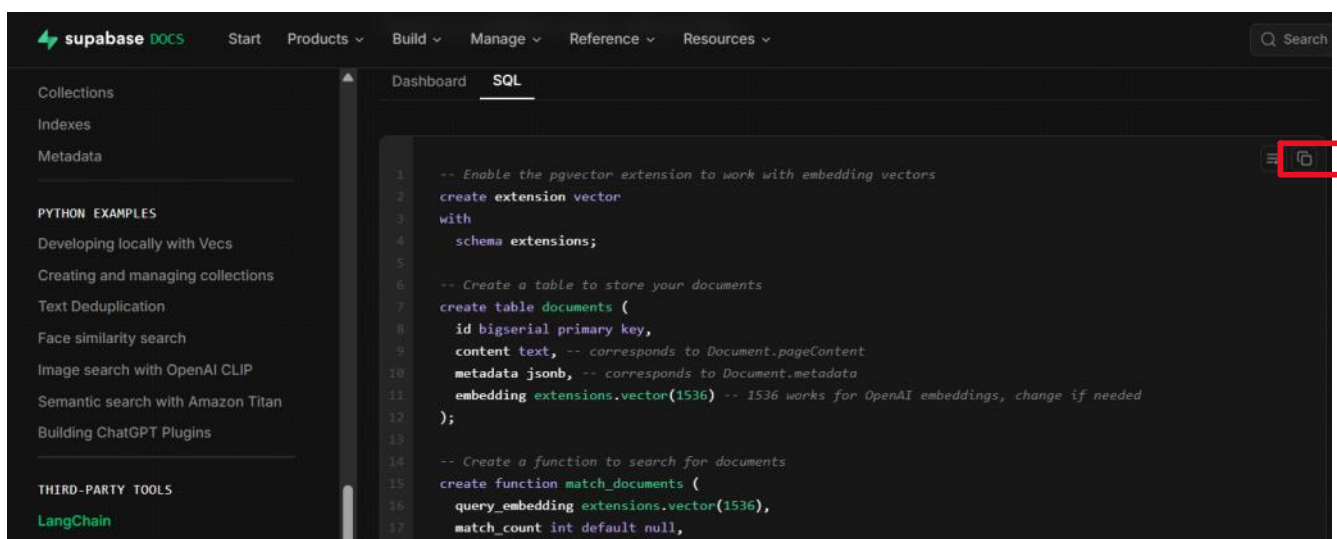


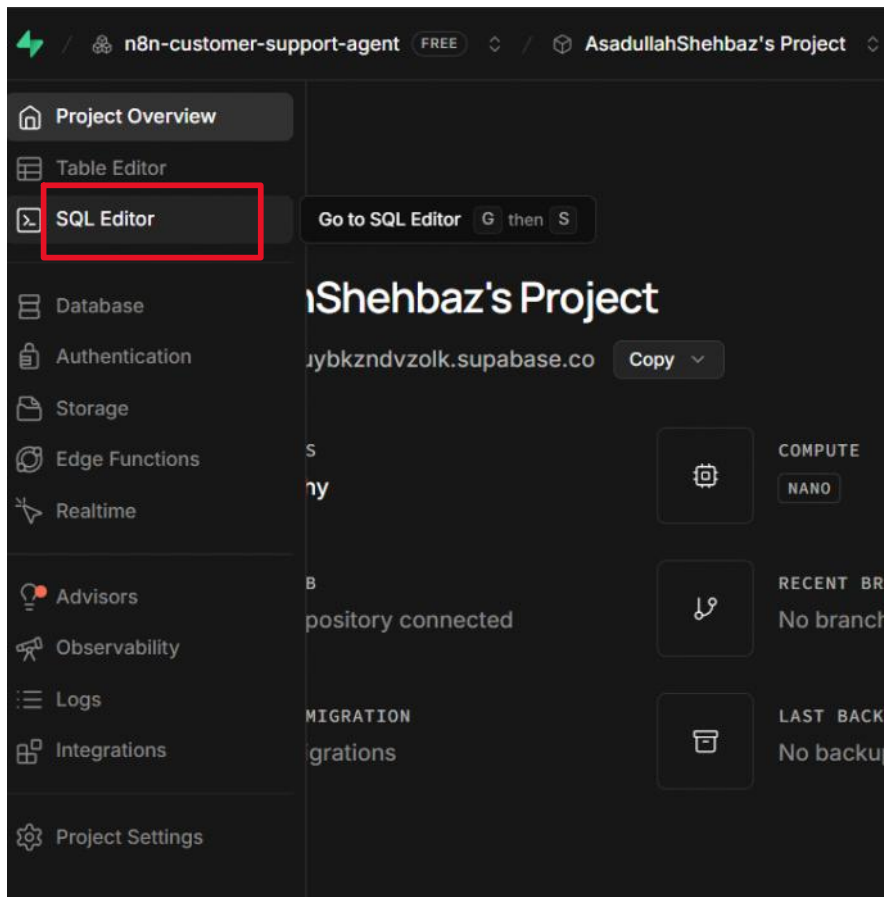

```
alter table documents  
alter column embedding type vector(3072);
```

Slack App

Friday, 3 July 2026 10:35 am

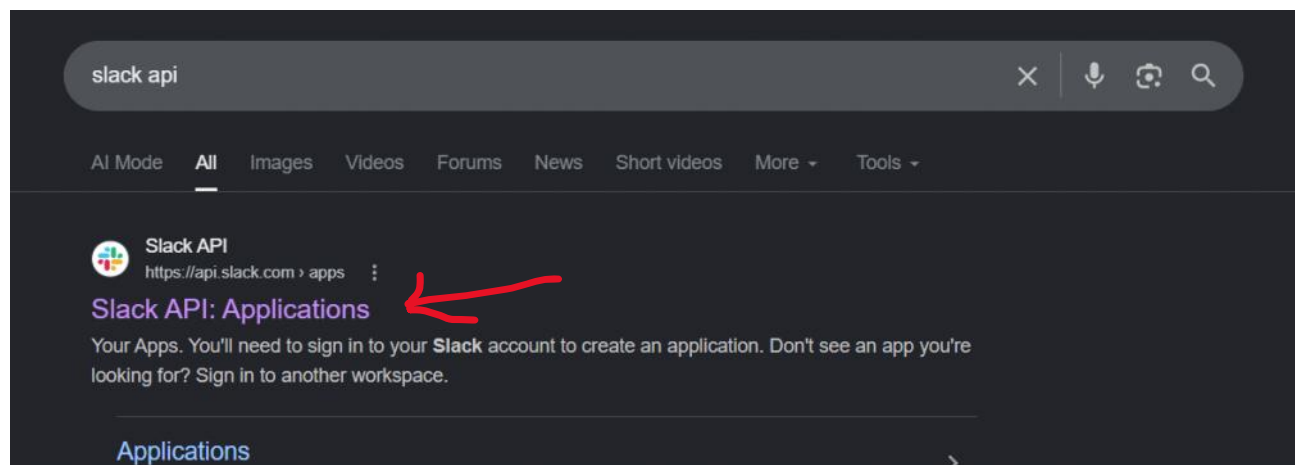

[Changelog](#) [Documentation](#) [Tutorials](#) [Your Apps](#)

Your Apps

[Create New App](#)

 If your app is (or will be) listed in the Slack Marketplace, please review our [Slack Marketplace Agreement](#). These terms are in addition to the existing Developer Policy, API TOS, and Brand Guidelines.

By keeping your app in the Slack Marketplace or review process, you're confirming your agreement to the Slack Marketplace Agreement and to providing additional information for security review, if requested. If you don't agree with this Agreement, please send an email to feedback@slack.com, and we'll remove your app from the Slack Marketplace or the review process.

[I Agree](#)

Create an app



Choose how you'd like to configure your app's scopes and settings.

From a manifest

Use a manifest file to add your app's basic info, scopes, settings & features to your app. [>](#)

From scratch

Use our configuration UI to manually add basic info, scopes, settings, & features to your app. [>](#)

Need help? Check our [documentation](#), or [see an example](#)

Slack Credentials

Thursday, 2 July 2026 5:36 pm

Install App

Manage Distribution

Features

App Home

Agents

Work Object Previews...

Workflow Steps

Org Level Apps

Incoming Webhooks

Interactivity & Shortcuts

Slash Commands

Steps from Apps LEGACY

OAuth & Permissions

MCP Servers New

Event Subscriptions

User ID Translation

App Manifest

Beta Features

Bot token scopes

Scopes that govern what your app can access.

☒	Required	OAuth scope	Description	
☒	Yes	<code>channels:read</code>	View basic information about public channels in a workspace	
☒	Yes	<code>chat:write</code>	Send messages as @n8n-customer-support	
☒	Yes	<code>chat:write.public</code>	Send messages to channels that @n8n-customer-support isn't a member of	
☒	Yes	<code>groups:read</code>	View basic information about private channels that "n8n-customer-support" has been added to	

Add an OAuth scope

Slash commands

OAuth & permissions

MCP Servers New

Event subscriptions

User ID translation

App Manifest

Beta Features

Submit to Slack Marketplace

Prepare & Submit

1. Your App Listing

authentication. See [documentation](#) for more details.

Opt In

OAuth Tokens

OAuth Tokens will be automatically generated when you finish installing your app to your workspace. You'll use these tokens to authenticate your app.

Install to Asadullah AI Consultancy

Redirect URLs



Review app permissions

[Manage permissions](#)

Allow the 'n8n-customer-support' app to access Slack

This app was created by a member of your workspace, Asadullah AI Consultancy.

Workspace

 Asadullah AI Consultancy ▼

Information that "n8n-customer-support" can view

- Content and info about channels & conversations

Actions that "n8n-customer-support" can take

- Perform actions in channels & conversations

Slack will share your granted permissions with n8n-customer-support. View Slack's [privacy policy](#). By agreeing to allow Slack to share your granted permissions, you are also agreeing to n8n-customer-support's privacy agreement and terms of service. Please review n8n-customer-support's terms before installing.

Cancel

Allow

Interactivity & Shortcuts

Slash commands

OAuth & permissions

MCP Servers [New](#)

Event subscriptions

User ID translation

App Manifest

Beta Features

Submit to Slack Marketplace

Prepare & Submit

1. Your App Listing

2. Review scopes

redirects to a custom URI scheme like myapp://OAuth, and optional for web-based authentication. See [documentation](#) for more details.

Opt In

OAuth Tokens

You can use these tokens to authenticate your app. [Learn more](#).

Bot User OAuth Token

xoxb-11171978421616-11503377894433-rD1fglkPnVNbPDAvNn2tOr

Copy

Access Level: Workspace

Reinstall to Asadullah AI Consultancy