
{EPITECH}

MANAGE VIRTUAL MACHINES_

< USER GUIDE FOR MY />

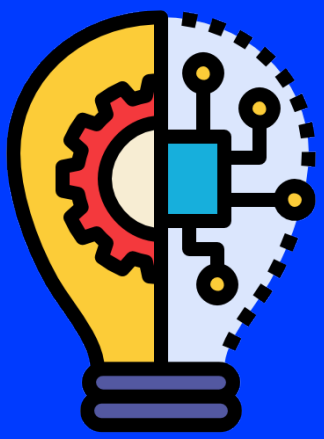

MANAGE VIRTUAL MACHINES

Some projects let you use cloud resources, in particular virtual machines. This guide explains how to **add your SSH key**, **create a virtual machine (VM)**, **track its status** and **put it to sleep** when you are not using it, all from your project page on My Epitech.



Only the group leader can manage the project's cloud resources: adding the SSH key, creating, starting, stopping, restarting, suspending, renaming or deleting a machine.
The other group members can see the machines (status, IP addresses, login) but cannot control them. See What if I am not the group leader?.

Before you start

You need:

- ✓ to be the **group leader** of the project;
- ✓ to have access to the project page in My (**Projects** menu, or **Modules** then your module);
- ✓ an **SSH key pair** on your computer (see below).

All the actions in this guide are done in the **Cloud resources** tab of the project page. It shows your **remaining credits**, the date of the **next renewal** and the list of the group's machines.




Never share your private key (the `id_ed25519` file, without the `.pub` extension). Only the public key (`.pub`) is pasted into My.

Add your SSH key

Without a registered SSH key, **no machine can be created**. On the **Cloud resources** tab, a yellow banner reminds you of this. Click **Add an SSH key**, at the top right.



In the **SSH info** window, paste your public key into the **Public key** field, then click **Add an SSH key**.

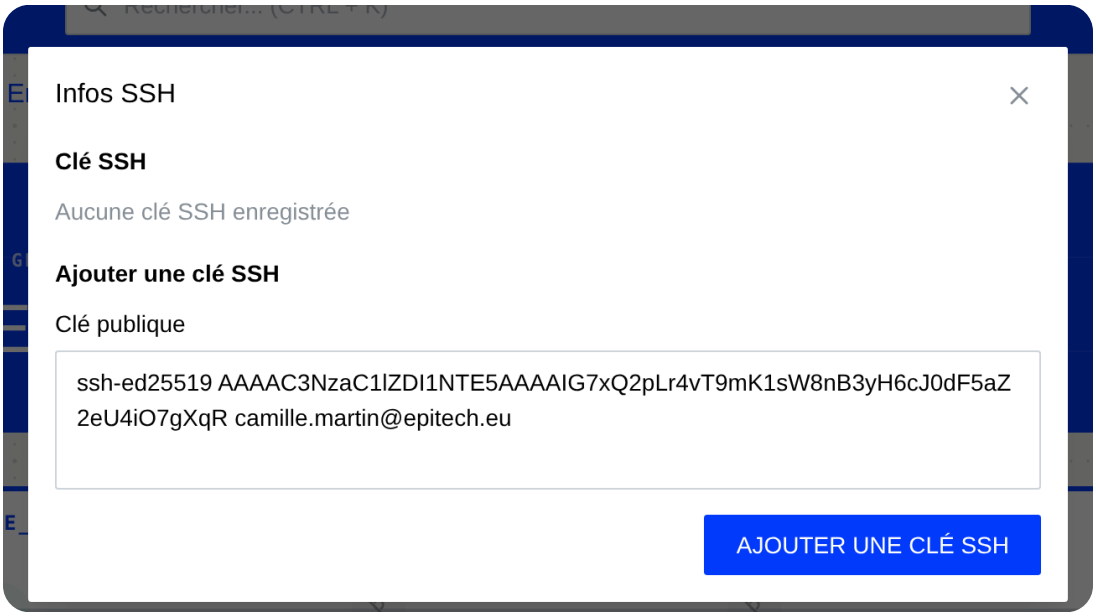

Never share your private key! Only the public key (`.pub`) is pasted into My.

An ”SSH key added” message confirms the operation. The window then shows the key's **fingerprint**, its **date added** and the **regions** where it is deployed. From this same window (**Manage SSH key** button), you can later **replace** the key by pasting a new public key, or **delete** it.


Once the key is in place, the yellow banner disappears and the **Create a virtual machine** button appears below the credits summary.

Create a virtual machine

Click **Create a virtual machine**. The form asks for:

Field	Description
Virtual machine name	Required. Pick a meaningful name (`web-server`, `k8s-master`...). It can be changed later.
Model	The machine size: vCPU, RAM, storage and **hourly rate** in credits.
Region	The datacenter that will host the machine.
Base image	The operating system installed at the start (for example Ubuntu 24.04).


For example, you can create a machine named `web-server`, model **d2-4** (2 vCPU, 4 GB of RAM, 50 GB of storage, 1 credit per hour), region **GRA11**, image **Ubuntu 24.04**. The **Create a virtual machine** button becomes active once all fields are filled in.

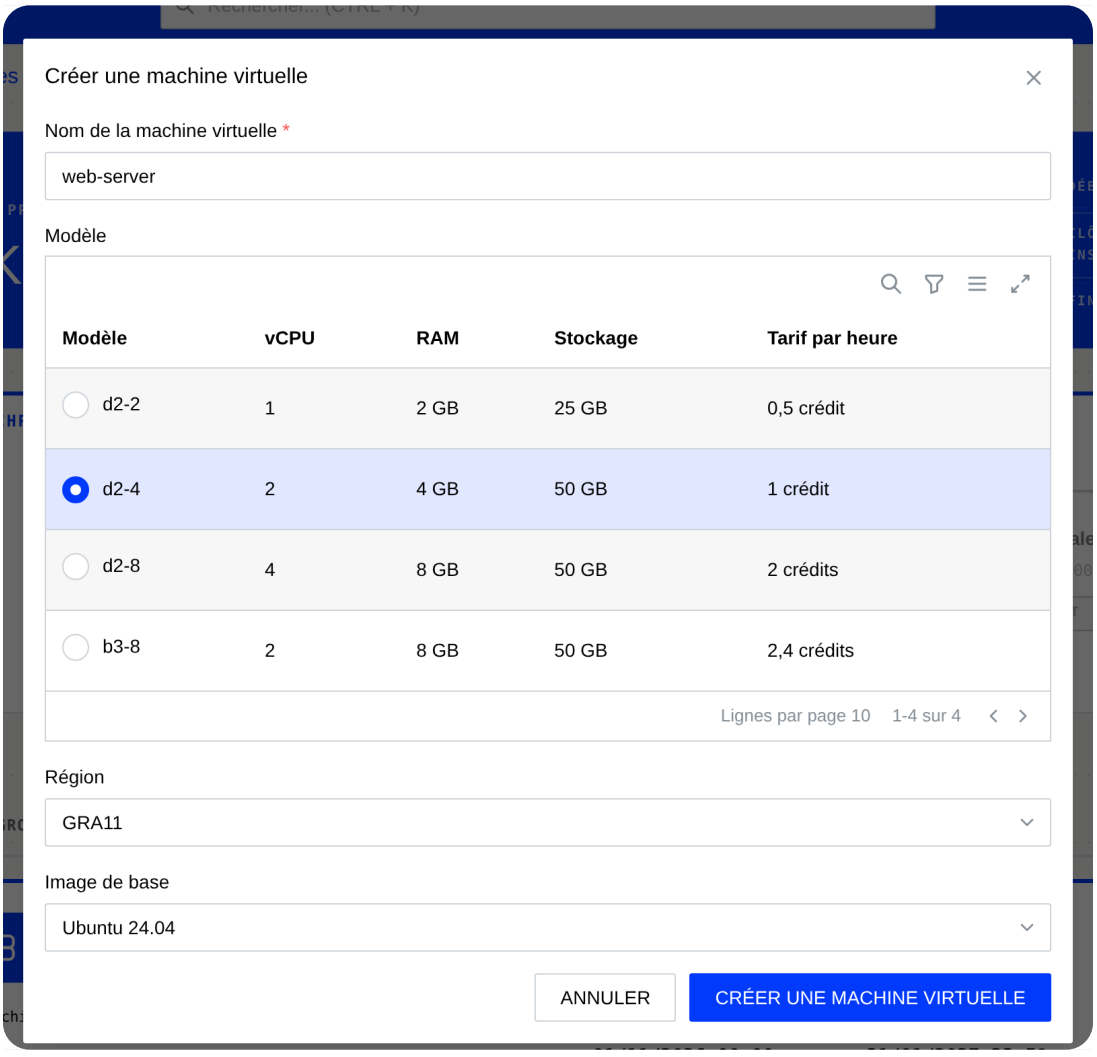

Pick the smallest model that meets your needs. Credits are shared by the **whole group** for the duration of the project: a model twice as big uses them twice as fast.

The machine appears immediately with the orange **Creating** status. Until it is ready, the action buttons are greyed out and the IP address has not been assigned yet.

When the status changes to **Started** (green), the card shows the region, the image's **default login**, the resources, the rate and the **IP addresses** (IPv4 and IPv6, copyable in one click).

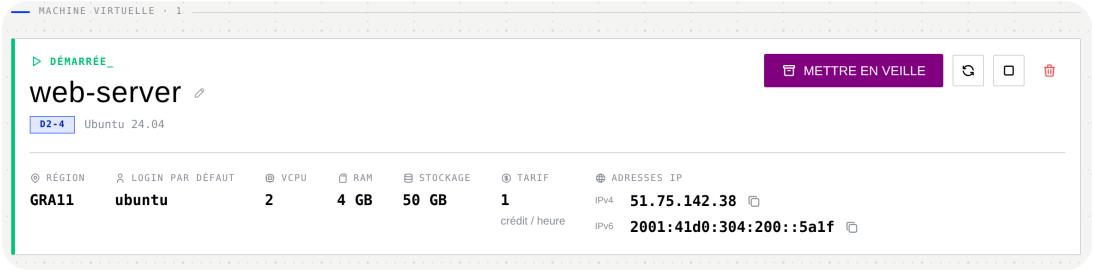

You can then connect with your SSH key, using the default login and the IPv4 address shown:

```
ssh ubuntu@51.75.142.38
```

The default login depends on the chosen image (here `ubuntu`). Always refer to the value shown in the **Default login** column of your machine, and replace the example address with your own.

Track your VM's status

Each machine's status is displayed at the top of its card, with a dedicated color. The project summary also shows the number of machines and how many are **active**.

Status	Color	What it means	Available actions
Creating	Orange	The machine is being created. The IP address is not assigned yet.	None (buttons greyed out)
Started	Green	The machine is on and reachable over SSH.	Suspend, restart, stop, delete
Stopped	Grey	The machine is off, but **still billed at the full rate**.	Start, suspend, delete
Suspended	Purple	The machine is unreachable, its data is kept, the hourly cost is reduced.	Resume, delete

State changes (start, restart, resume from suspension) go through an orange status with a loading indicator. Wait a few minutes: the operation can take some time.




Keep an eye on your **remaining credits** at the top of the tab: the progress bar and the counter show what is left before the next renewal.


Suspend your VM

Suspending is **the right habit when you are not using your machine** (evenings, weekends, periods without work on the project): the machine becomes unreachable, but its **data is preserved** and its **hourly cost is greatly reduced**.

To suspend a machine, click the purple **Suspend** button on the card of a **started** machine, then confirm with **Suspend** (or **Cancel**).

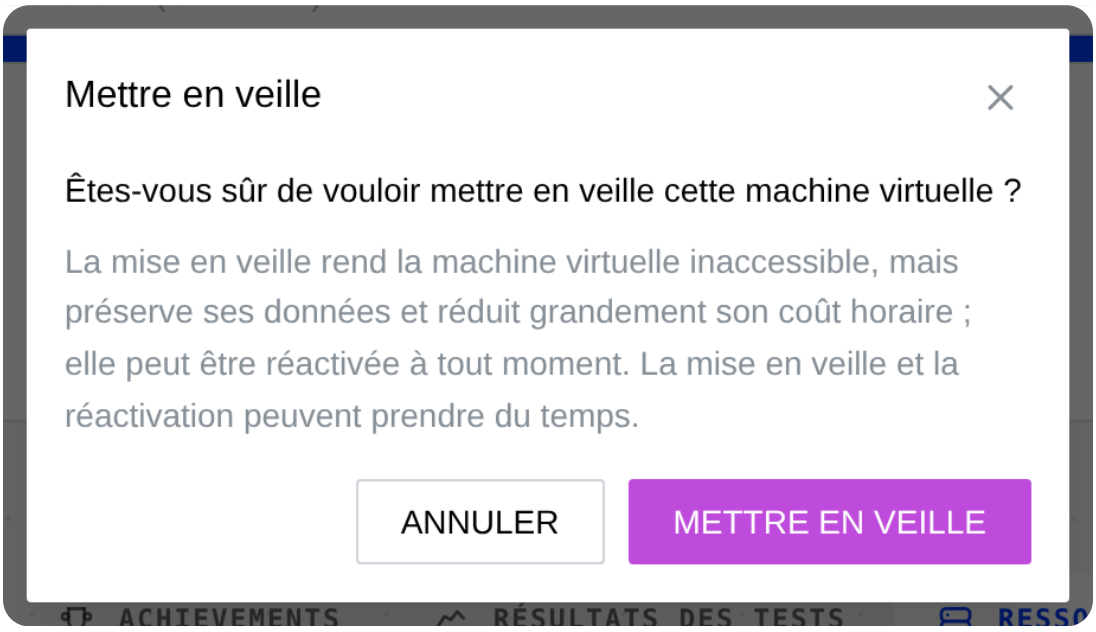

The card then switches to the purple **Suspended** status. It shows the **suspension date** and the **suspended rate** (much lower than the normal rate, for example 0.05 credit per hour instead of 1 for a d2-4 model).

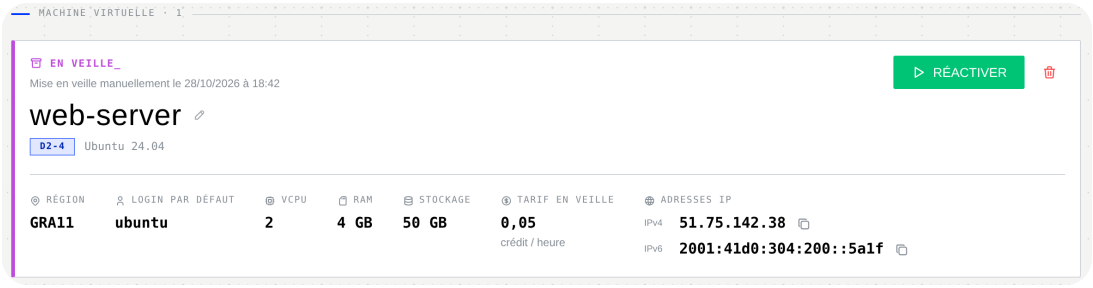

To get back to work, click the green **Resume** button. The machine goes through an orange status while it comes out of suspension.

> Suspending, like resuming, can take a few minutes.

If the **group's credits run out**, My **automatically suspends** the machine. The card indicates it under the status: "Automatically suspended (credits exhausted)".

Stop, restart, rename, delete

These actions are on the right of the card of a started (or stopped) machine.

The square **Stop** button turns the machine off after confirmation.

A stopped machine is still billed at the full rate. To save credits, use suspension rather than stopping.

A stopped machine is grey and offers a green **Start** button to relaunch it (or **Suspend** to reduce its cost). After clicking **Start**, the status turns orange with a loading indicator while the machine restarts.

The circular-arrows button **restarts** a running machine, after confirmation.

To rename a machine, click its name (or the pencil next to it). **Enter** confirms, **Esc** cancels.


Finally, the red trash can deletes the machine, after confirmation.

Deletion is **irreversible**: all the machine's data is lost. Back up anything you need before confirming.

What if I am not the group leader?

Only the **group leader** manages the project's cloud resources. If you are a regular member:

- ✓ you can **see** the group's machines, their status and their IP addresses, but **no action button** is available;
- ✓ for a machine to be created, started, suspended or deleted, **ask your group leader**;
- ✓ until the group leader has added their SSH key, you see the banner ”The group leader has not added an SSH key yet, so virtual machines cannot be created”.

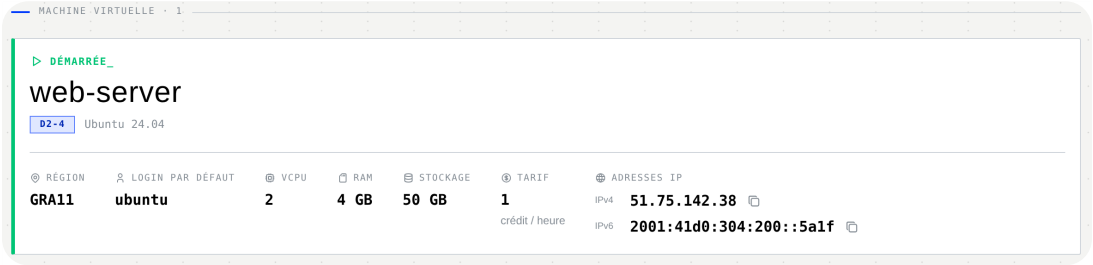

Reminder: **all these actions are reserved for the group leader.**

v1

