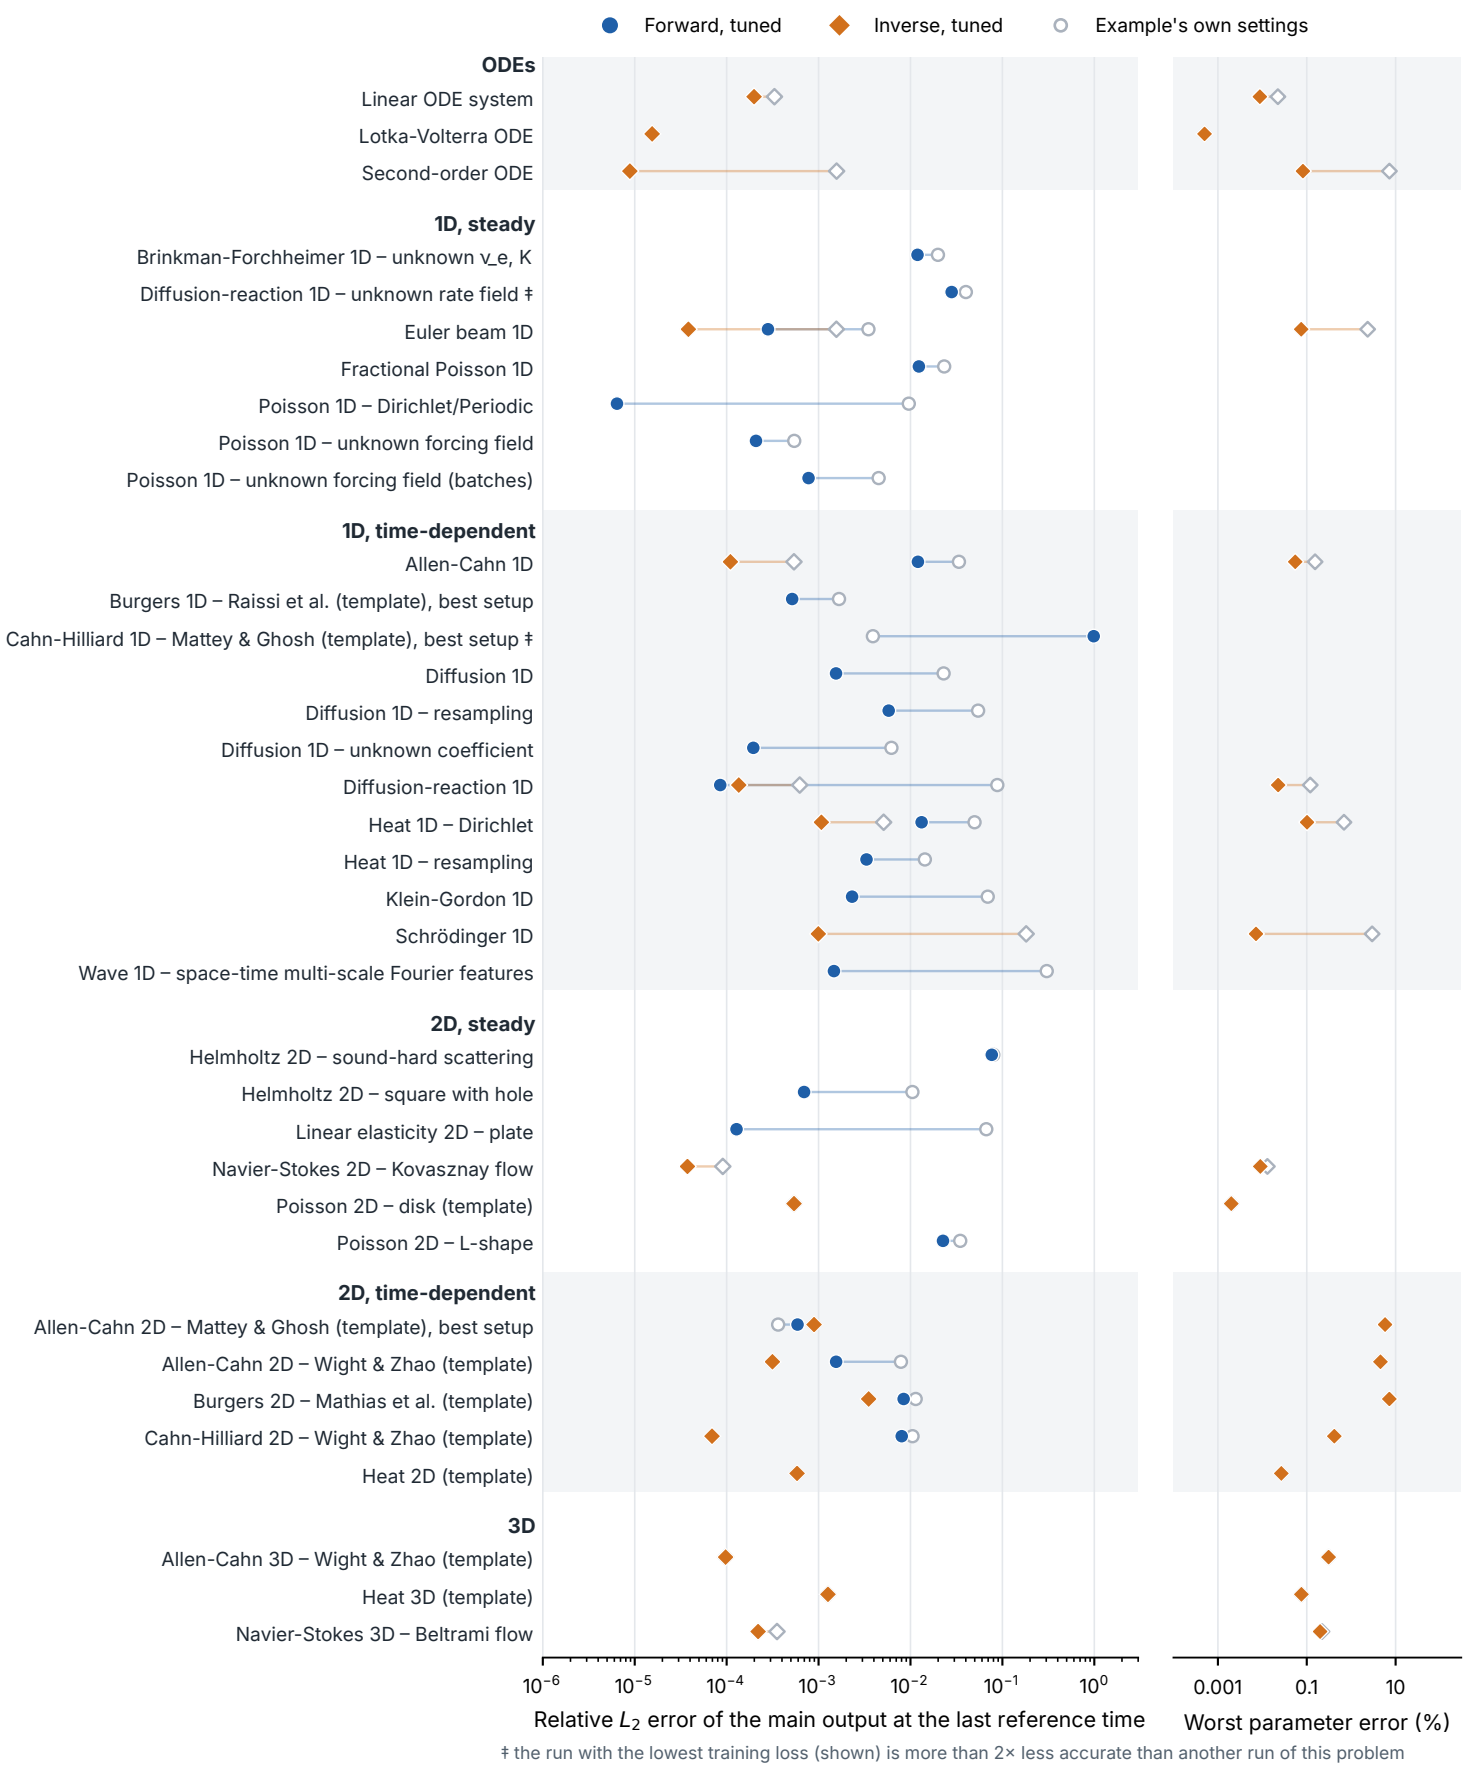
Forward, tuned
Inverse, tuned
Example's own settings
ODEs
Linear ODE system
Lotka-Volterra ODE
Second-order ODE
1D, steady
Brinkman-Forchheimer 1D – unknown ν_e, K
Diffusion-reaction 1D – unknown rate field ‡
Euler beam 1D
Fractional Poisson 1D
Poisson 1D – Dirichlet/Periodic
Poisson 1D – unknown forcing field
Poisson 1D – unknown forcing field (batches)
1D, time-dependent
Allen-Cahn 1D
Burgers 1D – Raissi et al. (template), best setup
Cahn-Hilliard 1D – Mattey & Ghosh (template), best setup ‡
Diffusion 1D
Diffusion 1D – resampling
Diffusion 1D – unknown coefficient
Diffusion-reaction 1D
Heat 1D – Dirichlet
Heat 1D – resampling
Klein-Gordon 1D
Schrödinger 1D
Wave 1D – space-time multi-scale Fourier features
2D, steady
Helmholtz 2D – sound-hard scattering
Helmholtz 2D – square with hole
Linear elasticity 2D – plate
Navier-Stokes 2D – Kovasznay flow
Poisson 2D – disk (template)
Poisson 2D – L-shape
2D, time-dependent
Allen-Cahn 2D – Mattey & Ghosh (template), best setup
Allen-Cahn 2D – Wight & Zhao (template)
Burgers 2D – Mathias et al. (template)
Cahn-Hilliard 2D – Wight & Zhao (template)
Heat 2D (template)
3D
Allen-Cahn 3D – Wight & Zhao (template)
Heat 3D (template)
Navier-Stokes 3D – Beltrami flow
10^{-6} 10^{-5} 10^{-4} 10^{-3} 10^{-2} 10^{-1} 10^{0}
Relative L_2 error of the main output at the last reference time
0.001 0.1 10
Worst parameter error (%)
‡ the run with the lowest training loss (shown) is more than 2× less accurate than another run of this problem