

Introduction to netCDF formats, data models, and utilities

Ward Fisher, UCAR Unidata
Workshop on Using Unidata Technologies with Python
17-19 October 2016

Introduction to netCDF

Covered

- Overview
- Formats
- Data models
- Utilities
- Exercises

Not covered

- Building and installing
- Library architecture
- Application programming interfaces for C, Fortran, Python, Java, ...
- CF metadata conventions
- Compression and chunking
- Diskless files
- Parallel I/O, HPC issues
- Future plans

See [most recent netCDF workshop](#) for subjects on right

Overview of netCDF

More than just a file format ...



At its simplest, it's also:

- A data model
- An application programming interface (API)
- Software implementing the API

Together, the format, data model, API, and software support the creation, access, and sharing of scientific data.

What is netCDF, really?

- Four format variants
 - **Classic** format and **64-bit offset** format for netCDF-3
 - **NetCDF-4** format and **netCDF-4 classic model** format
- Two data models
 - **Classic** model (for netCDF-3)
 - **Enhanced** model (for netCDF-4)
- Many language APIs
 - **C-based** (Python, C, Fortran, C++, R, Ruby, ...)
 - **Java-based** (Java, MATLAB, ...)
- Unidata and 3rd-party software (NCO, NCL, CDO, ...)

*Do users have to know about these complications?
Not usually, thanks to ...*

Version compatibility and transparency

You mostly don't need to be aware of version complications, because **new** versions of Unidata netCDF software continue to support

- All previous netCDF formats and their variants
- All previous netCDF data models
- All previous APIs¹
- NetCDF data written using one language API is readable through other language APIs.²

¹Disclaimer: exceptions for bugs, early releases, documented experiments

²Exception: currently some advanced netCDF-4 features are only available from C and Fortran APIs

NetCDF Compatibility Certificate

To ensure future access to existing data archives, Unidata is committed to compatibility of:

- **Data access:** new versions of netCDF software will provide read and write access to previously stored netCDF data.
- **Programming interfaces:** C and Fortran programs using documented netCDF interfaces from previous versions will work without change* with new versions of netCDF software.
- **Future versions:** Unidata will continue to support both data access compatibility and program compatibility in future netCDF releases*.

*See reverse side of this slide for disclaimers and exceptions.



unidata

Summary: netCDF formats, data models, APIs

- **File formats:** for making data & metadata portable
 - Supports sharing array-oriented scientific data and metadata
 - Provides data that is *self-describing, portable, scalable, extendible, remotely accessible, archivable, and structured*
- **Data models:** for faithfully representing science data
 - Classic: simplest model -- *dimensions, variables, and attributes*
 - Enhanced: more complex and powerful model – adds *groups* and *user-defined types*
- **APIs:** for developing applications and services
 - Unidata supports and maintains C and Java APIs.
 - Community developers support and maintain **Python API** and others.
 - Unidata provides best-effort support for Fortran and C++ APIs.

NetCDF formats

Characteristics of netCDF formats I

NetCDF data is:

- **Self-describing:** You can include metadata as well as data, name variables, locate data in time and space, store units of measure, conform to metadata standards.
- **Portable:** You can write on one platform and read it on other platforms.
- **Scalable:** You can access small subsets of large datasets efficiently.
- **Extendible:** You can add new data efficiently without copying existing data. You can add new metadata without breaking existing programs.

Characteristics of netCDF formats 2

- **Remotely accessible:** You can access subsets of data in netCDF and other formats from remote servers using OPeNDAP protocols.
- **Archivable:** You can access earlier versions of netCDF formats using current and future versions of software.
- **Structured:** You can use a variety of types and data structures to capture the meaning in your data.

NetCDF-3 *classic formats*

Strengths

- ✓ Simple to understand and explain
- ✓ Supported by many applications
- ✓ Standardized for used in many archives, data projects
- ✓ Mature conventions and best practices (e.g. CF) available

Limitations

- No support for efficient compression
- Schema changes slowed by copying data
- Some 4 GiB limits on variable sizes
- Performance issues reading data in different order than written

NetCDF-4 *formats*

Strengths

- ✓ Efficient compression (using zlib, HDF5 storage)
- ✓ Efficient access using HDF5 chunking
- ✓ Efficient schema changes supported
- ✓ Variables can be huge
- ✓ Good testing and support for high performance computing platforms

Limitations

- Zlib compression sometimes not competitive
- Chunking defaults may need careful tuning
- Complexity of format discourages multiple implementations
- Workarounds required to handle lack of HDF5 support for shared, named dimensions

NetCDF-4 classic-model transitional “format”

netCDF-3

- Compatible with existing applications
- Simplest data model and API

netCDF-4
classic model

- Can be accessed through netCDF-3 APIs, compatible with classic data model
- Uses netCDF-4/HDF5 storage for performance: compression, chunking, ...
- Transparent access after library update




netCDF-4

- Requires netCDF-4 APIs to access enhanced model features, such as strings, groups, and user-defined types
- Good for new data and applications

NetCDF data models

The netCDF classic data model

- NetCDF data has named ***dimensions***, ***variables***, and ***attributes***.
- ***Dimensions*** are for specifying shapes of variables
- ***Variables*** are for data, attributes are for metadata
- ***Attributes*** may apply to a whole dataset or to a variable
- Variables may share dimensions, indicating a common grid.
- One dimension may be of unlimited length.
- Each variable or attribute has a ***type***: char, byte, short, int, float, double

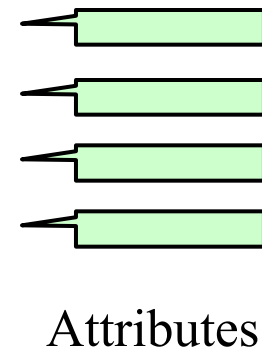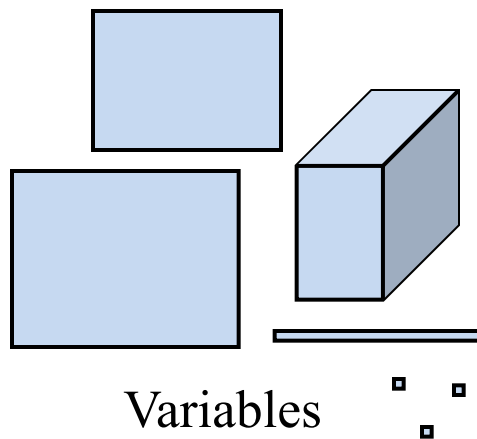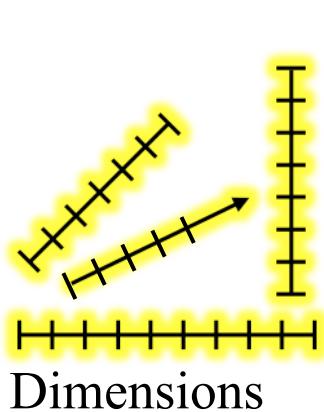

The netCDF classic data model (UML)

NetCDF Data has

Dimensions (*lat, lon, level, time, ...*)

Variables (*temperature, pressure, ...*)

Attributes (*units, valid_range, ...*)

Each dimension has

Name, length

Each variable has

Name, shape, type, attributes

N-dimensional array of values

Each attribute has

Name, type, value(s)

Variables *may share* dimensions


Represents shared coordinates, grids

Variable and attribute values are of type

Numeric: 8-bit **byte**, 16-bit **short**, 32-bit **int**,
32-bit **float**, 64-bit **double**


Character: arrays of **char** for text

UML = Unified Modeling Language

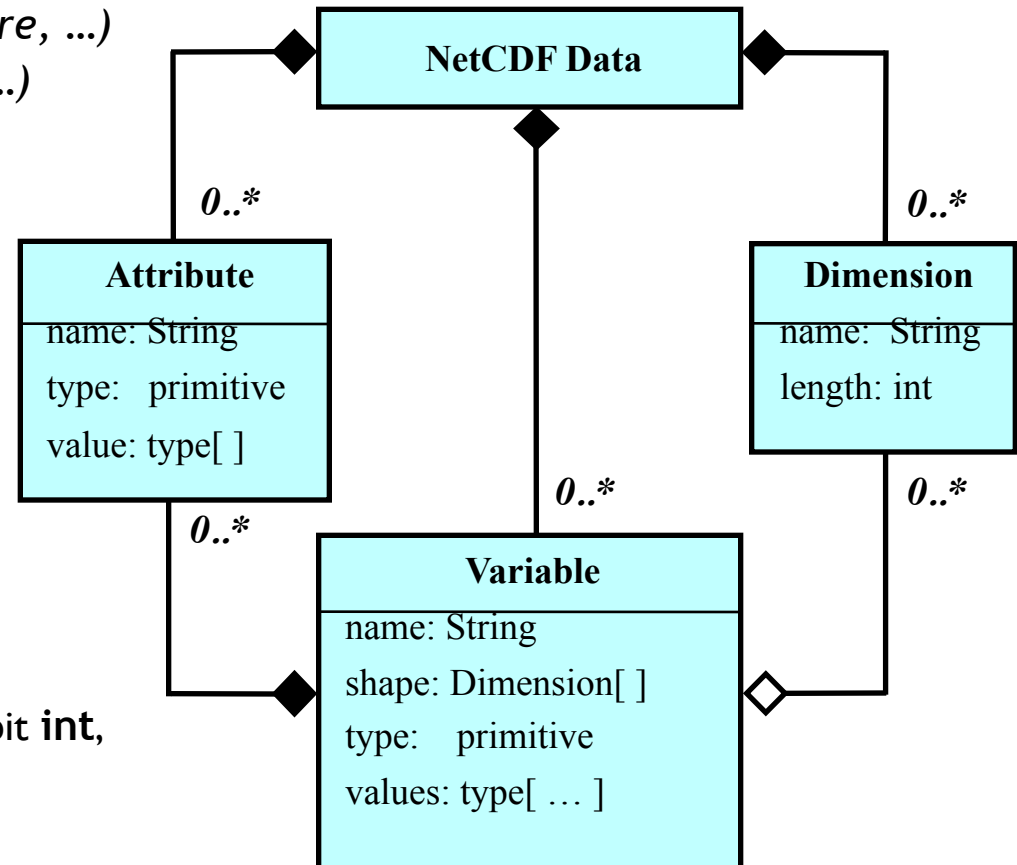

The netCDF-4 *enhanced* data model

A file has *a top-level unnamed group*. Each group may contain one or more named subgroups, *user-defined types*, variables, dimensions, and attributes. Variables also have attributes. Variables may share dimensions, indicating a common grid. One *or more* dimensions may be of unlimited length.

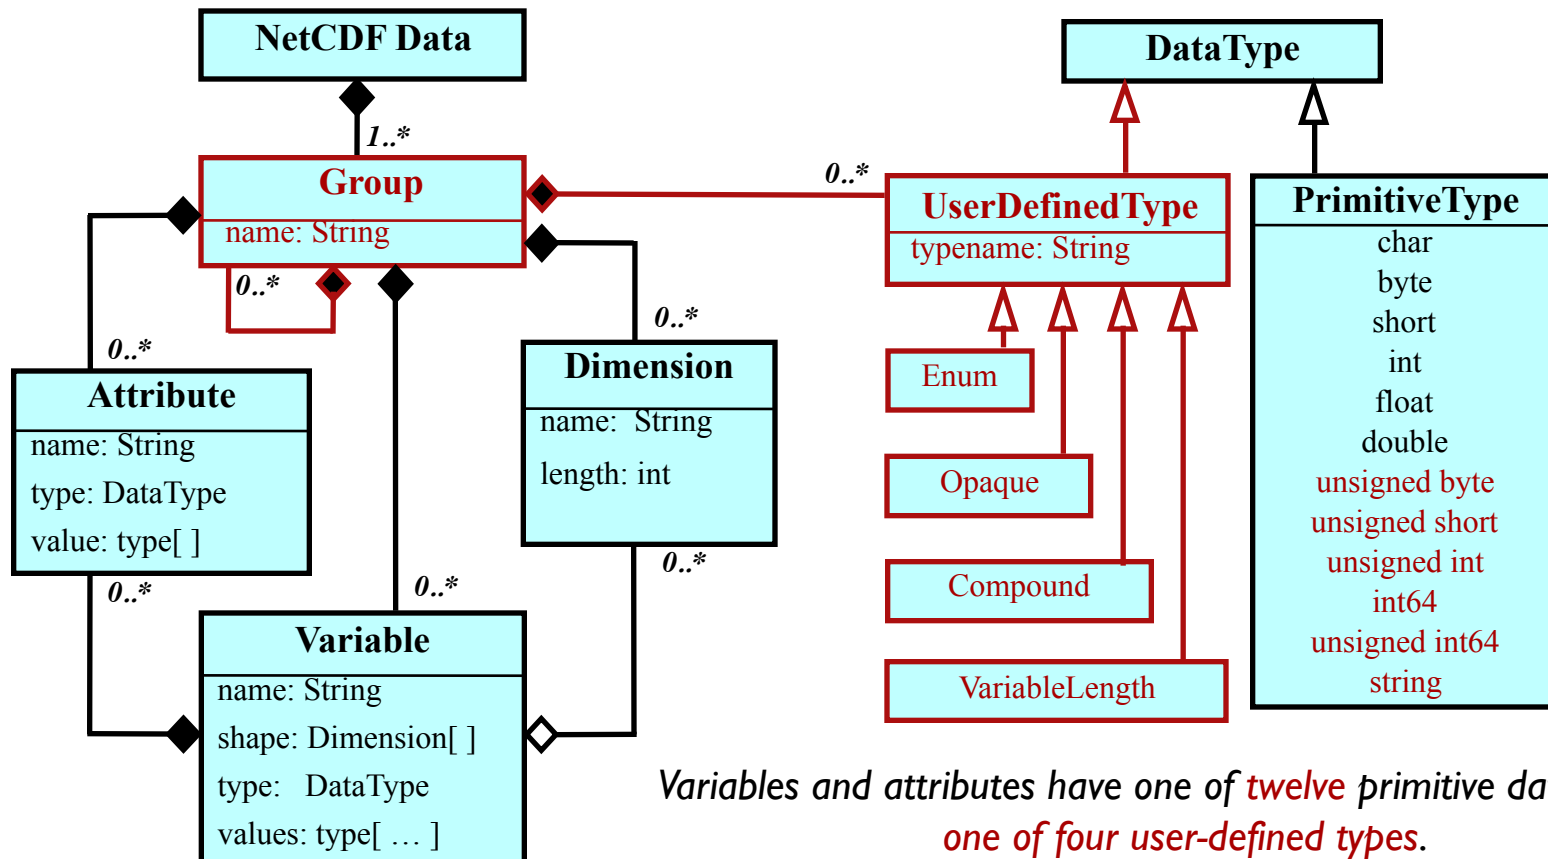


Variables or attributes?

Variables

- intended for data
- can hold arrays too large for memory
- may be multidimensional
- support partial access (only a subset of values)
- values may be changed, more data may be appended
- may have attributes
- shape specified with netCDF dimensions
- not read until accessed

Attributes

- intended for metadata
- for small units of information that fit in memory
- for single values, strings, or small 1-D arrays
- atomic access, must be written or read all at once
- values typically don't change after creation
- an attribute may not have attributes
- read when file opened

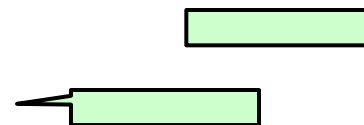

NetCDF classic data model

Strengths

- ✓ Data model simple to understand and explain
- ✓ Can be efficiently implemented
- ✓ Representation good for gridded multidimensional data
- ✓ Shared dimensions useful for coordinate systems
- ✓ Generic applications easy to develop

Limitations

- ◆ Small set of primitive types
- ◆ Data model limited to multidimensional arrays, (name, value) pairs
- ◆ Flat name space that hinders organizing many data objects
- ◆ Lack of nested structures, variable-length types, enumerations

NetCDF-4 enhanced data model

Strengths

- ✓ Increased representational power for more complex data
- ✓ Adds shared, named dimensions to HDF5 data model
- ✓ Compatible with netCDF-3 classic data model
- ✓ Adds useful primitive types
- ✓ Provides nesting: hierarchical groups, recursive data types

Limitations

- ◆ More complex than classic data model
- ◆ Effort required to develop general tools and applications
- ◆ Adoption proceeding slowly
- ◆ Best practices and conventions still maturing

NetCDF utilities (or netCDF without programming)

Common Data Language (CDL)

Text notation for netCDF metadata and data

```
netcdf example {    // example of CDL notation
  dimensions:
    x = 2 ;
    y = 8 ;
  variables:
    float rh(x, y) ;
        rh:units = "percent" ;
        rh:long_name = "relative humidity" ;
  // global attributes
    :title = "simple example, lacks conventions" ;
  data:
    rh =
      2, 3, 5, 7, 11, 13, 17, 19,
      23, 29, 31, 37, 41, 43, 47, 53 ;
}
```

Example with 2 dimensions (x and y), 1 variable (rh), 2 variable attributes (units and long_name), 1 global attribute (title), and 16 data values.

Utility programs for netCDF to/from CDL


```
$ ncdump -h co2.nc # converts netCDF to CDL
```

```
netcdf co2 {  
dimensions:  
    T = 456 ;  
variables:  
    float T(T) ;  
        T:units = "months since 1960-01-01" ;  
    float co2(T) ;  
        co2:long_name = "CO2 concentration by volume" ;  
        co2:units = "1.0e-6" ;  
        co2:_FillValue = -99.99f ;  
  
// global attributes:  
    :references = "Keeling_etal1996, Keeling_etal1995" ;  
}
```

- "-h" is for "header only", just outputs metadata, no data
- "-c" outputs header and coordinate variable data
- **ncgen** does the opposite of **ncdump**, converts CDL to netCDF

The ncdump utility

ncdump converts netCDF data to human-readable text form.
Useful for browsing data, has lots of options.

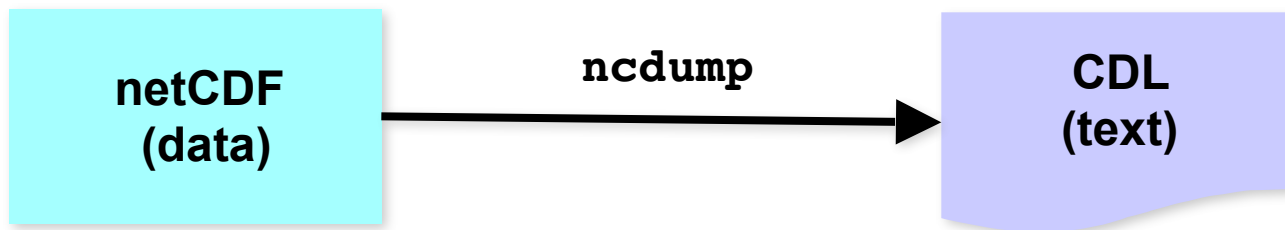


ncdump [-c|-h] [-v ...] [-k] *file.nc*

[-h -c]	header only, or coordinates and header
[-v <i>var1</i> [,...]]	data for variable(s) <i>var1</i> ,... only
[-k]	output kind of netCDF file instead of CDL
[-t]	show time data as date-time
<i>file.nc</i>	name of netCDF input file or OPeNDAP URL

The ncgen utility

ncgen generates a netCDF file, or a program to generate the netCDF file.

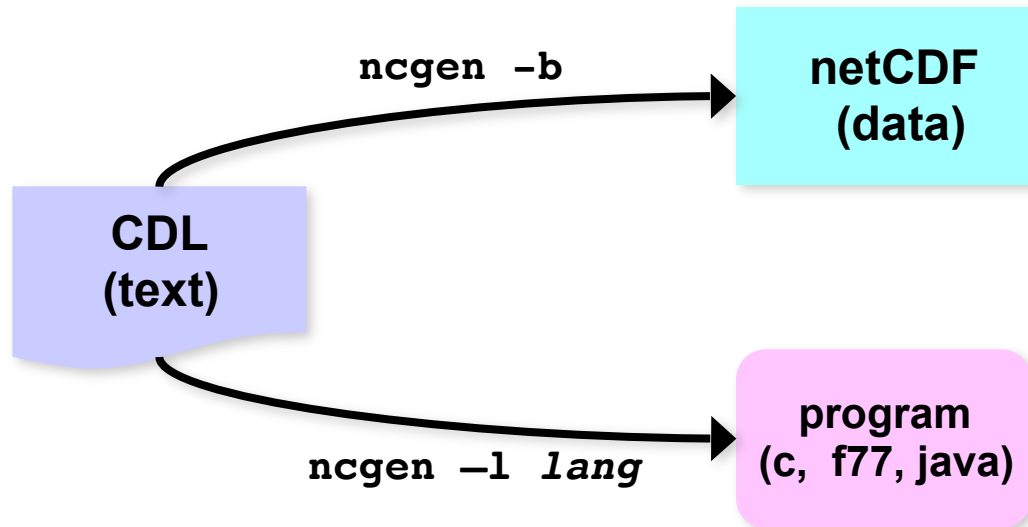


ncgen [-b] [-o *file.nc*] [-k *kind*] [-l *lang*] *file.cdl*


[-b]	binary output as a netCDF file, with “.nc” extension
[-o <i>file.nc</i>]	like -b except output netCDF to specified file
[-k <i>kind</i>]	kind of output netCDF file, simplest that works if omitted
[-l c f77 java]	language of program generated to standard output
<i>file.cdl</i>	name of input CDL file

Using ncgen and ncdump together

Together, **ncdump** and **ncgen** can accomplish simple manipulations with no programming. **ncdump** and **ncgen** are inverses:

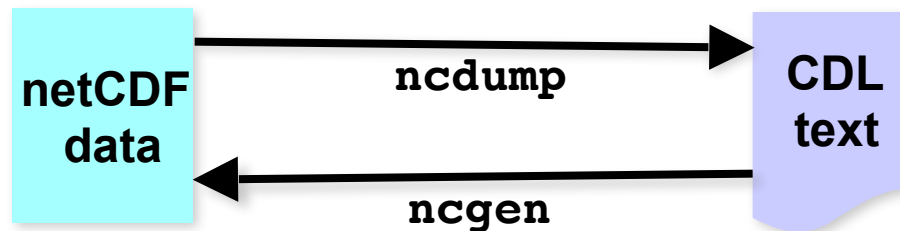


To edit metadata or data in a netCDF file:

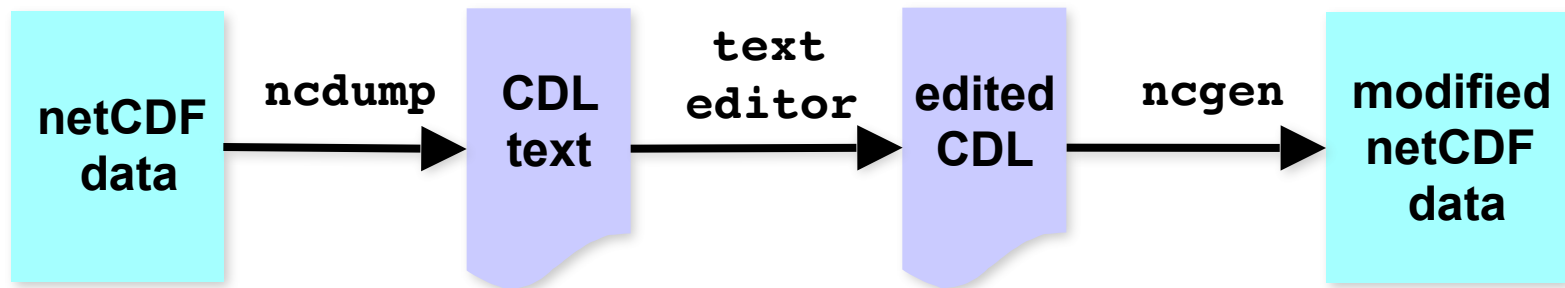

Note: not practical for huge netCDF files or lots of files. For that, you need to write a program, using netCDF library.

Using ncgen and ncdump together


To create a new netCDF file with lots of metadata:

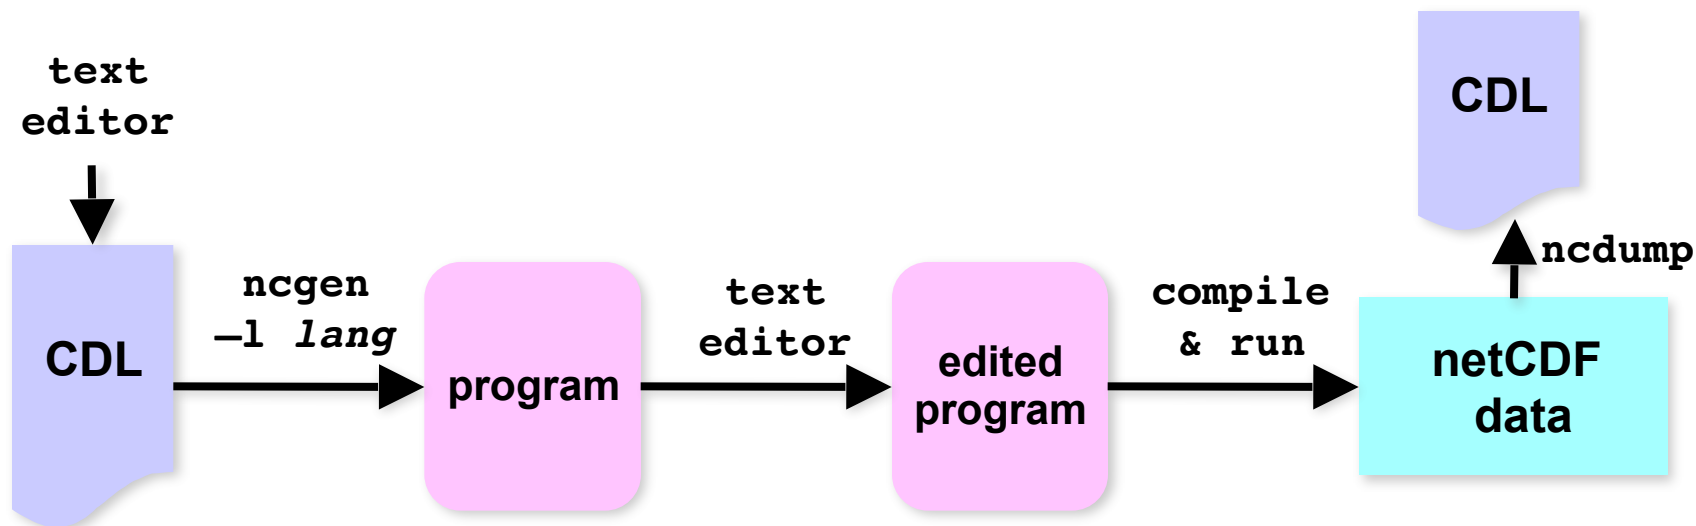

1. Use **text editor** to write **CDL** file with lots of metadata but no data.
2. Use **ncgen** to generate C or Fortran program for writing netCDF.
3. With **text editor**, insert netCDF “**var_put**” calls for writing data.
4. Compile and run the program to create desired netCDF file.
5. Optionally, use **ncdump** to verify result.

The nccopy utility

nccopy copies and optionally compresses and chunks netCDF data.

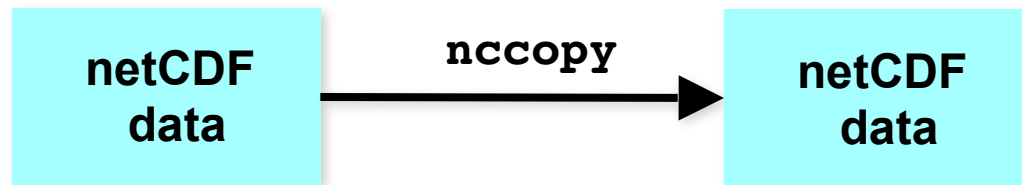


nccopy [-kind_num] [-u] [-d level] [-s] [-c chunkspec] *input* *output*


[-kind_num]	-3, -4, -6, -7 kind of netCDF output, default same as input
[-u]	convert unlimited dimensions to fixed-size in output
[-d level]	zlib “deflation” level, default same as input
[-s]	shuffling option, sometimes improves compression
[-c chunkspec]	specify chunking for dimensions
<i>input</i>	name of input file or OPeNDAP URL
<i>output</i>	name of output file

Using nccopy

Compress netCDF data to a specified level, compressing each variable separately.

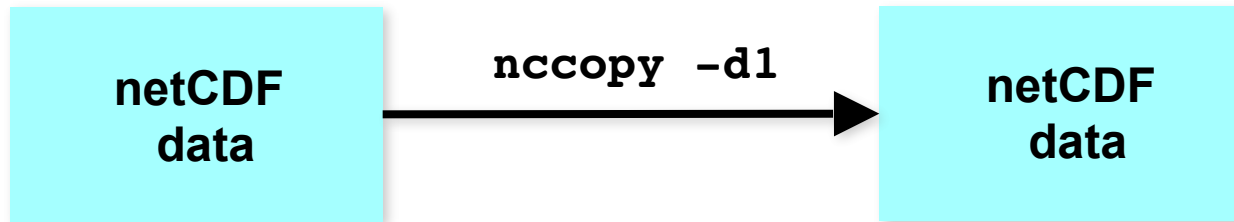

Convert a netCDF-4 classic model file to a netCDF-3 classic file, uncompressing any compressed variables.

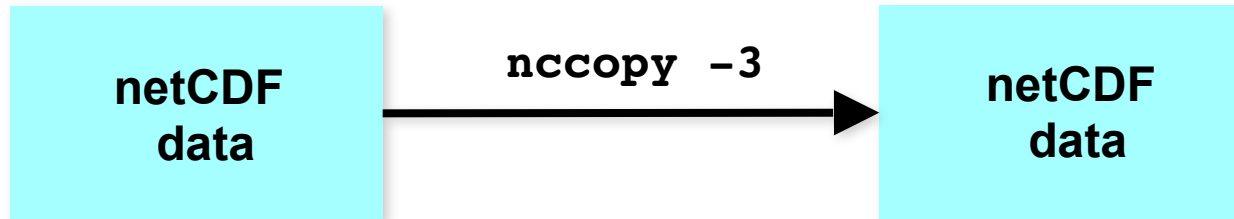

NetCDF exercises

Sample files for exercises

- Small netCDF file: data/mslp.nc
- Test file for compression: data/testrh.nc
- You can run netCDF utilities in iPython using “!” prefix, as in

```
>>> !ncdump file.nc
```
- Here’s an example of capturing the output of a command (as a list of strings) into a python variable using assignment, and writing the list of output strings, separated by newlines, to a file:

```
>>> f = open('file.cdl', 'w')  
>>> output_string = !ncdump file.nc  
>>> f.write(output_string.n)  
>>> f.close()
```


Try ncdump utility

- Look at just the header information (also called the schema or metadata):
`$ ncdump -h mslp.nc`
- Store entire CDL output for use later in ncgen exercises
`$ ncdump mslp.nc > mslp.cdl`
- Look at header and coordinate information, but not the data:
`$ ncdump -c mslp.nc`
- Look at all the data in the file, in addition to the metadata:
`$ ncdump mslp.nc`
- Look at a subset of the data by specifying one or more variables:
`$ ncdump -v lat,time mslp.nc`
- Look at times in human-readable form:
`$ ncdump -t -v lat,time mslp.nc`
- Look at what kind of netCDF data is in the file (classic, 64-bit offset, netCDF-4, or netCDF-4 classic model):
`$ ncdump -k mslp.nc`

Try ncgen utility

- Check a CDL file for any syntax errors:
`$ ncgen mslp.cdl`
- Edit mslp.cdl and change something (name of variable, data value, etc.).
- Use ncgen to generate new binary netCDF file (my.nc) with your changes:
`$ ncgen -o my.nc mslp.cdl`
`$ ncdump my.nc`
- Generate a C, Fortran, or Java program which, when compiled and run, will create the binary netCDF file corresponding to the CDL text file.
`$ ncgen -l c mslp.cdl > mslp.c`
`$ ncgen -l f77 mslp.cdl > mslp.f77`
`$ ncgen -l java mslp.cdl > mslp.java`
- Try compiling and running one of those programs. You will need to know where the netCDF library is to link your program.

Try remote access

- Look at what's in some remote data from an OPeNDAP server:

```
$ SERVER=http://test.opendap.org  
$ REMOTE=$SERVER/opendap/data/nc/3fnoc.nc  
$ ncdump -c $REMOTE
```
- Copy 3 coordinate variables out of the file

```
$ nccopy $REMOTE '?' lat,lon,time coords.nc
```
- Copy subarray of variable u out of the file into a new netCDF file

```
$ nccopy $REMOTE '?' u[2:5][0:4][0:5] u.nc  
$ ncdump u.nc
```

Try compression with nccopy utility

- Compress variables in a test file, testrh.nc, by using nccopy. Then check if adding the shuffling option improved compression:

```
$ nccopy -d1 testrh.nc testrhd1.nc          # compress data, level 1
$ nccopy -d1 -s testrh.nc testrhd1s.nc      # shuffle and compress data
$ ls -l testrh.nc testrhd1.nc testrhd1s.nc  # check results
```

Join the netCDF community

- Why participate?
 - To help extend netCDF to meet an important need.
 - To fix a bug that affects you or your users.
 - To help the geosciences community.
- How to collaborate?
 - Join netcdfgroup@unidata.ucar.edu mailing list
 - Use Unidata netCDF GitHub repository.
 - Build and test release candidates, provide feedback.
 - Contribute code, tests, and documentation improvements.
 - Suggest new features.
 - Also see netCDF Jira site for current open issues.