

Lab 2: Exploration by visualization: the streaming movies dataset

MinJae Jo


‘2025-09-12

Visualization by example

Exercise 1

```
library(ggplot2)
qplot(x = im_db, binwidth = 0.5, data = streaming)
```


```
## Warning: ‘qplot()’ was deprecated in ggplot2 3.4.0.
## This warning is displayed once every 8 hours.
## Call ‘lifecycle::last_lifecycle_warnings()’ to see where this warning was
## generated.
```

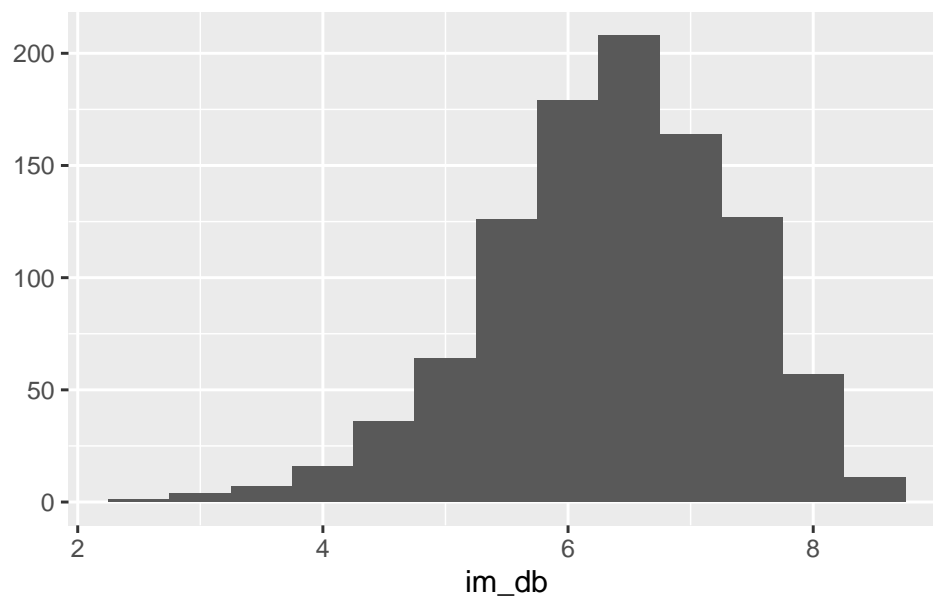

Exercise 2

```
library(ggplot2)

qplot(
  x = im_db,
  binwidth = 0.5,
  fill = main_language,
  data = streaming
)
```

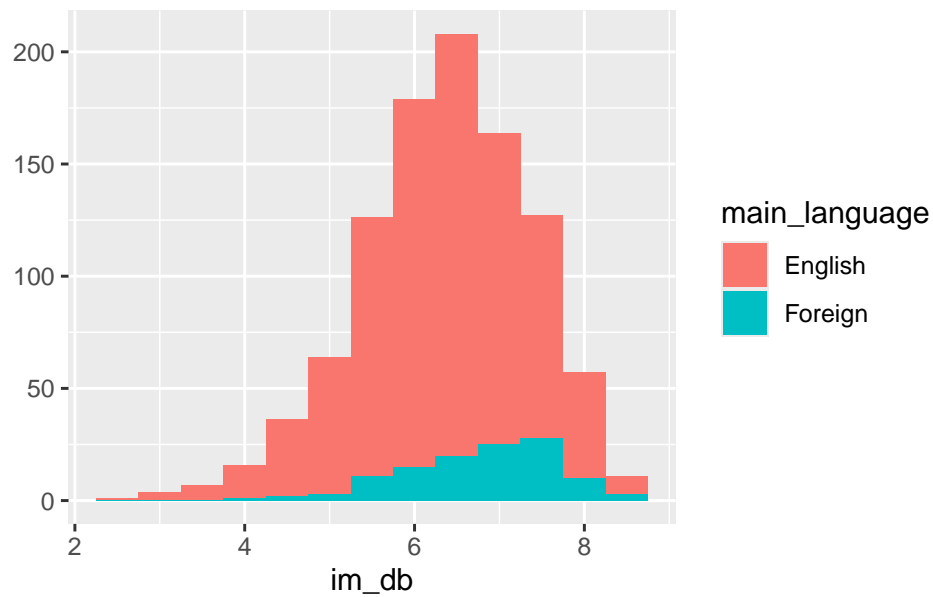


Exercise 3

Foreign films look slightly higher on average, which is a natural phenomenon as only popular or well-received films are usually streamed.

Exercise 4

```
library(ggplot2)


qplot(
  x = im_db,
  binwidth = 0.5,
  facets = ~ age,
  data = streaming
)
```

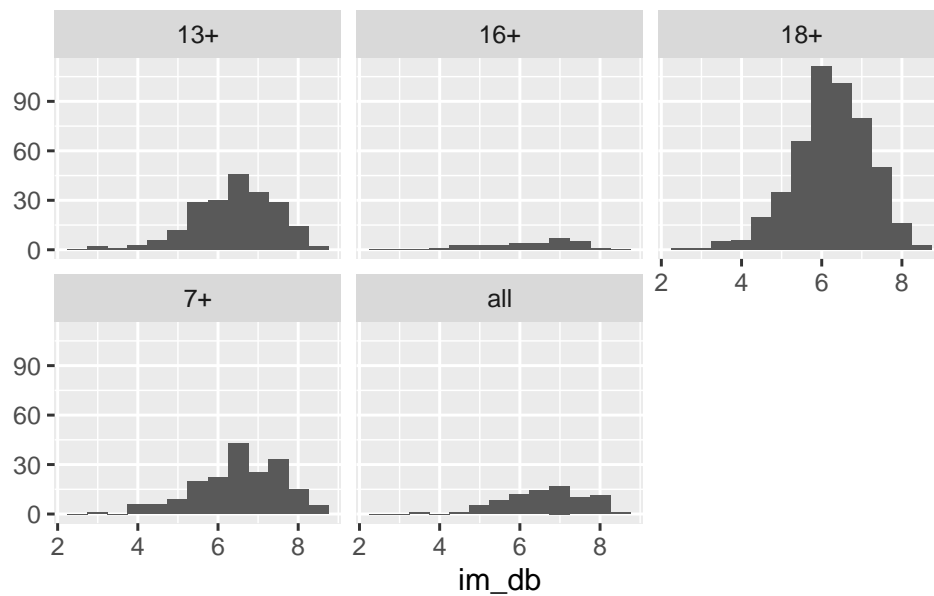

Exercise 5

```
library(ggplot2)


qplot(
  x = rotten_tomatoes,
  y = im_db,
  data = streaming
)
```

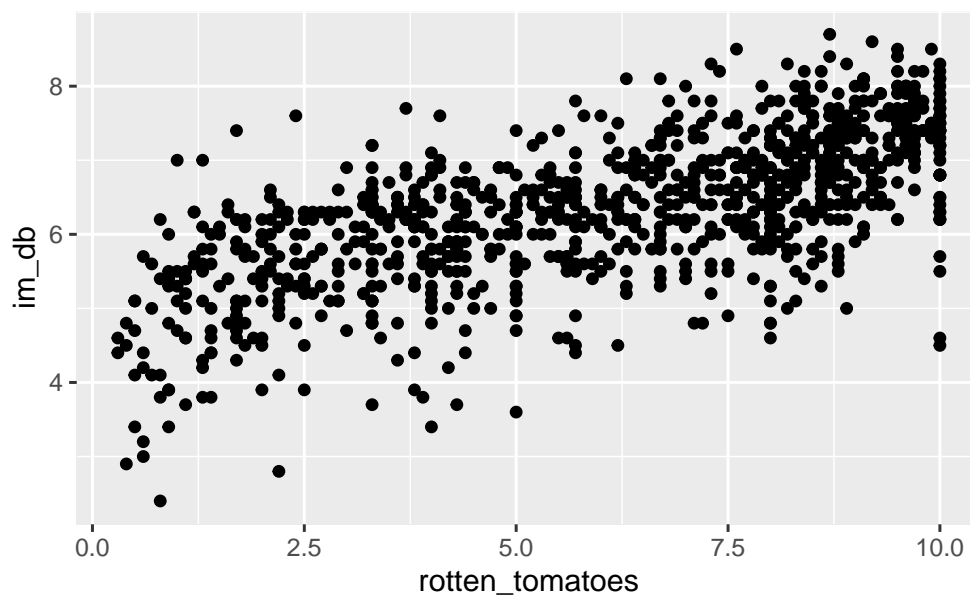

Exercise 6

```
library(ggplot2)


qplot(
  x = rotten_tomatoes,
  y = im_db,
  color = main_language,
  data = streaming
)
```

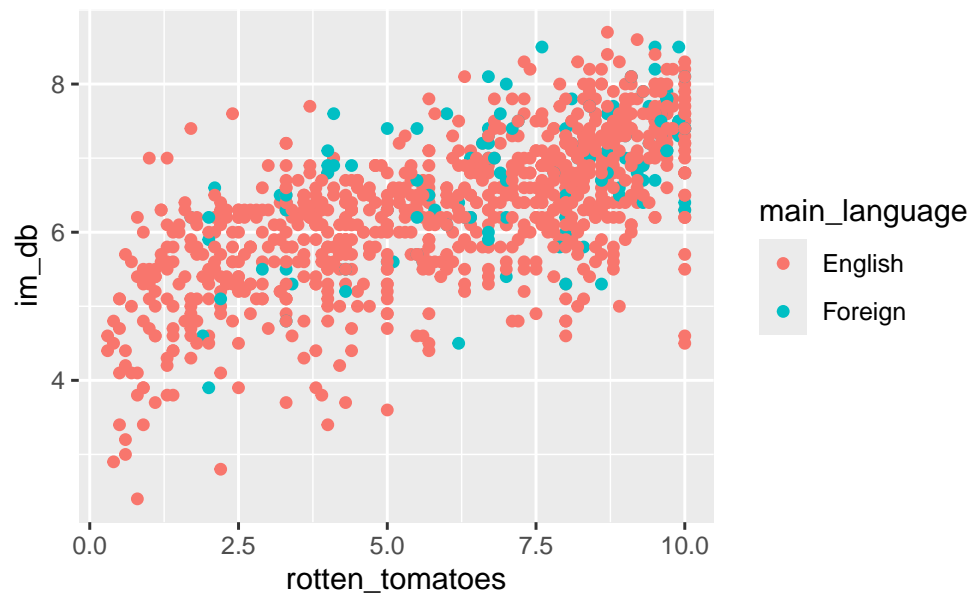

Exercise 7

```
library(ggplot2)

qplot(
  x = rotten_tomatoes,
  y = im_db,
  data = streaming,
  facets = ~ age
)
```

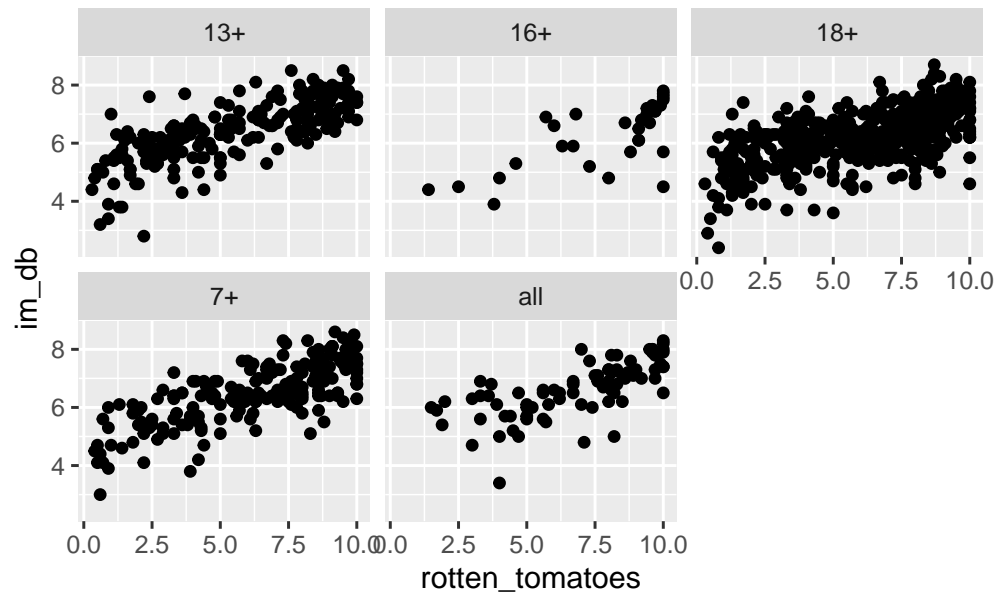


Exercise 8

```
library(ggplot2)
```

```
qplot(
  x = rotten_tomatoes,
  y = im_db,
  geom = "smooth",
  method = "lm",
  data = streaming
)
```

```
## 'geom_smooth()' using formula = 'y ~ x'
```

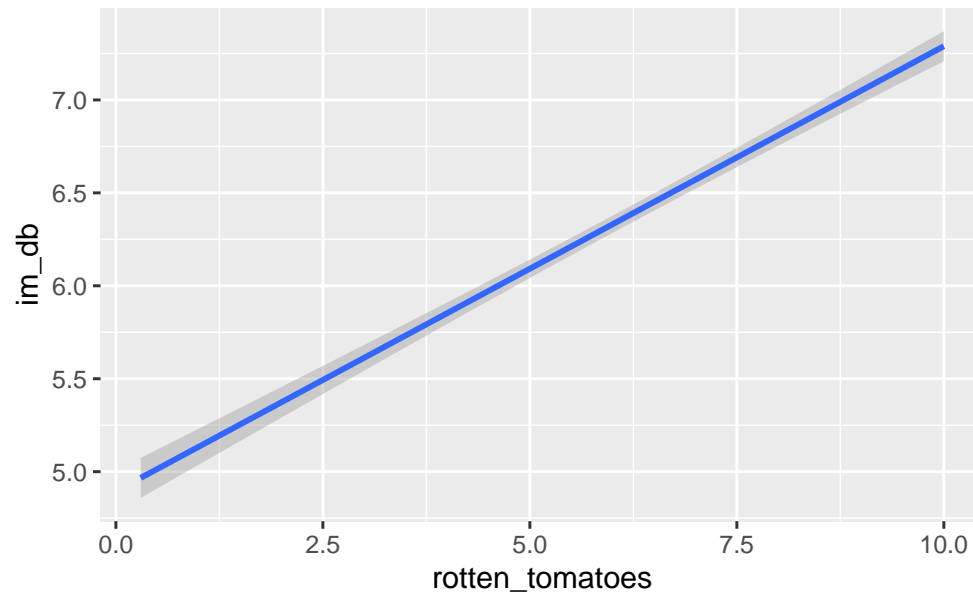

Exercise 9

```
library(ggplot2)
```

```
qplot(  
  x = rotten_tomatoes,  
  y = im_db,  
  geom = c("point", "smooth"),  
  method = "lm",  
  data = streaming  
)
```

```
## Warning in geom_point(method = "lm"): Ignoring unknown parameters: 'method'
```

```
## 'geom_smooth()' using formula = 'y ~ x'
```

