

PROJECT DEMONSTRATION

7. PROJECT DEMONSTRATION PHASE

7.1 INTRODUCTION


The project demonstration explains the working of the Script-Controlled ACL – Restrict Record Access Based on Field Value project implemented in ServiceNow.

The demonstration shows how different user roles control access to records and how ACLs are used for Read, Create, Write, and Delete operations.

7.2 DEMONSTRATION STEPS

Step 1: Login to ServiceNow

Log in to the ServiceNow instance using the administrator account.

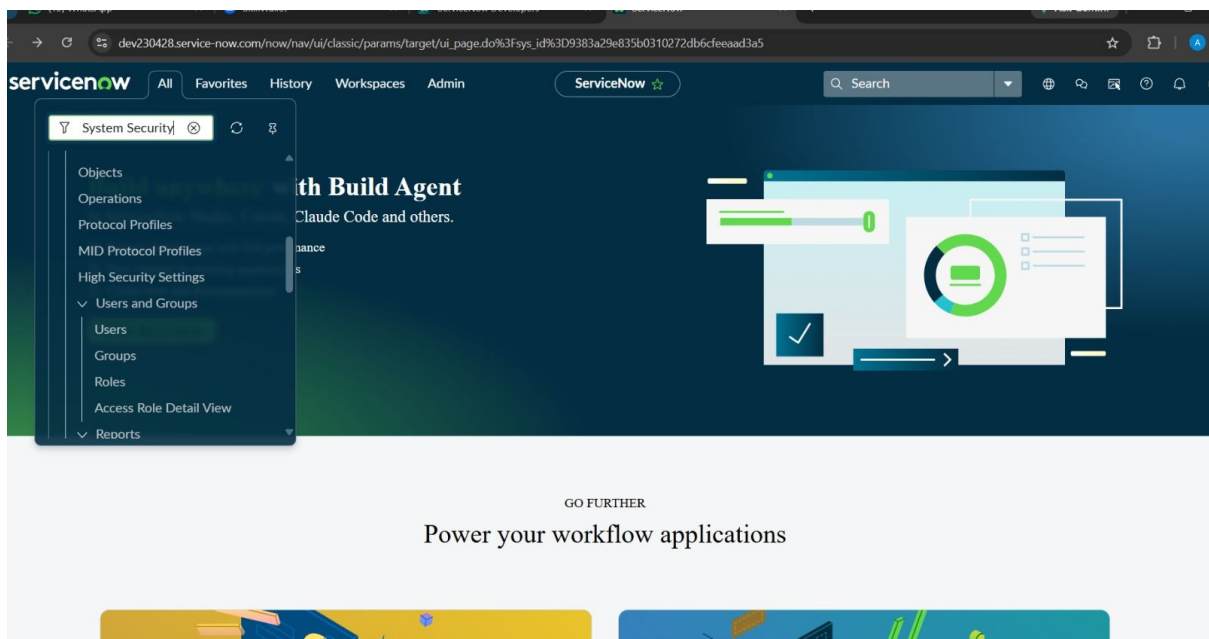

Step 2: Verify User and Roles

serviceNow All Favorites History Workspaces Access Control - New Record

Applies To No. of records matching the condition: 3

Add Filter Condition Add OR Clause

-- choose field -- -- oper -- -- value --

Conditions

Access Control Rules have two decision types, and these types will behave differently depending on conditions.

1. Allow Access: Allows access to a resource if all conditions are met. Additional ACLs may grant access to records where this ACL has not granted access.
2. Deny Access: Denies access to a resource unless all conditions are met. Additional ACLs may not grant access to records where this ACL has denied access.

[More Info](#)

Requires role

Role

bb2

Security Attribute Condition

Local or Existing ☒ Existing ☐ Local

Security Attribute

Condition All of these conditions must be met

-- choose field --

OR AND

Open the user record and show the EEE User with the assigned roles bb1, bb2, bb3, and bb4.

serviceNow All Favorites History Workspaces Access Control - New Record

Condition No. of records matching the condition: 3

Add Filter Condition Add OR Clause

Branch is EEE

AND OR

Advanced Condition


Controlled by References

Script Turn on ECMAScript 2021 (ES12) mode

```
1 (function () {
7   if (gs.hasRole('bb1')){
8     return true;
9   }
10  // Deny access for all others
11  return false;
12 })();
13 |
```

Step 3: Verify Institution Details Table


Open the Institution Details table and display the created fields and student records.

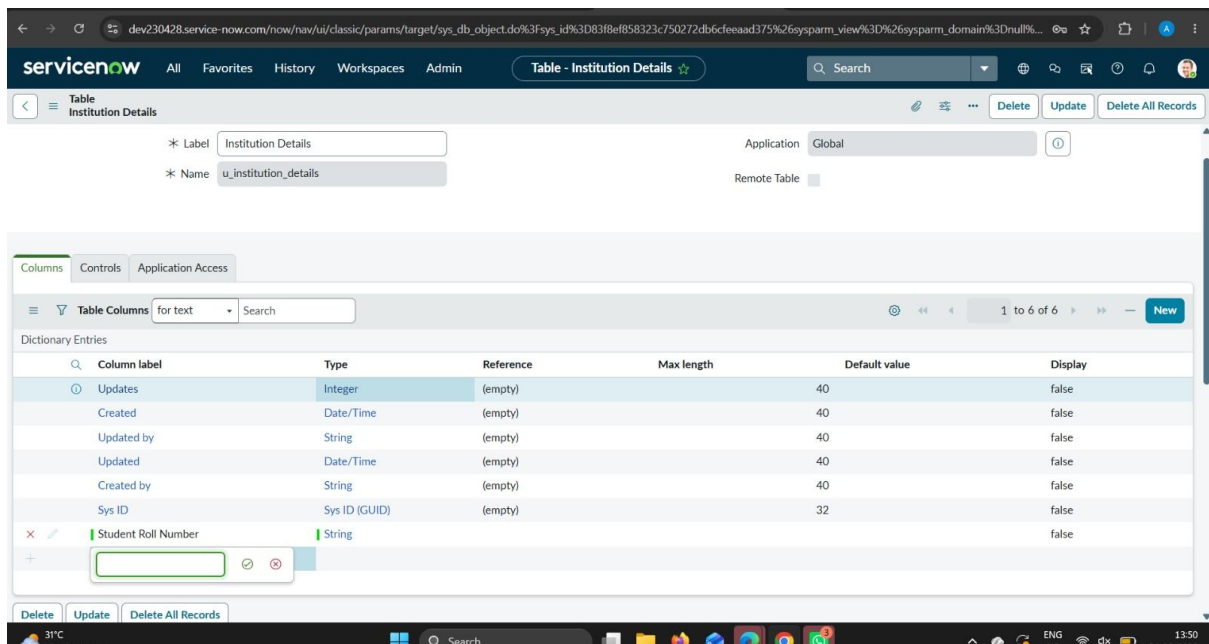

Step 4: Demonstrate Read ACL

Open the student records list using the appropriate user.

Verify that the configured Read ACL controls access to the records based on the EEE branch condition.

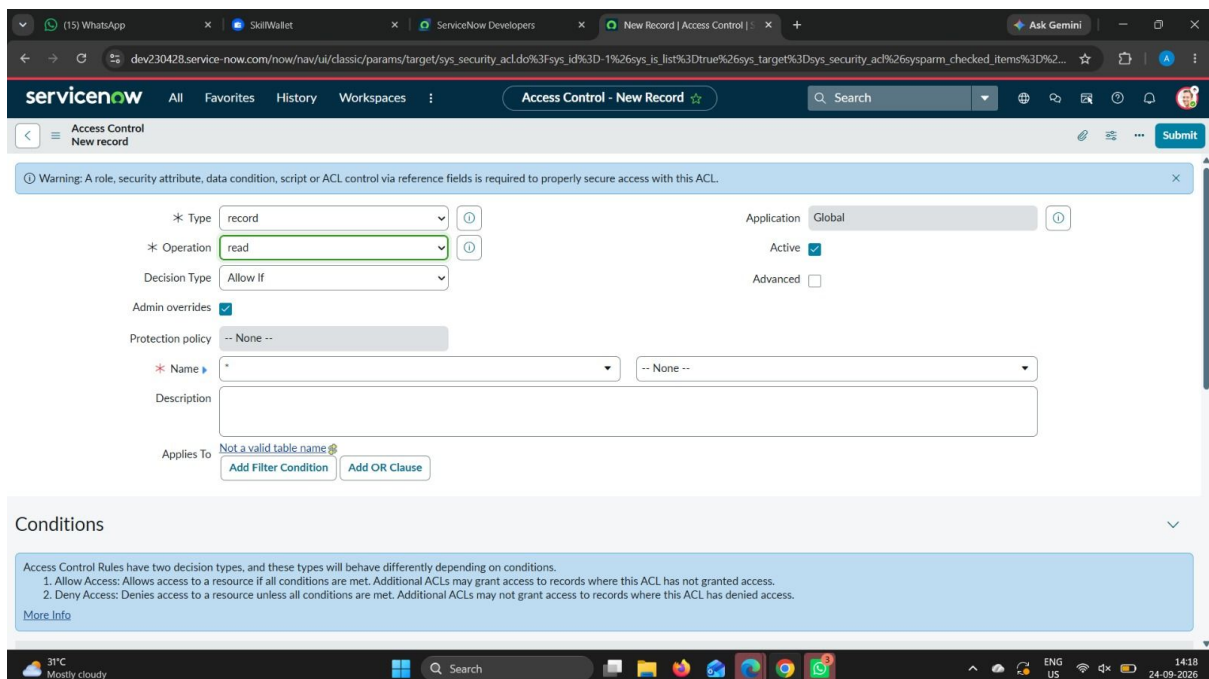

Step 5: Demonstrate Create ACL

Verify that a user with the bb2 role can perform the Create operation according to the configured ACL.

Warning: A role, security attribute, data condition, script or ACL control via reference fields is required to properly secure access with this ACL.

* Type: record
* Operation: read
Decision Type: Allow If
Admin overrides: ☒
Protection policy: -- None --
* Name: -- None --
Description:
Applies To: Not a valid table name
Add Filter Condition Add OR Clause

Application: Global
Active: ☒
Advanced: ☐

Conditions

Access Control Rules have two decision types, and these types will behave differently depending on conditions.
1. Allow Access: Allows access to a resource if all conditions are met. Additional ACLs may grant access to records where this ACL has not granted access.
2. Deny Access: Denies access to a resource unless all conditions are met. Additional ACLs may not grant access to records where this ACL has denied access.
[More Info](#)

Step 6: Demonstrate Write ACL

Verify that a user with the bb3 role can modify records according to the configured Write ACL.

Warning: A role, security attribute, data condition, script or ACL control via reference fields is required to properly secure access with this ACL.

* Type: record
* Operation: write
Decision Type: Allow If
Admin overrides: ☒
Protection policy: -- None --
* Name: Institution Details [u_institution_details]
Description:
Applies To: No. of records matching the condition: 3
Add Filter Condition Add OR Clause

Application: Global
Active: ☒
Advanced: ☐

Conditions

Access Control Rules have two decision types, and these types will behave differently depending on conditions.
1. Allow Access: Allows access to a resource if all conditions are met. Additional ACLs may grant access to records where this ACL has not granted access.
2. Deny Access: Denies access to a resource unless all conditions are met. Additional ACLs may not grant access to records where this ACL has denied access.
[More Info](#)

Step 7: Demonstrate Delete ACL

Verify that a user with the bb4 role can delete records according to the configured Delete ACL.

Warning: A role, security attribute, data condition, script or ACL control via reference fields is required to properly secure access with this ACL.

* Type: record
* Operation: delete
Decision Type: Allow If
Admin overrides: ☒
Protection policy: -- None --
* Name: Institution Details [u_institution_details]
Description:
Applies To: No. of records matching the condition: 3
Add Filter Condition Add OR Clause
-- choose field -- -- oper -- -- value --

Conditions

Access Control Rules have two decision types, and these types will behave differently depending on conditions.
1. Allow Access: Allows access to a resource if all conditions are met. Additional ACLs may grant access to records where this ACL has not granted access.
2. Deny Access: Denies access to a resource unless all conditions are met. Additional ACLs may not grant access to records where this ACL has denied access.

7.3 FINAL DEMONSTRATION RESULT

The demonstration verifies that the implemented ACLs control record-level access in ServiceNow.

The project demonstrates Read, Create, Write, and Delete access control using user roles and the configured field condition. Administrators retain full access to the records.

7.4 PROJECT OUTCOME

By completing the project, the implementation demonstrates how Script-Controlled ACLs can protect records from unauthorized viewing, modification, creation, and deletion in ServiceNow.