

Report - Set up Email Alert on Tetragon ELK Stack Integration (using ElastAlert2)

Starting Colima, and Minikube VM for Local Cluster on Mac:

```
...k-stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh |...k-stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh |...stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh ...|...stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh |+
mashlr@NIS-PK564 tetragon-elk-stack-poc % colima start --cpu 2 --memory 10
INFO[0000] starting colima
INFO[0000] runtime: docker
INFO[0001] starting ...
INFO[0001] provisioning ... context=vm
INFO[0024] starting ... context=edocker
INFO[0027] done context=docker
mashlr@NIS-PK564 tetragon-elk-stack-poc % minikube start
minikube v1.38.1 on Darwin 13.7.8
Using the docker driver based on existing profile
Starting "minikube" primary control-plane node in "minikube" cluster
Pulling base image v0.0.50 ...
Restarting existing docker container for "minikube" ...
Preparing Kubernetes v1.35.1 on Docker 29.2.1 ...
Verifying Kubernetes components...
  * Using image registry k8s.io/metrics-server/metrics-server:v0.8.1
  * Using image gcr.io/k8s-minikube/storage-provisioner:v5
Enabled addons: metrics-server, storage-provisioner, default-storageclass
Done! kubctl is now configured to use "minikube" cluster and "default" namespace by default
mashlr@NIS-PK564 tetragon-elk-stack-poc % kubctl config current-context minikube
mashlr@NIS-PK564 tetragon-elk-stack-poc % kubctl get ns
NAME STATUS AGE
default Active 111d
kube-node-lease Active 111d
kube-public Active 111d
kube-system Active 111d
prod Active 49s
mashlr@NIS-PK564 tetragon-elk-stack-poc % kubctl create ns elastic namespace/elastic created
mashlr@NIS-PK564 tetragon-elk-stack-poc % kubctl get ns
NAME STATUS AGE
default Active 111d
elastic Active 12s
kube-node-lease Active 111d
kube-public Active 111d
kube-system Active 111d
prod Active 49s
mashlr@NIS-PK564 tetragon-elk-stack-poc % mkdir elasticsearch-manifests
mashlr@NIS-PK564 tetragon-elk-stack-poc % cd elasticsearch-manifests
mashlr@NIS-PK564 elasticsearch-manifests % ls
elasticsearch-pvc.yaml elasticsearch-service.yaml elasticsearch-statefulset.yaml
mashlr@NIS-PK564 elasticsearch-manifests % kubctl apply -f elasticsearch-pvc.yaml
persistentvolumeclaim/elasticsearch-pvc created
mashlr@NIS-PK564 elasticsearch-manifests % kubctl get pvc -n elastic
NAME STATUS VOLUME CAPACITY ACCESS MODES STORAGECLASS VOLUMEATTRIBUTESCLASS AGE
elasticsearch-pvc Bound pvc-d6d1ca37-6041-48ef-bba0-a5601389ffce 5Gi RWX standard <unset> 11s
mashlr@NIS-PK564 elasticsearch-manifests % kubctl apply -f .
service/elasticsearch created
statefulset.apps/elasticsearch created
mashlr@NIS-PK564 elasticsearch-manifests % kubctl get pods -n elastic
NAME READY STATUS RESTARTS AGE
elasticsearch-0 1/1 Running 0 29s
mashlr@NIS-PK564 elasticsearch-manifests % kubctl get all -n elastic
NAME READY STATUS RESTARTS AGE
pod/elasticsearch-0 1/1 Running 0 182s
mashlr@NIS-PK564 elasticsearch-manifests %
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
service/elasticsearch ClusterIP 10.106.109.179 <none> 9200/TCP 182s
mashlr@NIS-PK564 elasticsearch-manifests %
NAME READY AGE
statefulset.apps/elasticsearch 1/1 182s
mashlr@NIS-PK564 elasticsearch-manifests %
```

```
...k-stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh |...k-stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh |...elk-stack-poc/elasticsearch-manifests -- -zsh • kubectf1.35.1 |...stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh |+
mashlr@NIS-PK564 elasticsearch-manifests % kubctl get svc -n elastic
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
elasticsearch ClusterIP 10.106.109.179 <none> 9200/TCP 2m38s
mashlr@NIS-PK564 elasticsearch-manifests % kubctl port-forward -n elastic svc/elasticsearch 9200:9200 --address 0.0.0.0 &
[1] 15830
mashlr@NIS-PK564 elasticsearch-manifests % Forwarding from 0.0.0.0:9200 -> 9200
mashlr@NIS-PK564 elasticsearch-manifests % Handling connection for 9200
Handling connection for 9200
Handling connection for 9200
Handling connection for 9200
Handling connection for 9200
mashlr@NIS-PK564 elasticsearch-manifests % curl http://localhost:9200
Handling connection for 9200
{"error":{"root_cause":{"type":"security_exception","reason":"missing authentication credentials for REST request [/]"},"header":{"WWW-Authenticate":["Basic realm=\"security\"", charset=\"UTF-8\""],"ApiKey":[""]},"type":"security_exception","reason":"missing authentication credentials for REST request [/]"},"header":{"WWW-Authenticate":["Basic realm=\"security\"", charset=\"UTF-8\""],"ApiKey":[""]},"status":401}
mashlr@NIS-PK564 elasticsearch-manifests % curl -u elastic:ElasticPass123 http://localhost:9200
Handling connection for 9200
{
  "name" : "elasticsearch-0",
  "cluster_name" : "docker-cluster",
  "cluster_uuid" : "auVf0pqrTcSY20f5WB5EBw",
  "version" : {
    "number" : "9.5.4",
    "build_flavor" : "default",
    "build_type" : "docker",
    "build_hash" : "9170df19c9e1adb187b7b489bad82dec66d7a337",
    "build_date" : "2020-09-09T22:42:55.976893287Z",
    "build_snapshot" : false,
    "luccent_version" : "10.5.1",
    "minimum_wire_compatibility_version" : "8.19.0",
    "minimum_index_compatibility_version" : "8.0.0"
  },
  "tagline" : "You Know, for Search"
}
mashlr@NIS-PK564 elasticsearch-manifests % Handling connection for 9200
|
```

```
localhost:9200 x Cilium Tetragon Integration f... x +
localhost:9200
Jenkins Google Docs Jenkins-kubernete... Outlook Sensibly Gmail Google Sheets Tutorial: Getting F... All Bookmarks
Pretty print
{
  "name" : "elasticsearch-0",
  "cluster_name" : "docker-cluster",
  "cluster_uuid" : "suFjogyRTXSY2dfSWB5EBw",
  "version" : {
    "number" : "9.5.4",
    "build_flavor" : "default",
    "build_type" : "docker",
    "build_hash" : "9178df19caeladb107b7b489b4d82dec66d7a337",
    "build_date" : "2026-09-09T22:42:53.976833287Z",
    "build_snapshot" : false,
    "lucene_version" : "10.5.1",
    "minimum_wire_compatibility_version" : "8.19.0",
    "minimum_index_compatibility_version" : "8.0.0"
  },
  "tagline" : "You Know, for Search"
}
```

..k-stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh	..k-stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh	...elk-stack-poc/elasticsearch-manifests -- -zsh • kubectf1.35.1 ...	..stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh	+
elastic	Active	12s		
kube-node-lease	Active	111d		
kube-public	Active	111d		
kube-system	Active	111d		
prod	Active	49d		
mashir@NIS-PK564 tetragon-elk-stack-poc % mkdir elasticsearch-manifests				
mashir@NIS-PK564 tetragon-elk-stack-poc % cd elasticsearch-manifests				
mashir@NIS-PK564 elasticsearch-manifests % ls				
elasticsearch-pvc.yaml elasticsearch-service.yaml elasticsearch-statefulset.yaml				
mashir@NIS-PK564 elasticsearch-manifests % kubect1 apply -f elasticsearch-pvc.yaml				
persistentvolumeclaim/elasticsearch-pvc created				
mashir@NIS-PK564 elasticsearch-manifests % kubect1 get pvc -n elastic				
NAME	STATUS	VOLUME	CAPACITY	ACCESS MODES
elasticsearch-pvc	Bound	pvc-48d1ca37-6041-48ef-bba8-a5601389ffce	501	RWO
mashir@NIS-PK564 elasticsearch-manifests % kubect1 apply -f .				
persistentvolumeclaim/elasticsearch-pvc unchanged				
service/elasticsearch created				
statefulset.apps/elasticsearch created				
mashir@NIS-PK564 elasticsearch-manifests % kubect1 get pods -n elastic				
NAME	READY	STATUS	RESTARTS	AGE
elasticsearch-0	1/1	Running	0	29s
mashir@NIS-PK564 elasticsearch-manifests % kubect1 get all -n elastic				
NAME	READY	STATUS	RESTARTS	AGE
pod/elasticsearch-0	1/1	Running	0	102s
NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)
service/elasticsearch	ClusterIP	10.106.109.179	<none>	9200/TCP
NAME	READY	AGE		
statefulset.apps/elasticsearch	1/1	102s		
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests % echo "Setting kibana_system credentials"				
Setting kibana_system credentials				
mashir@NIS-PK564 elasticsearch-manifests % curl -X POST \				
-u elastic:KibanaPass123 \				
-H "Content-Type: application/json" \				
http://localhost:9200/_security/user/kibana_system/_password \				
-d '{"password":"KibanaPass123"}'				
{}				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests % curl -u kibana_system:KibanaPass123 http://localhost:9200				
{				
"name" : "elasticsearch-0",				
"cluster_name" : "docker-cluster",				
"cluster_uuid" : "xuvYoggyRTx5YzdfSWb5EBw",				
"version" : {				
"number" : "8.0.0",				
"build_flavor" : "default",				
"build_type" : "docker",				
"build_hash" : "7176d0f1c6e8a1db187b7ba8794d82dec6dd7a337",				
"build_date" : "2020-09-09T22:42:53.976833287Z",				
"build_snapshot" : false,				
"lucene_version" : "8.5.1",				
"minimum_wire_compatibility_version" : "8.19.0",				
"minimum_index_compatibility_version" : "8.0.0"				
},				
"tagline" : "You Know, for Search"				
}				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				
mashir@NIS-PK564 elasticsearch-manifests %				

...elk-stack/tetragon-elk-stack-poc/kibana-manifests.yaml -- -zsh	...manifests -- kubectf1.35.1 logs -n elastic deployment/kibana -f	...elk-stack-poc/elasticsearch-manifests -- -zsh • kubectf1.35.1	..stack/tetragon-elk-stack-poc/elasticsearch-manifests -- -zsh	+
mashir@NIS-PK564 elasticsearch-manifests % ls				
elasticsearch-pvc.yaml elasticsearch-service.yaml elasticsearch-statefulset.yaml				
mashir@NIS-PK564 elasticsearch-manifests % cd ..				
mashir@NIS-PK564 tetragon-elk-stack-poc % ls				
elasticsearch-manifests				
mashir@NIS-PK564 tetragon-elk-stack-poc % mkdir kibana-manifests.yaml				
mashir@NIS-PK564 tetragon-elk-stack-poc % ls				
elasticsearch-manifests kibana-manifests.yaml				
mashir@NIS-PK564 tetragon-elk-stack-poc % cd kibana-manifests.yaml				
mashir@NIS-PK564 kibana-manifests.yaml % ls				
kibana-deployment.yaml kibana-service.yaml				
mashir@NIS-PK564 kibana-manifests.yaml % kubect1 apply -f kibana-service.yaml				
service/kibana created				
mashir@NIS-PK564 kibana-manifests.yaml % kubect1 apply -f kibana-deployment.yaml				
deployment.apps/kibana created				
mashir@NIS-PK564 kibana-manifests.yaml % kubect1 get pods -n elastic				
NAME	READY	STATUS	RESTARTS	AGE
elasticsearch-0	1/1	Running	0	12m
kibana-75977f498d-klxsj	1/1	Running	0	38s
mashir@NIS-PK564 kibana-manifests.yaml %				

[illegible]

localhost:9200 x Browse integrations - Integrations x Cilium Tetragon Integration f... x +

localhost:5601/app/integrations/browse?q=tetragon

elastic tetragon

Integrations

Help us improve the Elastic Stack

Usage collection is enabled. This allows us to learn what our users are most interested in, so we can improve our products and services. Refer to our [Privacy Statement](#). [Disable usage collection](#).

Dismiss

Choose an integration to start collecting and analyzing your data.

Browse integrations Installed integrations

Can't find an integration?

Use AI to create a new one or upload an integration package

Create integration

tetragon

Setup method 0 All signals 0 More 2 A-Z

Cilium Tetragon

Collect Cilium Tetragon logs from Kubernetes environments.

Technical preview

All categories

APM 0

AWS 0

Azure 0

Cloud 1

Config management 0

Containers 0

CRM 0

Custom 0

Database 0

localhost:9200 x Add integration - Cilium Tetragon x Cilium Tetragon Integration f... x +

localhost:5601/app/integrations/detail/cilium_tetragon-0.4.1/add-integration

elastic Find apps, content, and more.

Integrations Cilium Tetragon Add integration

< Cancel

Add Cilium Tetragon integration

Configure an integration for the selected agent policies.

1 Configure integration

Integration settings

Choose a name and description to help identify how this integration will be used.

Integration name

tetragon-kubernetes

Description Optional

> Advanced options

log : filestream

Settings

> Advanced options

Change defaults

2 Where to add this integration?

New hosts Existing hosts

Agent policies

Agent policies are used to manage a group of integrations across a set of agents.

Agent policies

Select an agent policy to add this integrati...

Cancel Preview API request Save and continue

localhost:9200

Add integration - Cilium Tetragon

Add integration - Cilium Tetragon

Cilium Tetragon Integration

localhost:5601/app/integrations/detail/cilium_tetragon-0.4.1/add-integration

elastic

IntegrationsCilium TetragonAdd integration

< Cancel

Add Cilium Tetragon integration

Configure an integration for the selected agent policies.

1

Configure integration

Integration settings

Choose a name and description to help identify how this integration will be used.

Integration name

tetragon-kubernetes

Description

Optional

> Advanced options

☒ log : filestream

Change defaults ^

Settings

> Advanced options

2

Where to add this integration?

New hosts

Existing hosts

Create agent policy

Add this integration to a new set of hosts by creating a new agent policy. You can add agent in the next step.

New agent policy name

Agent policy 1

☒ Collect system logs and metrics ⓘ

Cancel

Preview API request

Save and continue

localhost:9200

Add integration - Cilium Tetragon

Add integration - Cilium Tetragon

Cilium Tetragon Integration

localhost:5601/app/integrations/detail/cilium_tetragon-0.4.1/add-integration

elastic

IntegrationsCilium TetragonAdd integration

< Cancel

Add Cilium Tetragon integration

Configure an integration for the selected agent policies.

1

Configure integration

Integration settings

Choose a name and description to help identify how this integration will be used.

Integration name

tetragon-kubernetes

Description

Optional

> Advanced options

☒ log : filestream

Change defaults ^

Settings

> Advanced options

2

Where to add this integration?

New hosts

Existing hosts

Create agent policy

Add this integration to a new set of hosts by creating a new agent policy. You can add agent in the next step.

New agent policy name

Agent policy 1

☒ Collect system logs and metrics ⓘ

Cancel

Preview API request

Save and continue

Cilium Tetragon integration added

To complete this integration, add Elastic Agent to your hosts to collect data and send it to Elastic Stack.

Add Elastic Agent later

Add Elastic Agent to your hosts

Integrations Cilium Tetragon

Back to integrations



Cilium Tetragon

Elastic Agent Technical preview

Version 0.4.1 Policies 1 Add Cilium Tetragon

Overview Integration policies Assets Alerting Settings Configs API reference

Integration policy	Version	Agent policies	Last updated by	Last updated	Agents	Actions
tetragon-kubernetes	v0.4.1	Agent policy 1 rev. 2	system	1 minute ago	Add agent	
Rows per page: 20						

```
...ack-poc/tetragon-elk-filebeat-integration -- zsh ..._ubectl.35.1 logs -n elastic deployment/kibana-f ..._elasticsearch-manifests -- zsh • kubectl.35.1 ... .5.1 logs -n elastic kibana-75977f9d98d-kixsj -f ..._elk-stack-poc/elasticsearch-manifests -- zsh +
mashir@NIS-PK564 elasticsearch-manifests % ls
elasticsearch-pvc.yaml elasticsearch-service.yaml elasticsearch-statefulset.yaml
mashir@NIS-PK564 elasticsearch-manifests % cd ..
mashir@NIS-PK564 tetragon-elk-stack-poc % ls
elasticsearch-manifests
mashir@NIS-PK564 tetragon-elk-stack-poc % mkdir kibana-manifests.yaml
mashir@NIS-PK564 tetragon-elk-stack-poc % ls
elasticsearch-manifests kibana-manifests.yaml
mashir@NIS-PK564 tetragon-elk-stack-poc % cd kibana-manifests.yaml
mashir@NIS-PK564 kibana-manifests.yaml % ls
kibana-deployment.yaml kibana-service.yaml
mashir@NIS-PK564 kibana-manifests.yaml % kubectl apply -f kibana-service.yaml
service/kibana created
mashir@NIS-PK564 kibana-manifests.yaml % kubectl apply -f kibana-deployment.yaml
deployment.apps/kibana created
mashir@NIS-PK564 kibana-manifests.yaml % kubectl get pods -n elastic
NAME READY STATUS RESTARTS AGE
kibana-75977f9d98d-kixsj 1/1 Running 0 12m
mashir@NIS-PK564 kibana-manifests.yaml %
mashir@NIS-PK564 kibana-manifests.yaml %
mashir@NIS-PK564 kibana-manifests.yaml %
mashir@NIS-PK564 kibana-manifests.yaml %
mashir@NIS-PK564 kibana-manifests.yaml %
mashir@NIS-PK564 kibana-manifests.yaml % cd ..
mashir@NIS-PK564 tetragon-elk-stack-poc % ls
elasticsearch-manifests kibana-manifests.yaml tetragon-elk-filebeat-integration
mashir@NIS-PK564 tetragon-elk-stack-poc % cd tetragon-elk-filebeat-integration
mashir@NIS-PK564 tetragon-elk-filebeat-integration % ls
filebeat-config.yaml
mashir@NIS-PK564 tetragon-elk-filebeat-integration % kubectl apply -f filebeat-config.yaml
configmap/filebeat-configmap created
mashir@NIS-PK564 tetragon-elk-filebeat-integration % kubectl get configmap -n kube-system filebeat-configmap
NAME DATA AGE
filebeat-configmap 1 28s
mashir@NIS-PK564 tetragon-elk-filebeat-integration % ls
filebeat-config.yaml filebeat-helm-values.yaml
mashir@NIS-PK564 tetragon-elk-filebeat-integration % helm repo add cilium https://helm.cilium.io
helm repo update
"cilium" already exists with the same configuration, skipping
Hang tight while we grab the latest from your chart repositories...
...Successfully got an update from the "sns-app" chart repository
...Successfully got an update from the "falcosecurity" chart repository
...Successfully got an update from the "jenkins" chart repository
...Successfully got an update from the "prometheus-community" chart repository
...Successfully got an update from the "cilium" chart repository
...Successfully got an update from the "bitnami" chart repository
Update Complete. Happy Helming!
mashir@NIS-PK564 tetragon-elk-filebeat-integration % ls
filebeat-config.yaml filebeat-helm-values.yaml
mashir@NIS-PK564 tetragon-elk-filebeat-integration % kubectl get po -n kube-system | grep tetragon
tetragon-operator-7b4dd7b-vh8kj 1/1 Running 19 (66m ago) 6d9h
tetragon-ngjit 2/2 Running 28 (66m ago) 6d9h
mashir@NIS-PK564 tetragon-elk-filebeat-integration % helm upgrade tetragon cilium/tetragon \
--reuse-values \
--n kube-system \
-f filebeat-helm-values.yaml
Release "tetragon" has been upgraded. Happy Helming!
NAME: tetragon
LAST DEPLOYED: Tue Oct 6 00:32:09 2026
NAMESPACE: kube-system
STATUS: deployed
REVISION: 2
DESCRIPTION: Upgrade complete
TEST SUITE: None
mashir@NIS-PK564 tetragon-elk-filebeat-integration % kubectl get po -n kube-system | grep tetragon
tetragon-jfjck 0/2 ContainerCreating 0 27s
tetragon-operator-7b4dd7b-vh8kj 1/1 Running 19 (66m ago) 6d9h
mashir@NIS-PK564 tetragon-elk-filebeat-integration % kubectl get po -n kube-system | grep tetragon
tetragon-jfjck 2/2 Running 0 2m5s
tetragon-operator-7b4dd7b-vh8kj 1/1 Running 19 (68m ago) 6d9h
```

```


...elk-stack-poc/tetragon-tracing-policies -- -zsh      ...ubectl3.5.1 logs -n elastic deployment/kibana -f ... ..elasticsearch-manifests -- -zsh • kubectl3.5.1 ... ..elk-stack-poc/elasticsearch-manifests -- -zsh      ..k-poc/tetragon-elk-filebeat-integration -- -zsh      +
mashir@NIS-PK564 tetragon-elk-filebeat-integration % echo "Testing Tetragon Events Visualization in Kibana"
Testing Tetragon Events Visualization in Kibana
mashir@NIS-PK564 tetragon-elk-filebeat-integration %
mashir@NIS-PK564 tetragon-elk-filebeat-integration % kubect1 get tracingpolicy -n kube-system
NAME
AGE
block-cryptominer-n-malicious-exec      5d3h
file-monitoring-filtered                 6d7h
kill-gcp-credentials-search              5d10h
mashir@NIS-PK564 tetragon-elk-filebeat-integration % cd ..
mashir@NIS-PK564 tetragon-elk-stack-poc % ls
elasticsearch-manifests      kibana-manifests.yaml      tetragon-elk-filebeat-integration      tetragon-tracing-policies
mashir@NIS-PK564 tetragon-elk-stack-poc % cd tetragon-tracing-policies
mashir@NIS-PK564 tetragon-tracing-policies % ls
tp-block-cryptominer-n-malicious-exec.yaml      tp-filename-monitoring-filtered.yaml      tp-gcp-creds-protection.yaml
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies % kubect1 get tracingpolicy -n kube-system
NAME
AGE
block-cryptominer-n-malicious-exec      5d3h
file-monitoring-filtered                 6d7h
kill-gcp-credentials-search              5d10h
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies % kubect1 get po
NAME      READY      STATUS      RESTARTS      AGE
nginx     1/1        Running    11 (99m ago)   6d9h
nginx-56c45fd5ff-jcn7k  1/1        Running    13 (99m ago)   14d
pytest    0/1        Completed  0              5d5h
mashir@NIS-PK564 tetragon-tracing-policies % kubect1 exec -it nginx -- sh
# echo test >> /etc/shadow
command terminated with exit code 137
# echo test >> /etc/shadow
command terminated with exit code 137
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %

```

```

...g-policies -- kubectl3.5.1 exec -it nginx -- bash      ...ubectl3.5.1 logs -n elastic deployment/kibana -f ... ..elasticsearch-manifests -- -zsh • kubectl3.5.1 ... ..elk-stack-poc/elasticsearch-manifests -- -zsh      ..k-poc/tetragon-elk-filebeat-integration -- -zsh      +
mashir@NIS-PK564 tetragon-tracing-policies % kubect1 get tracingpolicy -n kube-system
NAME
AGE
block-cryptominer-n-malicious-exec      5d4h
file-monitoring-filtered                 6d7h
kill-gcp-credentials-search              5d10h
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies % echo "Testing gcp creds tracingpolicy"
Testing gcp creds tracingpolicy
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies % kubect1 get po
NAME      READY      STATUS      RESTARTS      AGE
nginx     1/1        Running    11 (119m ago)  6d9h
nginx-56c45fd5ff-jcn7k  1/1        Running    13 (119m ago)  14d
pytest    0/1        Completed  0              5d5h
mashir@NIS-PK564 tetragon-tracing-policies %
mashir@NIS-PK564 tetragon-tracing-policies % kubect1 exec -it nginx -- bash
root@nginx:/#
root@nginx:/#
root@nginx:/# grep application_default_credentials.json
^C
root@nginx:/# find / -name application_default_credentials.json
find: /proc/29/task/29/fdinfo/: Permission denied
find: /proc/29/map_files/: Permission denied
find: /proc/29/fdinfo/: Permission denied
find: /proc/30/task/30/fdinfo/: Permission denied
find: /proc/30/map_files/: Permission denied
find: /proc/30/fdinfo/: Permission denied
/tmp/application_default_credentials.json
root@nginx:/#
root@nginx:/#
root@nginx:/# mkdir -p /root/.config/gcloud
root@nginx:/# echo test > /root/.config/gcloud/test.txt
root@nginx:/# grep test /root/.config/gcloud/test.txt
Killed
root@nginx:/#

```

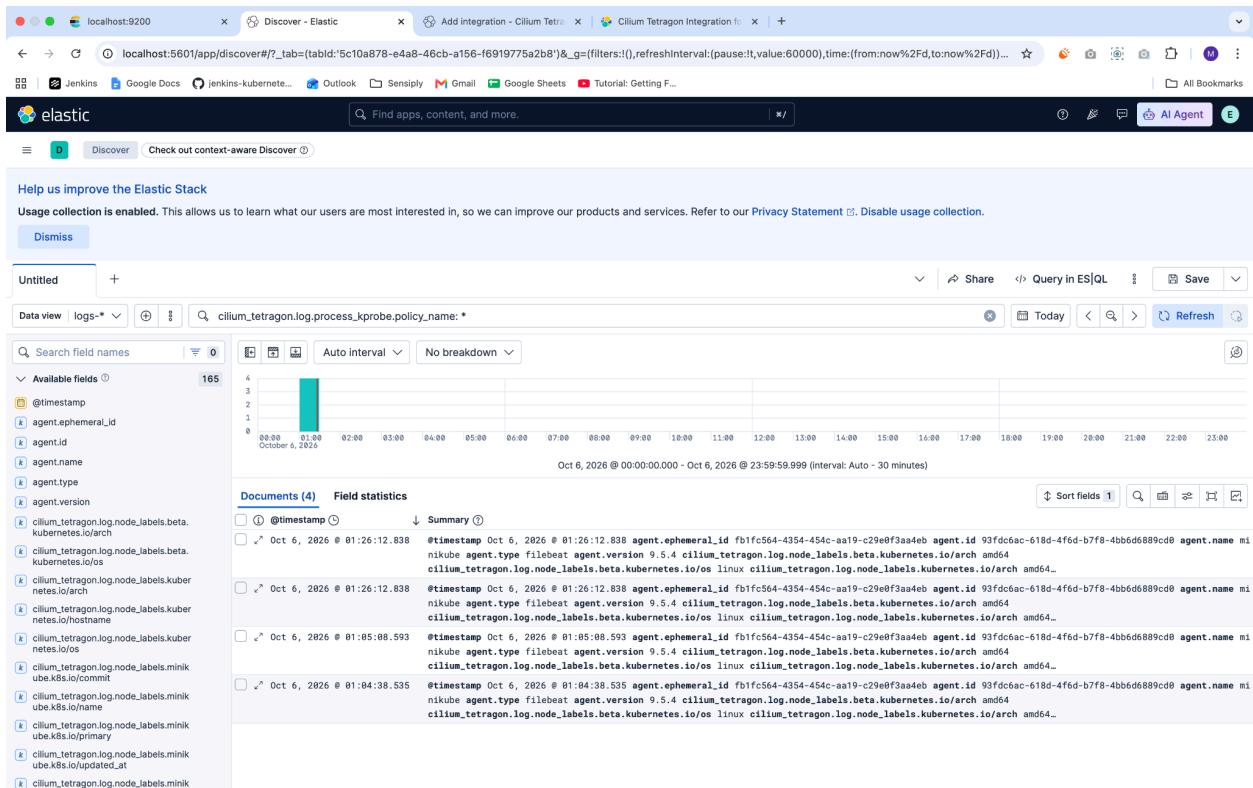

For Email Alerting Setup:

App passwords

myaccount.google.com/apppasswords?utm_source=chatgpt.com&pli=1&rapt=AEjHL4NoIG3zTFDguElsyyM82glpxCler8fPIAI87AKBPurLVT9ZcDDXygtbcf7RFftISgdKxrZeSiHWSYIKx2c85vY...

Jenkins Google Docs Outlook Sensibly Google Sheets Ashir GitHub Gmail

Google Account

App passwords

App passwords help you sign into your Google Account on older apps and services that don't support modern security standards.

App passwords are less secure than using up-to-date apps and services that use modern security standards. Before you create an app password, you should check to see if your app needs this in order to sign in.

[Learn more](#)

Your app passwords

Falco Email Alert

Created on Sep 21, last used on Sep 29

Tetragon Email Alert with ElastAlert2

Created on 11:32 PM

To create a new app specific password, type a name for it below...

App name

Create

Privacy Terms Help About

```

nashlr@N1S-PK564 ~ % kubectl exec -it -n kube-system ds/tetragon -c tetragon -- tetra getevents -o compact
process minikube /opt/cni/bin/bridge 0
exit minikube /opt/cni/bin/bridge 0
process minikube /opt/cni/bin/portmap 0
exit minikube /opt/cni/bin/portmap 0
process minikube /opt/cni/bin/firewall 0
exit minikube /opt/cni/bin/firewall 0
process minikube /opt/cni/bin/bridge 0
exit minikube /opt/cni/bin/bridge 0
process minikube /opt/cni/bin/portmap 0
exit minikube /opt/cni/bin/portmap 0
process minikube /opt/cni/bin/firewall 0
exit minikube /opt/cni/bin/firewall 0
write default/nginx /usr/bin/bash -c 'cat /dev/urandom | tr -dc 'a-z0-9' | fold -w 64 | xargs echo' 0
exit default/nginx /usr/bin/bash -c 'cat /dev/urandom | tr -dc 'a-z0-9' | fold -w 64 | xargs echo' 0
process minikube /opt/cni/bin/bridge 0
exit minikube /opt/cni/bin/bridge 0
process minikube /opt/cni/bin/portmap 0
exit minikube /opt/cni/bin/portmap 0
process minikube /opt/cni/bin/firewall 0
exit minikube /opt/cni/bin/firewall 0
process minikube /opt/cni/bin/bridge 0
exit minikube /opt/cni/bin/bridge 0
process minikube /opt/cni/bin/portmap 0
exit minikube /opt/cni/bin/portmap 0
process minikube /opt/cni/bin/firewall 0
exit minikube /opt/cni/bin/firewall 0
process minikube /opt/cni/bin/bridge 0
exit minikube /opt/cni/bin/bridge 0
process minikube /opt/cni/bin/portmap 0
exit minikube /opt/cni/bin/portmap 0
process minikube /opt/cni/bin/firewall 0
exit minikube /opt/cni/bin/firewall 0

```


The screenshot shows a Gmail interface on a desktop browser. The email is from 'mlummenstein2004@gmail.com' with the subject '[Tetragon ALERT] TracingPolicy triggered'. The email content is a JSON object containing details about a triggered tracing policy, including the policy name, namespace, and a list of triggered events. The email is marked as 'Unread' and 'Important'.

From: mlummenstein2004@gmail.com
Subject: [Tetragon ALERT] TracingPolicy triggered



Content:



```
{
  "policy": {
    "name": "TracingPolicy",
    "namespace": "default",
    "description": "TracingPolicy triggered",
    "enabled": true,
    "created": "2023-10-17T19:38:58Z",
    "updated": "2023-10-17T19:38:58Z",
    "labels": []
  },
  "events": [
    {
      "name": "TracingPolicyTriggered",
      "namespace": "default",
      "description": "TracingPolicy triggered",
      "enabled": true,
      "created": "2023-10-17T19:38:58Z",
      "updated": "2023-10-17T19:38:58Z",
      "labels": []
    }
  ]
}
```

Kibana Visualization (Updated):

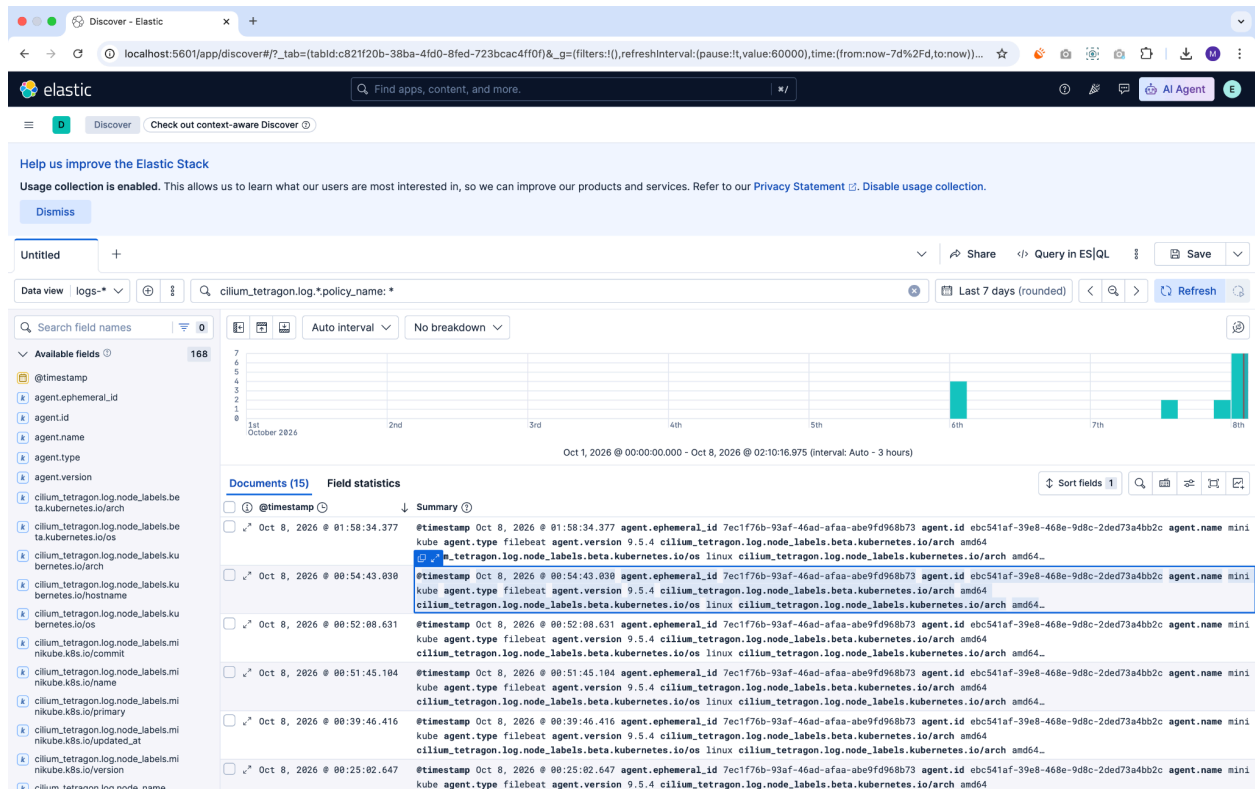

Making Kibana Dashboards:

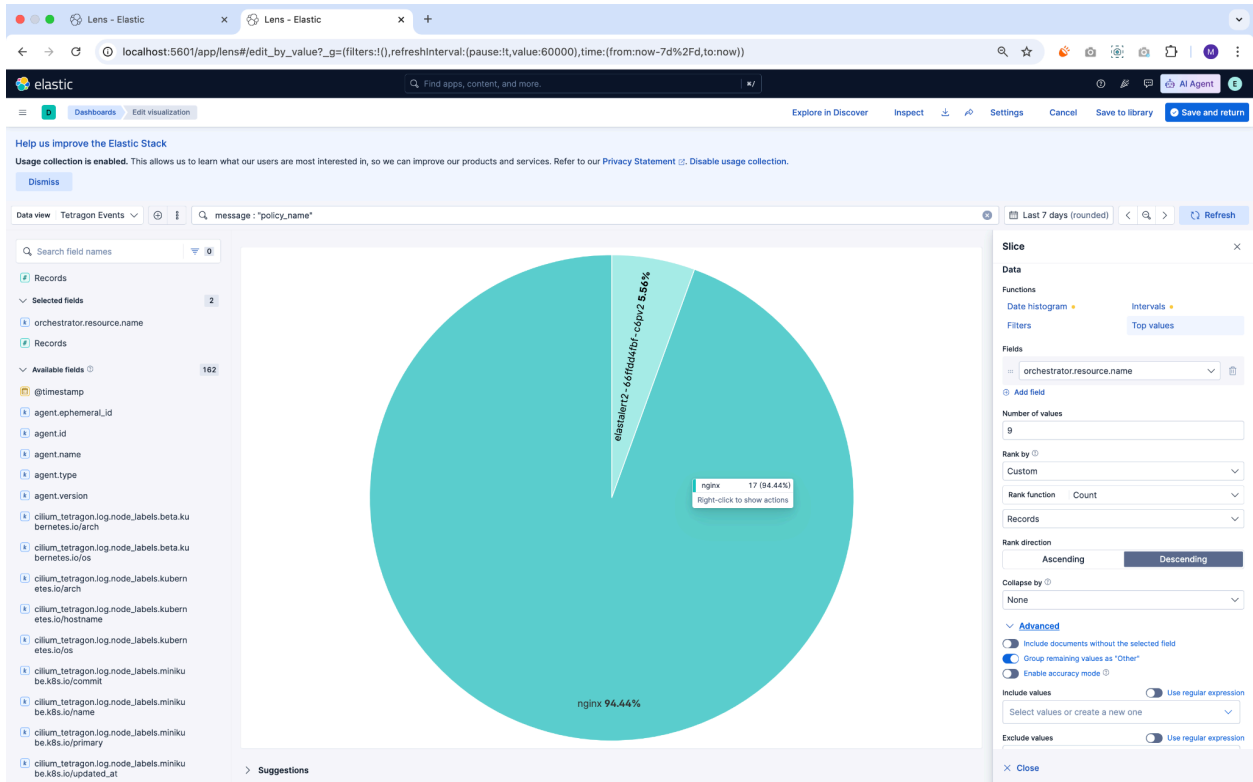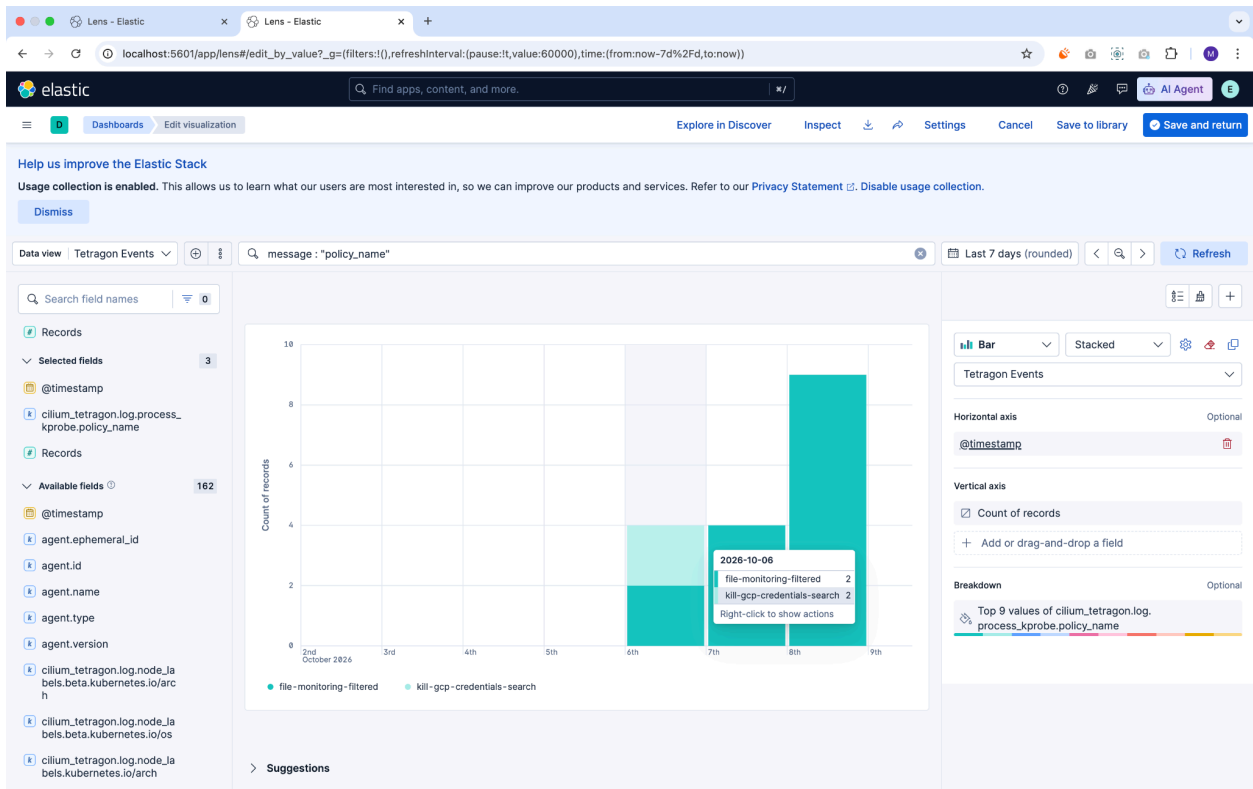

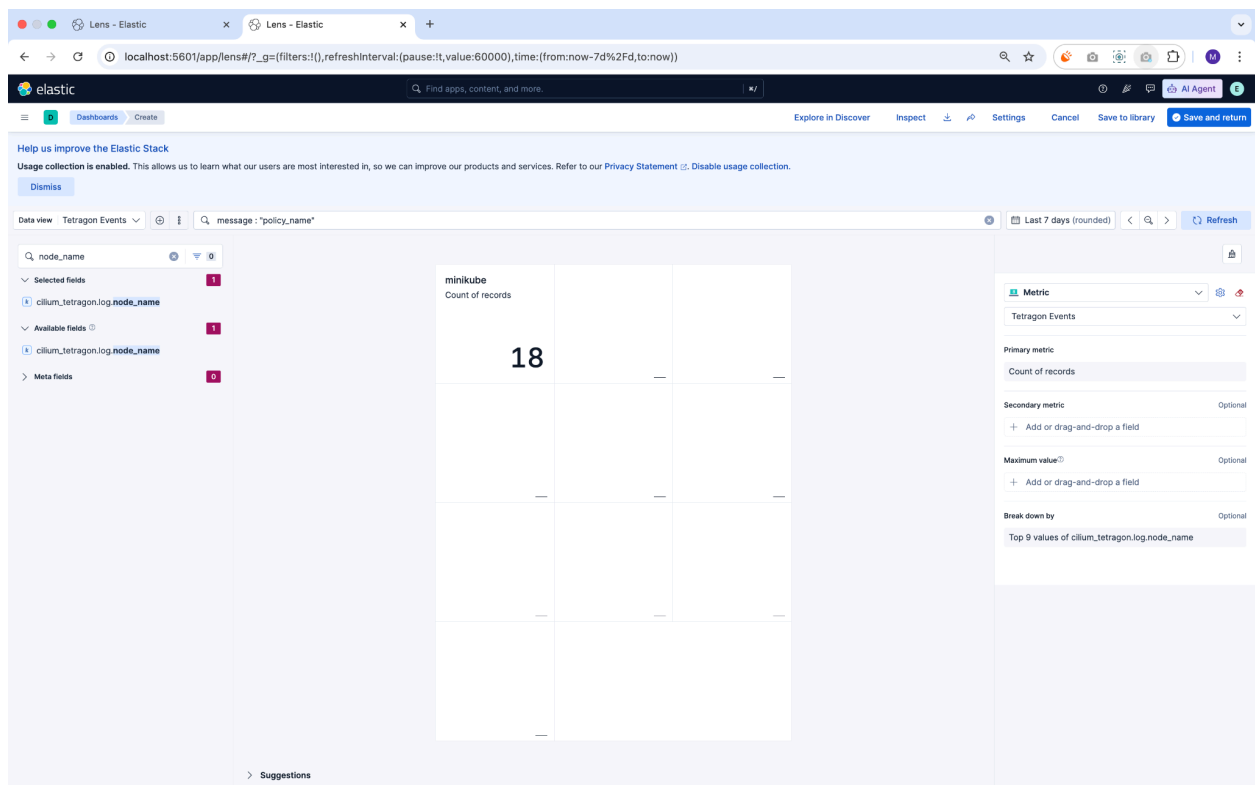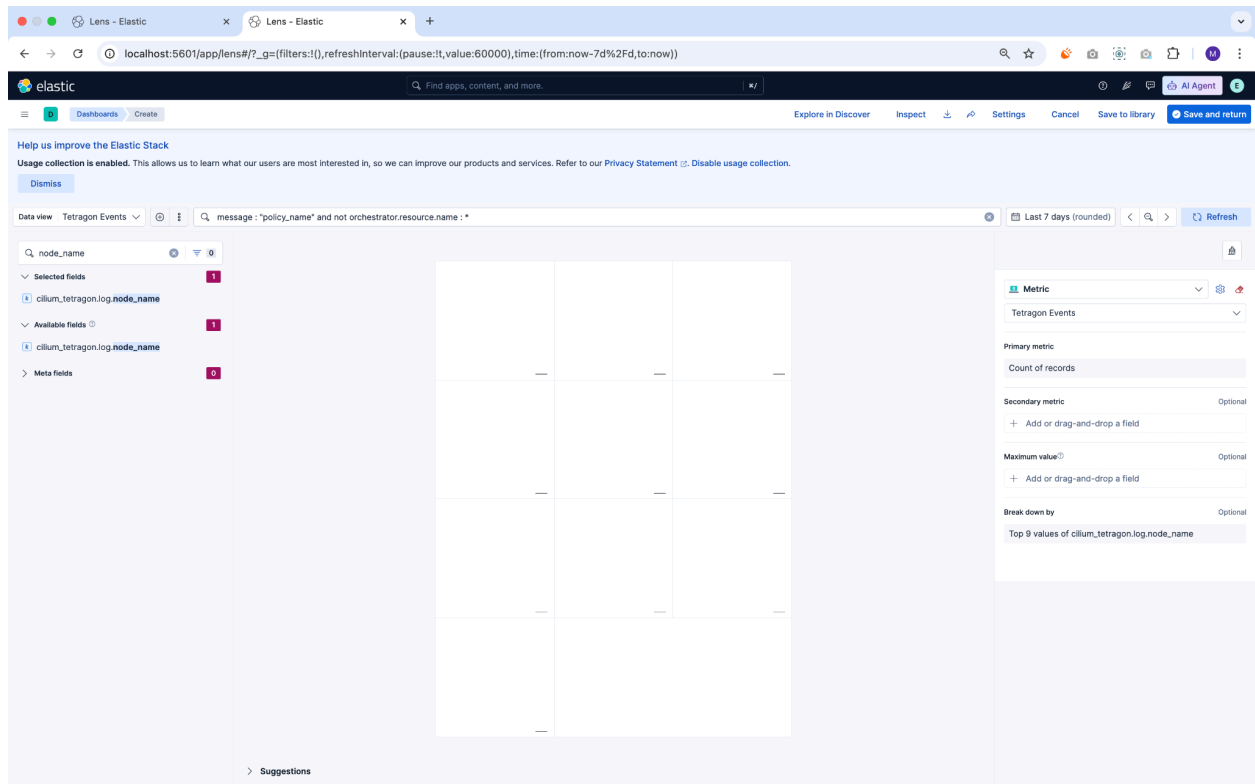

Kibana Dashboard:

