Experiment :- 6

AIM: Create Product Catalog Application using ASP.NET MVC Architecture. (Controllers, Models, Views, Routing).

Source:- Controllers/ProductController.cs

Code:-

```
using System.Web.Mvc;

using WebApplication2.Models;

namespace
  WebApplication2.Controllers

{

   public class ProductController :
Controller

    {

        // Product Catalog

        public ActionResult Index()

        {

            return View();

        }

        // Product Details

        public ActionResult
Details(int id)

        {

            if (id == 1)

            {

            ViewBag.ProductId = 1;

            ViewBag.ProductName = "Laptop";

            ViewBag.Description

             = "HP Laptop with 16GB RAM and
                512GB SSD";

            ViewBag.Price =
            80000;

            }

            else if (id == 2)
```

```
            {
                ViewBag.ProductId = 2;

                ViewBag.ProductName  ="Mobile";

                ViewBag.Description
                ="Samsung Mobile with 8GB RAM and
                128GB Storage";

                ViewBag.Price = 30000;

            }
            else if (id == 3)
            {
                ViewBag.ProductId =  3;

                ViewBag.ProductName
                 ="Headphones";

                ViewBag.Description
                ="Wireless Headphones";

                ViewBag.Price = 5000;

            }


return View();
        }
    }
}
```

Source:- Models/Products.cs

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
```

```
namespace WebApplication2.Models
{
    public class Products
    {
        public int Id { get; set; }
        public string Name { get; set; }
        public string Description { get; set; }

    }
}
```

Source:- Views/Product/Details.cshtml

Code:

```
@{
    ViewBag.Title = "Product Details";
}
<style>
    .details-box {
        border: 1px solid #ccc;
        width: 500px;
        padding: 25px;
        border-radius: 8px;
        box-shadow: 0 2px 5px #ccc;
        background-color: #f9f9f9;
    }
    .price {
        color: green;
        font-size: 20px;
        font-weight: bold;
    }
```

```
    .back-button {
        padding: 8px 12px;
        background-color: #555;
        color: white;
        text-decoration: none;
        border-radius: 5px;
    }
</style>
<h2>Product Details</h2>
<div class="details-box">
    <h3>@ViewBag.ProductName</h3>
    <p>
        <b>Product ID:</b>
@ViewBag.ProductId
    </p>
    <p>
        <b>Description:</b>
@ViewBag.Description
    </p>
    <p class="price">
        Price: ₹@ViewBag.Price
    </p>
    <br />
    <a class="back-button"
       href="@Url.Action("Index",
"Product")">
        Back to Products
    </a>
</div>
```

Source:- Views/Product/Index.cshtml

Code:


```
@model
WebApplication2.Models.Products


@{
    ViewBag.Title = "Products";
}
<style>
    .product-box {
        border: 1px solid #ccc;
        width: 250px;
        padding: 20px;
        margin: 15px;
        display: inline-block;
        vertical-align: top;
        border-radius: 8px;
        box-shadow: 0 2px 5px #ccc;
        background-color:  #f9f9f9;
    }
        .product-box h3 {
            color: #333;
        }
    .price {
        color:  green;
        font-weight: bold;
    }
    .details-button {
        display: inline-block;
        padding: 8px 12px;
        background-color: #007bff;
        color: white;
        text-decoration: none;
        border-radius: 5px;
    }
```


```
        .details-button:hover {
            background-color:
#0056b3;
        }
</style>
<h2>Product Catalog</h2>
<hr />
<div class="product-box">
    <h3>Laptop</h3>
    <p>
        HP Laptop with 16GB RAM and
512GB SSD
    </p>
    <p class="price">
        Price: ₹80000
    </p>
    <a class="details-button"
       href="@Url.Action("Details",
"Product", new { id = 1 })">
        View Details
    </a>
</div>
<div class="product-box">
    <h3>Mobile</h3>
    <p>
        Samsung Mobile with 8GB RAM
and 128GB Storage
    </p>
    <p class="price">
        Price: ₹30000
    </p>
    <a class="details-button"
```


```
        href="@Url.Action("Details",
"Product", new { id = 2 })">
            View Details
        </a>
</div>
<div class="product-box">
        <h3>Headphones</h3>
        <p>
            Wireless Bluetooth
Headphones
        </p>
        <p class="price">
            Price: ₹5000
        </p>
        <a class="details-button"
           href="@Url.Action("Details",
"Product", new { id = 3 })">
            View Details
        </a>
</div>
```

Output/ Screenshot:

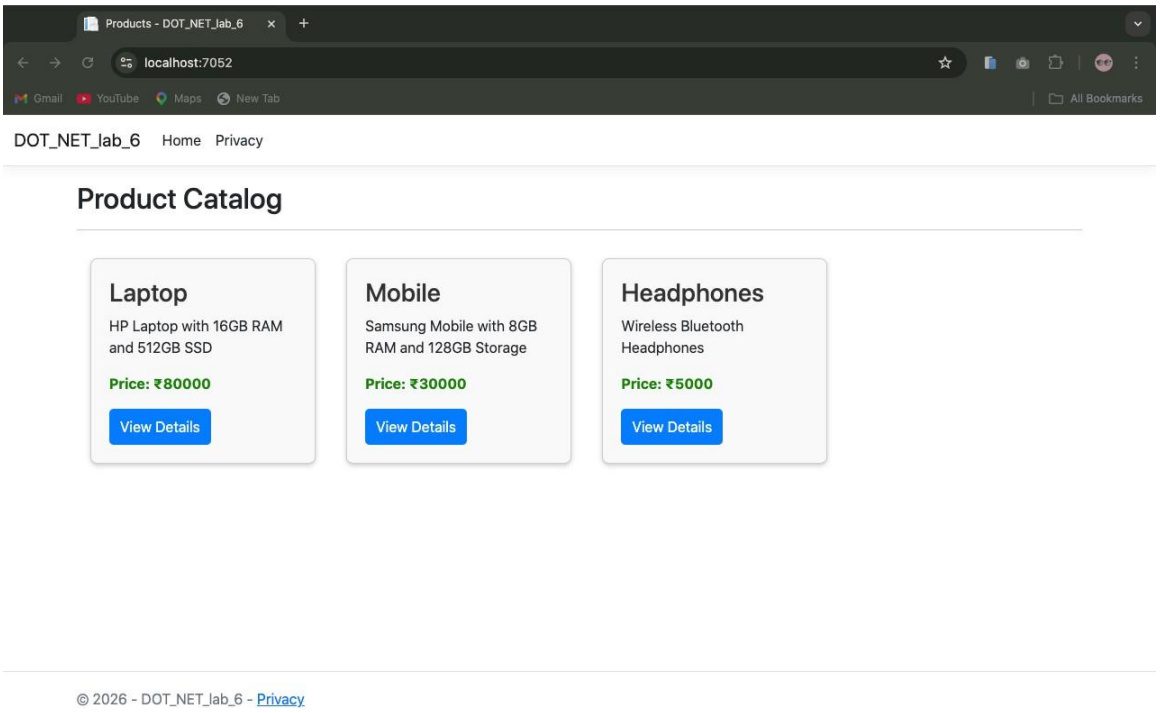

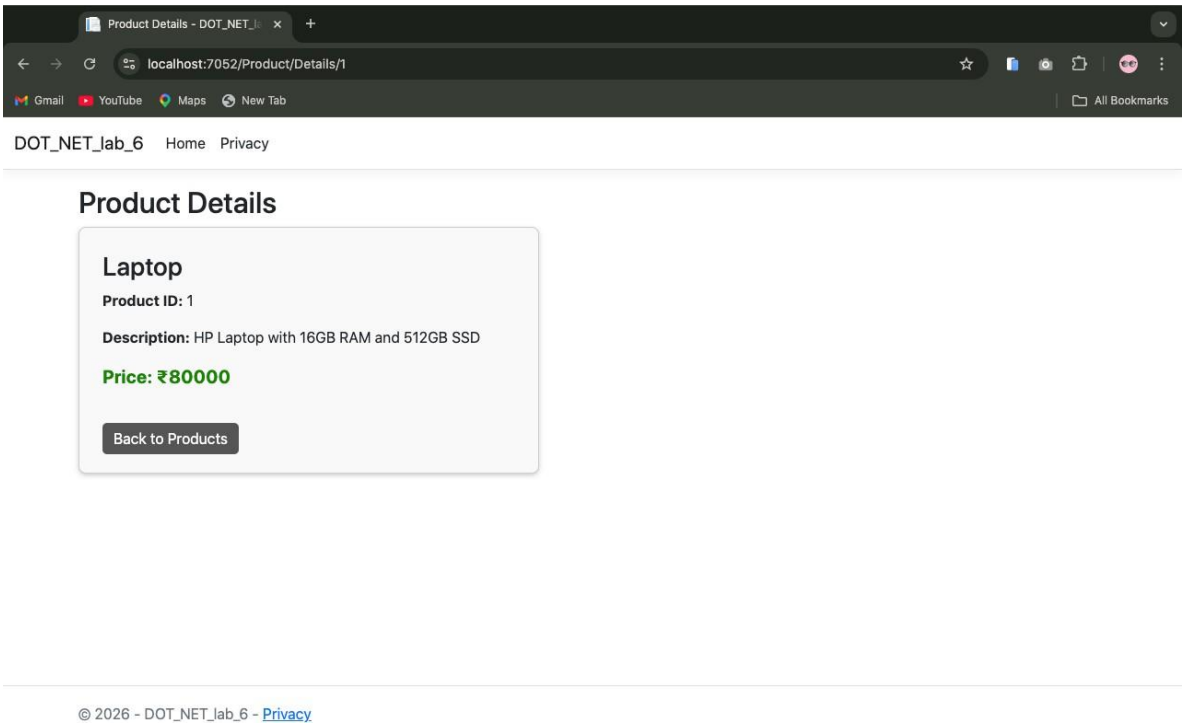

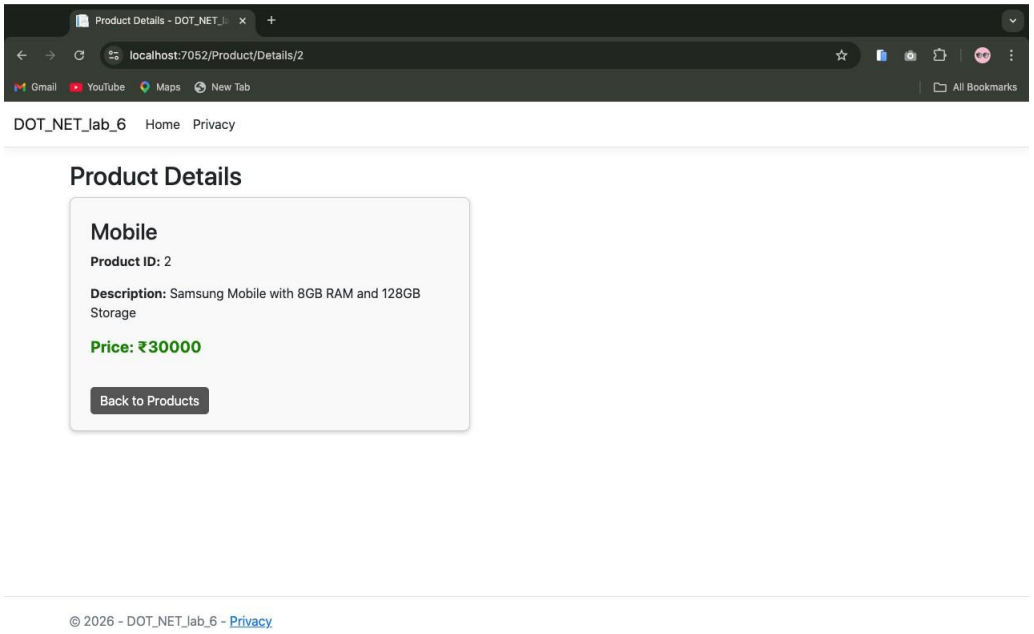

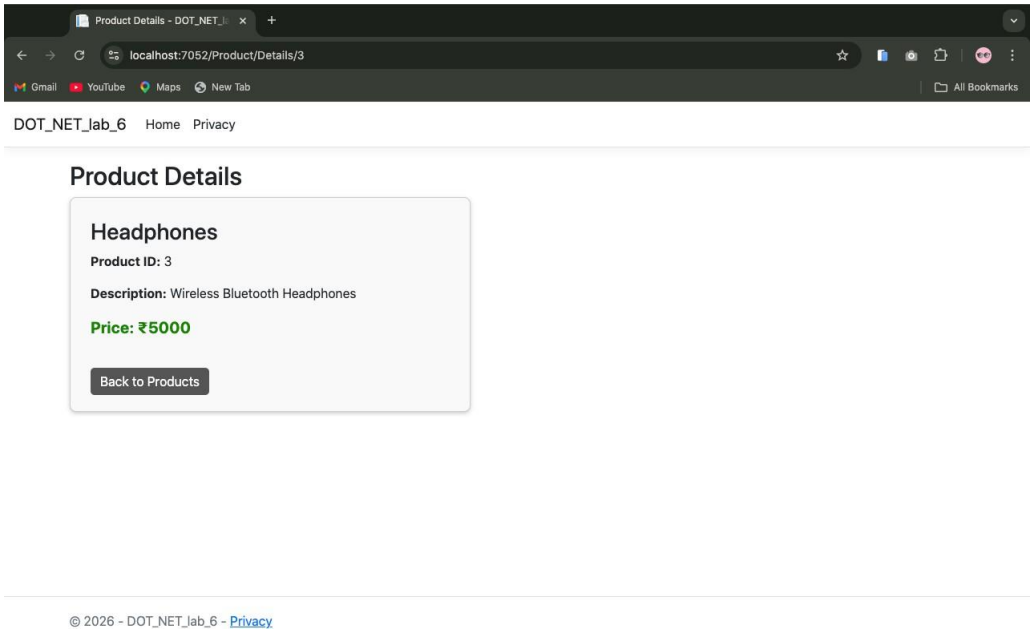

GitHub Link : https://github.com/Ashish-Agrawal-7322/.Net.git