

MERN STACK

DAY – 2

Date: June 26, 2026

HTML Lists

HTML lists allow web developers to group a set of related items in lists.

Unordered HTML List: An unordered list starts with the `<ul>` tag. Each list item starts with the `<li>` tag. The list items will be marked with bullets (small black circles) by default.

Choose List Item Marker: The CSS `list-style-type` property is used to define the style of the list item marker. It can have one of the following values:

Value	Description
disc	Sets the list item marker to a bullet (default)
circle	Sets the list item marker to a circle
square	Sets the list item marker to a square
none	The list items will not be marked

Ordered HTML List: An ordered list starts with the `<ol>` tag. Each list item starts with the `<li>` tag. The list items will be marked with numbers by default.

The Type Attribute: The type attribute of the `<ol>` tag, defines the type of the list item marker:

Type	Description
type="1"	The list items will be numbered with numbers (default)
type="A"	The list items will be numbered with uppercase letters
type="a"	The list items will be numbered with lowercase letters
type="I"	The list items will be numbered with uppercase roman numbers
type="i"	The list items will be numbered with lowercase roman numbers

TASK-1: List

Ordered List

types = A,a,i,I,1

- A. Item 1
- B. Item 2
- C. Item 3

Unordered List

types = circle, square, bullet

- Item 1
- Item 2
- Item 3

Nested List

- 1. Item 1
 - Item 1.1
 - Item 1.2
- Item2
 - 1. Item 2.1
 - 2. Item 2.2

Task1

- DSA
 - Array
 - Linked List
 - Stack
 - Queue
- Web Technologies
 - HTML
 - CSS
 - JavaScript
- Aptitude
- Gate
- Placement

Task2

- Item 1
- Item 2
 - Sub Item 2.1
 - Sub Item 2.2
 - Sub Item 2.3
- Item 3
- Item 4
 - Sub Item 4.1
 - Sub Item 4.2
 - Sub Item 4.2.1
 - Sub Item 4.2.2
 - Sub Item 4.3
- Item 5

HTML IMAGES

The HTML tag is used to embed an image in a web page. Images are not technically inserted into a web page; images are linked to web pages. The tag creates a holding space for the referenced image. The tag is empty, it contains attributes only, and does not have a closing tag.

The tag has two required attributes:

- src - Specifies the path to the image
- alt - Specifies an alternate text for the image


HTML Video

The <video> element in HTML is used to show video content on web pages. It supports various video formats, including MP4, WebM, and Ogg. It is introduced in HTML5.

Attributes of the <video> Element: The following attributes can be used with the <video> tag to enhance video playback:

Attribute	Description
controls	Adds playback controls such as play, pause, volume, etc.
width	Specifies the width of the video player.
height	Specifies the height of the video player.
autoplay	Automatically starts playing the video when it's loaded.
muted	Mutes the video by default.
src	Specifies the video file's path.
type	Defines the format of the video (e.g., video/mp4, video/webm).

TASK-2:

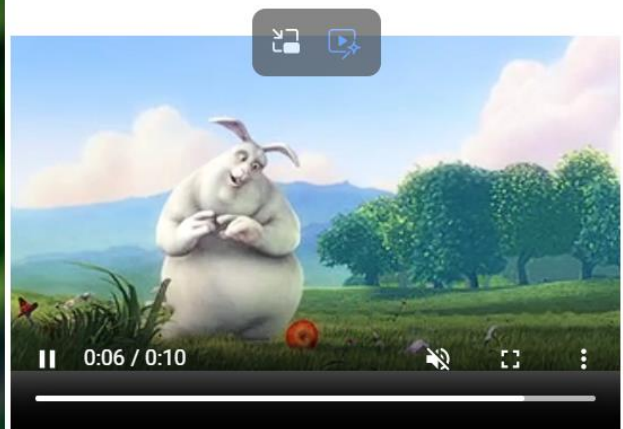

TASK-3: Simple image gallery



Check out these beautiful flowers!