

MERN STACK

DAY – 5

Date: June 30, 2026

CSS Box Model

Content - The content of the box, where text and images appear

CSS Borders

The CSS border properties allow you to specify the style, width, and color of an element's border.

CSS Border Style: The border-style property specifies what kind of border to display. The following values are allowed:

- dotted - Defines a dotted border
- dashed - Defines a dashed border
- solid - Defines a solid border
- double - Defines a double border
- none - Defines no border

CSS Border Width: The border-width property specifies the width of the four borders. The width can be set as a specific size (in px, pt, cm, em, etc) or by using one of the three pre-defined values: thin, medium, or thick.

CSS Border Color: The border-color property is used to set the color of the four borders. The color can be set by:

- name - specify a color name, like "red"
- HEX - specify a HEX value, like "#ff0000"
- RGB - specify a RGB value, like "rgb(255,0,0)"
- HSL - specify a HSL value, like "hsl(0, 100%, 50%)"
- transparent

CSS Rounded Borders: The border-radius property is used to add rounded borders to an element.

CSS Margins

The CSS margin properties are used to create space around elements, outside of any defined borders. Margins define the distance between an element's border and the surrounding elements.

CSS has properties for specifying the margin for each side of an element:

- margin-top - sets the top margin of an element
- margin-right - sets the right margin of an element
- margin-bottom - sets the bottom margin of an element

- margin-left - sets the left margin of an element

All the margin properties can have the following values:

- auto - the browser calculates the margin
- length - specifies a margin in px, pt, cm, etc.
- % - specifies a margin in % of the width of the containing element
- inherit - specifies that the margin should be inherited from the parent element

CSS Padding


The CSS padding properties are used to generate space around an element's content, inside of any defined borders. CSS has properties for specifying the padding for each side of an element:

- padding-top - sets the top padding of an element
- padding-right - sets the right padding of an element
- padding-bottom - sets the bottom padding of an element
- padding-left - sets the left padding of an element


All the padding properties can have the following values:

- length - specifies a padding in px, pt, cm, etc.
- % - specifies a padding in % of the width of the containing element
- inherit - specifies that the padding should be inherited from the parent element

TASK-1 Boxmodel



TASK-2

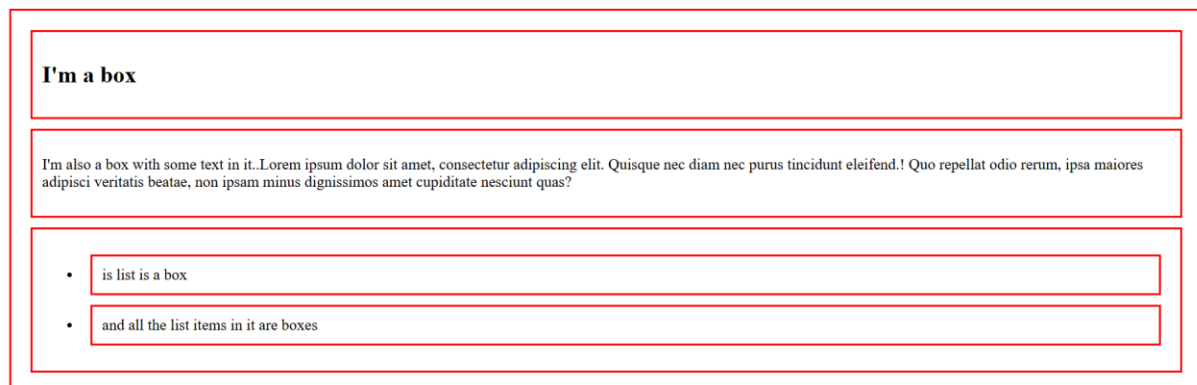


The CSS float Property

The float property specifies how an element should float within its container. It places an element on the left or right side of its container, allowing text and inline elements to wrap around it.

The float property can have one of the following values:

- left - The element floats to the left of its container
- right - The element floats to the right of its container
- none - Default. The element does not float and is displayed just where it occurs in the text
- inherit - The element inherits the float value of its parent

TASK-3

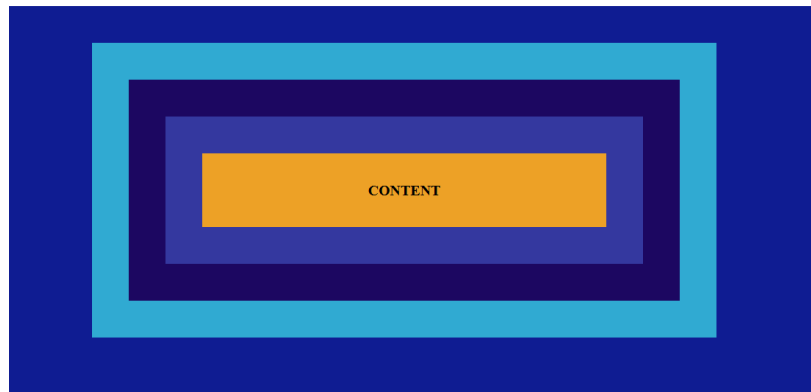

TASK-4: Float and Border radius

