

Importing Libraries

In [1]:

```
1 import numpy as np
2 import pandas as pd
3 import matplotlib.pyplot as plt
4 import seaborn as sns
```

Importing Datasets

In [2]:

```
1 df=pd.read_csv('TELANGANA.csv')
2 df
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL	Jan-Feb	Mar-May	
0	3198	TELANGANA	1902	0.0	0.0	0.2	10.7	7.3	52.4	146.3	142.8	190.5	41.7	31.2	7.3	630.4	0.0	18.2	5:
1	3199	TELANGANA	1903	12.9	4.6	0.0	9.9	40.7	99.2	505.2	246.7	191.9	155.8	15.5	1.1	1283.4	17.5	50.5	10:
2	3200	TELANGANA	1904	0.0	0.0	10.8	0.8	14.7	104.2	139.5	50.0	162.3	44.4	0.0	0.0	526.7	0.0	26.3	4:
3	3201	TELANGANA	1905	0.0	4.3	12.8	27.6	32.2	129.5	82.4	237.3	179.1	19.6	0.0	0.0	724.9	4.3	72.6	6:
4	3202	TELANGANA	1906	22.5	1.2	13.4	2.4	0.7	211.1	210.8	226.7	96.3	20.5	14.9	34.8	855.2	23.7	16.5	7:
...
109	3307	TELANGANA	2011	0.0	11.9	2.6	25.6	9.3	83.9	268.2	225.9	107.6	13.9	4.2	0.0	753.1	11.9	37.4	6:
110	3308	TELANGANA	2012	6.7	0.0	0.2	14.0	8.4	124.4	300.3	229.9	202.4	83.6	38.7	0.0	1008.6	6.7	22.6	8:
111	3309	TELANGANA	2013	2.4	29.0	0.2	24.4	8.5	213.4	453.8	230.6	161.4	205.9	16.4	2.7	1348.7	31.4	33.0	10:
112	3310	TELANGANA	2014	0.2	2.9	58.3	10.3	73.3	62.3	146.0	205.2	146.8	29.6	10.8	0.7	746.4	3.1	141.9	5:
113	3311	TELANGANA	2015	17.5	0.0	43.0	65.7	23.3	266.9	104.4	160.5	158.3	15.6	0.3	1.7	857.3	17.5	132.0	6:

114 rows × 20 columns

Data Cleaning and Data Preprocessing

```
In [3]: 1 df=df.dropna()  
2 df
```

Out[3]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL	Jan-Feb	Mar-May	
0	3198	TELANGANA	1902	0.0	0.0	0.2	10.7	7.3	52.4	146.3	142.8	190.5	41.7	31.2	7.3	630.4	0.0	18.2	5:
1	3199	TELANGANA	1903	12.9	4.6	0.0	9.9	40.7	99.2	505.2	246.7	191.9	155.8	15.5	1.1	1283.4	17.5	50.5	10:
2	3200	TELANGANA	1904	0.0	0.0	10.8	0.8	14.7	104.2	139.5	50.0	162.3	44.4	0.0	0.0	526.7	0.0	26.3	4:
3	3201	TELANGANA	1905	0.0	4.3	12.8	27.6	32.2	129.5	82.4	237.3	179.1	19.6	0.0	0.0	724.9	4.3	72.6	6:
4	3202	TELANGANA	1906	22.5	1.2	13.4	2.4	0.7	211.1	210.8	226.7	96.3	20.5	14.9	34.8	855.2	23.7	16.5	7:
...
109	3307	TELANGANA	2011	0.0	11.9	2.6	25.6	9.3	83.9	268.2	225.9	107.6	13.9	4.2	0.0	753.1	11.9	37.4	6:
110	3308	TELANGANA	2012	6.7	0.0	0.2	14.0	8.4	124.4	300.3	229.9	202.4	83.6	38.7	0.0	1008.6	6.7	22.6	8:
111	3309	TELANGANA	2013	2.4	29.0	0.2	24.4	8.5	213.4	453.8	230.6	161.4	205.9	16.4	2.7	1348.7	31.4	33.0	10:
112	3310	TELANGANA	2014	0.2	2.9	58.3	10.3	73.3	62.3	146.0	205.2	146.8	29.6	10.8	0.7	746.4	3.1	141.9	5:
113	3311	TELANGANA	2015	17.5	0.0	43.0	65.7	23.3	266.9	104.4	160.5	158.3	15.6	0.3	1.7	857.3	17.5	132.0	6:

114 rows × 20 columns



```
In [4]: 1 df.columns
```

Out[4]: Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY', 'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb', 'Mar-May', 'Jun-Sep', 'Oct-Dec'],
dtype='object')


In [5]: 1 df.info()

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 114 entries, 0 to 113
Data columns (total 20 columns):
 #   Column      Non-Null Count  Dtype  
--- 
 0   index       114 non-null    int64  
 1   SUBDIVISION 114 non-null    object  
 2   YEAR        114 non-null    int64  
 3   JAN         114 non-null    float64 
 4   FEB         114 non-null    float64 
 5   MAR         114 non-null    float64 
 6   APR         114 non-null    float64 
 7   MAY         114 non-null    float64 
 8   JUN         114 non-null    float64 
 9   JUL         114 non-null    float64 
 10  AUG         114 non-null    float64 
 11  SEP         114 non-null    float64 
 12  OCT         114 non-null    float64 
 13  NOV         114 non-null    float64 
 14  DEC         114 non-null    float64 
 15  ANNUAL      114 non-null    float64 
 16  Jan-Feb     114 non-null    float64 
 17  Mar-May     114 non-null    float64 
 18  Jun-Sep     114 non-null    float64 
 19  Oct-Dec     114 non-null    float64 
dtypes: float64(17), int64(2), object(1)
memory usage: 18.7+ KB
```

Line Chart


```
In [6]: 1 df.plot.line(subplots=True)
```

```
Out[6]: array([<AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
   <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
   <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
   <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
   <AxesSubplot:>, <AxesSubplot:>], dtype=object)
```

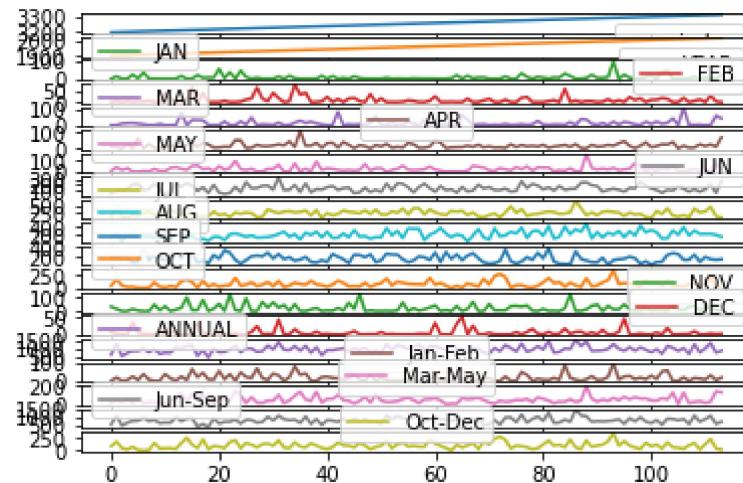

In [7]: 1 df.plot.line()


Out[7]: <AxesSubplot:>

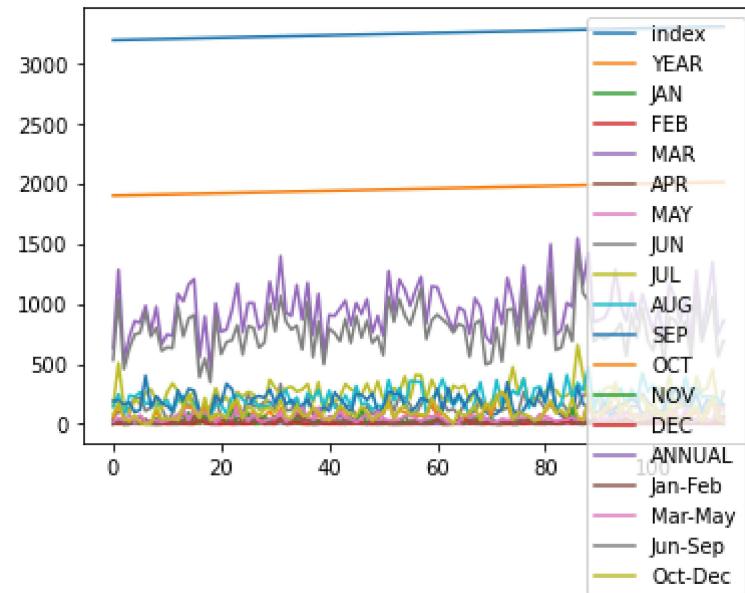

Bar Chart

In [8]: 1 df.plot.bar()


Out[8]: <AxesSubplot:>

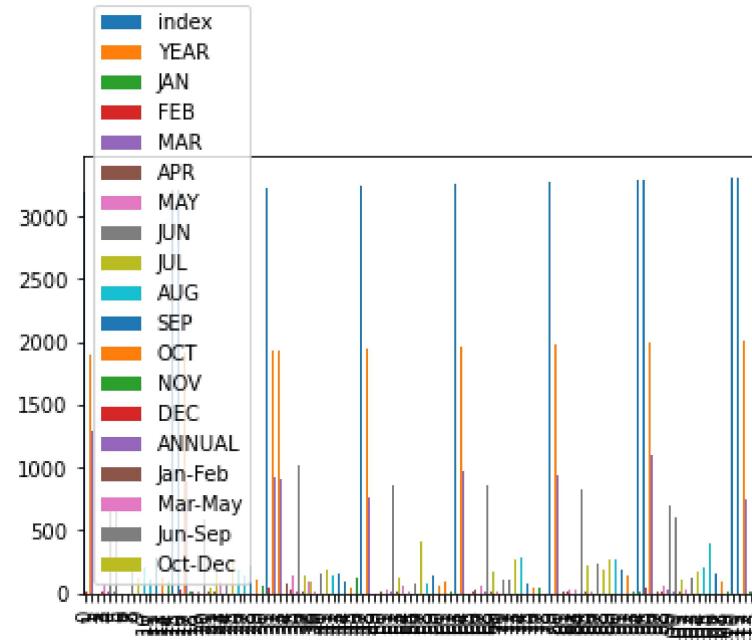

Histogram

In [9]: 1 df.plot.hist()


Out[9]: <AxesSubplot:ylabel='Frequency'>

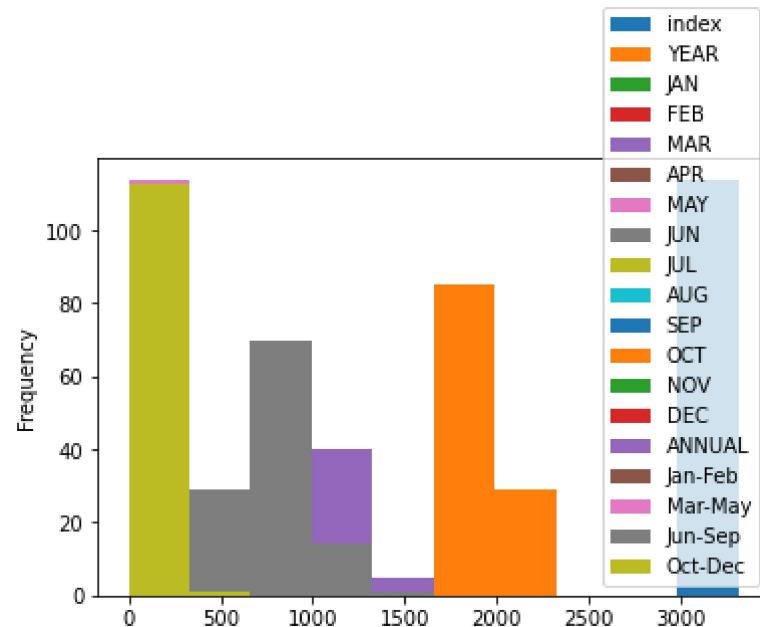

Area Chart

In [10]: 1 df.plot.area()


Out[10]: <AxesSubplot:>

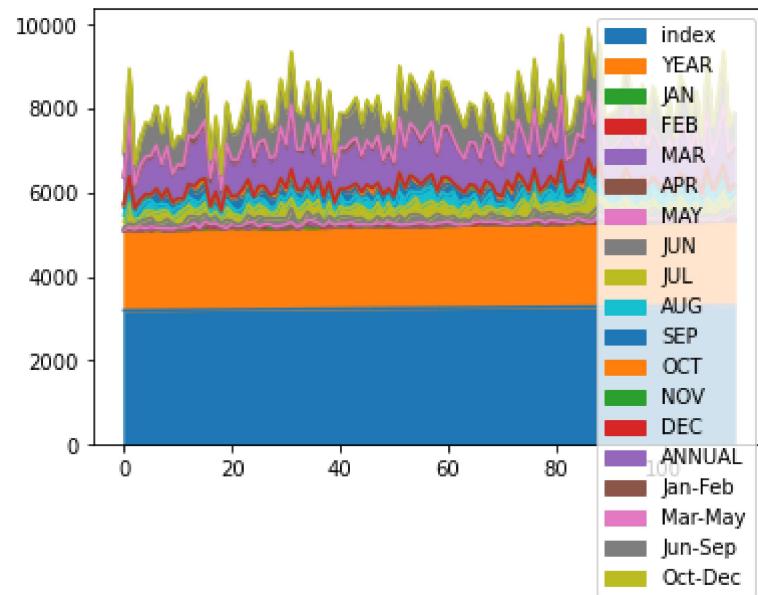

Box Chart

```
In [11]: 1 df.plot.box()
```


```
Out[11]: <AxesSubplot:>
```

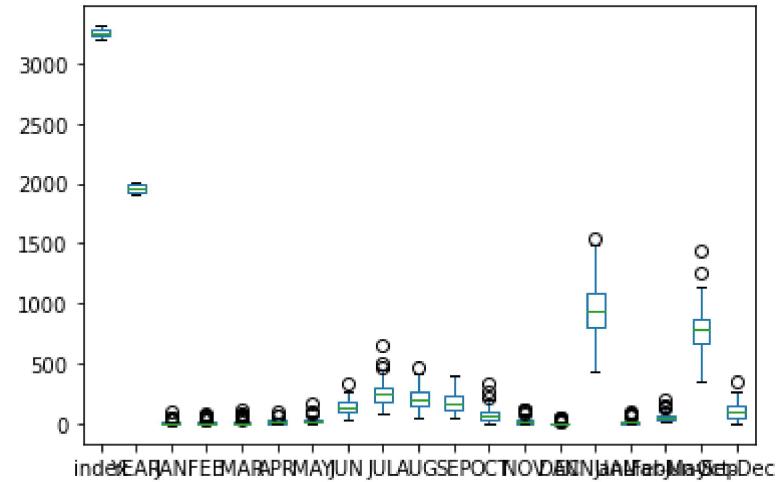


Pie Chart

```
In [12]: 1 df.plot.pie(y='ANNUAL')
```

```
Out[12]: <AxesSubplot:ylabel='ANNUAL'>
```

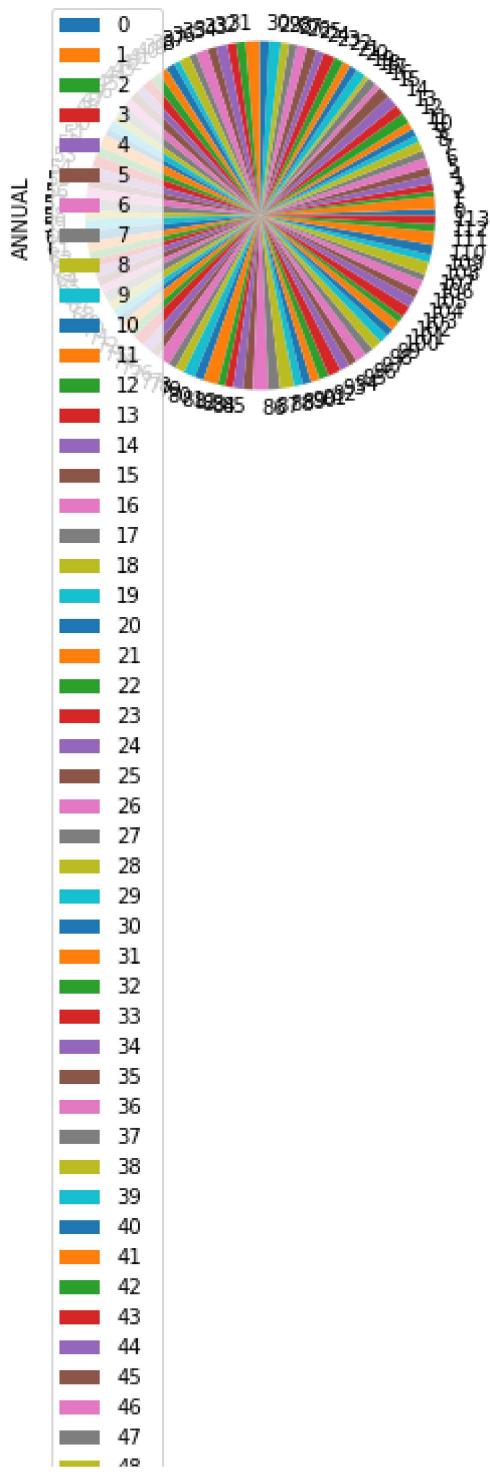
40
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97

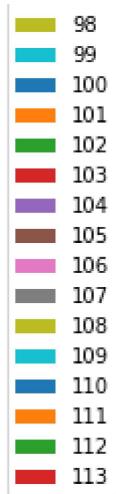

Scatter Plot

```
In [13]: 1 df.plot.scatter(x='SUBDIVISION',y='ANNUAL')
```

```
Out[13]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>
```

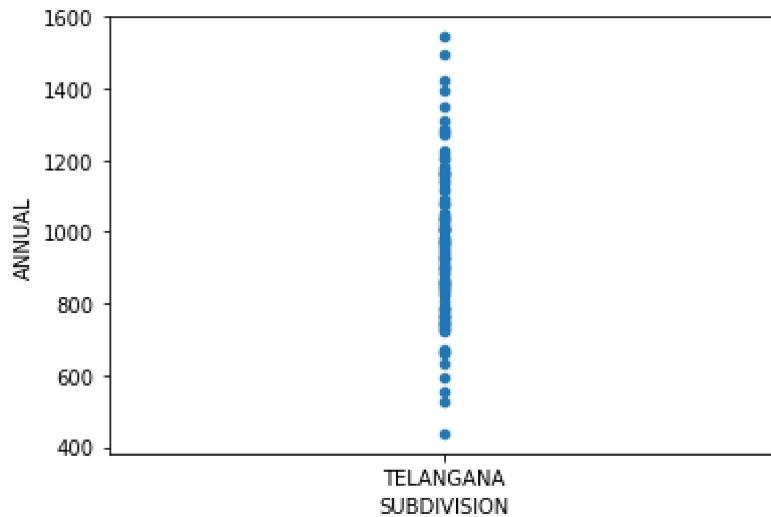

In [14]: 1 df.info()

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 114 entries, 0 to 113
Data columns (total 20 columns):
 #   Column      Non-Null Count  Dtype  
--- 
 0   index       114 non-null    int64  
 1   SUBDIVISION 114 non-null    object  
 2   YEAR        114 non-null    int64  
 3   JAN         114 non-null    float64 
 4   FEB         114 non-null    float64 
 5   MAR         114 non-null    float64 
 6   APR         114 non-null    float64 
 7   MAY         114 non-null    float64 
 8   JUN         114 non-null    float64 
 9   JUL         114 non-null    float64 
 10  AUG         114 non-null    float64 
 11  SEP         114 non-null    float64 
 12  OCT         114 non-null    float64 
 13  NOV         114 non-null    float64 
 14  DEC         114 non-null    float64 
 15  ANNUAL      114 non-null    float64 
 16  Jan-Feb     114 non-null    float64 
 17  Mar-May     114 non-null    float64 
 18  Jun-Sep     114 non-null    float64 
 19  Oct-Dec     114 non-null    float64 
dtypes: float64(17), int64(2), object(1)
memory usage: 18.7+ KB
```

```
In [15]: 1 df.describe()
```


Out[15]:


	index	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	
count	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	114.0
mean	3254.500000	1958.500000	7.709649	9.407018	12.657018	17.948246	25.403509	142.288596	247.584211	215.391228	176.3
std	33.052988	33.052988	13.942302	14.987002	18.859255	15.796758	23.745021	57.953959	96.473983	87.590983	75.7
min	3198.000000	1902.000000	0.000000	0.000000	0.000000	0.100000	0.200000	28.500000	82.400000	50.000000	52.4
25%	3226.250000	1930.250000	0.000000	0.000000	1.400000	6.925000	8.425000	103.450000	181.225000	150.650000	116.2
50%	3254.500000	1958.500000	1.000000	3.350000	4.700000	14.000000	20.500000	133.850000	249.350000	199.650000	162.3
75%	3282.750000	1986.750000	9.750000	13.625000	15.275000	24.625000	34.550000	181.175000	296.850000	270.550000	232.2
max	3311.000000	2015.000000	98.700000	79.100000	108.600000	105.600000	159.800000	332.000000	656.200000	471.100000	401.2

EDA And Visualization

```
In [16]: 1 sns.pairplot(df)
```

```
Out[16]: <seaborn.axisgrid.PairGrid at 0x2988ab7a7f0>
```

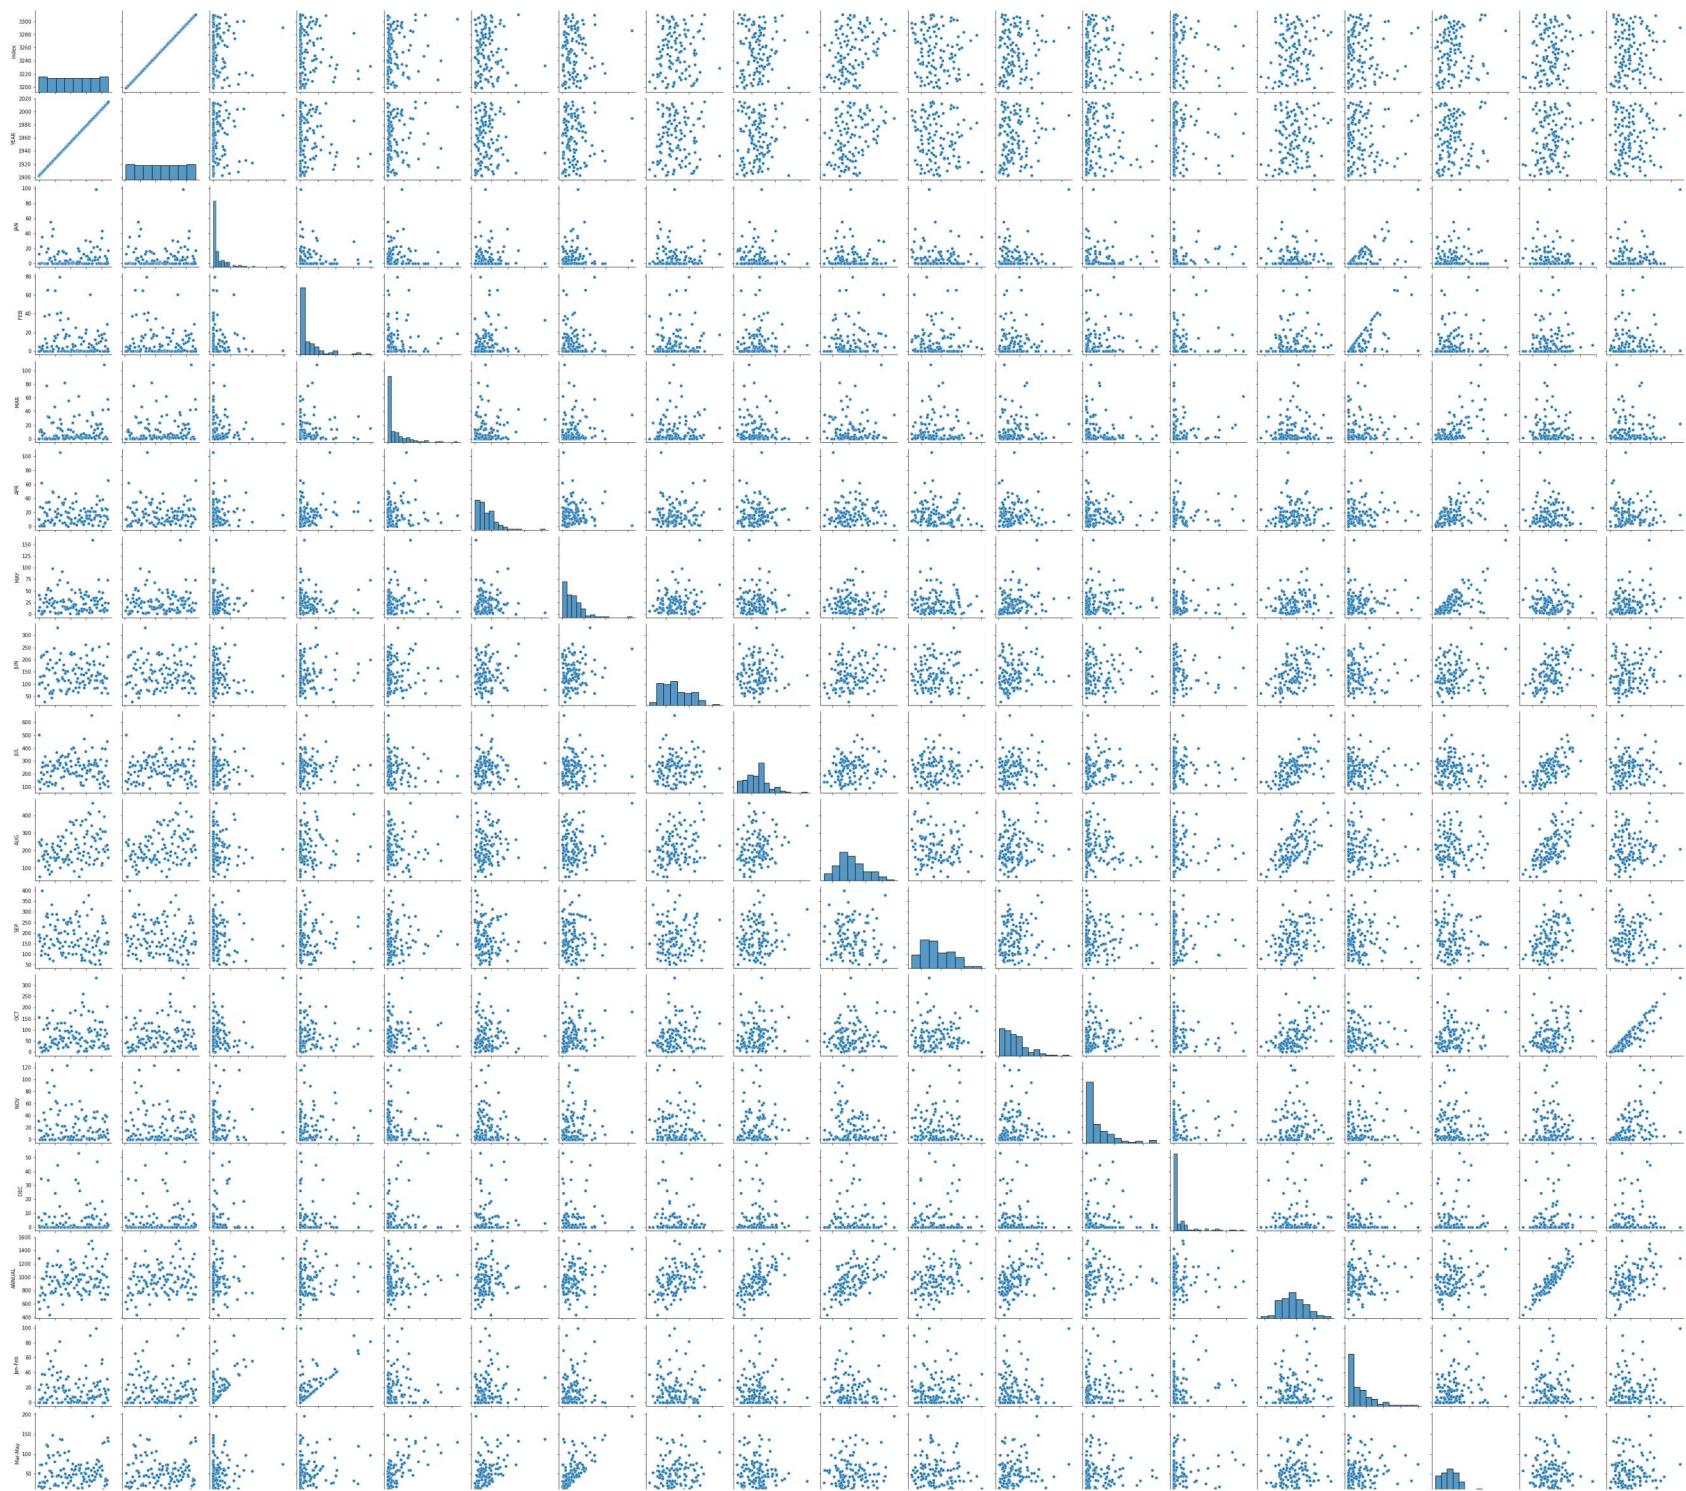


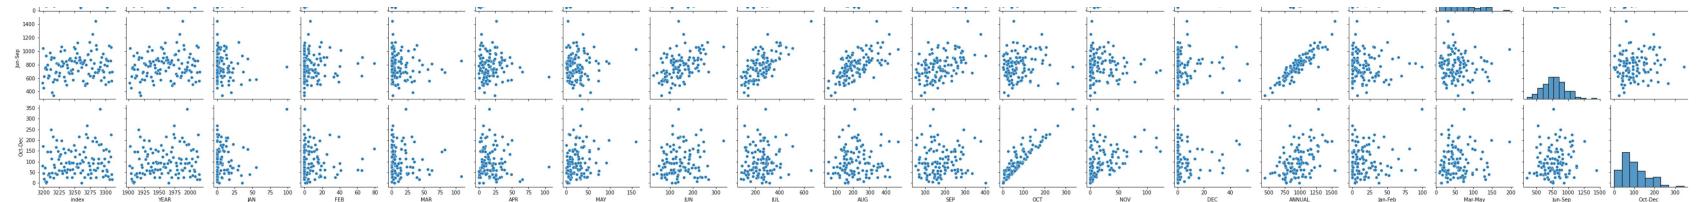


```
In [17]: 1 sns.distplot(df[ 'ANNUAL' ])
```

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).
warnings.warn(msg, FutureWarning)

```
Out[17]: <AxesSubplot:xlabel='ANNUAL', ylabel='Density'>
```

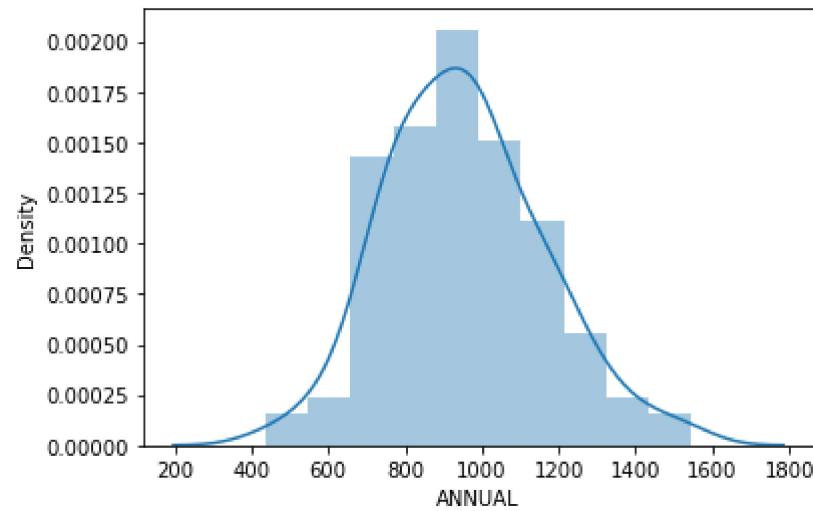

```
In [18]: 1 sns.heatmap(df.corr())
```

Out[18]: <AxesSubplot:>

