

Cucumber Report

12-Apr-2024, 10:30:04 am

Start : Apr 12, 10:28:21.549 am

End : Apr 12, 10:30:03.953 am

Duration : 1 m 42.404 s

Features

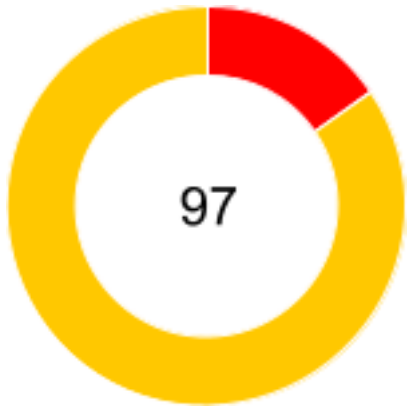
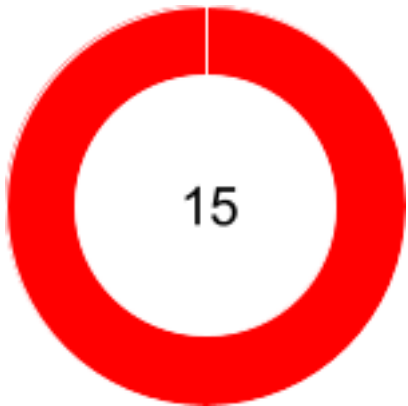
Scenarios

Steps

PASSED - 0
FAILED - 4
SKIPPED - 0

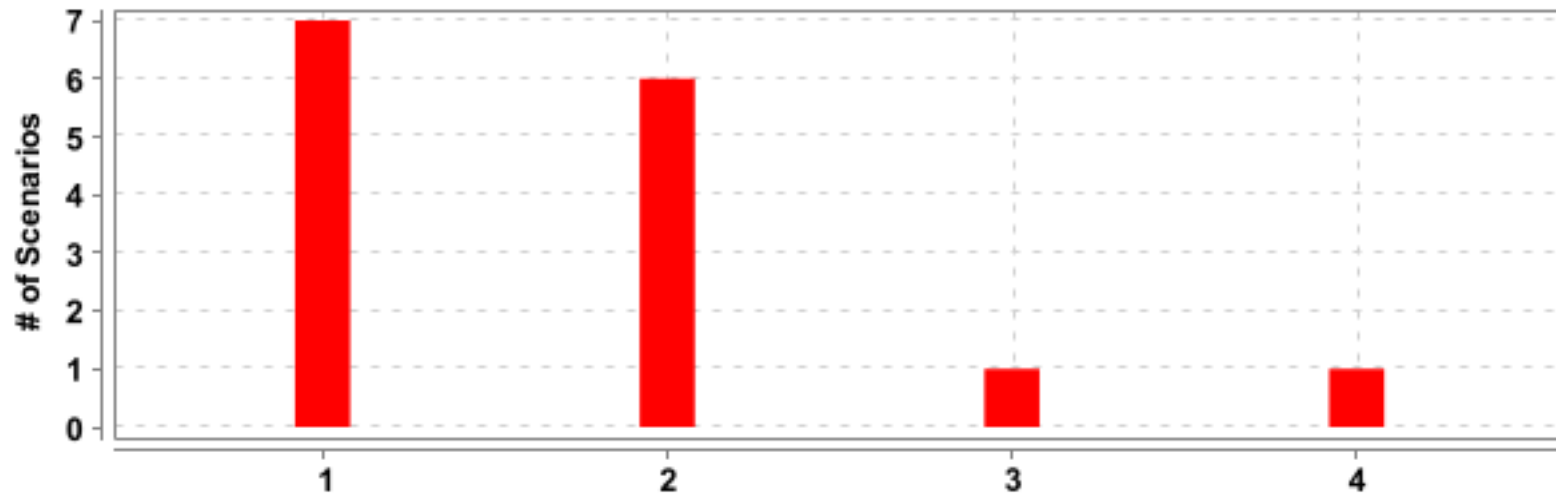
PASSED - 0
FAILED - 15
SKIPPED - 0

PASSED - 0
FAILED - 15
SKIPPED - 82

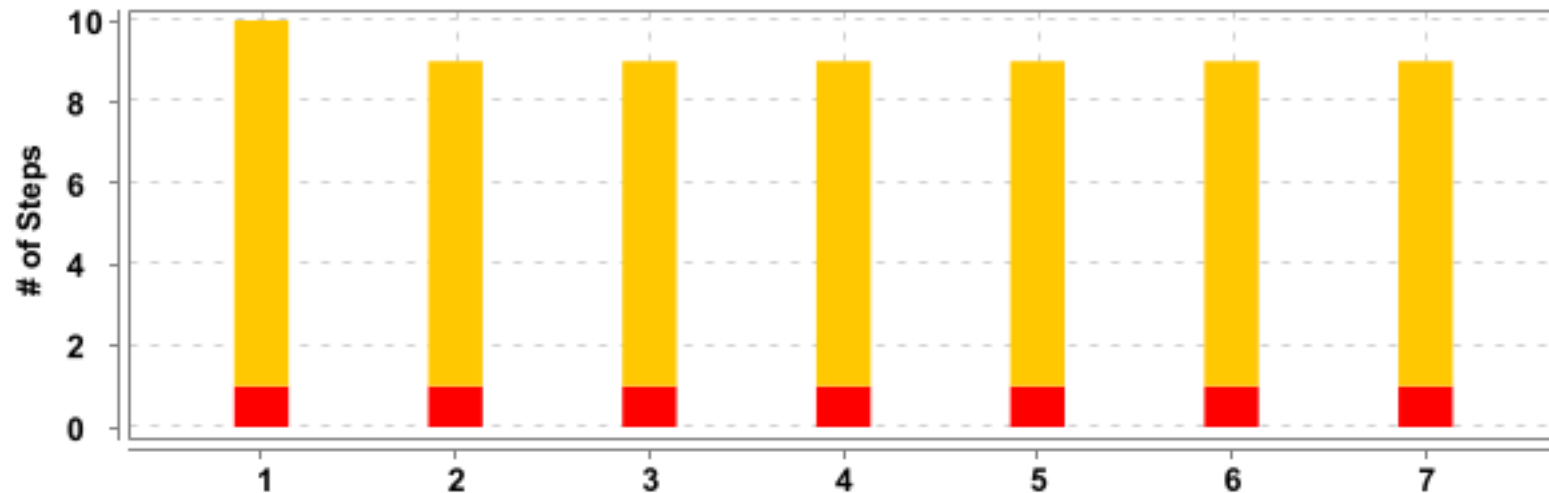


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Files Add Custom Folder and Uploading Files in it</u>	1 m 42.090 s	7	0	7	0	64	0	7	57
<u>PersonalVault General Legal Information of Uploading Different file types</u>	0.202 s	6	0	6	0	28	0	6	22
<u>Google Search Page Title</u>	0.002 s	1	0	1	0	2	0	1	1
<u>Google Search</u>	0.002 s	1	0	1	0	3	0	1	2

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@pdf	1	0	1	0	1	0	1	0
@feature	13	0	13	0	2	0	2	0
@docx	1	0	1	0	1	0	1	0
@txt	1	0	1	0	1	0	1	0
@xlsx	1	0	1	0	1	0	1	0
@png	1	0	1	0	1	0	1	0
@jpg	1	0	1	0	1	0	1	0
@mp4	1	0	1	0	1	0	1	0
@tag0	1	0	1	0	1	0	1	0
@tag1	1	0	1	0	1	0	1	0
@tag2	1	0	1	0	1	0	1	0
@tag3	1	0	1	0	1	0	1	0
@tag4	1	0	1	0	1	0	1	0
@tag5	1	0	1	0	1	0	1	0

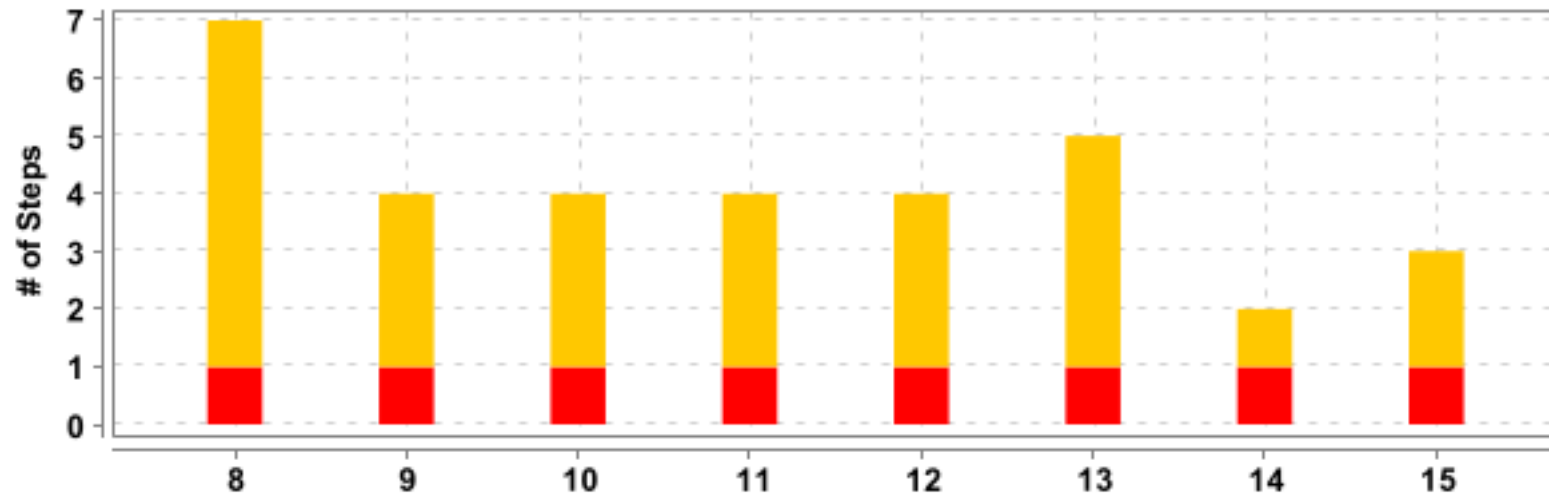


#	Feature Name	T	P	F	S	Duration
1	<u>Files Add Custom Folder and Uploading Files in it</u>	7	0	7	0	1 m 42.090 s
2	<u>PersonalVault General Legal Information of Uploading Different file types</u>	6	0	6	0	0.202 s
3	<u>Google Search Page Title</u>	1	0	1	0	0.002 s
4	<u>Google Search</u>	1	0	1	0	0.002 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload PDF Files of Small, Medium and Large init</u>	10	0	1	9	1 m 41.692 s
2	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload DOCX Files of Small, Medium and Large init</u>	9	0	1	8	0.065 s
3	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload TXT Files of Small, Medium and Large init</u>	9	0	1	8	0.020 s
4	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload XLSX Files of Small, Medium and Large init</u>	9	0	1	8	0.017 s
5	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload PNG Files of Small, Medium and Large init</u>	9	0	1	8	0.017 s
6	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload JPG Files of Small, Medium and Large init</u>	9	0	1	8	0.019 s
7	<u>Files Add Custom Folder and Uploading Files in it</u>	<u>Add a Custom Folder and Upload MP4 Files of Small, Medium and Large init</u>	9	0	1	8	0.017 s

* The feature name and/or scenario name has been cropped to fit in the available space.





#	Feature Name	Scenario Name	T	P	F	S	Duration
8	<u>PersonalVault General Legal Information of Uploading Different file *</u>	<u>General Legal upload PNG file upload</u>	7	0	1	6	0.010 s
9	<u>PersonalVault General Legal Information of Uploading Different file *</u>	<u>General Legal upload PDF file upload</u>	4	0	1	3	0.025 s
10	<u>PersonalVault General Legal Information of Uploading Different file *</u>	<u>General Legal upload JPG file upload</u>	4	0	1	3	0.011 s
11	<u>PersonalVault General Legal Information of Uploading Different file *</u>	<u>General Legal upload XLSX file upload</u>	4	0	1	3	0.011 s
12	<u>PersonalVault General Legal Information of Uploading Different file *</u>	<u>General Legal upload JPEG file upload</u>	4	0	1	3	0.010 s
13	<u>PersonalVault General Legal Information of Uploading Different file *</u>	<u>General Legal upload TXT file upload</u>	5	0	1	4	0.011 s
14	<u>Google Search Page Title</u>	<u>Verify Google Page Title</u>	2	0	1	1	0.002 s

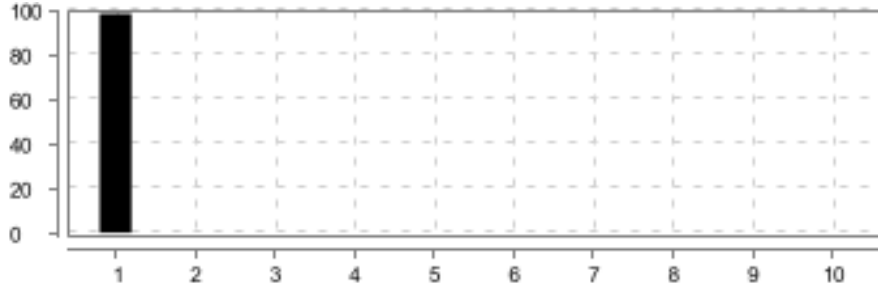

* The feature name and/or scenario name has been cropped to fit in the available space.

#	Feature Name	Scenario Name	T	P	F	S	Duration
15	<u>Google Search</u>	<u>Verify Google Title in Chrome</u>	3	0	1	2	0.002 s

Files Add Custom Folder and Uploading Files in it

FAILED	DURATION - 1 m 42.090 s	Scenarios Total - 7 Pass - 0 Fail - 7 Skip - 0		Steps Total - 64 Pass - 0 Fail - 7 Skip - 57	
/ 10:28:21.549 am // 10:30:03.639 am /					

Add a Custom Folder and Upload PDF Files of Small, Medium and Large init

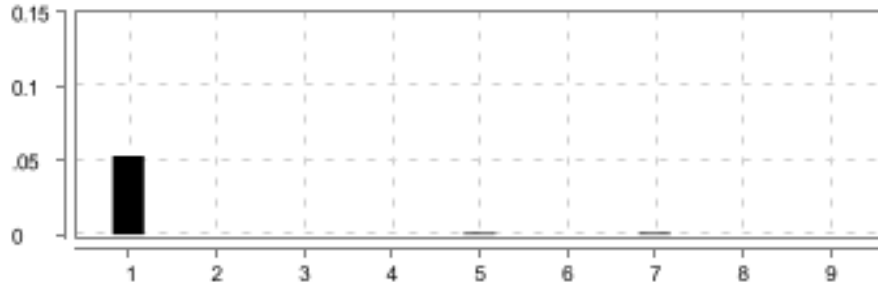

FAILED	DURATION - 1 m 41.692 s		Steps Total - 10 Pass - 0 Fail - 1 Skip - 9	
/ 10:28:21.551 am // 10:30:03.243 am /				
Files Add Custom Folder and Uploading Files in it				
@pdf @feature				

#	Step / Hook Details	Status	Duration				
1	<div>Given User is already logged in to application</div> <table><tr><td>username</td><td>password</td></tr><tr><td>ashokmarch12@yopmail.com</td><td>Password@123</td></tr></table> <div>org.openqa.selenium.WebDriverException: Failed to decode response from marionette Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[text()='Log In']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</div>	username	password	ashokmarch12@yopmail.com	Password@123	FAILED	1 m 38.268 s
username	password						
ashokmarch12@yopmail.com	Password@123						

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.qa.Utills.WebDriverWaits.waitForElementToBeClickable(WebDriverWaits.java:36) at com.Pages.LoginPage.doLogin(LoginPage.java:76) at parallel.AccountsPageSteps.user_is_already_logged_in_to_application(AccountsPageSteps.java:41) at ?.User is already logged in to application(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:7) * Not displayable characters are replaced by '?'. </pre>		
2	Given the User clicks on Family Access Files	SKIPPED	0.000 s
3	When the User clicks on Add Folder	SKIPPED	0.000 s
4	And the User enters the folder name into Folder name field	SKIPPED	0.000 s
5	And the User clicks on the Add button	SKIPPED	0.001 s
6	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.001 s
7	And the User clicks on close user guide	SKIPPED	0.000 s
8	And the User verifies the added custom folder	SKIPPED	0.000 s
9	And the User clicks and opens the folder	SKIPPED	0.000 s
10	And User uploads PDF file into the that specific folder	SKIPPED	0.001 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session </pre>	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<p>ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936</p> <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45) </pre>		

Add a Custom Folder and Upload DOCX Files of Small, Medium and Large init

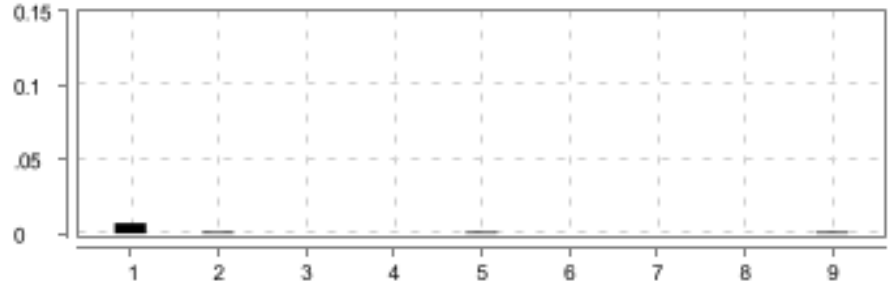

FAILED	DURATION - 0.065 s		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 10:30:03.322 am // 10:30:03.387 am /				
Files Add Custom Folder and Uploading Files in it				
@feature @docx				

#	Step / Hook Details	Status	Duration
1	<p>Given the User clicks on Family Access Files</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/span[contains(text(),'Family Access Files')]] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 </pre>	FAILED	0.053 s

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.Pages.AddCustomFolder.clickOnFamilyAccessFiles(AddCustomFolder.java:54) at parallel.AddCustomFolderSteps.the_user_clicks_on_family_access_files(AddCustomFolderSteps.java:38) at ?.the User clicks on Family Access Files(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:24) * Not displayable characters are replaced by '?'. </pre>		
2	When the User clicks on Add Folder	SKIPPED	0.000 s
3	And the User enters the folder name into Folder name field	SKIPPED	0.000 s
4	And the User clicks on the Add button	SKIPPED	0.000 s
5	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.001 s
6	And the User clicks on close user guide	SKIPPED	0.000 s
7	And the User verifies the added custom folder	SKIPPED	0.001 s
8	And the User clicks and opens the folder	SKIPPED	0.000 s
9	And User uploads DOCX file into the that specific folder	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.004 s
	<pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: </pre>		

#	Step / Hook Details	Status	Duration
	<p>127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)</p>		

Add a Custom Folder and Upload TXT Files of Small, Medium and Large init

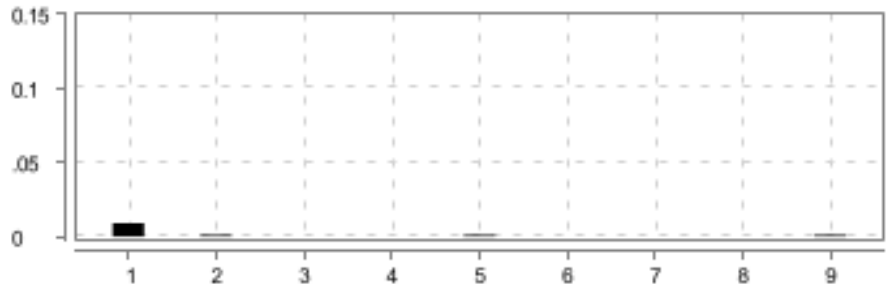

<div>FAILED</div> <div>DURATION - 0.020 s</div>		<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	<div></div>
<div>/ 10:30:03.429 am // 10:30:03.449 am /</div>				
<div>Files Add Custom Folder and Uploading Files in it</div>				
<div>@txt @feature</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given the User clicks on Family Access Files</p> <p>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/span[contains(text(),'Family Access Files')]] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0,</p>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<pre> moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.Pages.AddCustomFolder.clickOnFamilyAccessFiles(AddCustomFolder.java:54) at parallel.AddCustomFolderSteps.the_user_clicks_on_family_access_files(AddCustomFolderSteps.java:38) at ?.the User clicks on Family Access Files(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:37) * Not displayable characters are replaced by '?'. </pre>		
2	When the User clicks on Add Folder	SKIPPED	0.001 s
3	And the User enters the folder name into Folder name field	SKIPPED	0.000 s
4	And the User clicks on the Add button	SKIPPED	0.000 s
5	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.001 s
6	And the User clicks on close user guide	SKIPPED	0.000 s
7	And the User verifies the added custom folder	SKIPPED	0.000 s
8	And the User clicks and opens the folder	SKIPPED	0.000 s
9	And User uploads TXT file into the that specific folder	SKIPPED	0.001 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<p>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedic4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedic4-79f6-4c43-bc0d-3e02997e6936</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)</p>		

Add a Custom Folder and Upload XLSX Files of Small, Medium and Large init

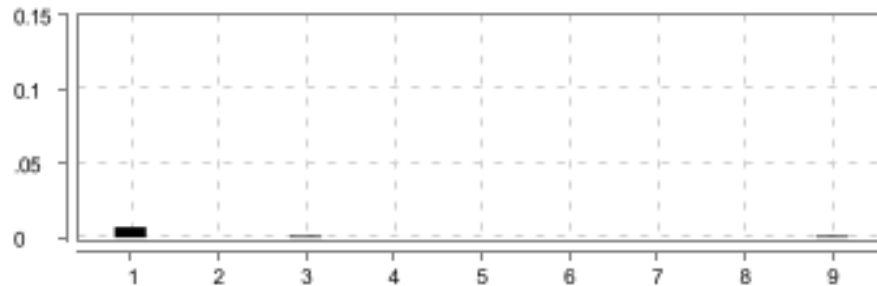

FAILED	DURATION - 0.017 s		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 10:30:03.479 am // 10:30:03.496 am /				
Files Add Custom Folder and Uploading Files in it				
@xlsx @feature				

#	Step / Hook Details	Status	Duration
1	Given the User clicks on Family Access Files	FAILED	0.009 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision:		

#	Step / Hook Details	Status	Duration
	<p>'9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/span[contains(text(),'Family Access Files')]] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.Pages.AddCustomFolder.clickOnFamilyAccessFiles(AddCustomFolder.java:54) at parallel.AddCustomFolderSteps.the_user_clicks_on_family_access_files(AddCustomFolderSteps.java:38) at ?.the User clicks on Family Access Files(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:50) * Not displayable characters are replaced by '?'. </p>		
2	When the User clicks on Add Folder	SKIPPED	0.001 s
3	And the User enters the folder name into Folder name field	SKIPPED	0.000 s
4	And the User clicks on the Add button	SKIPPED	0.000 s
5	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.001 s
6	And the User clicks on close user guide	SKIPPED	0.000 s
7	And the User verifies the added custom folder	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	And the User clicks and opens the folder	SKIPPED	0.000 s
9	And User uploads XLSX file into the that specific folder	SKIPPED	0.001 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)</p>	FAILED	0.004 s

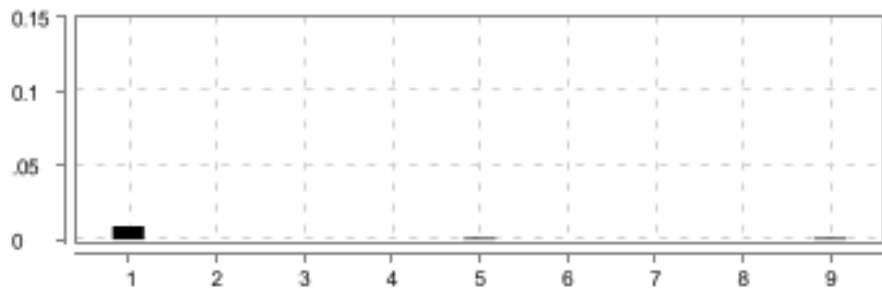

Add a Custom Folder and Upload PNG Files of Small, Medium and Large init

FAILED	DURATION - 0.017 s		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 10:30:03.526 am // 10:30:03.543 am /				
Files Add Custom Folder and Uploading Files in it				
@png @feature				

#	Step / Hook Details	Status	Duration
1	<p>Given the User clicks on Family Access Files</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/span[contains(text(),'Family Access Files')]]] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.Pages.AddCustomFolder.clickOnFamilyAccessFiles(AddCustomFolder.java:54) at parallel.AddCustomFolderSteps.the_user_clicks_on_family_access_files(AddCustomFolderSteps.java:38) at ?.the User clicks on Family Access Files(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:63) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.007 s
2	When the User clicks on Add Folder	SKIPPED	0.000 s
3	And the User enters the folder name into Folder name field	SKIPPED	0.001 s
4	And the User clicks on the Add button	SKIPPED	0.000 s
5	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
6	And the User clicks on close user guide	SKIPPED	0.000 s
7	And the User verifies the added custom folder	SKIPPED	0.000 s
8	And the User clicks and opens the folder	SKIPPED	0.000 s
9	And User uploads PNG file into the that specific folder	SKIPPED	0.001 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)</p>	FAILED	0.004 s

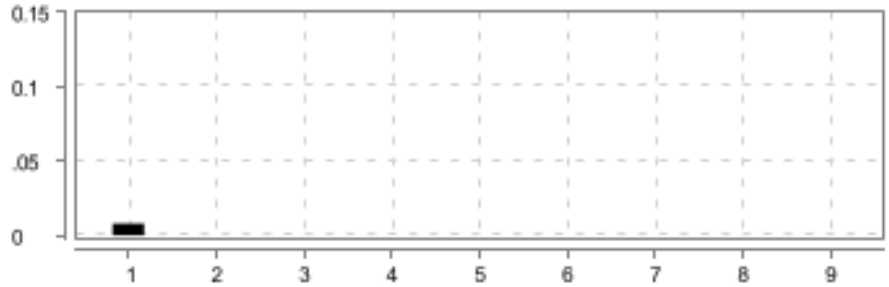

Add a Custom Folder and Upload JPG Files of Small, Medium and Large init

FAILED	DURATION - 0.019 s		<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	
/ 10:30:03.576 am // 10:30:03.595 am /				
Files Add Custom Folder and Uploading Files in it				
@jpg @feature				

#	Step / Hook Details	Status	Duration
1	<p>Given the User clicks on Family Access Files</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/span[contains(text(),'Family Access Files')]] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204)</pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	at com.Pages.AddCustomFolder.clickOnFamilyAccessFiles(AddCustomFolder.java:54) at parallel.AddCustomFolderSteps.the_user_clicks_on_family_access_files(AddCustomFolderSteps.java:38) at ?.the User clicks on Family Access Files(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:76) * Not displayable characters are replaced by '?'.		
2	When the User clicks on Add Folder	SKIPPED	0.000 s
3	And the User enters the folder name into Folder name field	SKIPPED	0.000 s
4	And the User clicks on the Add button	SKIPPED	0.000 s
5	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.001 s
6	And the User clicks on close user guide	SKIPPED	0.000 s
7	And the User verifies the added custom folder	SKIPPED	0.000 s
8	And the User clicks and opens the folder	SKIPPED	0.000 s
9	And User uploads JPG file into the that specific folder	SKIPPED	0.001 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)	FAILED	0.004 s

Add a Custom Folder and Upload MP4 Files of Small, Medium and Large init



FAILED	DURATION - 0.017 s		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 10:30:03.622 am // 10:30:03.639 am /				
Files Add Custom Folder and Uploading Files in it				
@mp4 @feature				

#	Step / Hook Details	Status	Duration
1	<p>Given the User clicks on Family Access Files</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/span[contains(text(),'Family Access Files')]] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627)</pre>	FAILED	0.008 s

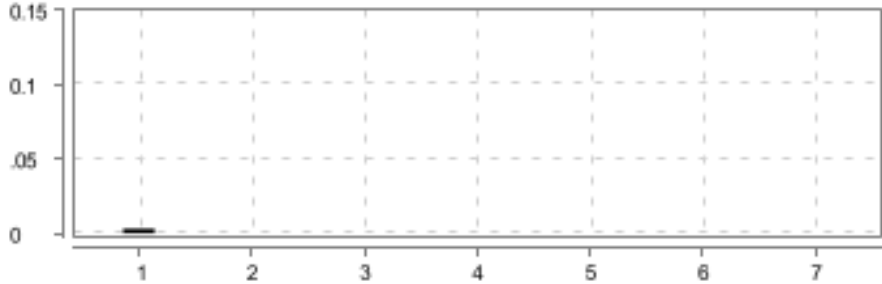

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.Pages.AddCustomFolder.clickOnFamilyAccessFiles(AddCustomFolder.java:54) at parallel.AddCustomFolderSteps.the_user_clicks_on_family_access_files(AddCustomFolderSteps.java:38) at ?.the User clicks on Family Access Files(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/AddCustomFolder_Files.feature:89) * Not displayable characters are replaced by '?'.		
2	When the User clicks on Add Folder	SKIPPED	0.000 s
3	And the User enters the folder name into Folder name field	SKIPPED	0.000 s
4	And the User clicks on the Add button	SKIPPED	0.000 s
5	Then the User should see a success popup with the message "added successfully"	SKIPPED	0.000 s
6	And the User clicks on close user guide	SKIPPED	0.000 s
7	And the User verifies the added custom folder	SKIPPED	0.000 s
8	And the User clicks and opens the folder	SKIPPED	0.000 s
9	And User uploads MP4 file into the that specific folder	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600)	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)		

PersonalVault General Legal Information of Uploading Different file types

FAILED	DURATION - 0.202 s	Scenarios Total - 6 Pass - 0 Fail - 6 Skip - 0		Steps Total - 28 Pass - 0 Fail - 6 Skip - 22	
/ 10:30:03.669 am // 10:30:03.871 am /					

General Legal upload PNG file upload

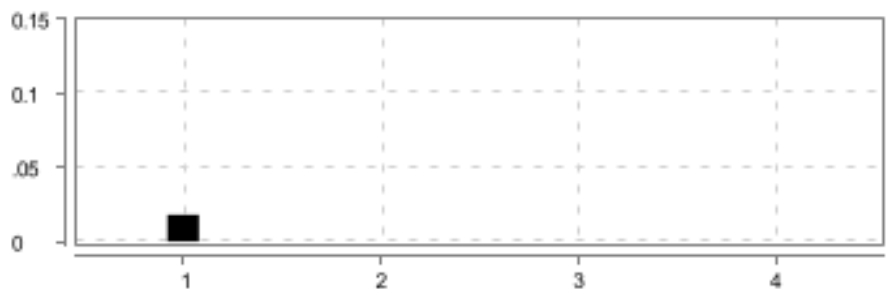

FAILED	DURATION - 0.010 s		Steps Total - 7 Pass - 0 Fail - 1 Skip - 6	
/ 10:30:03.671 am // 10:30:03.681 am /				
PersonalVault General Legal Information of Uploading Different file types				
@feature @tag0				

#	Step / Hook Details	Status	Duration				
1	<div>Given User is already logged in to application</div> <table><tr><td>username</td><td>password</td></tr><tr><td>ashokmarch12@yopmail.com</td><td>Password@123</td></tr></table> <div>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, get {url=https://familycentral.com}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</div>	username	password	ashokmarch12@yopmail.com	Password@123	FAILED	0.003 s
username	password						
ashokmarch12@yopmail.com	Password@123						

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:305) at parallel.AccountsPageSteps.user_is_already_logged_in_to_application(AccountsPageSteps.java:38) at ?.User is already logged in to application(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/PersonalVault_GeneralLegal.feature:12) * Not displayable characters are replaced by '?'. </pre>		
2	When User clicks on personal vault	SKIPPED	0.000 s
3	And User navigates to smstome website	SKIPPED	0.000 s
4	When user clicks on general legal information	SKIPPED	0.000 s
5	And user clicks on add option	SKIPPED	0.000 s
6	And user clicks on upload file	SKIPPED	0.000 s
7	Then User should see the "File Uploaded Successfully" Message	SKIPPED	0.000 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45) </pre>		

General Legal upload PDF file upload

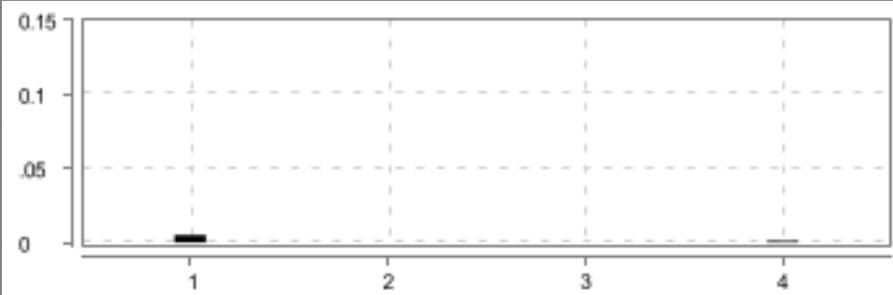

FAILED	DURATION - 0.025 s		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
/ 10:30:03.720 am // 10:30:03.745 am /				
PersonalVault General Legal Information of Uploading Different file types				
@feature @tag1				

#	Step / Hook Details	Status	Duration
1	When User clicks on personal vault <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/child::span[text()='Personal Vault']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) </pre>	FAILED	0.018 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.qa.Utills.WebDriverWaits.waitForElementToBeClickable(WebDriverWaits.java:36) at com.Pages.PersonalVault_ShareUploadLink.clickonPersonalvault(PersonalVault_ShareUploadLink.java:72) at parallel.PersonalVault_ShareUploadLinkSteps.user_clicks_on_personal_vault(PersonalVault_ShareUploadLinkSteps.java:19) at ?.User clicks on personal vault(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/PersonalVault_GeneralLegal.feature:25) * Not displayable characters are replaced by '?'. </pre>		
2	And user clicks on add option	SKIPPED	0.000 s
3	And user clicks on upload file1	SKIPPED	0.000 s
4	Then User should see the "Uploaded Successfully" Message	SKIPPED	0.000 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45) </pre>		

General Legal upload JPG file upload

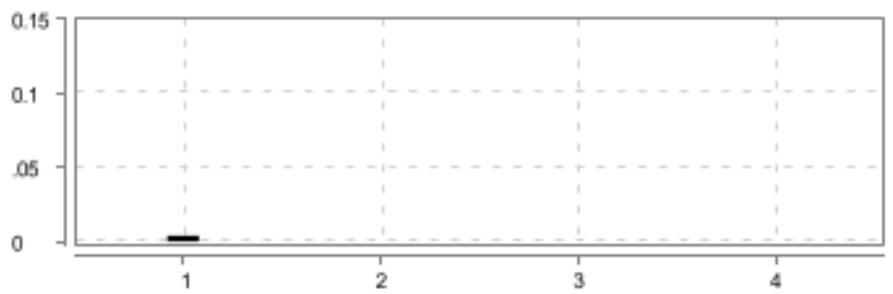

<div>FAILED</div> <div>DURATION - 0.011 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 10:30:03.764 am // 10:30:03.775 am /				
PersonalVault General Legal Information of Uploading Different file types				
@feature @tag2				

#	Step / Hook Details	Status	Duration
1	When User clicks on personal vault <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aadc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/child::span[text()='Personal Vault']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aadc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) </pre>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.qa.Utills.WebDriverWaits.waitForElementToBeClickable(WebDriverWaits.java:36) at com.Pages.PersonalVault_ShareUploadLink.clickonPersonalvault(PersonalVault_ShareUploadLink.java:72) at parallel.PersonalVault_ShareUploadLinkSteps.user_clicks_on_personal_vault(PersonalVault_ShareUploadLinkSteps.java:19) at ?.User clicks on personal vault(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/PersonalVault_GeneralLegal.feature:34) * Not displayable characters are replaced by '?'. </pre>		
2	And user clicks on add option	SKIPPED	0.000 s
3	And user clicks on upload file2	SKIPPED	0.000 s
4	Then User should see the "Uploaded Successfully" Message	SKIPPED	0.001 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) </pre>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)</pre>		

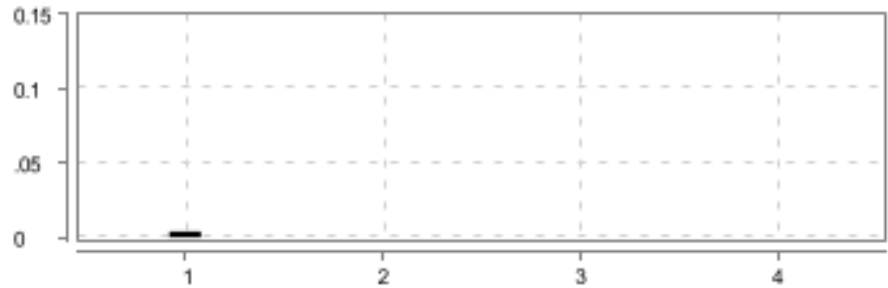

General Legal upload XLSX file upload

<div>FAILED</div> <div>DURATION - 0.011 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 10:30:03.795 am // 10:30:03.806 am /				
PersonalVault General Legal Information of Uploading Different file types				
@tag3 @feature				

#	Step / Hook Details	Status	Duration
1	When User clicks on personal vault <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/child::span[text()='Personal Vault']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360)</pre>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.qa.Utils.WebDriverWaits.waitForElementToBeClickable(WebDriverWaits.java:36) at com.Pages.PersonalVault_ShareUploadLink.clickonPersonalvault(PersonalVault_ShareUploadLink.java:72) at parallel.PersonalVault_ShareUploadLinkSteps.user_clicks_on_personal_vault(PersonalVault_ShareUploadLinkSteps.java:19) at ?.User clicks on personal vault(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/PersonalVault_GeneralLegal.feature:43) * Not displayable characters are replaced by '?'. </pre>		
2	And user clicks on add option	SKIPPED	0.000 s
3	And user clicks on upload file2	SKIPPED	0.000 s
4	Then User should see the "Uploaded Successfully" Message	SKIPPED	0.000 s
	<p>AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45) </pre>	FAILED	0.004 s

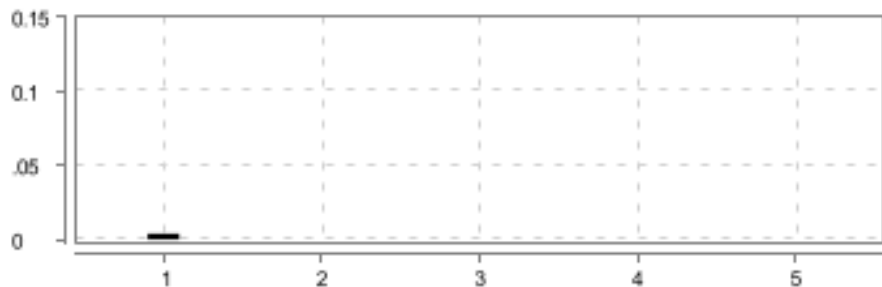

General Legal upload JPEG file upload

<div>FAILED</div> <div>DURATION - 0.010 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 10:30:03.828 am // 10:30:03.838 am /				
PersonalVault General Legal Information of Uploading Different file types				
@tag4 @feature				

#	Step / Hook Details	Status	Duration
1	When User clicks on personal vault org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/child::span[text()='Personal Vault']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624)	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.qa.Utills.WebDriverWaits.waitForElementToBeClickable(WebDriverWaits.java:36) at com.Pages.PersonalVault_ShareUploadLink.clickonPersonalvault(PersonalVault_ShareUploadLink.java:72) at parallel.PersonalVault_ShareUploadLinkSteps.user_clicks_on_personal_vault(PersonalVault_ShareUploadLinkSteps.java:19) at ?.User clicks on personal vault(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/PersonalVault_GeneralLegal.feature:52) * Not displayable characters are replaced by '?'.		
2	And user clicks on add option	SKIPPED	0.000 s
3	And user clicks on upload file4	SKIPPED	0.000 s
4	Then User should see the "Uploaded Successfully" Message	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)	FAILED	0.003 s



General Legal upload TXT file upload

<div>FAILED</div> <div>DURATION - 0.011 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
<div>/ 10:30:03.860 am // 10:30:03.871 am /</div>				
<div>PersonalVault General Legal Information of Uploading Different file types</div>				
<div>@tag5 @feature</div>				



#	Step / Hook Details	Status	Duration
1	When User clicks on personal vault <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, findElement {using=xpath, value=//a[@class='nav-link']/child::span[text()='Personal Vault']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:194) at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:190) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:627) at org.openqa.selenium.support.ui.ExpectedConditions\$22.apply(ExpectedConditions.java:624) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:204) at com.qa.Utills.WebDriverWaits.waitForElementToBeClickable(WebDriverWaits.java:36)</pre>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	at com.Pages.PersonalVault_ShareUploadLink.clickonPersonalvault(PersonalVault_ShareUploadLink.java:72) at parallel.PersonalVault_ShareUploadLinkSteps.user_clicks_on_personal_vault(PersonalVault_ShareUploadLinkSteps.java:19) at ?.User clicks on personal vault(file:///C:/Users/Ashok/eclipse-workspace/FamilyCentral_ProdCucumber/src/test/resources/dummyFeatures/PersonalVault_GeneralLegal.feature:61) * Not displayable characters are replaced by '?'.		
2	When user clicks on general legal information	SKIPPED	0.000 s
3	And user clicks on add option	SKIPPED	0.000 s
4	And user clicks on upload file5	SKIPPED	0.000 s
5	Then User should see the "Uploaded Successfully" Message	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [fe0aedc4-79f6-4c43-bc0d-3e02997e6936, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 124.0.2, moz:accessibilityChecks: false, moz:buildID: 20240401114208, moz:debuggerAddress: 127.0.0.1:22776, moz:geckodriverVersion: 0.34.0, moz:headless: false, moz:platformVersion: 10.0, moz:processID: 12636, moz:profile: C:\Users\Ashok\AppData\Loca..., moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://127.0.0.1:22776/devtoo..., se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: fe0aedc4-79f6-4c43-bc0d-3e02997e6936 atjdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)	FAILED	0.004 s

Google Search Page Title



FAILED	DURATION - 0.002 s	Scenarios		Steps	
/ 10:30:03.925 am // 10:30:03.927 am /		Total - 1	1	Total - 2	2
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	

Verify Google Page Title

<div>FAILED</div> <div>DURATION - 0.002 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 10:30:03.925 am // 10:30:03.927 am /				
Google Search Page Title				

#	Step / Hook Details	Status	Duration
1	Given I am on the Google Search page	FAILED	0.000 s
	Step undefined		
2	Then the page title should be "Google"	SKIPPED	0.000 s

Google Search

FAILED	DURATION - 0.002 s	Scenarios		Steps	
/ 10:30:03.951 am // 10:30:03.953 am /		Total - 1	1	Total - 3	3
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

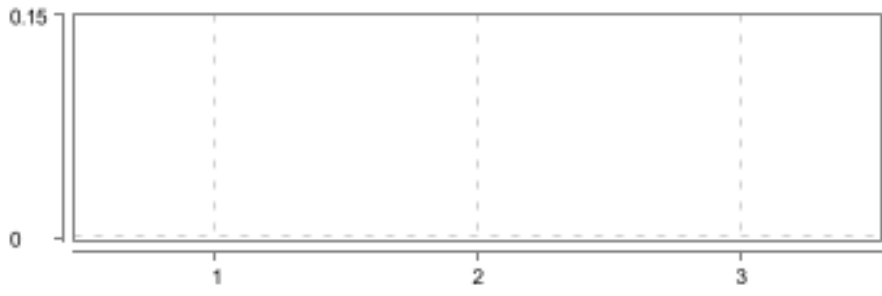
Verify Google Title in Chrome

FAILED

DURATION - 0.002 s

/ 10:30:03.951 am // 10:30:03.953 am /

Google Search




Steps

Total - 3

Pass - 0

Fail - 1

Skip - 2



#	Step / Hook Details	Status	Duration
1	Given I open Google Chrome browser	FAILED	0.000 s
	Step undefined		
2	When I navigate to the Google homepage	SKIPPED	0.000 s
3	Then I get the title of the page	SKIPPED	0.000 s