Cucumber Report

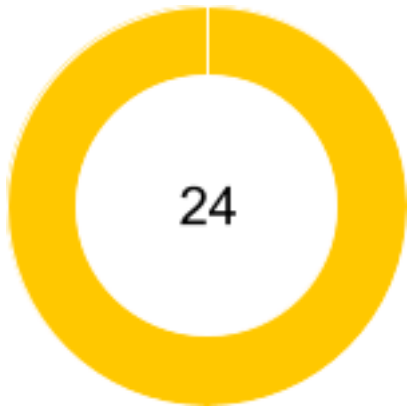| Start : Apr 10, 3:16:51.127 pm	End : Apr 10, 3:16:54.790 pm	Duration : 3.663 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 24

Features: 1

Scenarios: 1

Steps: 24

Pass %

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Emergency prep : world wide numbers , family health cards, emergency numbers feature	3.663 s	1	0	1	0	24	0	0	24

#	Feature Name	T	P	F	S	Duration
1	Emergency prep : world wide numbers , family health cards, emergency numbers feature	1	0	1	0	3.663 s
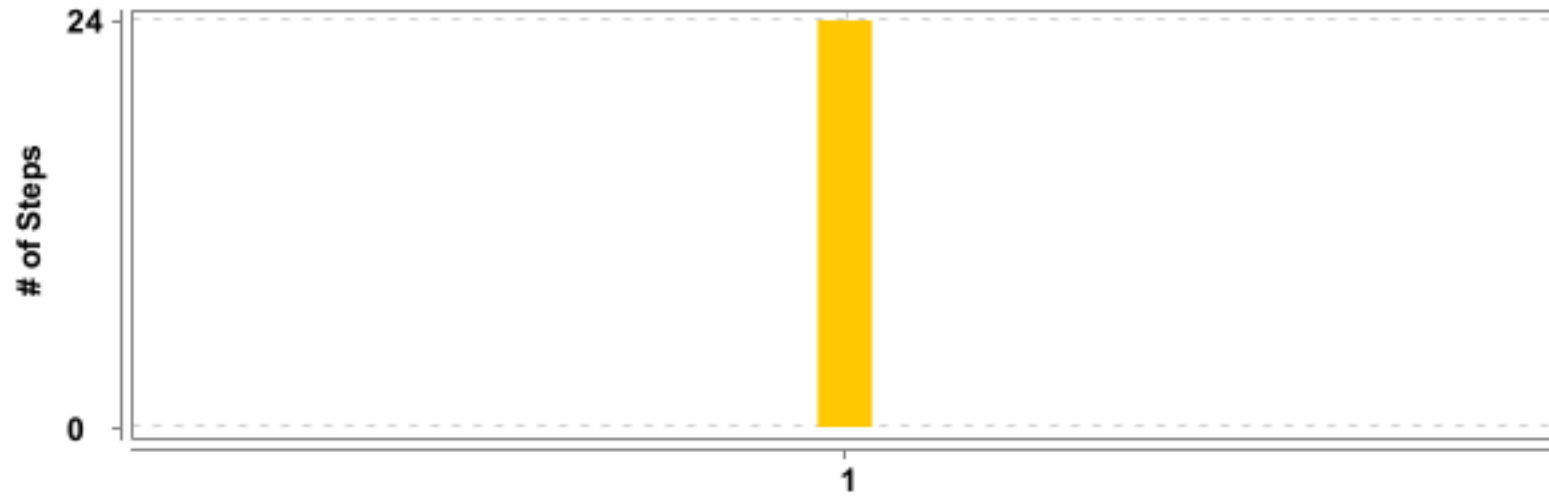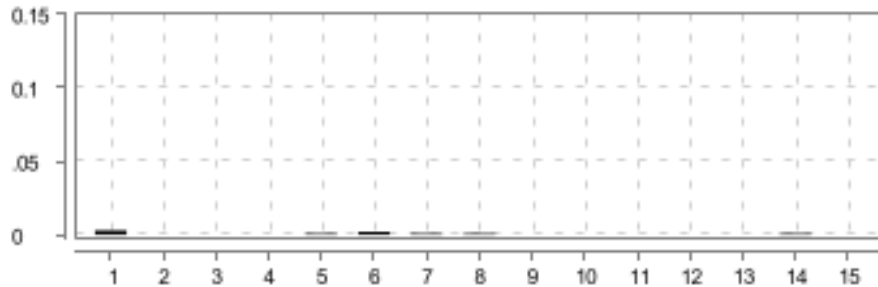
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Emergency prep : world wide numbers , family health cards, emergency *	Emergency prep : world wide numbers , family health cards, emergency numbers	24	0	0	24	3.659 s

Emergency prep : world wide numbers , family health cards, emergency numbers feature

FAILED	DURATION - 3.663 s		Scenarios		Steps	
			Total - 1		Total - 24	
/ 3:16:51.127 pm // 3:16:54.790 pm /			Pass - 0	1	Pass - 0	24
			Fail - 1		Fail - 0	
			Skip - 0		Skip - 24	

Emergency prep : world wide numbers , family health cards, emergency numbers

FAILED	DURATION - 3.659 s			Steps	
/ 3:16:51.131 pm // 3:16:54.790 pm /				Total - 24	
Emergency prep : world wide numbers , family health cards, emergency numbers feature				Pass - 0	24
				Fail - 0	
				Skip - 24	

#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.LaunchBrowser()	FAILED	3.610 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Failed to decode response from marionette Host info: host: 'DESKTOP-DEE9V3N', ip: '192.168.200.87' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os. name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {binary: C:\Program Files\Mozilla Fi..., prefs: {media.navigator.streams.fake: true}}}]}]
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)
	  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237)
	  at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164)
	  at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157)
	  at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152)
	  at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:35) at AppHooks.ApplicationHooks.LaunchBrowser(ApplicationHooks.java:37)		
1	Given User is already logged in to application 	username	password
ashokmarch12@yopmail.com	Password@123		SKIPPED	0.003 s
2	When user click on emergency prep and add the folder	SKIPPED	0.000 s
3	When user clicks on the Emergency Prep	SKIPPED	0.000 s
4	Then user clicks on the Worldwide Emergency phone numbers	SKIPPED	0.000 s
5	Then user clicks on the Search option	SKIPPED	0.001 s
6	When user click on emergency prep	SKIPPED	0.002 s
7	Then user clicks on family health cards	SKIPPED	0.001 s
8	And user clicks on add details	SKIPPED	0.001 s
9	Then user enters the height	SKIPPED	0.000 s
10	And user enters the weight	SKIPPED	0.000 s
11	And user enters the blood group	SKIPPED	0.000 s
12	And user enters the medical conditions	SKIPPED	0.000 s
13	And user enters the allergies	SKIPPED	0.000 s
14	And user enters the medications	SKIPPED	0.001 s
15	Then user clicks on save	SKIPPED	0.000 s
16	And user edits the familyhealthcard details	SKIPPED	0.000 s
17	When user click on emergency prep	SKIPPED	0.001 s
18	When user clicks on emergency phone numbers	SKIPPED	0.000 s
19	Then user clicks on add contact	SKIPPED	0.000 s
20	Then user enters the first name	SKIPPED	0.001 s
21	And user enters the last name	SKIPPED	0.000 s
22	Then user enters the phone number	SKIPPED	0.000 s
23	And user enters the email	SKIPPED	0.000 s
24	Then user clicks on save option	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because "this.driver" is null at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:45)	FAILED	0.011 s