```
In [1]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

Out[2]:

index		SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
0	0	ANDAMAN & NICOBAR ISLANDS	1901	49.2	87.1	29.2	2.3	528.8	517.5	365.1	481.1	332.6
1	1	ANDAMAN & NICOBAR ISLANDS	1902	0.0	159.8	12.2	0.0	446.1	537.1	228.9	753.7	666.2
2	ANDAMAN & 2 2 NICOBAR ISLANDS		1903	12.7	144.0	0.0	1.0	235.1	479.9	728.4	326.7	339.0
3	ANDAMAN 3 3 NICOB, ISLANI		1904	9.4	14.7	0.0	202.4	304.5	495.1	502.0	160.1	820.4
4	4	ANDAMAN & NICOBAR ISLANDS	1905	1.3	0.0	3.3	26.9	279.5	628.7	368.7	330.5	297.0
4111	4111	LAKSHADWEEP	2011	5.1	2.8	3.1	85.9	107.2	153.6	350.2	254.0	255.2
4112	4112	LAKSHADWEEP	2012	19.2	0.1	1.6	76.8	21.2	327.0	231.5	381.2	179.8
4113	4113	LAKSHADWEEP	2013	26.2	34.4	37.5	5.3	88.3	426.2	296.4	154.4	180.0
4114	4114	LAKSHADWEEP	2014	53.2	16.1	4.4	14.9	57.4	244.1	116.1	466.1	132.2
4115	4115	LAKSHADWEEP	2015	2.2	0.5	3.7	87.1	133.1	296.6	257.5	146.4	160.4
4116 r	ows ×	20 columns										

Naga Mizo tripura

In [3]: df=data.iloc[782:897]
 df

Out[3]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OC.
782	782	JHARKHAND	1901	92.7	66.6	11.1	18.4	33.5	70.9	269.4	415.1	248.0	37.
783	783	JHARKHAND	1902	4.2	7.7	13.2	28.5	59.8	89.9	456.1	204.9	306.6	17.
784	784	JHARKHAND	1903	25.1	19.5	10.7	32.8	56.4	142.1	206.1	280.8	190.2	210.
785	785	JHARKHAND	1904	2.5	17.0	38.1	9.1	116.1	308.9	494.1	336.1	125.6	30.
786	786	JHARKHAND	1905	38.4	53.3	61.6	32.9	66.2	41.5	420.3	293.7	322.8	21.
		•••											
892	892	JHARKHAND	2011	3.3	2.5	6.4	25.4	55.0	349.0	181.8	403.2	324.6	23.
893	893	JHARKHAND	2012	34.6	10.3	1.5	9.6	6.6	121.1	287.2	282.4	217.6	37.
894	894	JHARKHAND	2013	1.1	17.9	1.6	22.3	85.0	181.5	211.1	278.1	173.8	281.
895	895	JHARKHAND	2014	9.9	47.5	22.9	1.9	98.2	139.7	321.3	290.9	178.2	44.
896	896	JHARKHAND	2015	12.2	2.6	21.6	55.5	25.5	183.3	429.7	240.7	85.1	22.

115 rows × 20 columns

In [4]: | df.head()

Out[4]:

		index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OC.
7	782	782	JHARKHAND	1901	92.7	66.6	11.1	18.4	33.5	70.9	269.4	415.1	248.0	37.
7	783	783	JHARKHAND	1902	4.2	7.7	13.2	28.5	59.8	89.9	456.1	204.9	306.6	17.
7	784	784	JHARKHAND	1903	25.1	19.5	10.7	32.8	56.4	142.1	206.1	280.8	190.2	210.
7	785	785	JHARKHAND	1904	2.5	17.0	38.1	9.1	116.1	308.9	494.1	336.1	125.6	30.
7	786	786	JHARKHAND	1905	38.4	53.3	61.6	32.9	66.2	41.5	420.3	293.7	322.8	21.
4														•

```
In [5]: df.tail()
```

Out[5]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
892	892	JHARKHAND	2011	3.3	2.5	6.4	25.4	55.0	349.0	181.8	403.2	324.6	23.3
893	893	JHARKHAND	2012	34.6	10.3	1.5	9.6	6.6	121.1	287.2	282.4	217.6	37.8
894	894	JHARKHAND	2013	1.1	17.9	1.6	22.3	85.0	181.5	211.1	278.1	173.8	281.1
895	895	JHARKHAND	2014	9.9	47.5	22.9	1.9	98.2	139.7	321.3	290.9	178.2	44.9
896	896	JHARKHAND	2015	12.2	2.6	21.6	55.5	25.5	183.3	429.7	240.7	85.1	22.7
4													•

In [6]: df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 782 to 896
Data columns (total 20 columns):

#	Column	Non-Null Count	Dtype
0	index	115 non-null	int64
1	SUBDIVISION	115 non-null	object
2	YEAR	115 non-null	int64
3	JAN	115 non-null	float64
4	FEB	115 non-null	float64
5	MAR	115 non-null	float64
6	APR	115 non-null	float64
7	MAY	115 non-null	float64
8	JUN	115 non-null	float64
9	JUL	115 non-null	float64
10	AUG	115 non-null	float64
11	SEP	115 non-null	float64
12	OCT	115 non-null	float64
13	NOV	115 non-null	float64
14	DEC	115 non-null	float64
15	ANNUAL	115 non-null	float64
16	Jan-Feb	115 non-null	float64
17	Mar-May	115 non-null	float64
18	Jun-Sep	115 non-null	float64
19	Oct-Dec	115 non-null	float64
dtyp	es: float64(1	7), int64(2), ob	ject(1)

memory usage: 18.1+ KB

In [7]: df1=data.fillna(0)
df1

Out[7]:

index		SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
0	0	ANDAMAN & NICOBAR ISLANDS	1901	49.2	87.1	29.2	2.3	528.8	517.5	365.1	481.1	332.6
1	1	ANDAMAN & NICOBAR ISLANDS	1902	0.0	159.8	12.2	0.0	446.1	537.1	228.9	753.7	666.2
2	2	ANDAMAN & NICOBAR ISLANDS	1903	12.7	144.0	0.0	1.0	235.1	479.9	728.4	326.7	339.0
3	3	ANDAMAN & NICOBAR ISLANDS	1904	9.4	14.7	0.0	202.4	304.5	495.1	502.0	160.1	820.4
4	4	ANDAMAN & NICOBAR ISLANDS	1905	1.3	0.0	3.3	26.9	279.5	628.7	368.7	330.5	297.0
4111	4111	LAKSHADWEEP	2011	5.1	2.8	3.1	85.9	107.2	153.6	350.2	254.0	255.2
4112	4112	LAKSHADWEEP	2012	19.2	0.1	1.6	76.8	21.2	327.0	231.5	381.2	179.8
4113	4113	LAKSHADWEEP	2013	26.2	34.4	37.5	5.3	88.3	426.2	296.4	154.4	180.0
4114	4114	LAKSHADWEEP	2014	53.2	16.1	4.4	14.9	57.4	244.1	116.1	466.1	132.2
4115	4115	LAKSHADWEEP	2015	2.2	0.5	3.7	87.1	133.1	296.6	257.5	146.4	160.4

4116 rows × 20 columns


In [8]: df1.describe()

Out[8]:

	index	YEAR	JAN	FEB	MAR	APR	MA
count	4116.000000	4116.000000	4116.000000	4116.000000	4116.000000	4116.000000	4116.00000
mean	2057.500000	1958.218659	18.938897	21.789431	27.319315	43.085520	85.68292
std	1188.331183	33.140898	33.574242	35.901220	46.936787	67.811512	123.2117 ⁻
min	0.000000	1901.000000	0.000000	0.000000	0.000000	0.000000	0.00000
25%	1028.750000	1930.000000	0.600000	0.600000	1.000000	3.000000	8.60000
50%	2057.500000	1958.000000	6.000000	6.700000	7.800000	15.600000	36.40000
75%	3086.250000	1987.000000	22.125000	26.800000	31.225000	49.825000	96.82500
max	4115.000000	2015.000000	583.700000	403.500000	605.600000	595.100000	1168.60000
4							>


In [10]: df1.plot.line()

Out[10]: <AxesSubplot:>

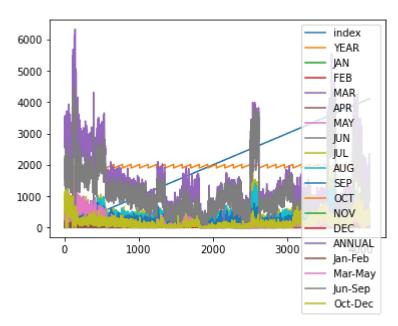


In [11]: df1.plot.box()

Out[11]: <AxesSubplot:>

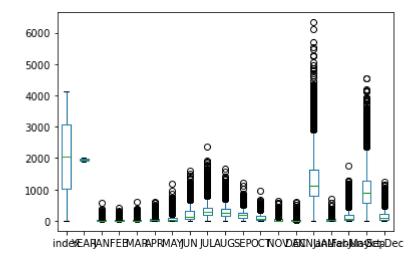


In [12]: df1.plot.hist()


Out[12]: <AxesSubplot:ylabel='Frequency'>

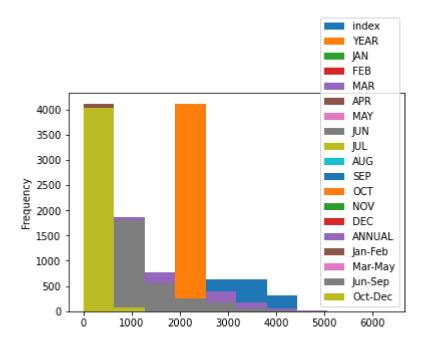

In [13]: df1.plot.scatter(x="SUBDIVISION",y="YEAR")


Out[13]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='YEAR'>

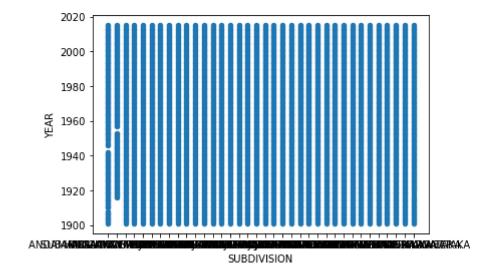

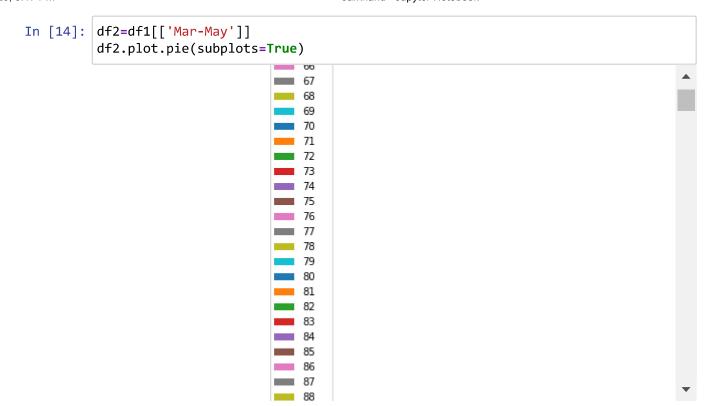


In [15]: sns.pairplot(df1)

Out[15]: <seaborn.axisgrid.PairGrid at 0x17e3b2bc490>

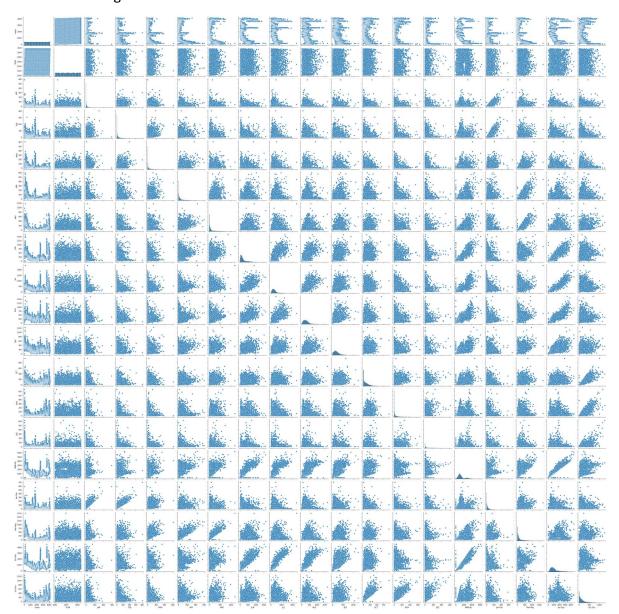


In [16]: sns.displot(data["Mar-May"])

Out[16]: <seaborn.axisgrid.FacetGrid at 0x17e52658f10>

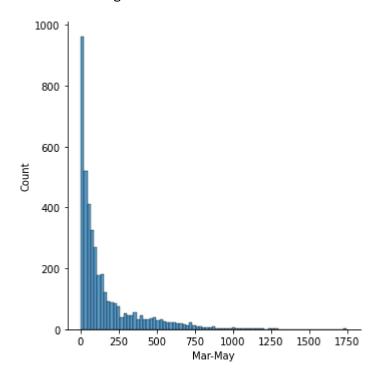

In [17]: sns.heatmap(df1.corr())

Out[17]: <AxesSubplot:>

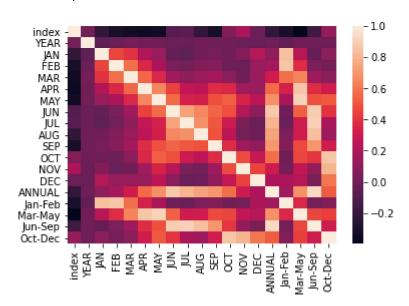

```
In [ ]:
```