

Advanced JavaScript

Eng. Niveen Nasr El-Den
iTi

Day 2

Inner Functions

- Functions can be defined within one another
- Inner functions have access to the outer function's variables and parameters.

```
function getRandomInt(max) {  
  var randNum = Math.random() * max;
```

```
    function ceil() {  
      return Math.ceil(randNum);  
    }
```

Inner Function; only
accessible within
getRandomInt

```
  return ceil(); // Notice that no arguments are passed  
}
```

```
// Alert random number between 1 and 5  
alert(getRandomInt(5));
```

Inner Functions

```
function a(param) {  
  function b(theinput) {  
    return theinput * 2;  
  };  
  
  return 'The result is ' +  
    b(param);  
};
```

```
var a = function(param) {  
  var b = function(theinput) {  
    return theinput * 2;  
  };  
  
  return 'The result is ' +  
    b(param);  
};
```

- ▷ a(2); → "The result is 4"
- ▷ a(8); → "The result is 16"
- ▷ b(2); → b is not defined

Example!

Inner Functions

- The nested (inner) function is **private** to its containing (outer) function.
- The inner function can be accessed only from statements in the outer function.
- The inner function forms a **closure**:
 - ▷ The inner function can use the arguments and variables of the outer function, while the outer function cannot use the arguments and variables of the inner function
 - i.e. **The inner function contains the scope of the outer function.**
 - ▷ When two arguments or variables in the scopes of a closure have the same name, there is a name conflict. More inner scopes take precedence
 - ▷ According to scope chain, the inner-most scope is the first on the chain.

Inner Functions

```
function myFun(x) {  
  var z = 10;
```

```
  function innerFun(y) {  
    return x + y + z;  
  }
```

```
  return innerFun;  
}
```

```
var myFun = function (x) {  
  var z = 10;
```

```
  return function (y) {  
    return x + y + z;  
  };  
}
```

```
var fun = myFun(5);  
var result = fun(10);
```

```
var result = myFun(5)(10);
```

Inner Functions

Execution Context

Hoist: funA{
~~a=undefined~~ 0

funA

Hoist: funB{
x=1

funB

Hoist: funC{
y=2

funC

Hoist:
z=3

Call Stack

.log()

funC

funB

funA

```
function funA(x) {
```

```
  function funB(y) {
```

```
    function funC(z) {
```

```
      console.log(x + y + z + a);
```

```
    }
```

```
    funC(3);
```

```
  }
```

```
  funB(2);
```

```
}
```

```
var a=0;
```

```
funA(1);    //6
```

Inner Functions

```
function fHello(){return "Hello "}
var fHey=function(){return "Hey..."}
var x1= fHello();
function fHii(){return "Hii!!!"};
```

```
var myFun=function() {
  var x2 = fHey ();

  return function(){
    var x4 =fHii();
    console.log(x1+x4+x2)
  };
}
```

```
var fun=myFun();
fun();
```

Hello Hii!!!Hey...

Closures


- Closure is one of the most **powerful** features of JavaScript.

“A closure is an expression (typically a function) that can have free variables together with an environment that binds those variables (that "closes" the expression).”

- When function returns from another function it returns with all variables from its external scope
- A new closure is created for each call to outside.
- Closure wrap-up the entire environment with all variables from external scope

Closures

- Closure provides a sort of security for the variables of the inner function, since they are not accessed by their outer function
 - This provides a sort of **encapsulation** for the variables of the inner function
- It is created when the inner function is somehow made available to any scope outside the outer function.
- If the inner function manages to survive beyond the life of the outer function; the variables and functions defined in the outer function will live longer than the outer function itself, since the inner function has access to the scope of the outer function.
- Closure makes currying possible in JavaScript.
- A closure **problem** occurs inside **loops**

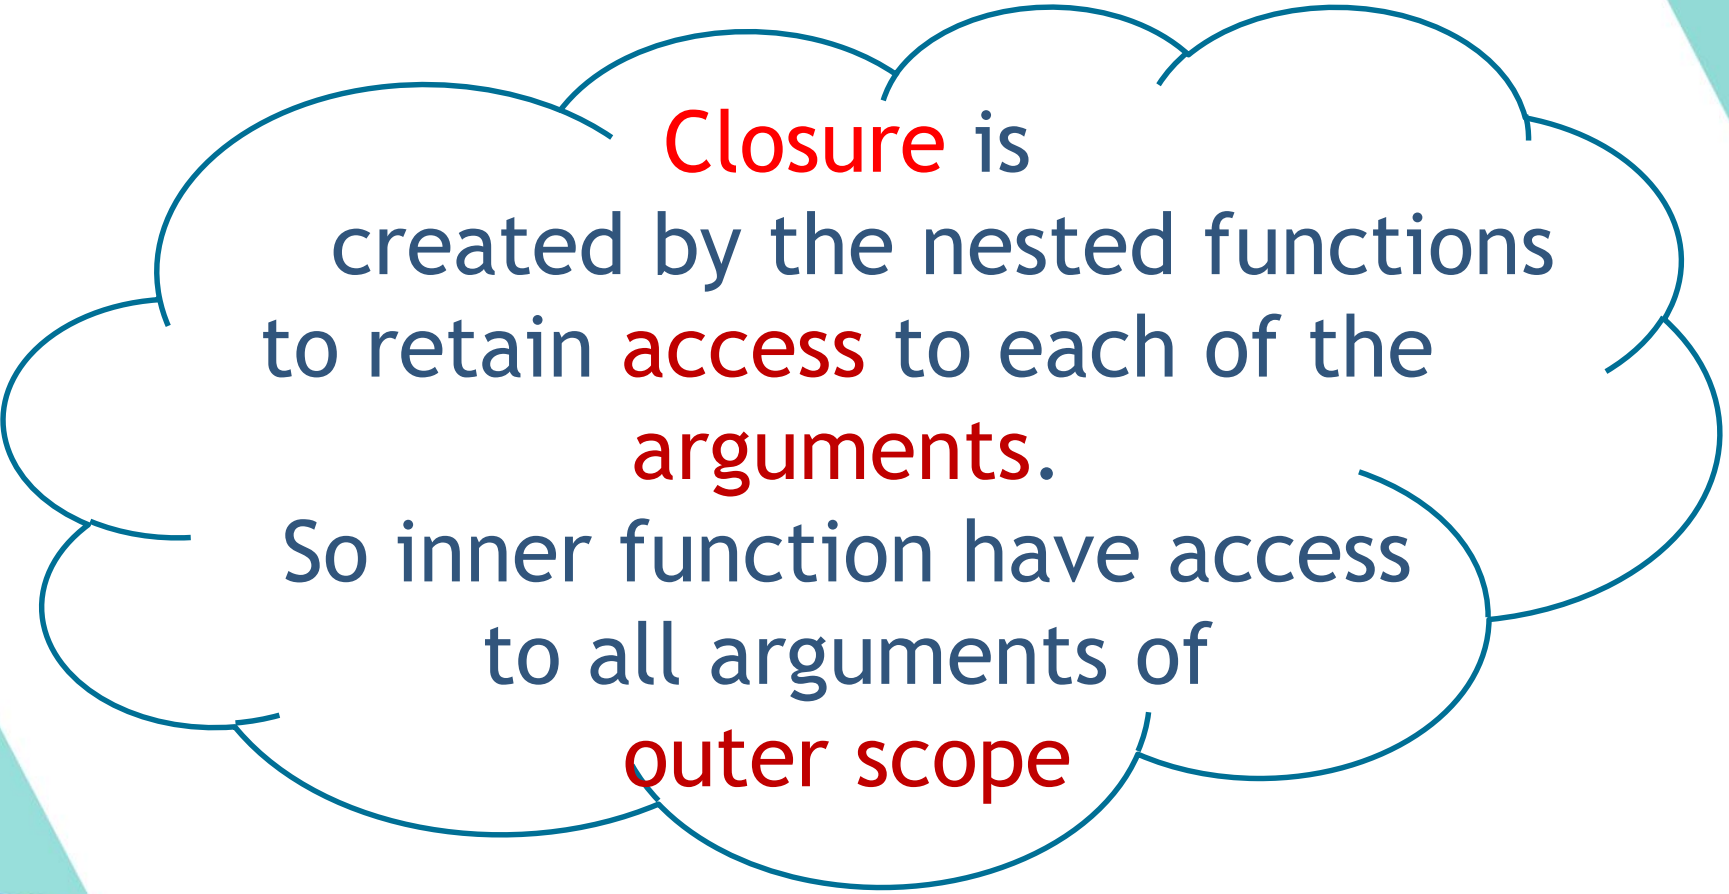

Closure is
created by the nested functions
to retain **access** to each of the
arguments.

So inner function have access
to all arguments of
outer scope

Problem

```
function closureTest(){
    var arr = [];

    for(var i = 0; i < 3; i ++) {
        arr.push(function(){
            console.log(i);
        });
    }

    return arr;
}

var cFn = closureTest();

cFn[0]();
cFn[1]();
cFn[2]();
```

Solution

```
function closureTest(){
    var arr = [];

    for(var i = 0; i < 3; i ++) {
        arr.push((function(j) {
            return function(){console.log(j);}
        })(i));
    }

    return arr;
}

var cFn = closureTest();

cFn[0]();
cFn[1]();
cFn[2]();
```

IIFE Pattern

- A common often extra ordinary used **pattern**
- Besides advantages and disadvantages of anonymous function, IFEs are
 - ▷ Suitable for initialization tasks
 - ▷ Work done without creating global variable
 - ▷ Its where the magical part happens in avoiding **closures**
 - ▷ Also, cant execute twice unless it is put inside loop or another function
 - ▷ Introduces a **new scope** that restrict the lifetime of a variable



JavaScript is
Multi-paradigm
Programming Language.



JavaScript supports
programming
in **many** different **styles**.

Object-Oriented JavaScript

Object-Oriented JavaScript

- The main principle with **OOP** is the use of **Classes** to create objects, and that objects are implemented in a manner that allows them to adopt **Inheritance**, **Polymorphism**, and **Encapsulation**.
- In most other object-oriented languages you would instantiate an instance of a particular class, but that is not the case in JavaScript.
- Unlike most other object-oriented languages, JavaScript doesn't actually have a concept of **classes**. It looks and **behaves differently**.

Object-Oriented JavaScript

- JavaScript is a *class-free*, object-oriented language
- Although **ES6** introduces JavaScript **class** expressions and class declarations, to provide a much clearer syntax to create objects and deal with.
- In fact **classes** are **functions**
- **Custom Object** that you, as a JavaScript developer, create and use is the main actor in application.

Custom Object

- Objects that you, as a JavaScript developer, create and use.
- An object in JavaScript is a complex construct usually consisting of a constructor as well as zero or more methods and/or properties.
- Objects can be either **stand-alone** with their own set of properties & functions or they can **inherit** properties from other objects

Custom Object

- There are different ways to create an instance of an object class (**Functions** in JavaScript)
 - ▷ Basic Object Literal Pattern
 - ▷ Factory Function
 - ▷ Custom Object Constructor Function
 - ▷ ...

Literal Pattern Object Creation

```
var obj = { };  
  
obj.name = "banana"  
  
obj.click = function(){  
    alert( "you can eat" );  
}  
  
obj.details = {  
    mycolor: "yellow",  
    mycount: 12  
}  
  
//(obj instanceof Object) // true
```

Literal Pattern Object Creation

```
var obj = {  
  // Set the property names and values use key/value pairs  
  "name" : "banana", // name : "banana"  
  click : function(){  
    alert( "you can eat" );  
  },  
  //initialize entire object  
  details : {  
    mycolor: "yellow",  
    mycount:12  
  }  
};
```

Custom Object creation using basic object literal pattern

- We can create objects with a short syntax that defines an object inside curly braces. (**basic object literal pattern**)

```
var emp1 = { name:"Aly", age: 23};
```

```
var emp2 = { name: "Hassan", age: 32};
```


Custom Object creation using basic object literal pattern

- After an object exists, you can add a new property to that instance by simply assigning a value to the property name of your choice.
- For example, to add a property about the “Salary” for “Hassan”, the statement is:

```
var emp1 = { name: "Aly", age: 23};  
var emp2 = { name: "Hassan", age: 32};  
emp2.salary = 320;
```

- After that assignment, only emp2 has that property.
- There is no requirement that a property be pre-declared in its constructor or shortcut creation code.

Factory Function Pattern

- It is a way where **object** is created as a **return** of a function call assigned to a variable
- Used to create Multiple Objects with same interface
- No need to use “**new**” when calling a factory function

Creating New Instance from Custom Object using Factory Pattern

- Factory Function for Employee Object

```
var Employee = function (e_nm, e_ag){  
  return {  
    name : e_nm,  
    age : e_ag  
  }  
}
```

```
var Employee = function (e_nm, e_ag) {  
  var emp = { name : e_nm,  
              age : e_ag  
            };  
  return emp;  
}
```

- Creating object instances using Factory Function Method

```
var emp1 = Employee ("Aly", 23);  
var emp2 = Employee ("Hassan", 32);  
var emp3 = Employee ();
```

Constructor Function

- A constructor function looks like any other JavaScript function, but its purpose is:
 - ▷ to define the initial structure of an object
 - ▷ to define its property and method names
 - ▷ It can populate some or all of the properties with initial values.
 - ▷ Values to be assigned to properties of the object are typically passed as parameters to the function,
 - ▷ Statements in the constructor function assign those values to properties.
- MyConstructor
- myFunction

Creating New Instance from Custom Object using Constructor Method

- Constructor Function for Employee Object

```
function Employee (name, age){  
    this.name = name;  
    this.age = age;  
}
```

- To create object instances using Constructor Function Method, invoke the function with the **new** keyword

```
var emp1 = new Employee ("Aly", 23);  
  
var emp2 = new Employee ("Hassan", 32);  
  
var emp3 = new Employee ();
```

Adding methods to Constructor Function (**Functional shared Pattern**)

- Functional shared pattern is used to save memory by adding methods to the constructor function:

```
function Employee(name, age){
```

```
    this.name = name;  
    this.age = age;
```

Property

```
    this.show = showAll;
```

Method

```
}
```

```
function showAll( ){
```

```
    alert("Employee " + this.name + " is " + this.age + " years  
    old.");
```

```
}
```

Adding methods to Constructor Function (**Functional Class Pattern**)

- Adding methods to the constructor function using **Function Literal**:

```
function Employee(name, age) {
```

```
    this.name = name;  
    this.age = age;
```

Property

```
    this.show = function () {  
        alert("Employee " + this.name + " is " + this.age + " years old.");  
    }
```

Function
Literal

```
}
```

Instance Object Creation

```
// Class using constructor function
function User( name ) {
    this.name = name;
    this.display = function(){return this.name;}
}

// Instance object of user
var me = new User( "My Name" );

// Test
alert( me.name );
alert( me.display());
alert( me.constructor == User); // true
alert( me.constructor == Object); // false
```


Reminder:

Function Default arguments

```
function myFun(){  
    var x = arguments[0] || 10;  
    var y = arguments[1] == undefined ? 11 :  
arguments[1]  
  
    return x + y;  
}
```

```
myFun(); //21  
myFun(1); //12  
myFun(1,2); //3
```

Creating New Instance from Custom Object via Constructor **Overloading**

- Assign a *default value* to a Property:

```
function Employee (id='idx' /*ES6*/),name, age,salary=2000/*ES6*/){  
  this.name = typeof name ==="undefined"? "Nour": name;  
  this.age = age || 0; //ES5  
  this.salary = salary;  
  this.id = id;  
}
```

- We can also generate a blank object and then populate it explicitly; property by property:

```
var emp1 = new Employee( );  
emp1.name = "Aly";  
emp1.age = 23;
```

Overloading


- A common feature in other object-oriented languages is the ability to “overload” functions.
- Overloading occurs when more than one method within the same class have the same method name but different in parameters (different numbers and/or types of passed arguments) to perform different behaviors
- Overloading can be fulfilled via
 - function arguments property using default parameters & any conditional statement.
 - Creating function that calls the meant function with proper requirement

Constructor Function, new & this

- When function invoked with **new**, functions return an object known as **this**.
- “**new**” before any function call **turns** it into **constructor** function
- JavaScript uses “**this**” keyword to refer to the current object.
- “**this**” is confusing sometimes, when it doesn't return the expected object.
- You have a chance of modifying **this** before it is returned

“new” Operator

- When using “new”
 - A brand new empty object is created
 - That object get linked to another object
 - It gets bound as “this” keyword as a purpose for function call
 - If the function doesn’t return any thing, it will return “this”.
- Note:
 - Primitive datatypes pass by value while Objects and Arrays pass by reference;
 - When any change happens in obj1 it is reflected in obj2
 - using new can over come this problem

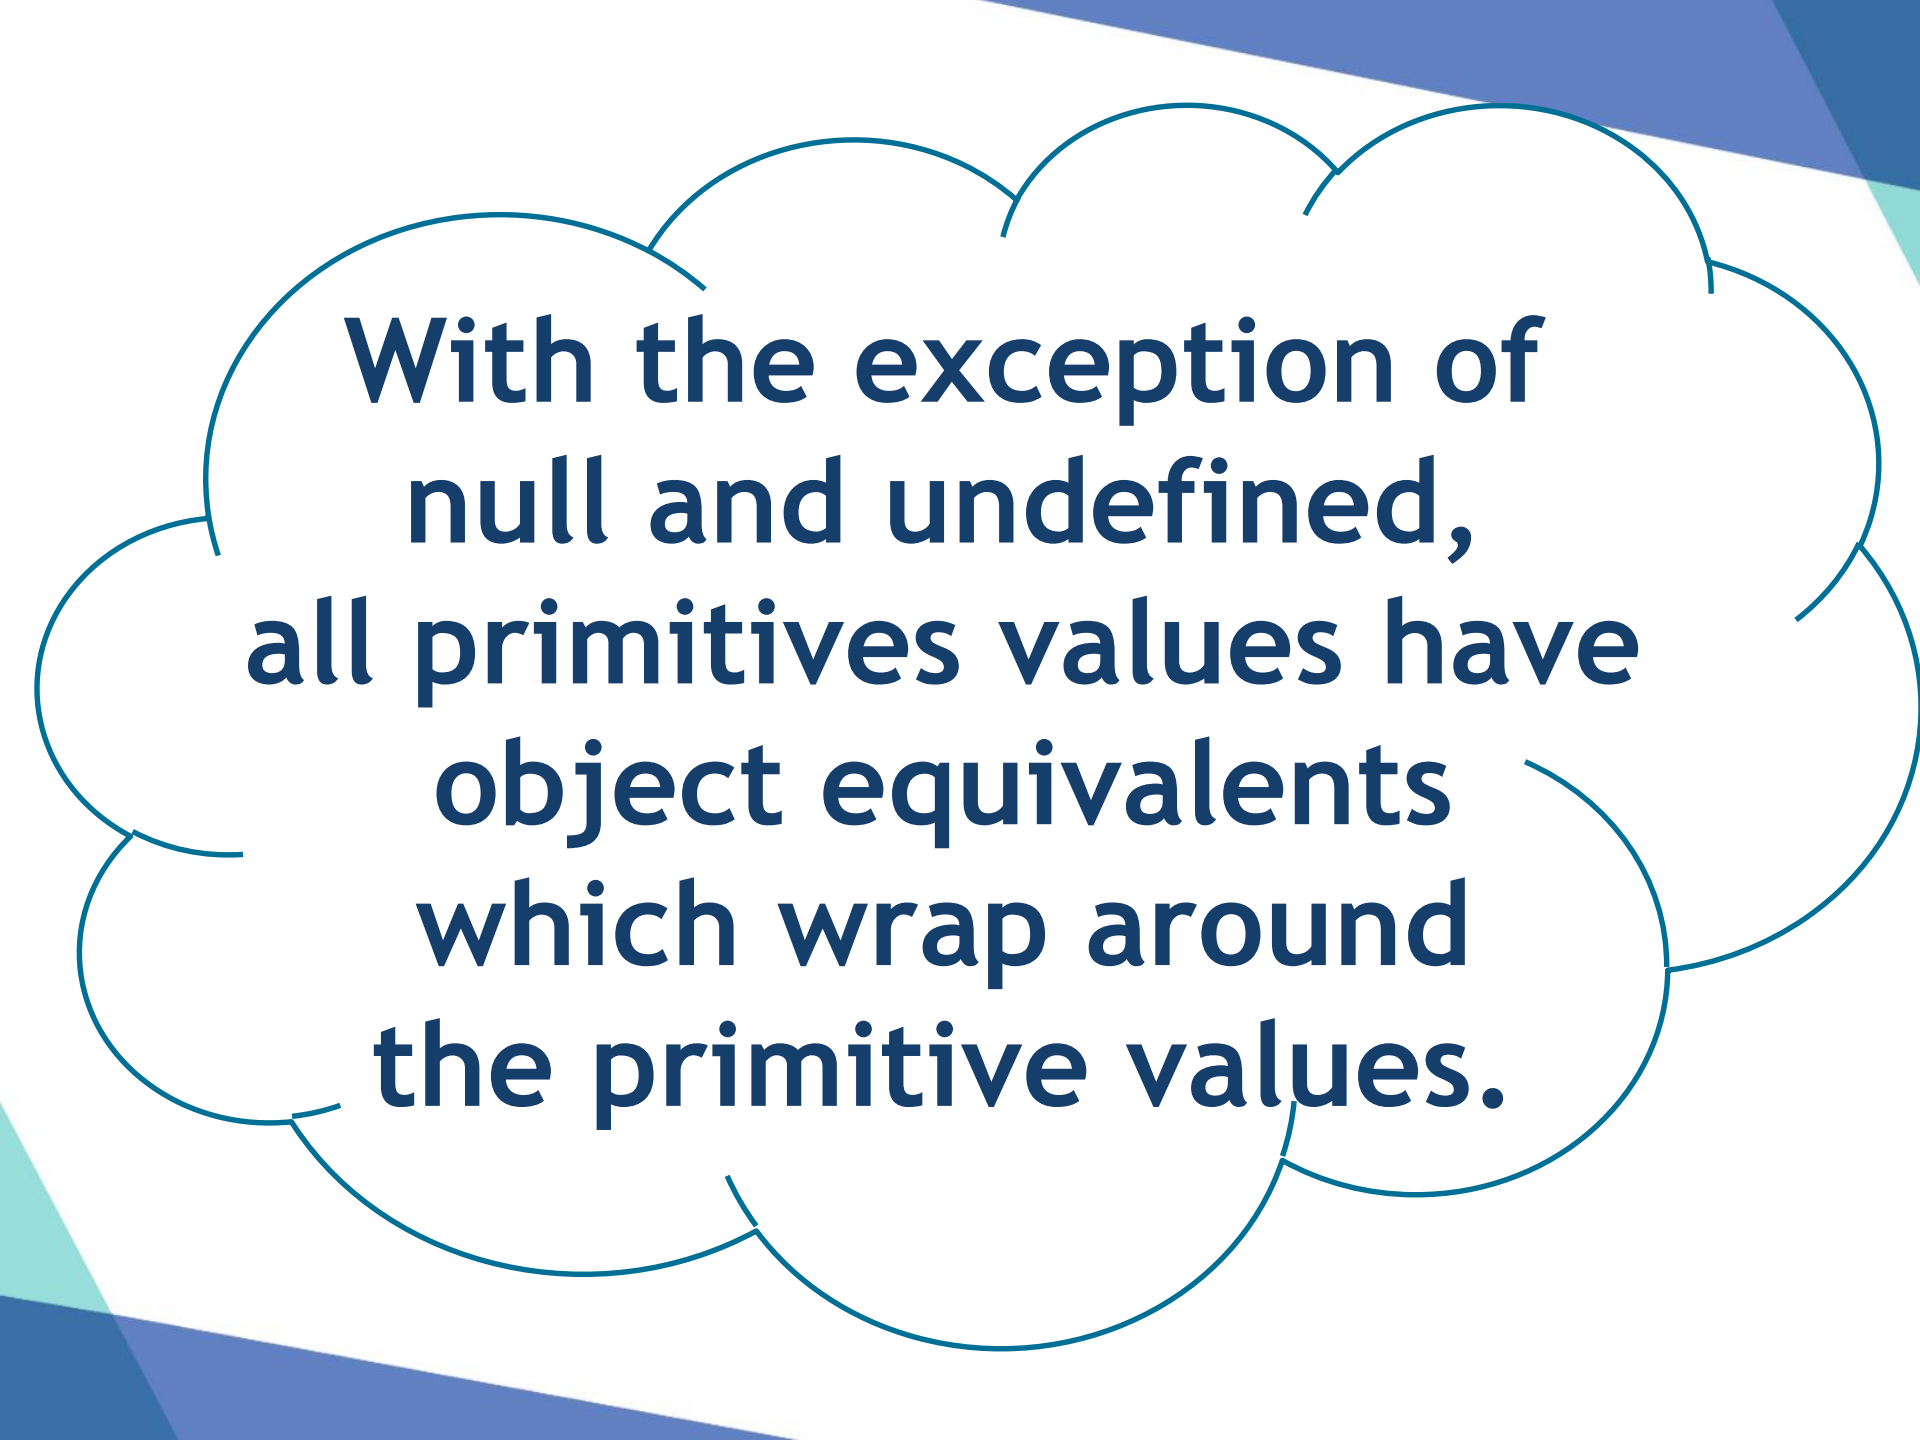

**With the exception of
null and undefined,
all primitives values have
object equivalents
which wrap around
the primitive values.**



All primitives are
immutable




All objects are
reference values

References

- Reference is a pointer to an actual location of an object
- An object can contain a set of properties, all of which are simply references to other objects.
- When multiple variables point to the same object, modifying the underlying type of that object will be reflected in all variables

Example!


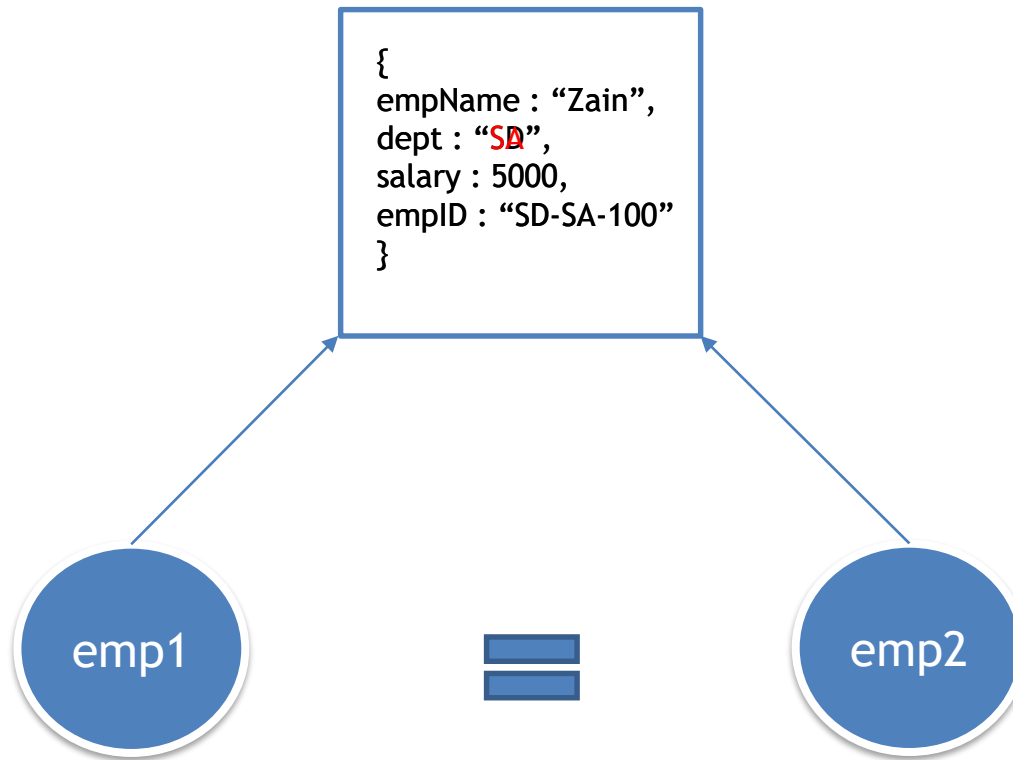


```
var emp1 = new Employee("Zain", 5000, "SD", "SD-SA-100");
```

```
var emp2 = emp1;
```

```
emp2.dept = "SA";
```

```
console.log(emp1.dept); //SA
```

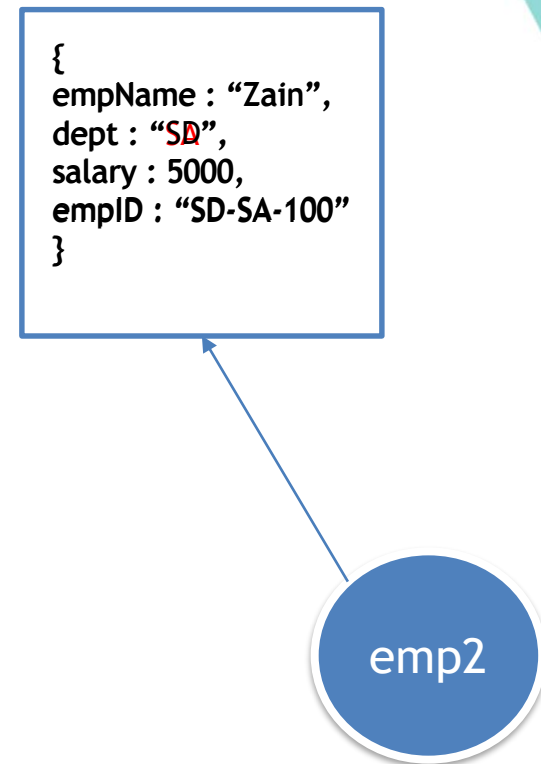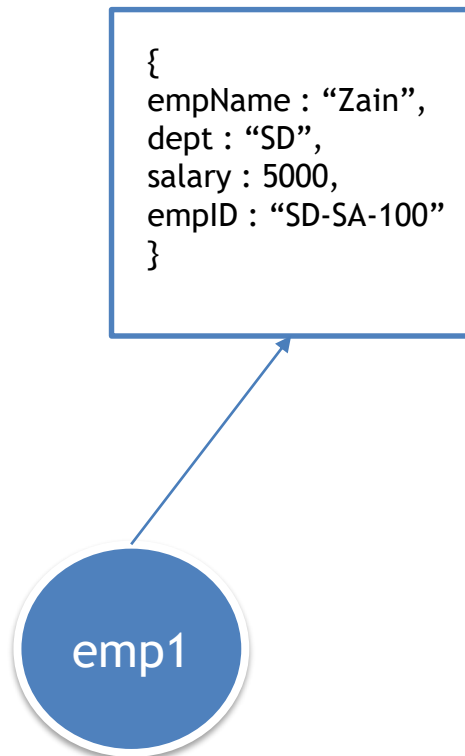

```
var emp1 = new Employee("Zain", 5000, "SD", "SD-SA-100");
```

```
var emp2 = new Employee();
```

```
for( var i in emp1)  
    emp2[i] = emp1[i];
```

```
emp2.dept = "SA"  
console.log(emp1.dept); //SD  
console.log(emp2.dept); //SA
```

“this” keyword & Binding

- Every function while executing, has a reference to its execution context called “this”.
- “this” is an identifier that gets the value of object bound to it, it behaves like normal parameters.
- “this” binding is dependent on its “call site” (where the function get executed)

“this” keyword

- “this” is dynamic since it looks for things at runtime, based upon how you call things
- 4 rules for binding “this” (in terms of order precedence) depending on call site
 - ▷ Default Binding
 - ▷ Implicit Binding
 - ▷ Explicit Binding
 - ▷ new keyword

↑ priority
low
high

Hard Binding

Default & Implicit Binding

- Default Binding

- It is applied on a standalone functions & IIFEs
 - Function defined in Global Scope
- Depends on Strict Mode of code running inside a function
 - Its value is **undefined** in strict mode,
 - To be applied globally should be called as `window.fn`
 - otherwise its value is **Global** Object

- Implicit Binding

- An object is calling the function
 - Object on the left of the `(.)` function call

Example 1

```
function myFun(){  
    console.log(this.val)  
}  
var val = "myVal";  
  
var myObj1 = {val : "obj1Val", myFun: myFun};  
  
var myObj2 = {val : "obj2Val", myFun : myFun};  
  
myFun(); //myVal  
myObj1.myFun(); //obj1Val  
myObj2.myFun(); //obj2Val
```

```
function myFun(){  
    var val= "myVal";  
    this.val= "myNewVal"  
    this.fun=fun;  
    this.fun();  
    fun();  
}
```

```
function fun(){  
    console.log(this.val)  
}
```

```
var val = "globalVal";
```

```
myFun(); //new myFun();  
console.log(val); //???
```

Explicit Binding

- It's a hard binding
- When function is called, it predict its object
- If you want to set a specific object other than the calling object make hard binding using Function Object methods.
 - ▷ `bind()`
 - ▷ `apply()`
 - ▷ `call()`

Example!

Using call() and apply()

```
var myObj={  
  name:"myObj Object",  
  myFunc:function(){  
    alert(this.name)  
  },  
  myFuncArgs:function(x,y){  
    alert(this.name+" " + x + " "+y)  
  }  
};  
  
var obj1={name:"obj1 Object"};
```

```
myObj.myFuncArgs(1,2);    //myObj Object 1 2
```

```
myObj.myFuncArgs.apply(obj1,[1,2]);    //obj1 Object 1 2
```

```
myObj.myFuncArgs.call(obj1,1,2);    //obj1 Object 1 2
```

Using bind()

```
var myObj={  
  name:"myObj Object",  
  myFunc:function(){  
    alert(this.name)  
  },  
  myFuncArgs:function(x,y){  
    alert(this.name+" " + x +" "+y)  
  }  
};  
  
var obj1={name:"obj1 Object"};
```

```
myObj.myFuncArgs(1,2); //myObj Object 1 2
```

```
myObj.myFuncArgs.bind(obj1)(5,6); //obj1 Object 5 6
```

```
myObj.myFuncArgs.bind(obj1,5)(6); //obj1 Object 5 6
```

```
myObj.myFuncArgs.bind(obj1,5,6)(); //obj1 Object 5 6
```

Assignment