The "FOSS Logic" Architect

The Story:

Well, in one college event, the attendance desk was getting messy very quickly. What was supposed to be a small line to sign in was now a huge crowd. The volunteers were doing their best to keep up by writing down the names as quickly as they could. However, this was just not working. People were leaving without signing in, people were signing twice, and at one point, no one knew if the list was even accurate.

And then later on, all that information had to be typed in again. This was taking a lot of time and was still inaccurate. It was just not necessary. I mean, we are surrounded by technology. Why do we still have to do things the old-fashioned way? There was a way to make things easier. There was a way to make things simpler.

The Logic Path:

1. If the input is directly from the camera:

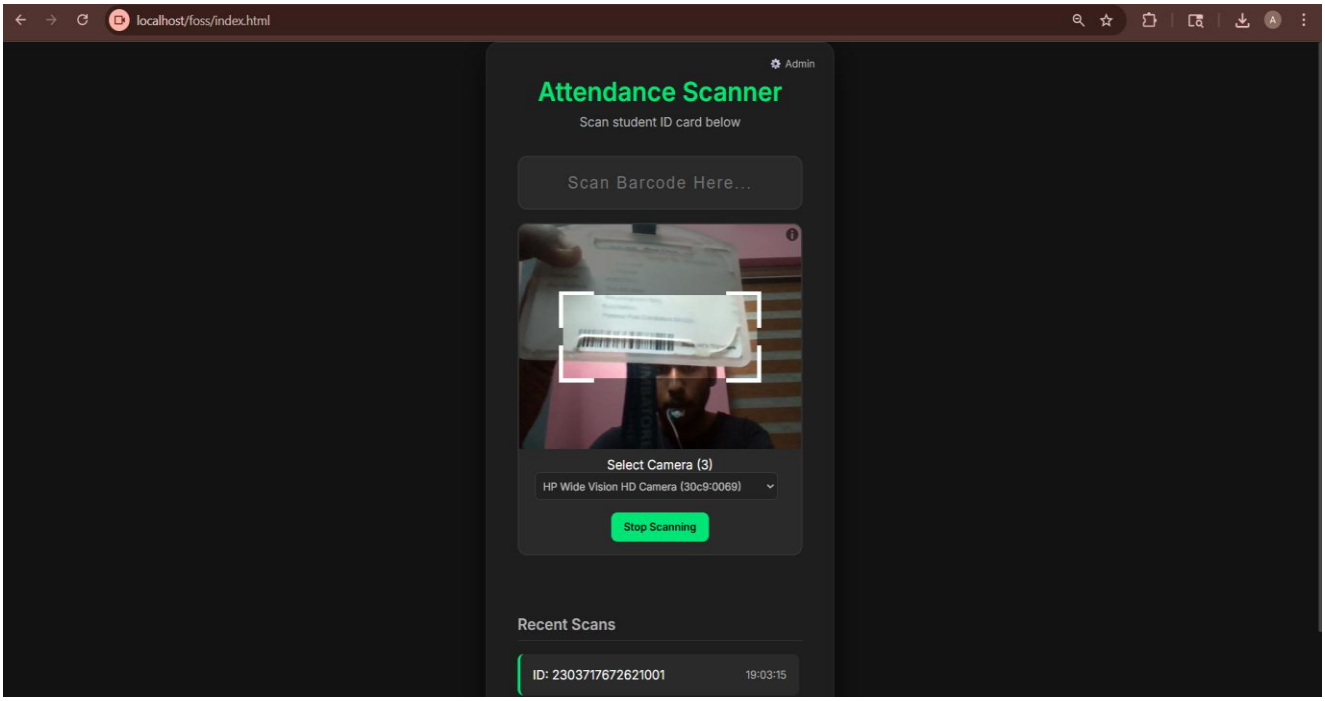

2. If the input is text

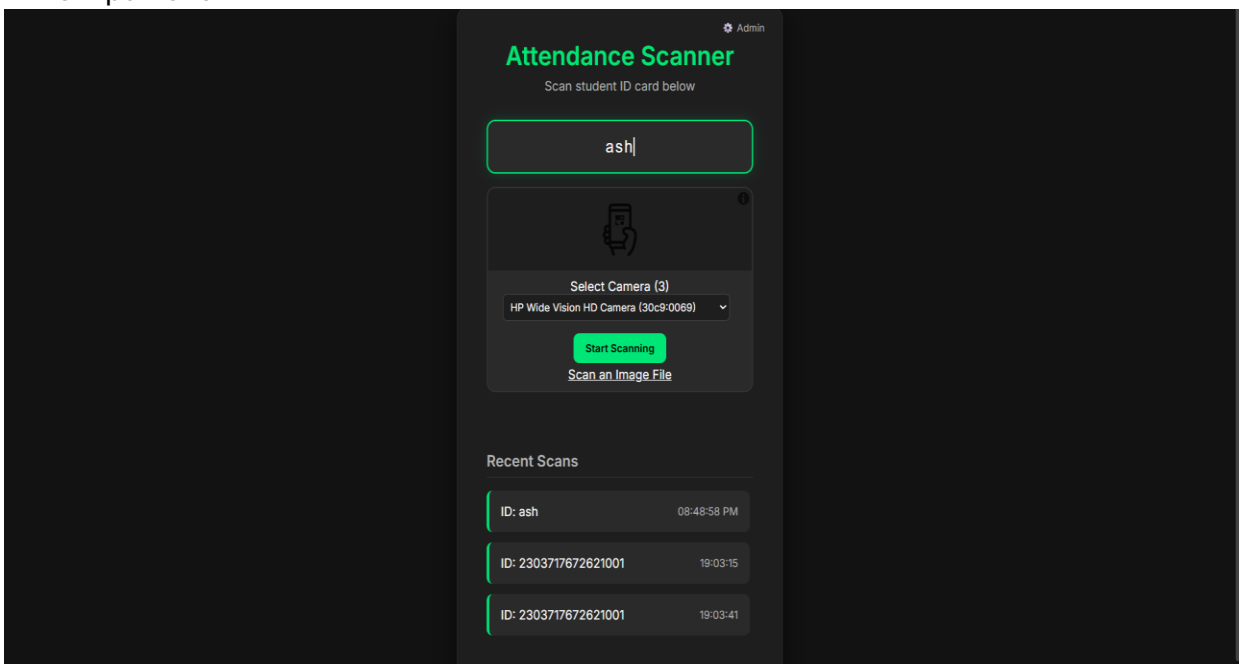

3. If the input is from a file

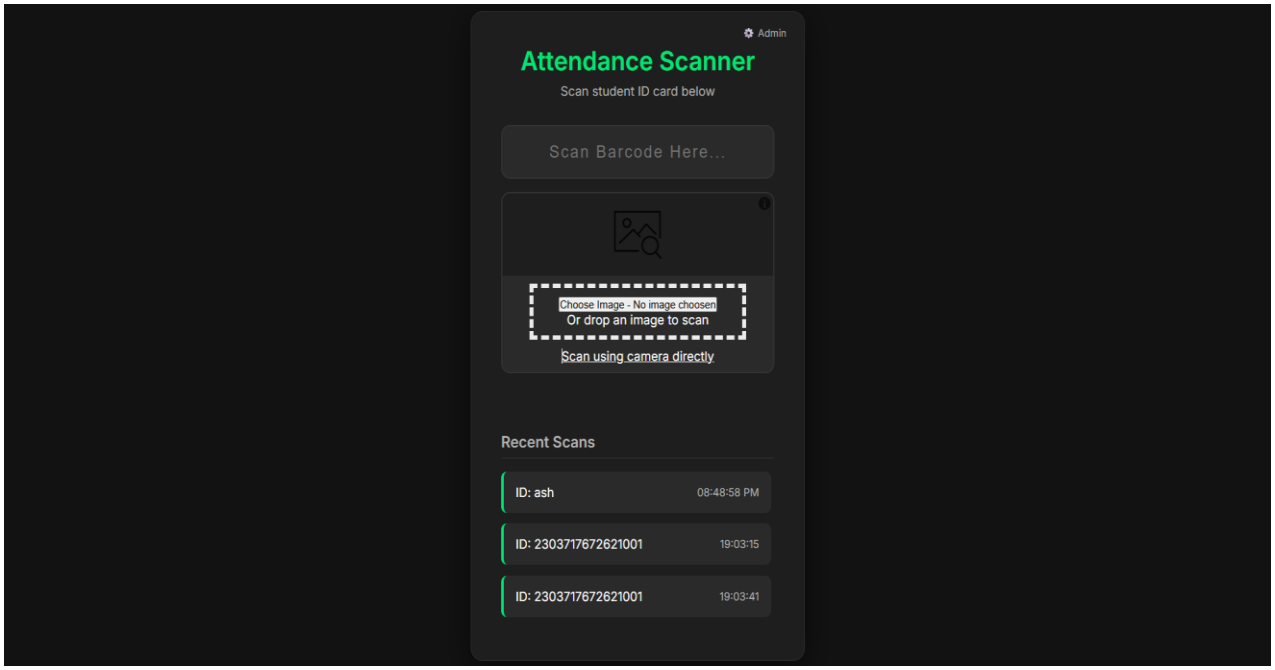

Technical format:

Title:

Event attendance system.

Discription:

A simple, modern web application that records event attendance by scanning student ID barcodes. It uses client-side logic to store data in a JSON-like format using localStorage, eliminating the need for a backend. With a dark-themed UI, real-time updates, and export functionality, it provides a fast, reliable, and easy-to-use solution for managing attendance efficiently.

Constraints:

This system is **fast and simple**, but best suited for:
Small events
Demo projects
Offline usage
Not ideal for:
Large-scale or high-security environments

Input format:

1. If the input is directly from the camera:

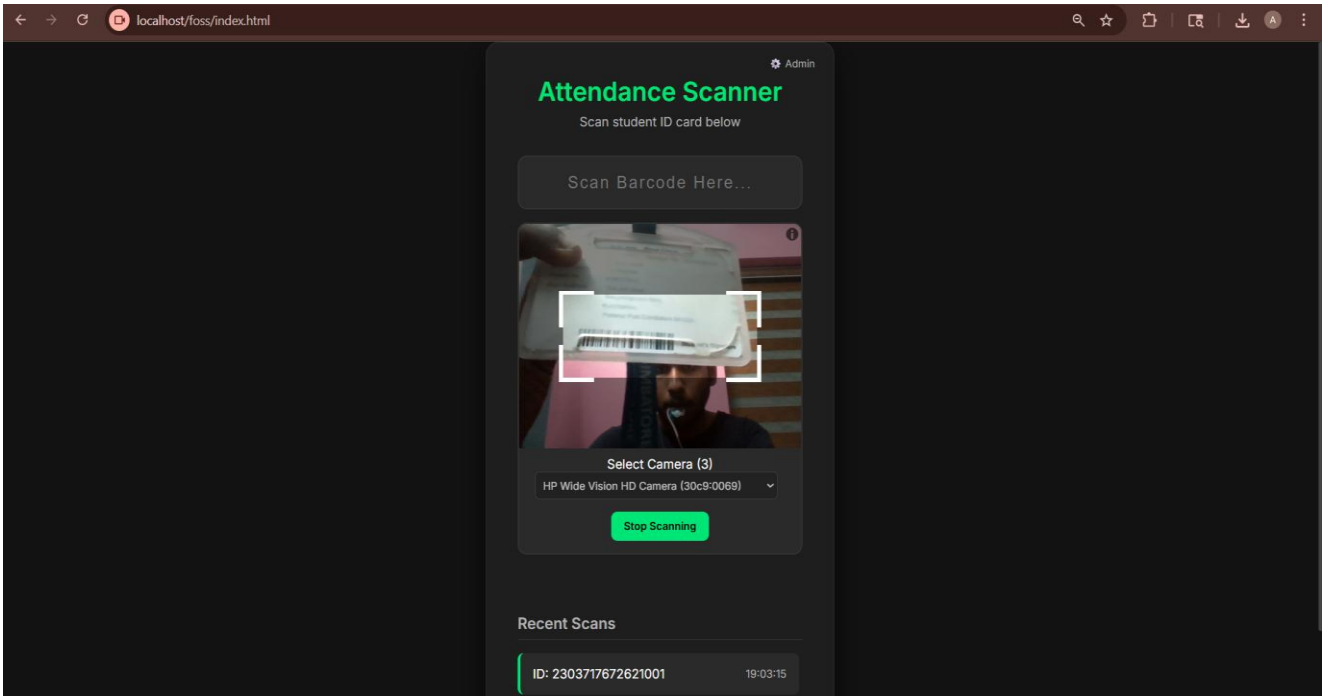

2. If the input is text

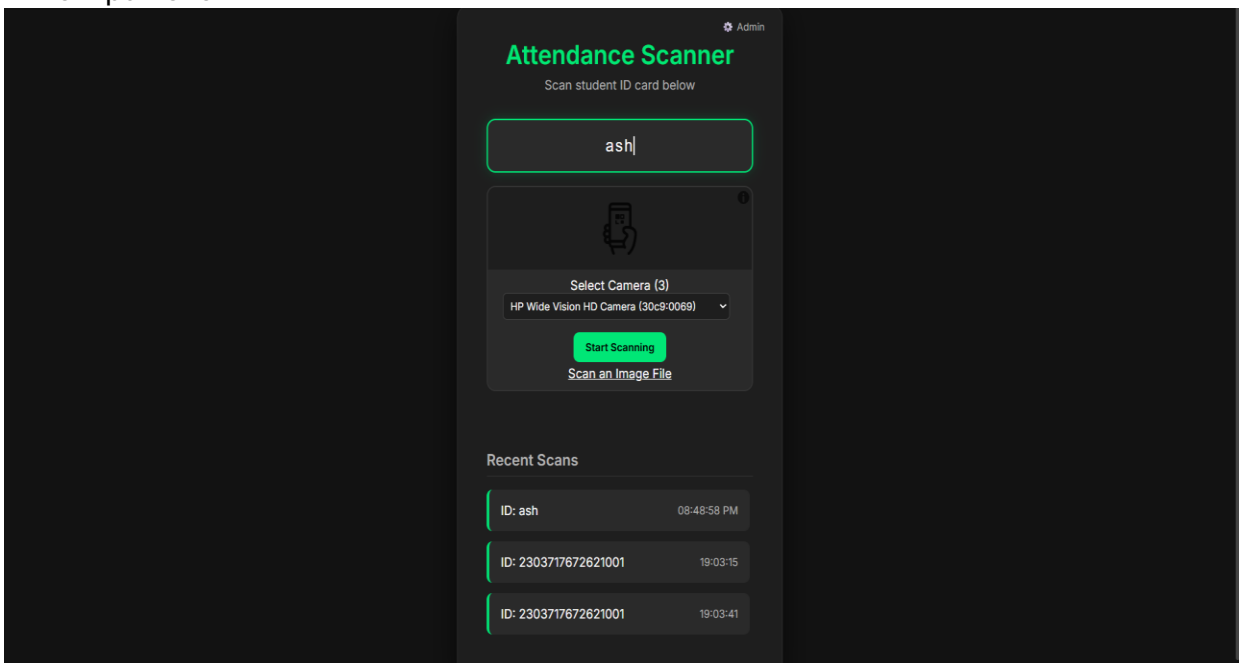

3. If the input is from a file

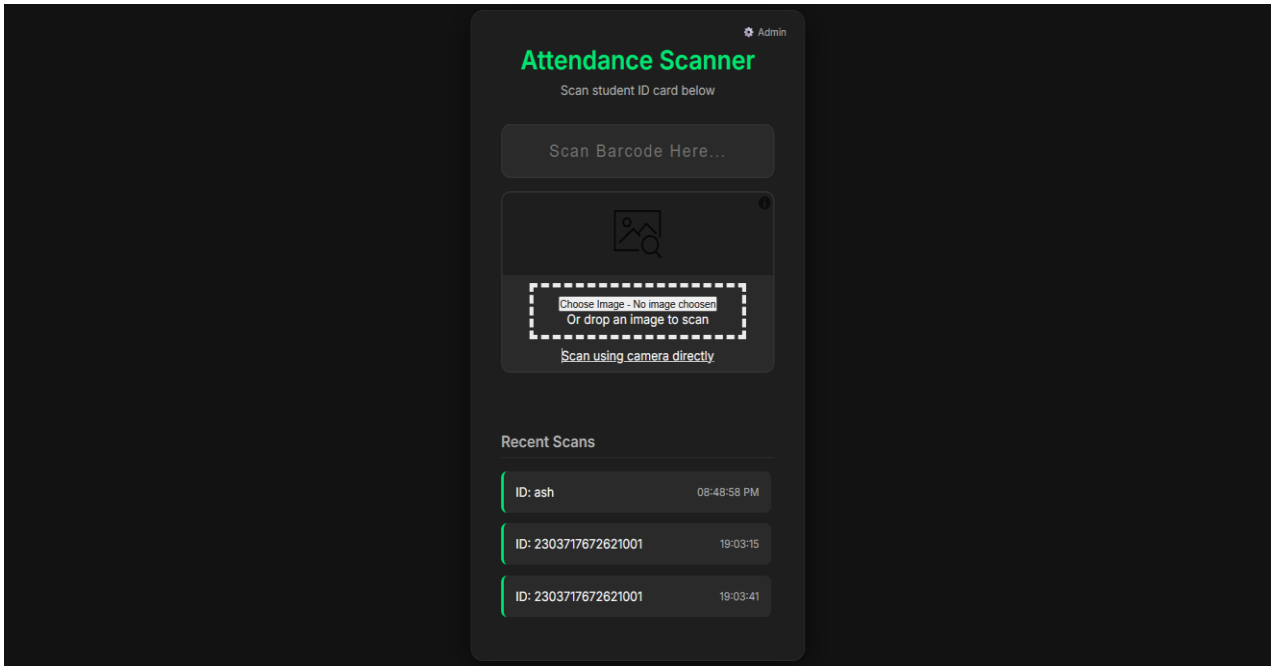

Output format:

1. Recent scans

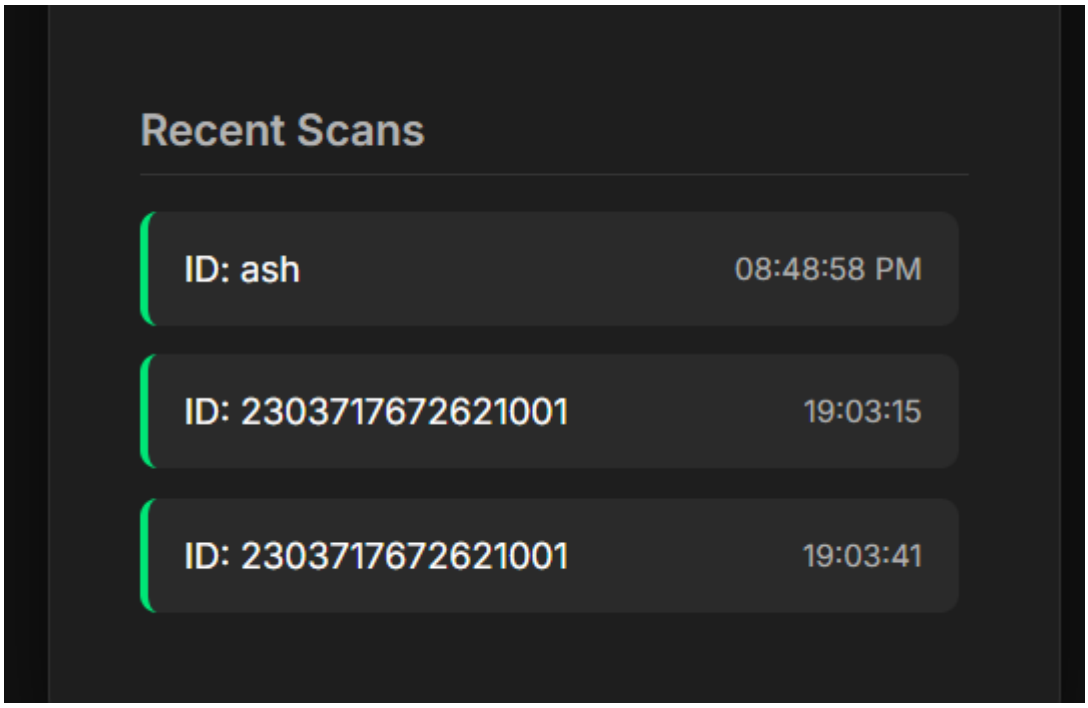

2. Admin access

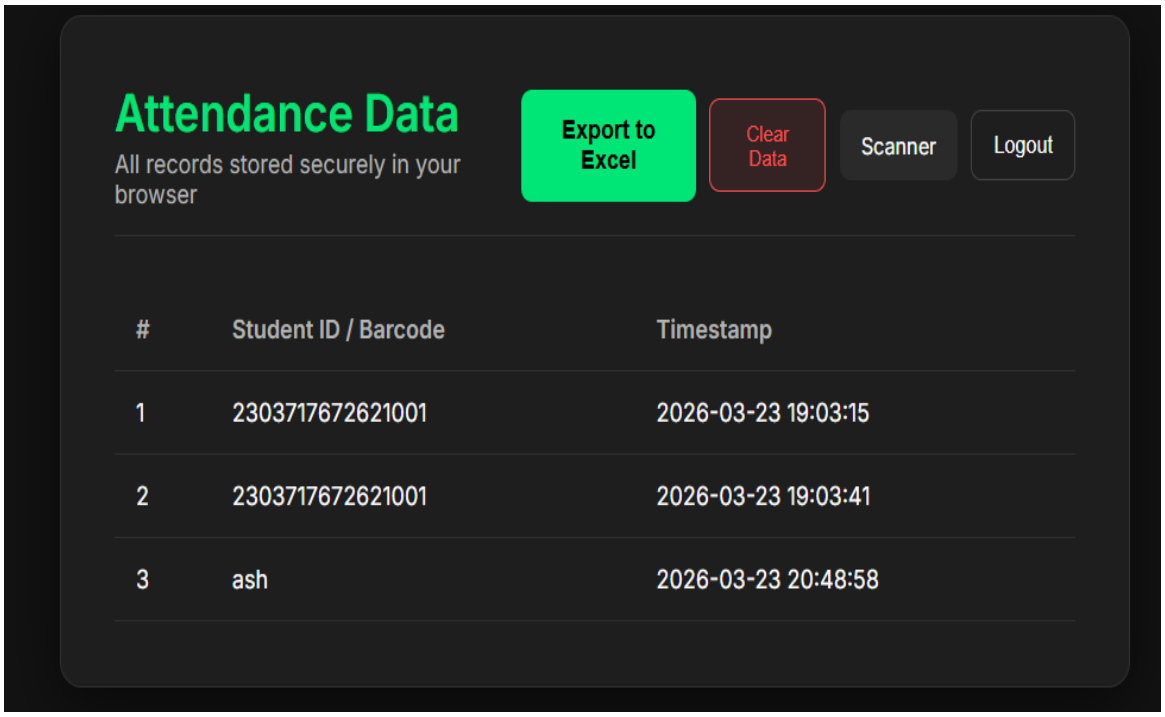

3. CSV file

Sample test cases:

1. If the input is directly from the camera:

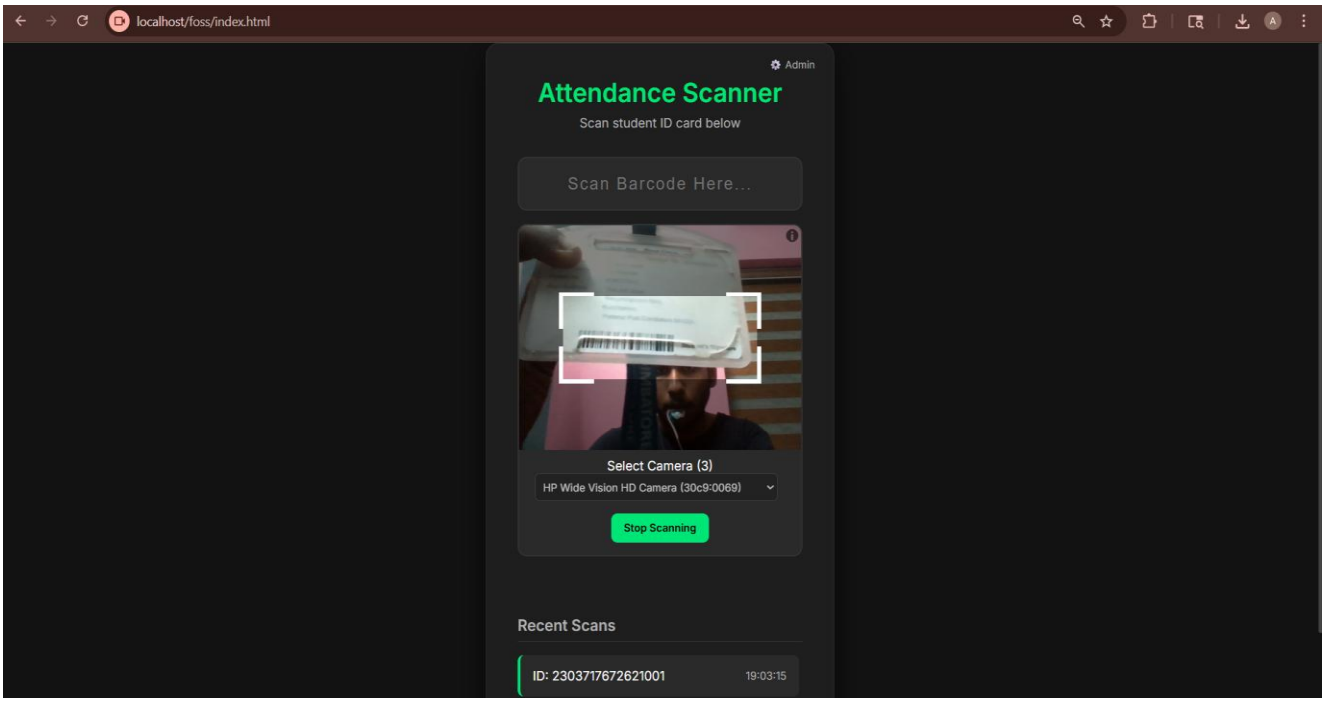

2. If the input is text

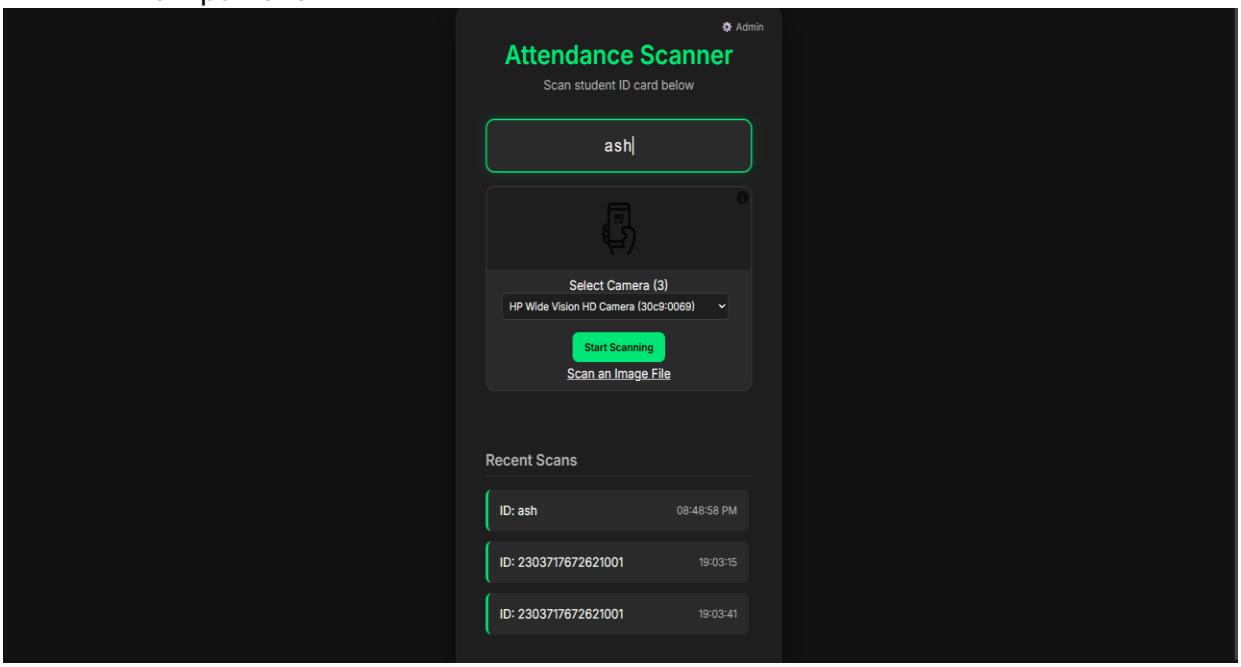
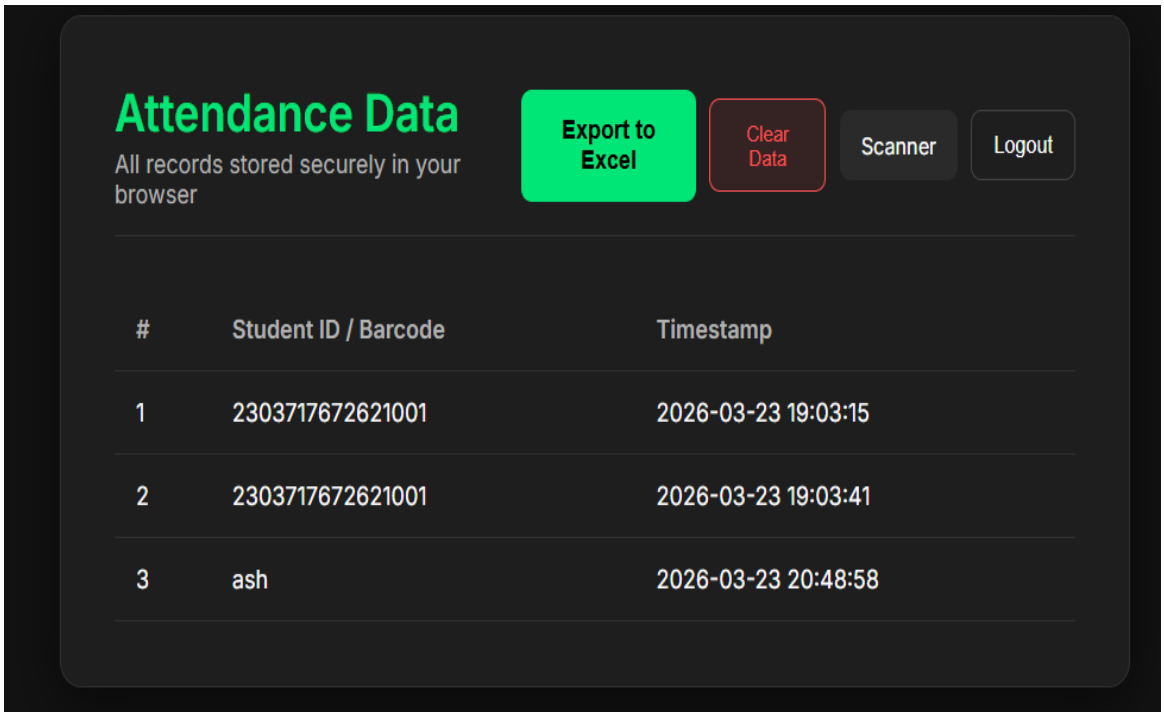
3. Admin access