



STATIC HOSTING ON AWS


➤ Step 1 : search on google aws

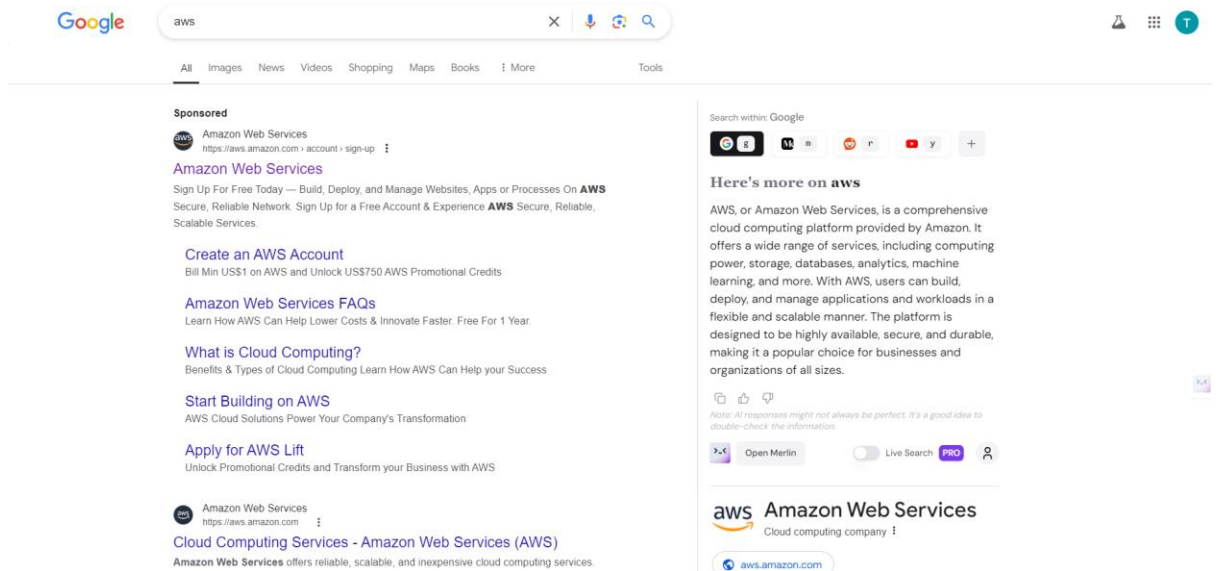

➤ Step 2 , search s3 -> simple storage services

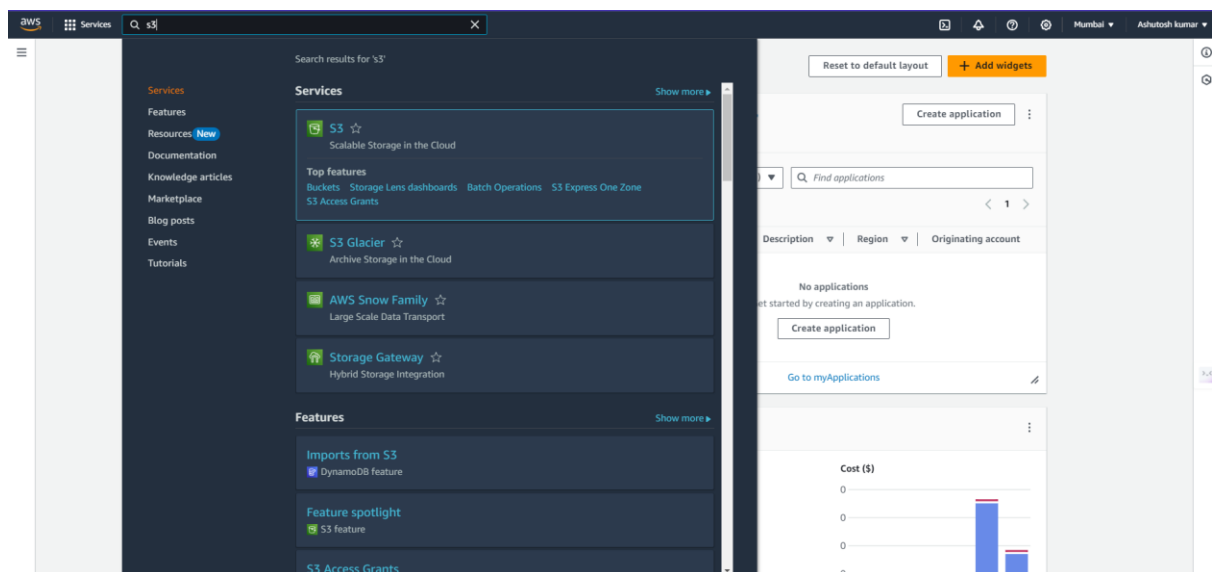


➤ Step 3 , Now we have to create our Bucket

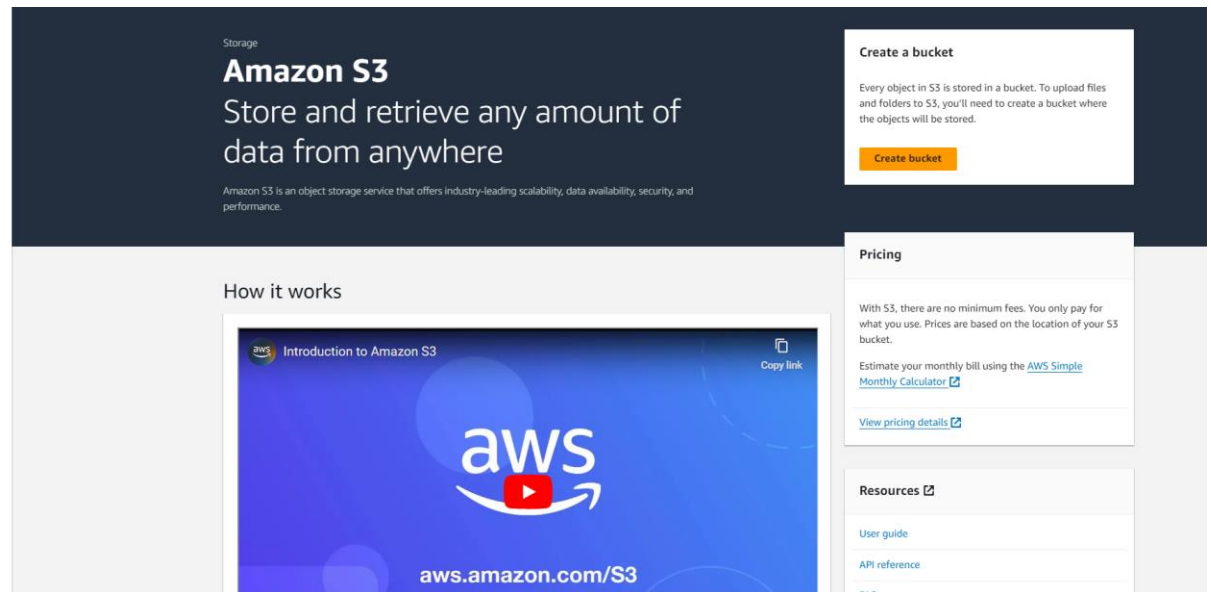


The image shows the Amazon S3 landing page. At the top, it says "Storage" and "Amazon S3". Below that, it says "Store and retrieve any amount of data from anywhere". A sub-headline reads: "Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance." On the right, there's a "Create a bucket" section with a "Create bucket" button. Below that is a "Pricing" section with a "View pricing details" link. At the bottom right is a "Resources" section with links to "User guide" and "API reference". In the center, there's a "How it works" section with a video player titled "Introduction to Amazon S3" and a "Copy link" button. The video player shows the AWS logo and the URL "aws.amazon.com/S3".

➤ Step 4 , Enter bucket name , must be globally unique

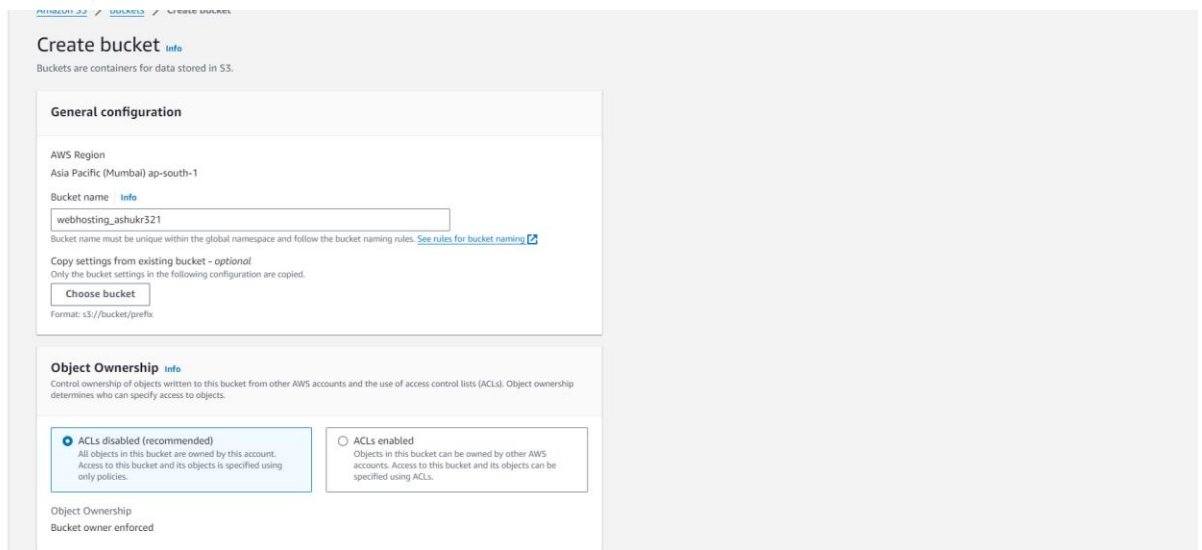


The image shows the "Create bucket" form in the AWS console. The form is titled "Create bucket" and has a sub-header "Buckets are containers for data stored in S3." Below this, there's a "General configuration" section. In this section, the "AWS Region" is set to "Asia Pacific (Mumbai) ap-south-1". The "Bucket name" is "webhosting_ashukr321". Below the bucket name, there's a note: "Bucket name must be unique within the global namespace and follow the bucket naming rules. See rules for bucket naming." There's a "Copy settings from existing bucket - optional" section with a "Choose bucket" button. Below that, there's a "Format: s3://bucket/prefix" field. In the "Object Ownership" section, there are two radio buttons: "ACLs disabled (recommended)" (which is selected) and "ACLs enabled". The "ACLs disabled" option has a note: "All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies." The "ACLs enabled" option has a note: "Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs." At the bottom, there's a section for "Object Ownership" with the text "Bucket owner enforced".

➤ Step 5 Congratulations our bucket is created

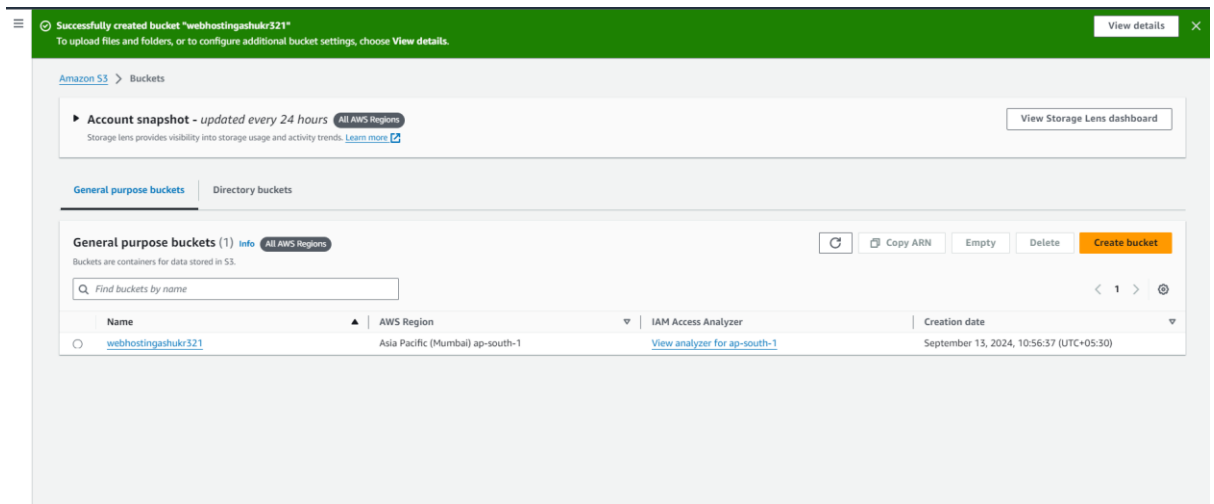

➤ Step 6 upload our file

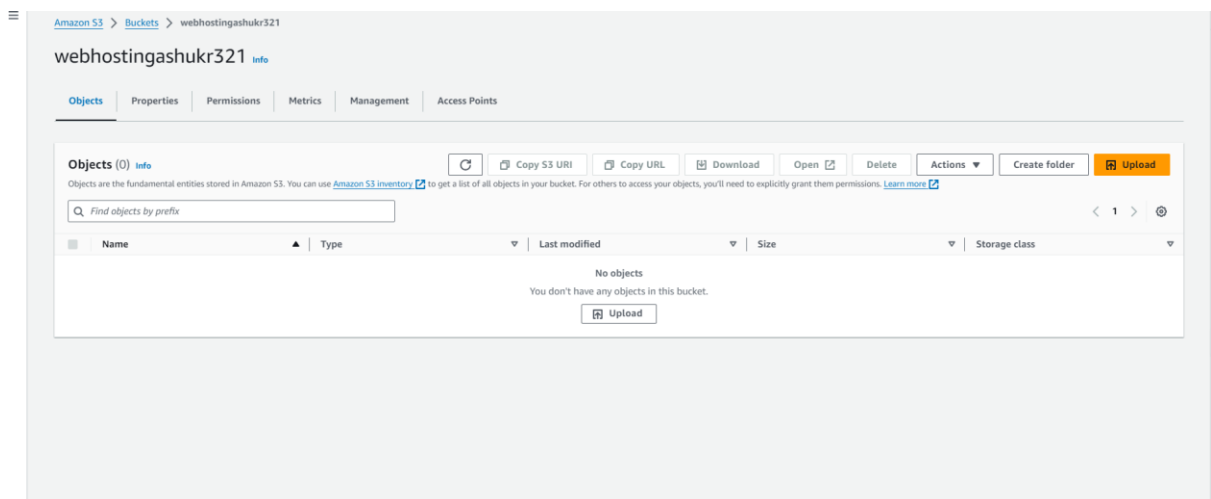

➤ Upload our static file

☰

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDK or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (1 Total, 618.0 B)
All files and folders in this table will be uploaded.

< 1 >

☐	Name	Folder
☐	index.html	-

Destination [Info](#)

Destination
[s3://webhostingashukr321](#)

► **Destination details**
Bucket settings that impact new objects stored in the specified destination.

► **Permissions**
Grant public access and access to other AWS accounts.

► **Properties**
Specify storage class, encryption settings, tags, and more.

Cancel Upload

☰

Upload succeeded
View details below.

Upload: status [Close](#)

[i](#) The information below will no longer be available after you navigate away from this page.

Summary

Destination s3://webhostingashukr321	Succeeded ✔ 1 file, 618.0 B (100.00%)	Failed ✖ 0 files, 0 B (0%)
---	--	-------------------------------

Files and folders | Configuration

Files and folders (1 Total, 618.0 B)

< 1 >

Name	Folder	Type	Size	Status	Error
index.html	-	text/html	618.0 B	✔ Succeeded	-

➤ Step 7 , go to permission

Amazon S3

Buckets

Access Grants

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

Feature spotlight

AWS Marketplace for S3

Amazon S3 > Buckets > webhostingashukr321

webhostingashukr321

Objects | Properties | Permissions | Metrics | Management | Access Points

Permissions overview

Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)

[View analyzer for ap-south-1](#)

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access

On

Individual Block Public Access settings for this bucket

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

EditDelete

Go to policy generators

Amazon S3

Buckets

Access Grants

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

Feature spotlight

AWS Marketplace for S3

Amazon S3 > Buckets > webhostingashukr321 > Edit bucket policy

Edit bucket policy

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Policy examplesPolicy generator

Bucket ARN

arn:aws:s3::webhostingashukr321

Policy

1

Edit statement

Select a statement

Select an existing statement in the policy or add a new statement.

+ Add new statement



AWS Policy Generator

The AWS Policy Generator is a tool that enables you to create policies that control access to Amazon Web Services (AWS) products and resources. For more information about creating policies, see [key concepts in Using AWS Identity and Access Management](#). Here are [sample policies](#).

Step 1: Select Policy Type

A Policy is a container for permissions. The different types of policies you can create are an IAM Policy, an S3 Bucket Policy, an SNS Topic Policy, a VPC Endpoint Policy, and an SQS Queue Policy.

Select Type of Policy S3 Bucket Policy

Step 2: Add Statement(s)

A statement is the formal description of a single permission. See a [description of elements](#) that you can use in statements.

Effect ☒ Allow ☐ Deny

Principal

Use a comma to separate multiple values.

AWS Service

Amazon S3

☐ All Services ("*")

Use multiple statements to add permissions for more than one service.

Actions -- Select Actions --

☐ All Actions ("*")

Amazon Resource Name (ARN)

ARN should follow the following format: arn:aws:s3:::{BucketName}/{Key/Name}. Use a comma to separate multiple values.

[Add Conditions \(Optional\)](#)

[Add Statement](#)

You added the following statements. Click the button below to Generate a policy.

Principal(s)	Effect	Action	Resource	Conditions
• *	Allow	• s3:GetObject	arn:aws:s3:::webhostingashukr321	None

Step 3: Generate Policy

A policy is a document (written in the [Access Policy Language](#)) that acts as a container for one or more statements.

[Generate Policy](#)

[Start Over](#)

We have to disables the block public

Amazon S3

Buckets

Access Grants

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

Feature spotlight

AWS Marketplace for S3

[Amazon S3](#) > [Buckets](#) > [webhostingashukr321](#) > Edit Block public access (bucket settings)

Edit Block public access (bucket settings) [info](#)

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Cancel

[Save changes](#)

We have to add in policy / * in Resource

Bucket ARN
arn:aws:s3::webhostingashukr321

Policy

```
1 {  
2   "Id": "Policy1726205734201",  
3   "Version": "2012-10-17",  
4   "Statement": [  
5     {  
6       "Sid": "Stmt1726205706099",  
7       "Action": [  
8         "s3:GetObject"  
9       ],  
10      "Effect": "Allow",  
11      "Resource": "arn:aws:s3::webhostingashukr321/*",  
12      "Principal": "*"   
13    }  
14  ]  
15 }
```

Edit statement

Select a statement

Select an existing statement or add a new statement

+ Add new statement

Now go back and paste the url

Amazon S3

Buckets

Access Grants

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

▼ Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

Feature spotlight

► AWS Marketplace for S3

Amazon S3 > Buckets > webhostingashukr321 > index.html

index.html

Copy S3 URI Download Open Object actions

Properties Permissions Versions

Object overview

Owner	3b01e2d90aae970bf703e64de2f8e48cea43831b1046bf5dc11b72176c8cf1c1
AWS Region	Asia Pacific (Mumbai) ap-south-1
Last modified	September 13, 2024, 10:59:38 (UTC+05:30)
Size	618.0 B
Type	html
Key	index.html
S3 URI	s3://webhostingashukr321/index.html
Amazon Resource Name (ARN)	arn:aws:s3::webhostingashukr321/index.html
Entity tag (ETag)	a47261bc1cc3f444e03fe37cd4a81d6c
Object URL	https://webhostingashukr321.s3.ap-south-1.amazonaws.com/index.html

Object management overview

The following bucket properties and object management configurations impact the behavior of this object.

Congratulations you do it

