

Module 2: Software Processes (Part I) & Agile Software Engineering (Part II)



Lectures: Tuesdays from 8:00 AM to 10:00 AM. We will meet in Room Z312 at the **Toowoomba campus**. You can also attend online via Zoom



Lecturer: Dr. Thanveer Shaik

Part I – Software Processes

The software process

- ✧ A structured set of activities required to develop a software system.
- ✧ Many different software processes but all involve:
 - Specification – defining what the system should do;
 - Design and implementation – defining the organization of the system and implementing the system;
 - Validation – checking that it does what the customer wants;
 - Evolution – changing the system in response to changing customer needs.
- ✧ A software process model is an abstract representation of a process. It presents a description of a process from some particular perspective.

Software process descriptions

- ✧ When we describe and discuss processes, we usually talk about the activities in these processes such as specifying a data model, designing a user interface, etc. and the ordering of these activities.
- ✧ Process descriptions may also include:
 - Products, which are the outcomes of a process activity;
 - Roles, which reflect the responsibilities of the people involved in the process;
 - Pre- and post-conditions, which are statements that are true before and after a process activity has been enacted or a product produced.

Plan-driven and agile processes

- ✧ Plan-driven processes are processes where all of the process activities are planned in advance and progress is measured against this plan.
- ✧ In agile processes, planning is incremental and it is easier to change the process to reflect changing customer requirements.
- ✧ In practice, most practical processes include elements of both plan-driven and agile approaches.
- ✧ There are no right or wrong software processes.

Topics covered

- ✧ Software process models
- ✧ Process activities
- ✧ Coping with change
- ✧ Process improvement

Software process models

✧ The waterfall model

- Plan-driven model. Separate and distinct phases of specification and development.

✧ Incremental development

- Specification, development and validation are interleaved. May be plan-driven or agile.

✧ Integration and configuration


- The system is assembled from existing configurable components. May be plan-driven or agile.

✧ In practice, most large systems are developed using a process that incorporates elements from all of these models.

Waterfall model phases

- ✧ There are separate identified phases in the waterfall model:
 - Requirements analysis and definition
 - System and software design
 - Implementation and unit testing
 - Integration and system testing
 - Operation and maintenance
- ✧ The main drawback of the waterfall model is the difficulty of accommodating change after the process is underway. In principle, a phase has to be complete before moving onto the next phase.

The waterfall model

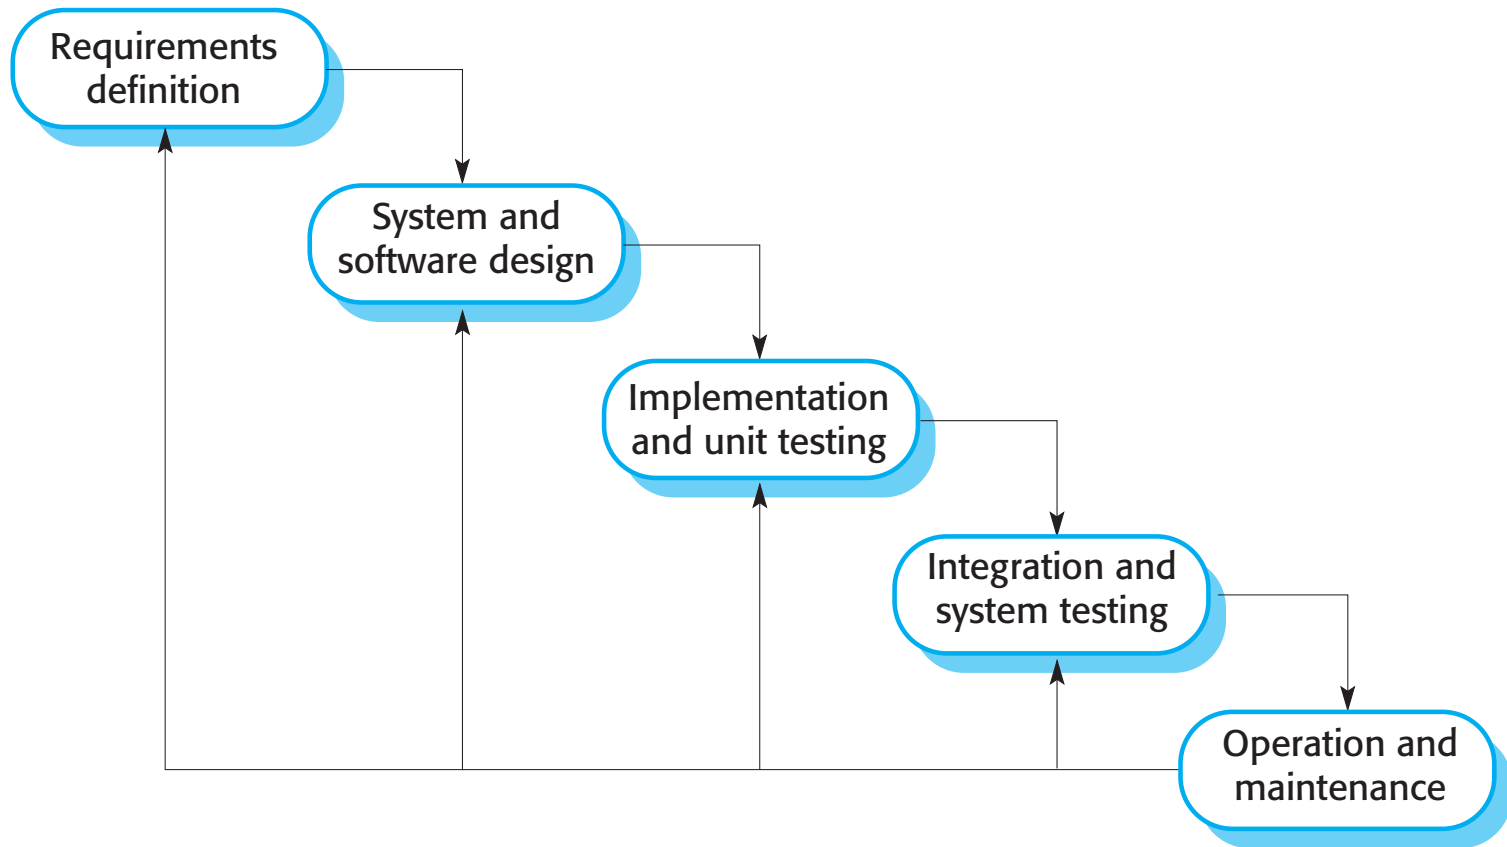


Waterfall model problems

- ✧ Inflexible partitioning of the project into distinct stages **makes it difficult to respond to changing customer requirements.**
 - Therefore, this model is only appropriate when the requirements are well-understood and changes will be fairly limited during the design process.
 - Few business systems have stable requirements.
- ✧ The waterfall model is mostly used for large systems engineering projects where a system is developed at several sites.
 - In those circumstances, the plan-driven nature of the waterfall model helps coordinate the work.

Incremental development benefits

- ✧ The cost of accommodating changing customer requirements is reduced.
 - The amount of analysis and documentation that has to be redone is much less than is required with the waterfall model.
- ✧ It is easier to get customer feedback on the development work that has been done.
 - Customers can comment on demonstrations of the software and see how much has been implemented.
- ✧ More rapid delivery and deployment of useful software to the customer is possible.
 - Customers are able to use and gain value from the software earlier than is possible with a waterfall process.

Incremental development

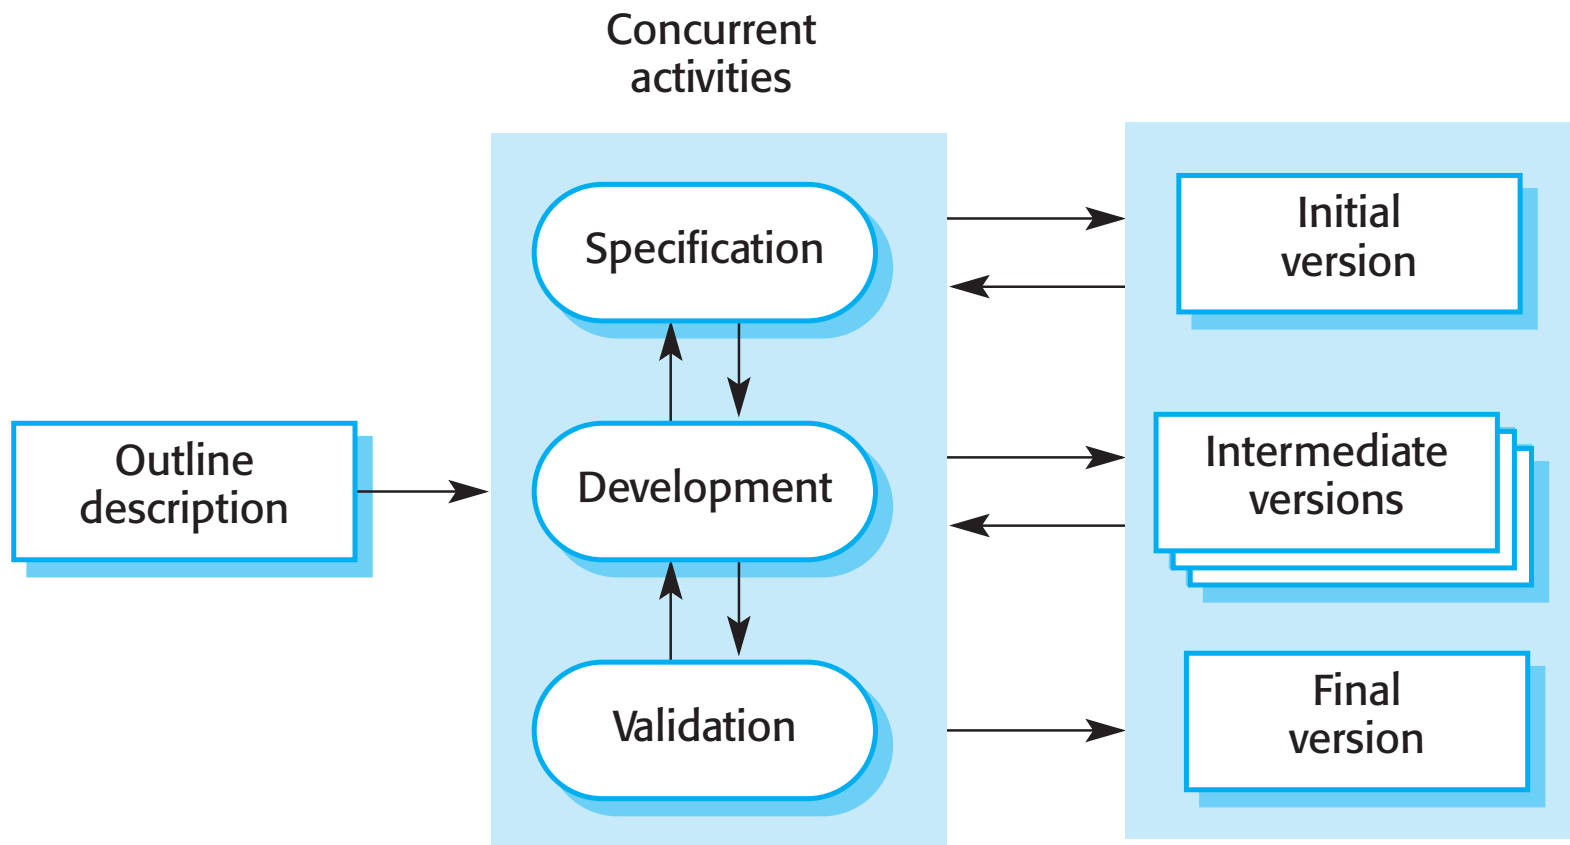

Incremental development problems

✧ The process is not visible.

- Managers need regular deliverables to measure progress. If systems are developed quickly, it is not cost-effective to produce documents that reflect every version of the system.

✧ System structure tends to degrade as new increments are added.

- Unless time and money is spent on refactoring to improve the software, regular change tends to corrupt its structure. Incorporating further software changes becomes increasingly difficult and costly.


Integration and configuration

- ✧ Based on software reuse where systems are integrated from existing components or application systems (sometimes called COTS -Commercial-off-the-shelf) systems).
- ✧ Reused elements may be configured to adapt their behaviour and functionality to a user's requirements
- ✧ Reuse is now the standard approach for building many types of business system
 - Reuse covered in more depth in Chapter 15.

Types of reusable software

- ✧ Stand-alone application systems (sometimes called COTS) that are configured for use in a particular environment.
- ✧ Collections of objects that are developed as a package to be integrated with a component framework such as .NET or J2EE.
- ✧ Web services that are developed according to service standards and which are available for remote invocation.

Reuse-oriented software engineering

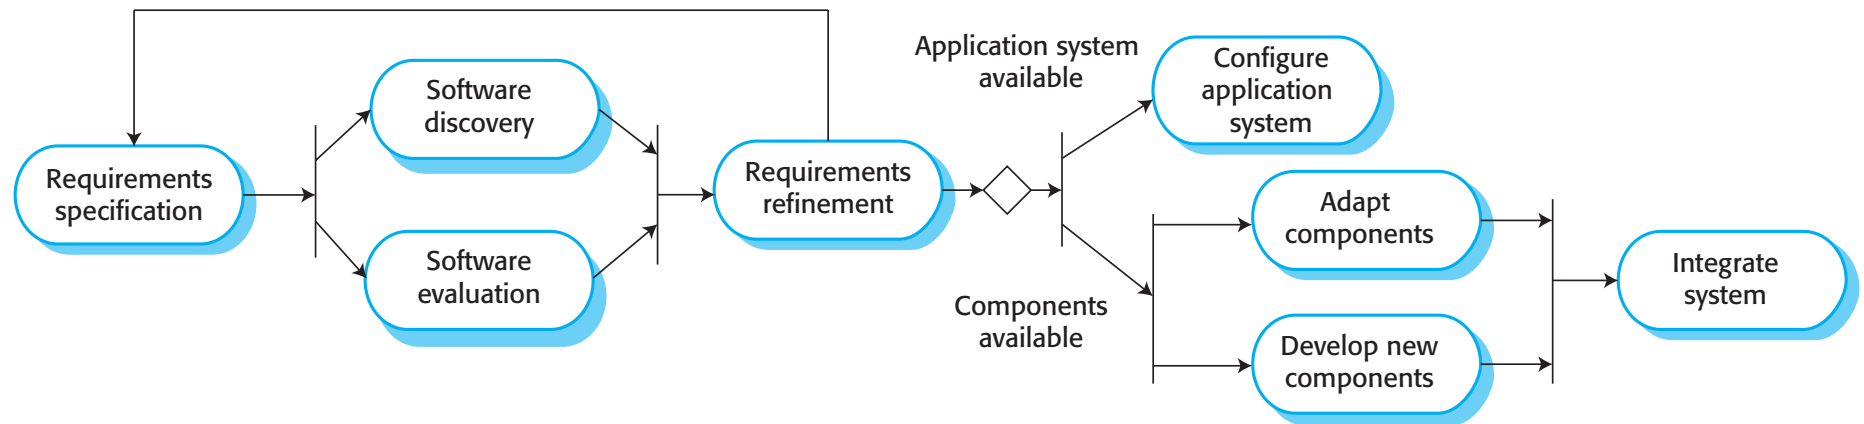

Key process stages

- ✧ Requirements specification
- ✧ Software discovery and evaluation
- ✧ Requirements refinement
- ✧ Application system configuration
- ✧ Component adaptation and integration

Advantages and disadvantages

- ✧ Reduced costs and risks as less software is developed from scratch
- ✧ Faster delivery and deployment of system
- ✧ But requirements compromises are inevitable so system may not meet real needs of users
- ✧ Loss of control over evolution of reused system elements

Topics covered

- ✧ Software process models
- ✧ Process activities
- ✧ Coping with change
- ✧ Process improvement


Process activities

- ✧ Real software processes are inter-leaved sequences of technical, collaborative and managerial activities with the overall goal of specifying, designing, implementing and testing a software system.
- ✧ The four basic process activities of specification, development, validation and evolution are organized differently in different development processes.
- ✧ For example, in the waterfall model, they are organized in sequence, whereas in incremental development they are interleaved.

Software specification

- ✧ The process of establishing what services are required and the constraints on the system's operation and development.
- ✧ Requirements engineering process
 - Requirements elicitation and analysis
 - What do the system stakeholders require or expect from the system?
 - Requirements specification
 - Defining the requirements in detail
 - Requirements validation
 - Checking the validity of the requirements

The requirements engineering process

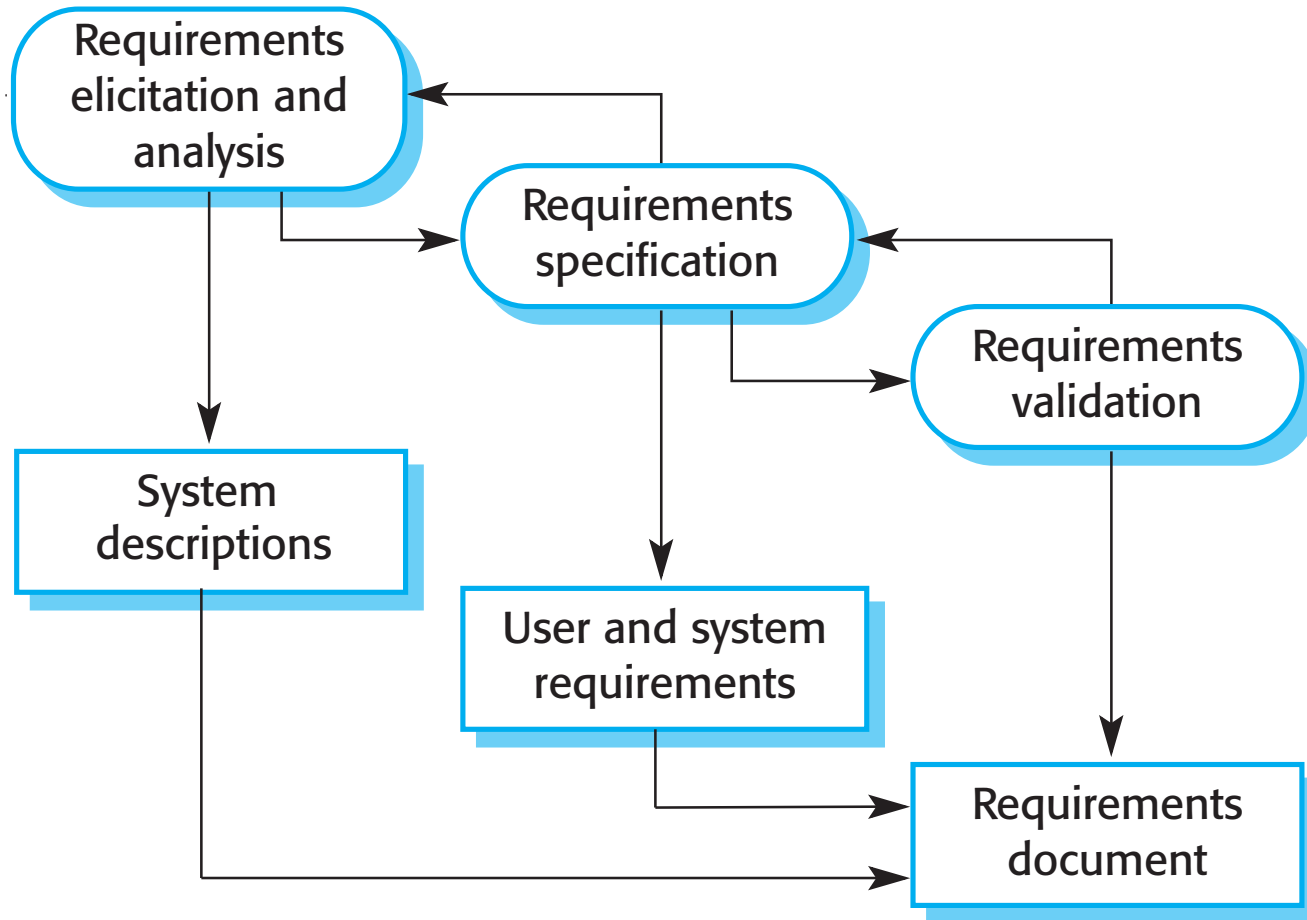


Software design and implementation

- ✧ The process of converting the system specification into an executable system.
- ✧ Software design
 - Design a software structure that realises the specification;
- ✧ Implementation
 - Translate this structure into an executable program;
- ✧ The activities of design and implementation are closely related and may be inter-leaved.

Design activities

- ✧ *Architectural design*, where you identify the overall structure of the system, the principal components (subsystems or modules), their relationships and how they are distributed.
- ✧ *Database design*, where you design the system data structures and how these are to be represented in a database.
- ✧ *Interface design*, where you define the interfaces between system components.
- ✧ *Component selection and design*, where you search for reusable components. If unavailable, you design how it will operate.

A general model of the design process

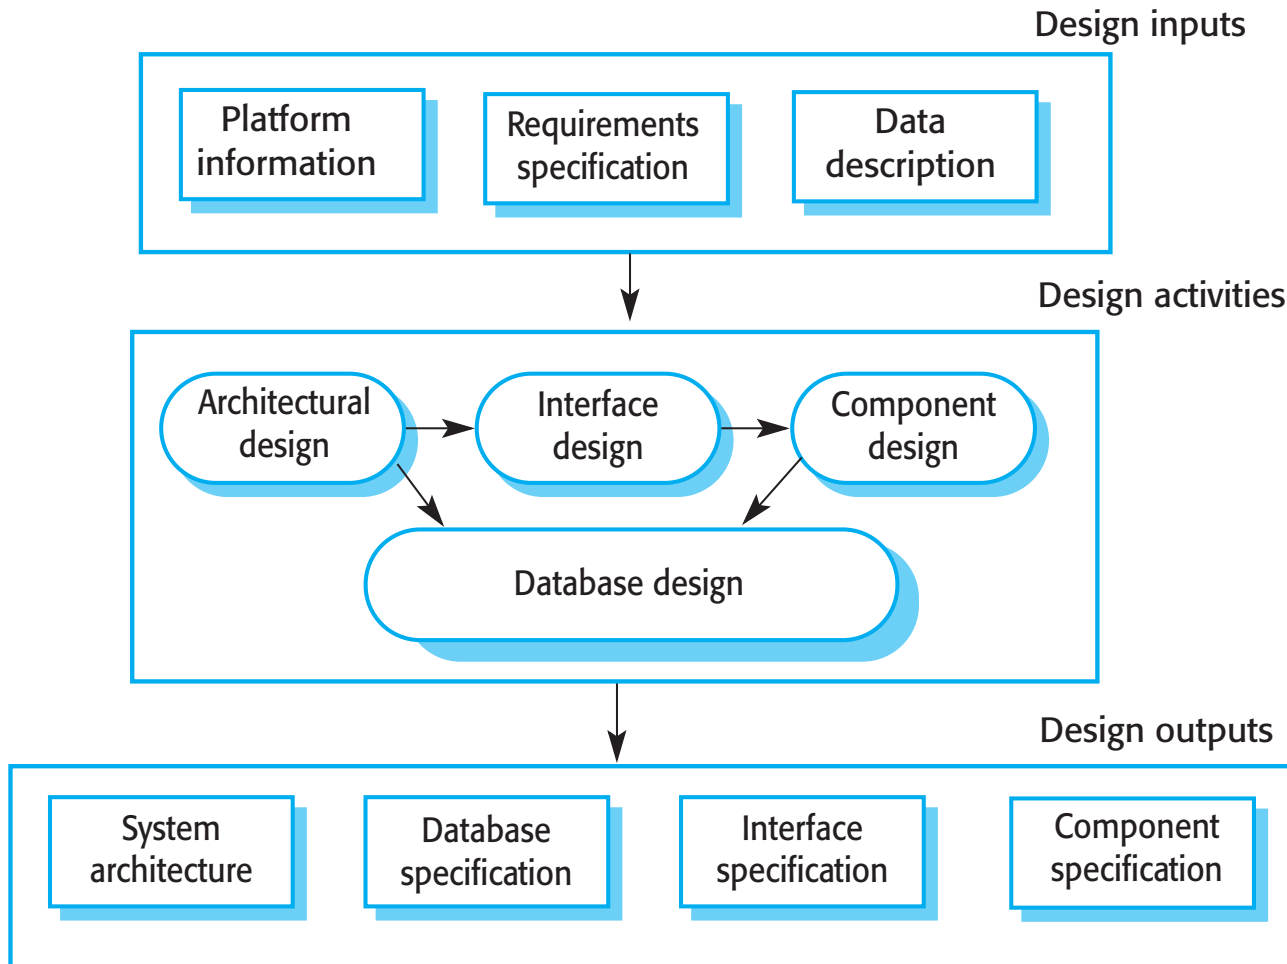

System implementation

- ✧ The software is implemented either by developing a program or programs or by configuring an application system.
- ✧ Design and implementation are interleaved activities for most types of software system.
- ✧ Programming is an individual activity with no standard process.
- ✧ Debugging is the activity of finding program faults and correcting these faults.

Software validation

- ✧ Verification and validation (V & V) is intended to show that a system conforms to its specification and meets the requirements of the system customer.
- ✧ Involves checking and review processes and system testing.
- ✧ System testing involves executing the system with test cases that are derived from the specification of the real data to be processed by the system.
- ✧ Testing is the most commonly used V & V activity.

Testing stages

✧ Component testing

- Individual components are tested independently;
- Components may be functions or objects or coherent groupings of these entities.


✧ System testing

- Testing of the system as a whole. Testing of emergent properties is particularly important.


✧ Customer testing

- Testing with customer data to check that the system meets the customer's needs.

Stages of testing

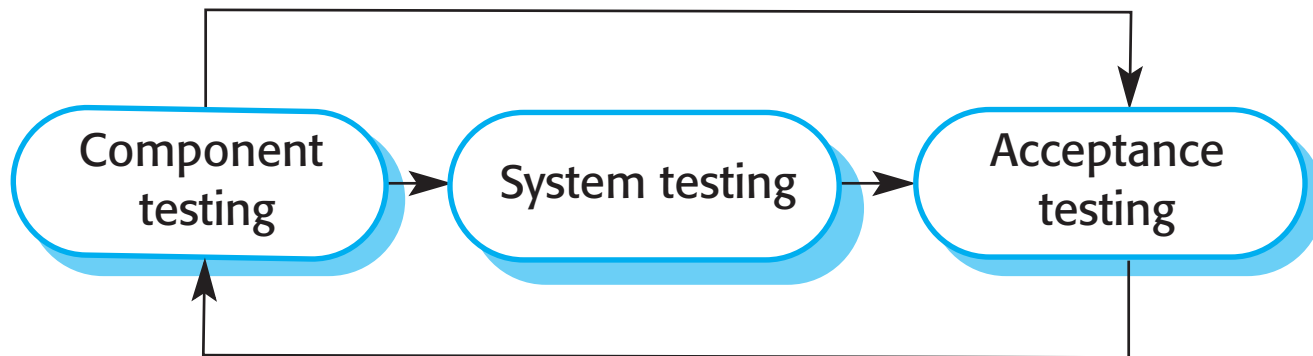


Testing phases in a plan-driven software process (V-model)

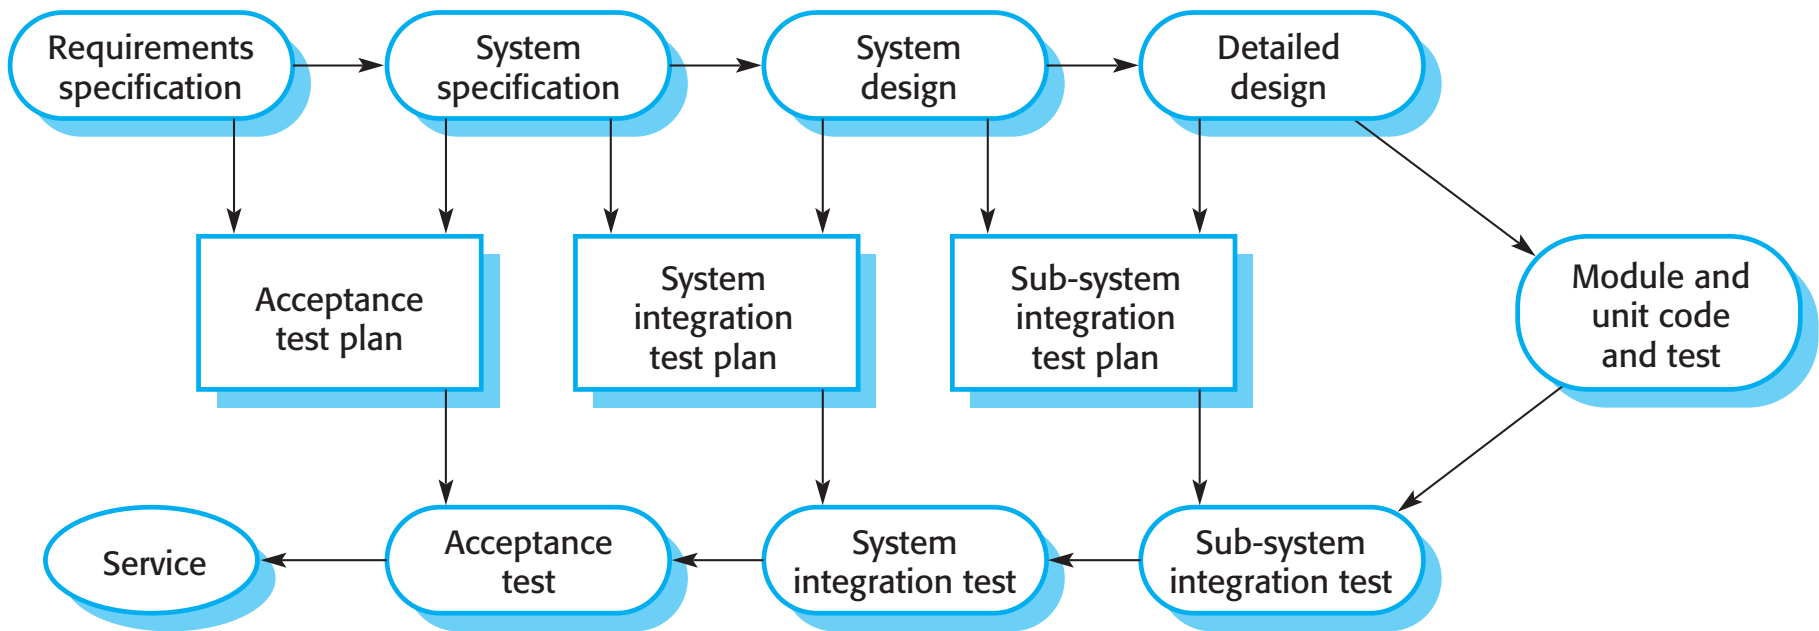

Software evolution

- ✧ Software is inherently flexible and can change.
- ✧ As requirements change through changing business circumstances, the software that supports the business must also evolve and change.
- ✧ Although there has been a demarcation between development and evolution (maintenance) this is increasingly irrelevant as fewer and fewer systems are completely new.

System evolution

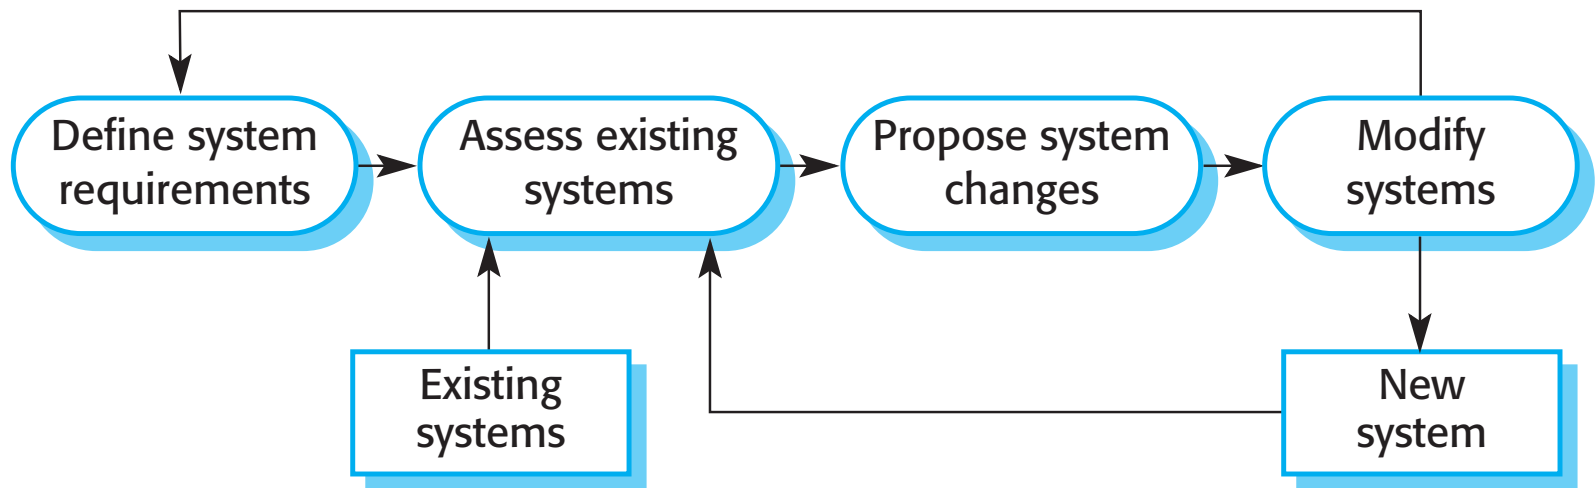

Topics covered

- ✧ Software process models
- ✧ Process activities
- ✧ Coping with change
- ✧ Process improvement

Coping with change

- ✧ Change is inevitable in all large software projects.
 - Business changes lead to new and changed system requirements
 - New technologies open up new possibilities for improving implementations
 - Changing platforms require application changes
- ✧ Change leads to rework so the costs of change include both rework (e.g. re-analysing requirements) as well as the costs of implementing new functionality

Reducing the costs of rework

- ✧ Change anticipation, where the software process includes activities that can anticipate possible changes before significant rework is required.
 - For example, a prototype system may be developed to show some key features of the system to customers.
- ✧ Change tolerance, where the process is designed so that changes can be accommodated at relatively low cost.
 - This normally involves some form of incremental development. Proposed changes may be implemented in increments that have not yet been developed. If this is impossible, then only a single increment (a small part of the system) may have be altered to incorporate the change.

Coping with changing requirements

- ✧ System prototyping, where a version of the system or part of the system is developed quickly to check the customer's requirements and the feasibility of design decisions. This approach supports change anticipation.
- ✧ Incremental delivery, where system increments are delivered to the customer for comment and experimentation. This supports both change avoidance and change tolerance.


Software prototyping

- ✧ A prototype is an initial version of a system used to demonstrate concepts and try out design options.
- ✧ A prototype can be used in:
 - The requirements engineering process to help with requirements elicitation and validation;
 - In design processes to explore options and develop a UI design;
 - In the testing process to run back-to-back tests.

Benefits of prototyping

- ✧ Improved system usability.
- ✧ A closer match to users' real needs.
- ✧ Improved design quality.
- ✧ Improved maintainability.
- ✧ Reduced development effort.

The process of prototype development

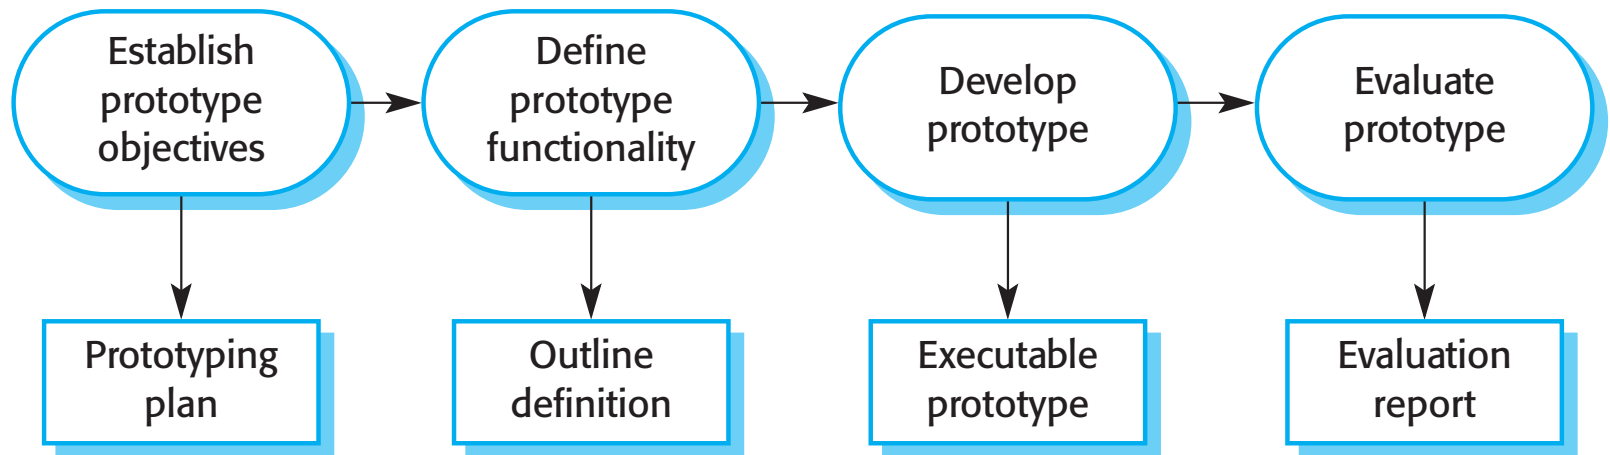

Prototype development

- ✧ May be based on rapid prototyping languages or tools
- ✧ May involve leaving out functionality
 - Prototype should focus on areas of the product that are not well-understood;
 - Error checking and recovery may not be included in the prototype;
 - Focus on functional rather than non-functional requirements such as reliability and security

Throw-away prototypes

- ✧ Prototypes should be discarded after development as they are not a good basis for a production system:
 - It may be impossible to tune the system to meet non-functional requirements;
 - Prototypes are normally undocumented;
 - The prototype structure is usually degraded through rapid change;
 - The prototype probably will not meet normal organisational quality standards.

Incremental delivery

- ✧ Rather than deliver the system as a single delivery, the development and delivery is broken down into increments with each increment delivering part of the required functionality.
- ✧ User requirements are prioritised and the highest priority requirements are included in early increments.
- ✧ Once the development of an increment is started, the requirements are frozen though requirements for later increments can continue to evolve.

Incremental development and delivery


✧ Incremental development

- Develop the system in increments and evaluate each increment before proceeding to the development of the next increment;
- Normal approach used in agile methods;
- Evaluation done by user/customer proxy.

✧ Incremental delivery

- Deploy an increment for use by end-users;
- More realistic evaluation about practical use of software;
- Difficult to implement for replacement systems as increments have less functionality than the system being replaced.

Incremental delivery

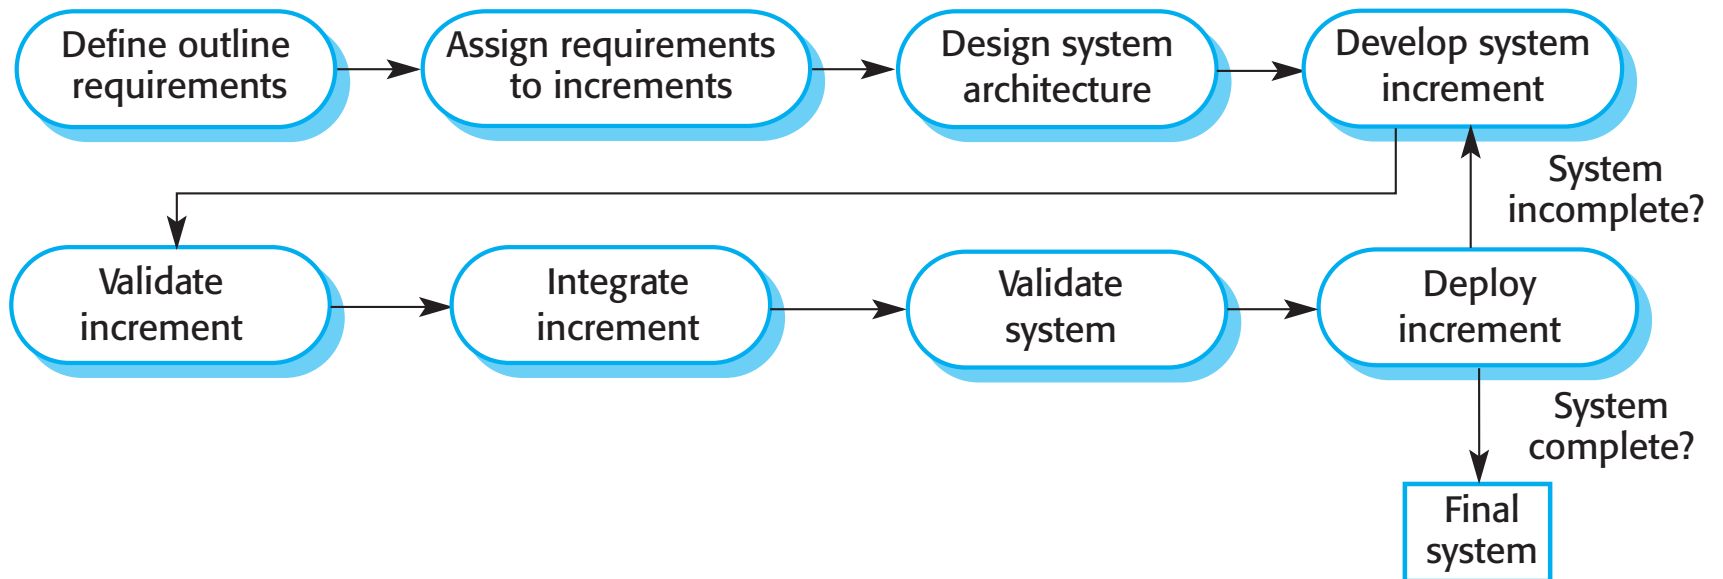

Incremental delivery advantages

- ✧ Customer value can be delivered with each increment so system functionality is available earlier.
- ✧ Early increments act as a prototype to help elicit requirements for later increments.
- ✧ Lower risk of overall project failure.
- ✧ The highest priority system services tend to receive the most testing.

Incremental delivery problems

- ✧ Most systems require a set of basic facilities that are used by different parts of the system.
 - As requirements are not defined in detail until an increment is to be implemented, it can be hard to identify common facilities that are needed by all increments.
- ✧ The essence of iterative processes is that the specification is developed in conjunction with the software.
 - However, this conflicts with the procurement model of many organizations, where the complete system specification is part of the system development contract.

Topics covered

- ✧ Software process models
- ✧ Process activities
- ✧ Coping with change
- ✧ Process improvement

Process improvement

- ✧ Many software companies have turned to software process improvement as a way of enhancing the quality of their software, reducing costs or accelerating their development processes.
- ✧ Process improvement means understanding existing processes and changing these processes to increase product quality and/or reduce costs and development time.

Approaches to improvement

- ✧ The process maturity approach, which focuses on improving process and project management and introducing good software engineering practice.
 - The level of process maturity reflects the extent to which good technical and management practice has been adopted in organizational software development processes.
- ✧ The agile approach, which focuses on iterative development and the reduction of overheads in the software process.
 - The primary characteristics of agile methods are rapid delivery of functionality and responsiveness to changing customer requirements.

Process improvement activities

✧ *Process measurement*

- You measure one or more attributes of the software process or product. These measurements form a baseline that helps you decide if process improvements have been effective.


✧ *Process analysis*

- The current process is assessed, and process weaknesses and bottlenecks are identified. Process models (sometimes called process maps) that describe the process may be developed.

✧ *Process change*

- Process changes are proposed to address some of the identified process weaknesses. These are introduced and the cycle resumes to collect data about the effectiveness of the changes.

The process improvement cycle

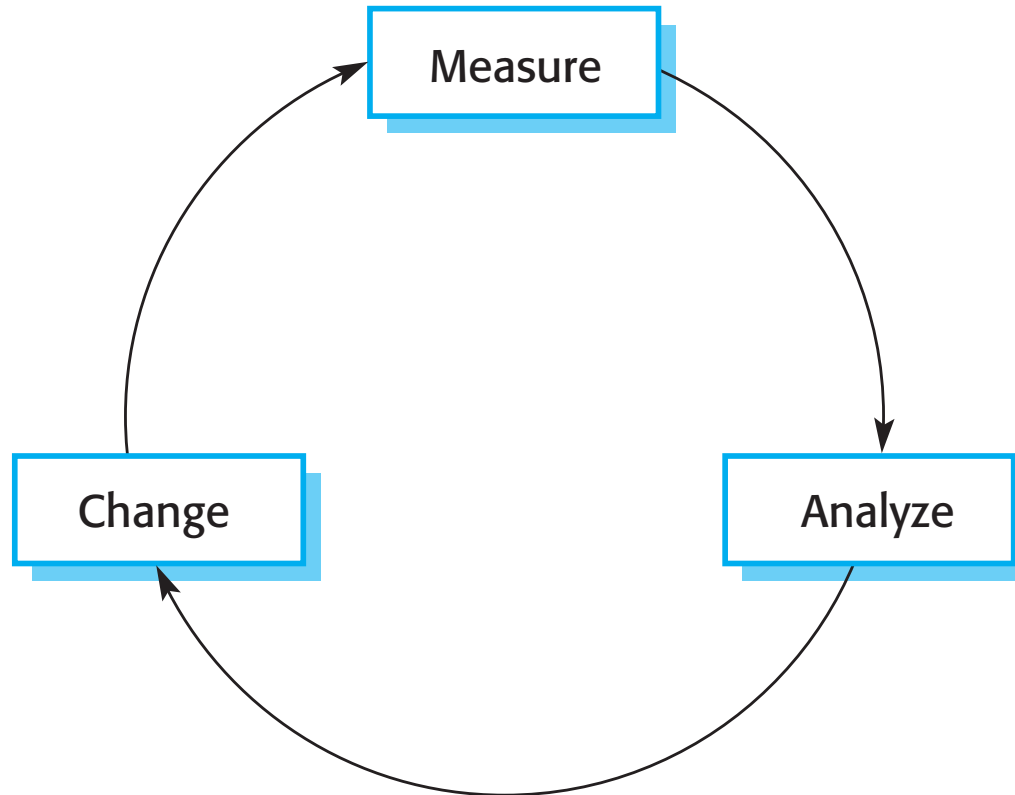

Process measurement

- ✧ Wherever possible, quantitative process data should be collected
 - However, where organisations do not have clearly defined process standards this is very difficult as you don't know what to measure. A process may have to be defined before any measurement is possible.
- ✧ Process measurements should be used to assess process improvements
 - But this does not mean that measurements should drive the improvements. The improvement driver should be the organizational objectives.

Process metrics

- ✧ Time taken for process activities to be completed
 - E.g. Calendar time or effort to complete an activity or process.
- ✧ Resources required for processes or activities
 - E.g. Total effort in person-days.
- ✧ Number of occurrences of a particular event
 - E.g. Number of defects discovered.

The SEI capability maturity model

✧ Initial

- Essentially uncontrolled

✧ Repeatable

- Product management procedures defined and used

✧ Defined

- Process management procedures and strategies defined and used


✧ Managed

- Quality management strategies defined and used

✧ Optimising

- Process improvement strategies defined and used

Capability maturity levels

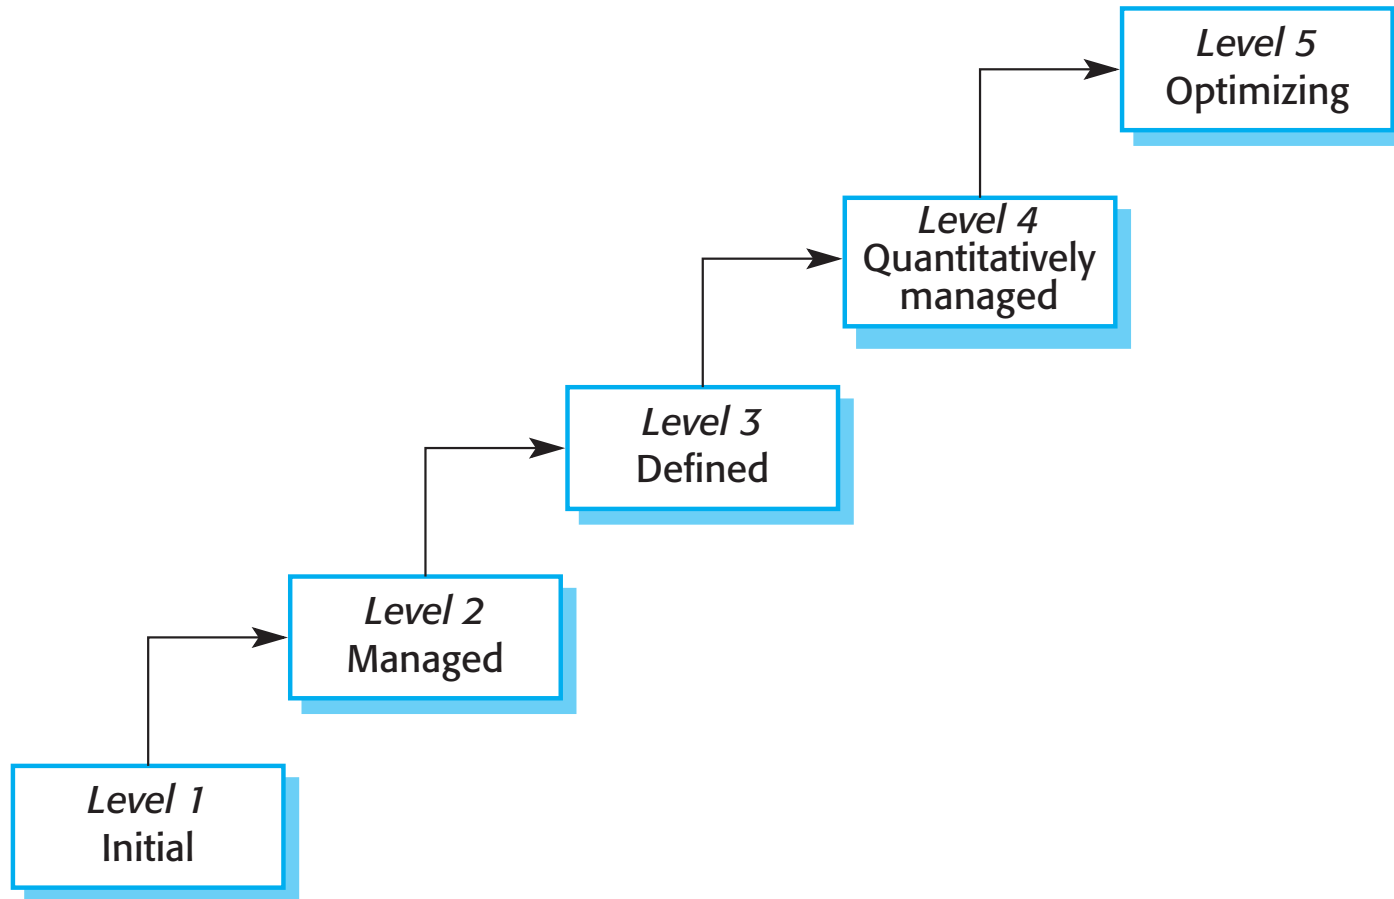

Part II – Agile Software Engineering

(Agile Methods)

Agile software engineering

- ❖ Software products must be brought to market quickly so rapid software development and delivery is essential.
- ❖ Virtually all software products are now developed using an agile approach.
- ❖ Agile software engineering focuses on delivering functionality quickly, responding to changing product specifications and minimizing development overheads.
- ❖ A large number of 'agile methods' have been developed.
 - *There is no 'best' agile method or technique.*
 - *It depends on who is using the technique, the development team and the type of product being developed*

Agile methods

- ❖ Plan-driven development evolved to support the engineering of large, long-lifetime systems (such as aircraft control systems) where teams may be geographically dispersed and work on the software for several years.
 - *This approach is based on controlled and rigorous software development processes that include detailed project planning, requirements specification and analysis and system modelling.*
 - *However, plan-driven development involves significant overheads and documentation and it does not support the rapid development and delivery of software.*
- ❖ Agile methods were developed in the 1990s to address this problem.
 - *These methods focus on the software rather than its documentation, develop software in a series of increments and aim to reduce process bureaucracy as much as possible.*

Table 2.1 The agile manifesto

We are uncovering better ways of developing software by doing it and helping others to do it. Through this work, we have come to value:

- *individuals and interactions over processes and tools;*
- *working software over comprehensive documentation;*
- *customer collaboration over contract negotiation;*
- *responding to change over following a plan.*

While there is value on the items on the right, we value the items on the left more.

Incremental development

- ❖ All agile methods are based around incremental development and delivery.
- ❖ Product development focuses on the software features, where a feature does something for the software user.
- ❖ With incremental development, you start by prioritizing the features so that the most important features are implemented first.
 - *You only define the details of the feature being implemented in an increment.*
 - *That feature is then implemented and delivered.*
- ❖ Users or surrogate users can try it out and provide feedback to the development team. You then go on to define and implement the next feature of the system.

Figure 2.1 Incremental development

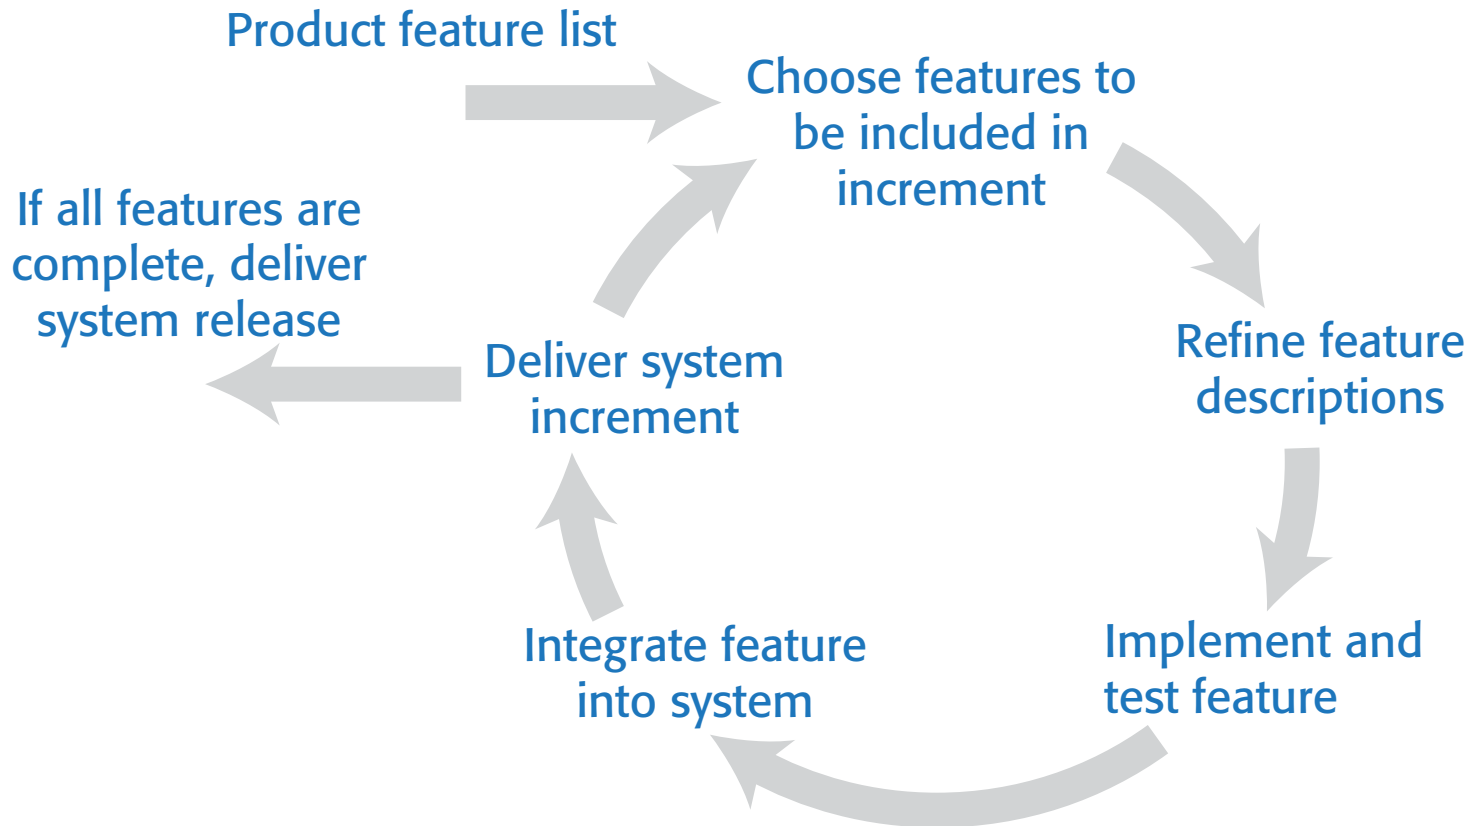


Table 2.2 Incremental development activities

- ❖ **Choose features to be included in an increment**

Using the list of features in the planned product, select those features that can be implemented in the next product increment.

- ❖ **Refine feature descriptions**

Add detail to the feature descriptions so that the team have a common understanding of each feature and there is sufficient detail to begin implementation.

- ❖ **Implement and test**

Implement the feature and develop automated tests for that feature that show that its behaviour is consistent with its description.

- ❖ **Integrate feature and test**

Integrate the developed feature with the existing system and test it to check that it works in conjunction with other features.

- ❖ **Deliver system increment**

Deliver the system increment to the customer or product manager for checking and comments. If enough features have been implemented, release a version of the system for customer use.

Table 2.3 Agile development principles

Involve the customer

Involve customers closely with the software development team. Their role is to provide and prioritize new system requirements and to evaluate each increment of the system.

Embrace change

Expect the features of the product and the details of these features to change as the development team and the product manager learn more about it. Adapt the software to cope with changes as they are made.

Develop and deliver incrementally

Always develop software products in increments. Test and evaluate each increment as it is developed and feed back required changes to the development team.

Table 2.3 Agile development principles

Maintain simplicity

Focus on simplicity in both the software being developed and in the development process. Wherever possible, do what you can to eliminate complexity from the system.

Focus on people, not things

Trust the development team and do not expect everyone to always do the development process in the same way. Team members should be left to develop their own ways of working without being limited by prescriptive software processes.

In Week 4, we will delve deeper into the realm of Agile Software Engineering, where we will explore methodologies such as *Extreme Programming*, *Scrum*, and more.

Key points

- ✧ Software processes are the activities involved in producing a software system. Software process models are abstract representations of these processes.
- ✧ General process models describe the organization of software processes.
 - Examples of these general models include the 'waterfall' model, incremental development, and reuse-oriented development.
- ✧ Requirements engineering is the process of developing a software specification.

Key points

- ✧ Design and implementation processes are concerned with transforming a requirements specification into an executable software system.
- ✧ Software validation is the process of checking that the system conforms to its specification and that it meets the real needs of the users of the system.
- ✧ Software evolution takes place when you change existing software systems to meet new requirements. The software must evolve to remain useful.
- ✧ Processes should include activities such as prototyping and incremental delivery to cope with change.

Key points

- ✧ Processes may be structured for iterative development and delivery so that changes may be made without disrupting the system as a whole.
- ✧ The principal approaches to process improvement are agile approaches, geared to reducing process overheads, and maturity-based approaches based on better process management and the use of good software engineering practice.
- ✧ The SEI process maturity framework identifies maturity levels that essentially correspond to the use of good software engineering practice.

Thanks