

CSS Attribute Selectors

Style HTML Elements With Specific Attributes

- It is possible to style HTML elements that have specific attributes or attribute values.

CSS [attribute] Selector

- The [attribute] selector is used to select elements with a specified attribute.
- The following example selects all <a> elements with a target attribute

```
<!DOCTYPE html>
<html>
<head>
<style>
a[target] {
  background-color: yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute] Selector</h2>
<p>The links with a target attribute gets a yellow background:</p>

<a href="https://www.w3schools.com">w3schools.com</a>
<a href="http://www.disney.com" target="_blank">disney.com</a>
<a href="http://www.wikipedia.org" target="_top">wikipedia.org</a>

</body>
</html>
```

CSS [attribute] Selector

The links with a target attribute gets a yellow background:

[w3schools.com](https://www.w3schools.com) [disney.com](http://www.disney.com) [wikipedia.org](http://www.wikipedia.org)

CSS [attribute="value"] Selector

- The [attribute="value"] selector is used to select elements with a specified attribute and value.
- The following example selects all <a> elements with a target="_blank" attribute

```
<!DOCTYPE html>
<html>
<head>
<style>
a[target=_blank] {
  background-color: yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute="value"] Selector</h2>
<p>The link with target="_blank" gets a yellow background:</p>

<a href="https://www.w3schools.com">w3schools.com</a>
<a href="http://www.disney.com" target="_blank">disney.com</a>
<a href="http://www.wikipedia.org" target="_top">wikipedia.org</a>

</body>
</html>
```

CSS [attribute="value"] Selector

The link with target="_blank" gets a yellow background:

[w3schools.com](https://www.w3schools.com) [disney.com](http://www.disney.com) [wikipedia.org](http://www.wikipedia.org)

CSS [attribute~="value"] Selector

- The [attribute~="value"] selector is used to select elements with an attribute value containing a specified word.
- The following example selects all elements with a title attribute that contains a space-separated list of words, one of which is "flower"

```
<!DOCTYPE html>
<html>
<head>
<style>
[title~="flower"] {
    border: 5px solid yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute~="value"] Selector</h2>
<p>All images with the title attribute containing the word "flower" get a yellow border.</p>





</body>
</html>
```

CSS [attribute~="value"] Selector

All images with the title attribute containing the word "flower" get a yellow border.



CSS [attribute]="value" Selector

- The [attribute]="value" selector is used to select elements with the specified attribute starting with the specified value.
- The following example selects all elements with a class attribute value that begins with "top":
- Note: The value has to be a whole word, either alone, like class="top", or followed by a hyphen(-), like class="top-text"!

```
<!DOCTYPE html>
<html>
<head>
<style>
[class|=top] {
  background: yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute]="value" Selector</h2>

<h1 class="top-header">Welcome</h1>
<p class="top-text">Hello world!</p>
<p class="topcontent">Are you learning CSS?</p>

</body>
</html>
```

CSS [attribute]="value" Selector

Welcome

Hello world!

Are you learning CSS?

CSS [attribute^="value"] Selector

- The [attribute^="value"] selector is used to select elements whose attribute value begins with a specified value.
- The following example selects all elements with a class attribute value that begins with "top":
- Note: The value does not have to be a whole word!

```
<!DOCTYPE html>
<html>
<head>
<style>
[class^="top"] {
  background: yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute^="value"] Selector</h2>

<h1 class="top-header">Welcome</h1>
<p class="top-text">Hello world!</p>
<p class="topcontent">Are you learning CSS?</p>

</body>
</html>
```

CSS [attribute^="value"] Selector

Welcome

Hello world!

Are you learning CSS?

CSS [attribute\$="value"] Selector

- The [attribute\$="value"] selector is used to select elements whose attribute value ends with a specified value.
- The following example selects all elements with a class attribute value that ends with "test":
- Note: The value does not have to be a whole word!

```

<!DOCTYPE html>
<html>
<head>
<style>
[class$="test"] {
    background: yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute$="value"] Selector</h2>

<div class="first_test">The first div element.</div>
<div class="second">The second div element.</div>
<div class="my-test">The third div element.</div>
<p class="mytest">This is some text in a paragraph.</p>

</body>
</html>

```

CSS [attribute\$="value"] Selector

The first div element.

The second div element.

The third div element.

This is some text in a paragraph.

CSS [attribute*="value"] Selector

- The [attribute*="value"] selector is used to select elements whose attribute value contains a specified value.
- The following example selects all elements with a class attribute value that contains "te":
- Note: The value does not have to be a whole word!

```

<!DOCTYPE html>
<html>
<head>
<style>
[class*="te"] {
    background: yellow;
}
</style>
</head>
<body>

<h2>CSS [attribute*="value"] Selector</h2>

<div class="first_test">The first div element.</div>
<div class="second">The second div element.</div>
<div class="my-test">The third div element.</div>
<p class="mytest">This is some text in a paragraph.</p>

</body>
</html>

```

CSS [attribute*="value"] Selector

The first div element.

The second div element.

The third div element.

This is some text in a paragraph.

Styling Forms

- The attribute selectors can be useful for styling forms without class or ID

```
<!DOCTYPE html>
<html>
<head>
<style>
input[type=text] {
  width: 150px;
  display: block;
  margin-bottom: 10px;
  background-color: yellow;
}

input[type=button] {
  width: 120px;
  margin-left: 35px;
  display: block;
}
</style>
</head>
<body>

<h2>Styling Forms</h2>

<form name="input" action="" method="get">
  Firstname:<input type="text" name="Name" value="Peter" size="20">
  Lastname:<input type="text" name="Name" value="Griffin" size="20">
  <input type="button" value="Example Button">
</form>

</body>
</html>
```

Styling Forms

Firstname:

Lastname:

CSS Selectors

CSS Selectors

- In CSS, selectors are patterns used to select the element(s) you want to style

Selector	Example	Example description
<u>.class</u>	.intro	Selects all elements with class="intro"
.class1.class2	.name1.name2	Selects all elements with both <i>name1</i> and <i>name2</i> set within its class attribute
.class1 .class2	.name1 .name2	Selects all elements with <i>name2</i> that is a descendant of an element with <i>name1</i>
<u>#id</u>	#firstname	Selects the element with id="firstname"
<u>*</u>	*	Selects all elements
<u>element</u>	p	Selects all <p> elements
<u>element.class</u>	p.intro	Selects all <p> elements with class="intro"
<u>element,element</u>	div, p	Selects all <div> elements and all <p> elements
<u>element element</u>	div p	Selects all <p> elements inside <div> elements

<u><i>element+element</i></u>	div + p	Selects all <p> elements that are placed immediately after <div> elements
<u><i>element1~element2</i></u>	p ~ ul	Selects every element that are preceded by a <p> element
[<u><i>attribute</i></u>]	[target]	Selects all elements with a target attribute
[<u><i>attribute=value</i></u>]	[target=_blank]	Selects all elements with target="_blank"
[<u><i>attribute~=value</i></u>]	[title~=flower]	Selects all elements with a title attribute containing the word "flower"
[<u><i>attribute =value</i></u>]	[lang =en]	Selects all elements with a lang attribute value starting with "en"
[<u><i>attribute^=value</i></u>]	a[href^="https"]	Selects every <a> element whose href attribute value begins with "https"
[<u><i>attribute\$=value</i></u>]	a[href\$=".pdf"]	Selects every <a> element whose href attribute value ends with ".pdf"
[<u><i>attribute*=value</i></u>]	a[href*="w3schools"]	Selects every <a> element whose href attribute value contains the substring "w3schools"

<u>:active</u>	a:active	Selects the active link
<u>::after</u>	p::after	Insert something after the content of each <p> element
<u>::before</u>	p::before	Insert something before the content of each <p> element
<u>:checked</u>	input:checked	Selects every checked <input> element
<u>:default</u>	input:default	Selects the default <input> element
<u>:disabled</u>	input:disabled	Selects every disabled <input> element
<u>:empty</u>	p:empty	Selects every <p> element that has no children (including text nodes)
<u>:enabled</u>	input:enabled	Selects every enabled <input> element
<u>:first-child</u>	p:first-child	Selects every <p> element that is the first child of its parent
<u>::first-letter</u>	p::first-letter	Selects the first letter of every <p> element
<u>::first-line</u>	p::first-line	Selects the first line of every <p> element


<u>:first-of-type</u>	p:first-of-type	Selects every <p> element that is the first <p> element of its parent
<u>:focus</u>	input:focus	Selects the input element which has focus
<u>:fullscreen</u>	:fullscreen	Selects the element that is in full-screen mode
<u>:hover</u>	a:hover	Selects links on mouse over
<u>:in-range</u>	input:in-range	Selects input elements with a value within a specified range
<u>:indeterminate</u>	input:indeterminate	Selects input elements that are in an indeterminate state
<u>:invalid</u>	input:invalid	Selects all input elements with an invalid value
<u>:lang(<i>language</i>)</u>	p:lang(it)	Selects every <p> element with a lang attribute equal to "it" (Italian)
<u>:last-child</u>	p:last-child	Selects every <p> element that is the last child of its parent
<u>:last-of-type</u>	p:last-of-type	Selects every <p> element that is the last <p> element of its parent

<u>:link</u>	a:link	Selects all unvisited links
<u>:not(selector)</u>	:not(p)	Selects every element that is not a <p> element
<u>:nth-child(n)</u>	p:nth-child(2)	Selects every <p> element that is the second child of its parent
<u>:nth-last-child(n)</u>	p:nth-last-child(2)	Selects every <p> element that is the second child of its parent, counting from the last child
<u>:nth-last-of-type(n)</u>	p:nth-last-of-type(2)	Selects every <p> element that is the second <p> element of its parent, counting from the last child
<u>:nth-of-type(n)</u>	p:nth-of-type(2)	Selects every <p> element that is the second <p> element of its parent
<u>:only-of-type</u>	p:only-of-type	Selects every <p> element that is the only <p> element of its parent
<u>:only-child</u>	p:only-child	Selects every <p> element that is the only child of its parent
<u>:optional</u>	input:optional	Selects input elements with no "required" attribute
<u>:out-of-range</u>	input:out-of-range	Selects input elements with a value outside a specified range

<u>::placeholder</u>	input::placeholder	Selects input elements with the "placeholder" attribute specified
<u>:read-only</u>	input:read-only	Selects input elements with the "readonly" attribute specified
<u>:read-write</u>	input:read-write	Selects input elements with the "readonly" attribute NOT specified
<u>:required</u>	input:required	Selects input elements with the "required" attribute specified
<u>:root</u>	:root	Selects the document's root element
<u>::selection</u>	::selection	Selects the portion of an element that is selected by a user
<u>:target</u>	#news:target	Selects the current active #news element (clicked on a URL containing that anchor name)
<u>:valid</u>	input:valid	Selects all input elements with a valid value
<u>:visited</u>	a:visited	Selects all visited links

Exercise 15

- <https://reurl.cc/jQ1Nj1>

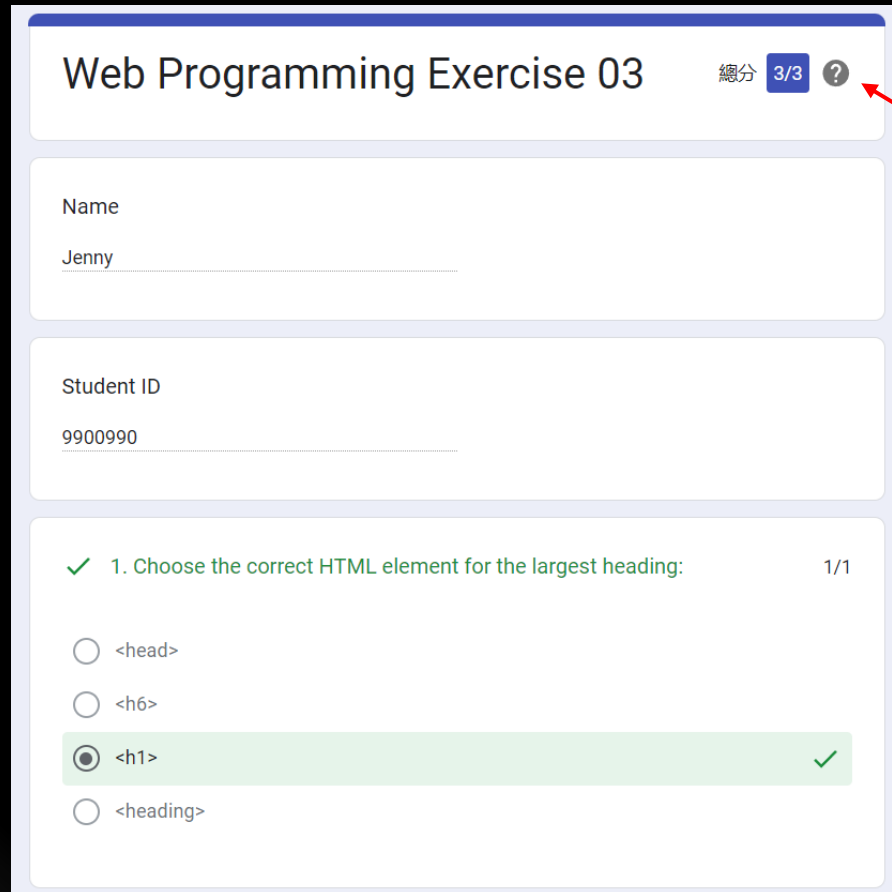

Web Programming Exercise 03 總分 3/3 ?

Name
Jenny

Student ID
9900990

✓ 1. Choose the correct HTML element for the largest heading: 1/1

☐ <head>

☐ <h6>

☒ <h1> ✓

☐ <heading>

Just show that you are all correct!

And upload the screenshot to the portal