


## Single Phase



## Three Phase

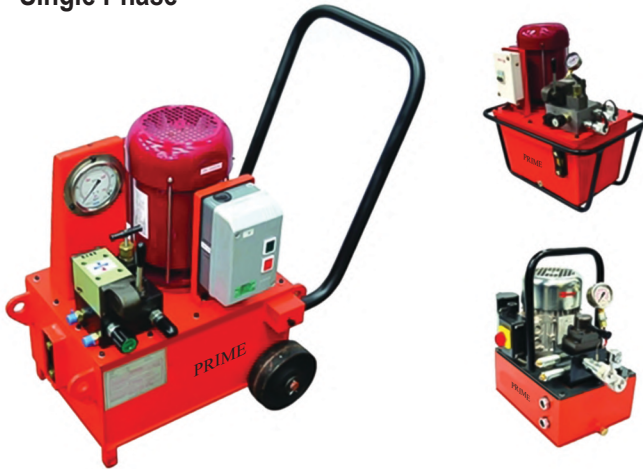

### FEATURES :

- ▶ Hydraulic elements, tube fittings, tank accessories & electricals of reputed make
- ▶ Robust & aesthetically designed for easy maintenance
- ▶ Compatible to all reputed brand jacks
- ▶ Options available: Hand lever/Solenoid (Push button)
- ▶ Wheels for easy handling
- ▶ Voltages: 110V - 220V - 415V A/C, 50 & 60Hz

### SINGLE PHASE TECHNICAL SPECIFICATION

Model No.	Pump Stage	Motor HP	Flow Up to 150 Bar (l/min.)	Flow Above 150 Bar (l/min.)	Filling Capacity (Ltrs.)	Usable Oil (Ltrs.)
PEP-2M-20-HS	Single	2	-	1.0	20	12
PEP-3M-40-HS	Single	3	-	1.5	40	25
PEP-2M-40-HD	Two	2	4.8	1.0	40	25
PEP-3M-40-HD	Two	3	7.3	1.5	40	25
PEP-2M-40-PD	Two	2	4.8	1.0	40	25
PEP-3M-40-PD	Two	3	7.3	1.5	40	25

### THREE PHASE TECHNICAL SPECIFICATION

Model No.	Pump Stage	Motor HP	Flow Up to 150 Bar (l/min.)	Flow Above 150 Bar (l/min.)	Filling Capacity (Ltrs.)	Usable Oil (Ltrs.)
PEP-2-20-HS	Single	2	-	1.0	20	12
PEP-3-40-HS	Single	3	-	1.5	40	25
PEP-5-50-HS	Single	5	-	2.5	50	23
PEP-7.5-80-HS	Single	7.5	-	3.7	80	55
PEP-7.5-120-HS	Single	7.5	-	3.7	120	90
PEP-2-40-HD	Two	2	4.8	1.0	40	25
PEP-3-40-HD	Two	3	7.3	1.5	40	25
PEP-5-50-HD	Two	5	12.3	2.5	50	35
PEP-7.5-80-HD	Two	7.5	17.3	3.7	80	55
PEP-7.5-120-HD	Two	7.5	17.3	3.7	120	90
PEP-2-40-PD	Two	2	4.8	1.0	40	25
PEP-3-40-PD	Two	3	7.3	1.5	40	25
PEP-5-50-PD	Two	5	12.3	2.5	50	35
PEP-7.5-80-PD	Two	7.5	17.3	3.7	80	55
PEP-7.5-120-PD	Two	7.5	17.3	3.7	120	90