

SQL

SQL tutorial gives unique learning on Structured Query Language and it helps to make practice on SQL commands which provides immediate results. SQL is a language of database, it includes database creation, deletion, fetching rows and modifying rows etc. SQL is an ANSI (American National Standards Institute) standard, but there are many different versions of the SQL language.

Why SQL?


- Allows users to access data in relational database management systems.
- Allows users to describe the data.
- Allows users to define the data in the database and manipulate that data.
- Allows embedding within other languages using SQL modules, libraries & pre-compilers.
- Allows users to create and drop databases and tables.
- Allows users to create views, stored procedure, functions in a database.
- Allows users to set permissions on tables, procedures and views

SQL Process

When you are executing an SQL command for any RDBMS, the system determines the best way to carry out your request and SQL engine figures out how to interpret the task.

There are various components included in the process. These components are Query Dispatcher, Optimization Engines, Classic Query Engine and SQL Query Engine, etc. Classic query engine handles all non-SQL queries, but SQL query engine won't handle logical files.

Following is a simple diagram showing SQL Architecture:

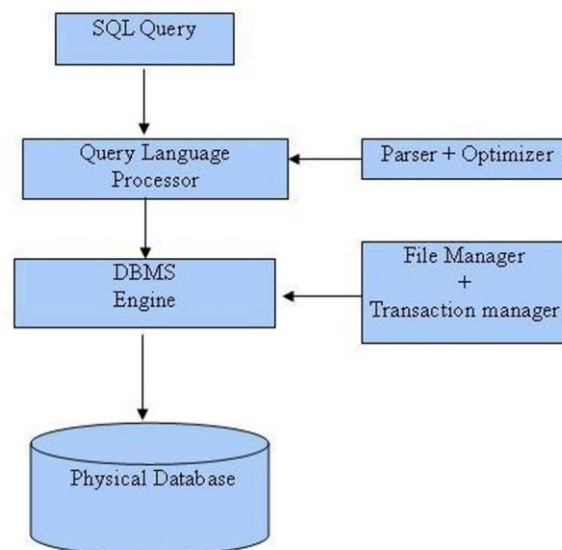

SQL Commands

In previous manual we covered DDL & DML, in this manual we'll cover DQL

DQL - Data Query Language:

Command	Description
SELECT	Retrieves certain records from one or more tables

Details of DQL

1. Views in SQL Server

Definition

A **view** in SQL Server is a **virtual table** that contains the result of a SQL query. It does not store data physically but dynamically retrieves data from underlying tables whenever accessed.

Advantages of Views

- **Data Abstraction:** Simplifies query complexity by presenting a virtual table.
- **Security:** Restricts access to specific columns or rows.
- **Reusability:** Saves frequently used queries for easy access.
- **Performance Optimization:** Improves performance by pre-compiling complex queries.

Syntax for Creating a View

```
CREATE VIEW view_name AS
```

```
SELECT column1, column2, ...
```

```
FROM table_name
```

```
WHERE condition;
```

Example

Creating a view that shows employees' names and salaries from the **Employees** table:

```
CREATE VIEW EmployeeSalaries AS  
  
SELECT EmployeeID, FirstName, LastName, Salary  
  
FROM Employees  
  
WHERE Salary > 50000;
```

Updating Data Through a View

A view can be **updated** if it meets certain conditions:

1. The view is based on a **single table**.
2. It does not use **aggregations** (**SUM**, **AVG**, etc.).
3. It does not use **DISTINCT** or **GROUP BY**.
4. It does not contain **computed columns** or **expressions**.
5. It does not involve **JOINS on multiple tables** (except updateable views with **INSTEAD OF** triggers).

Example of updating a view:

```
UPDATE EmployeeSalaries  
  
SET Salary = 70000  
  
WHERE EmployeeID = 101;
```

This will update the underlying **Employees** table if conditions are met.

When a View Cannot Be Updated

A view **cannot be updated** if it:

- ✗ Contains **aggregations** (e.g., **SUM**, **AVG**, **MAX**, **MIN**).
- ✗ Uses **GROUP BY** or **DISTINCT**.
- ✗ Contains **JOINS** on multiple tables without an **INSTEAD OF** trigger.
- ✗ Uses **computed columns** or **expressions** (e.g., **Salary * 1.1**).
- ✗ References a **non-updatable view**.

Example of a non-updatable view:

```
CREATE VIEW TotalSalaries AS
```

```
SELECT DepartmentID, SUM(Salary) AS TotalSalary  
FROM Employees  
GROUP BY DepartmentID;
```

Trying to update **TotalSalaries** will **fail** because it contains an aggregation (**SUM**).

Modifying a View

```
ALTER VIEW view_name AS  
SELECT column1, column2, ...  
FROM table_name  
WHERE condition;
```

Example:

```
ALTER VIEW EmployeeSalaries AS  
SELECT EmployeeID, FirstName, LastName, Salary, DepartmentID  
FROM Employees  
WHERE Salary > 60000;
```

Dropping a View

```
DROP VIEW view_name;
```

Example:

```
DROP VIEW EmployeeSalaries;
```

2. Stored Procedures in SQL Server

Definition

A **stored procedure** is a precompiled collection of **SQL statements and logic** stored in the database. It can accept parameters and return values.

Advantages of Stored Procedures

- **Performance Improvement:** Precompiled and cached for faster execution.
- **Security:** Restricts direct access to tables.
- **Code Reusability:** Can be called multiple times from different applications.
- **Reduced Network Traffic:** Executes on the database server, reducing the amount of data sent over the network.

Syntax for Creating a Stored Procedure

```
CREATE PROCEDURE procedure_name
```

```
AS
```

```
BEGIN
```

```
-- SQL statements
```

```
END;
```

Example

Creating a stored procedure to fetch employees with a salary above a given amount:

```
CREATE PROCEDURE GetHighSalaryEmployees
```

```
@MinSalary DECIMAL(10,2)
```

```
AS
```

```
BEGIN
```

```
SELECT EmployeeID, FirstName, LastName, Salary
```

```
FROM Employees
```

```
WHERE Salary > @MinSalary;
```

```
END;
```

Executing a Stored Procedure

```
EXEC procedure_name;
```

Example:

```
EXEC GetHighSalaryEmployees @MinSalary = 60000;
```

Stored Procedure with Output Parameter

```
CREATE PROCEDURE GetTotalEmployees  
    @TotalCount INT OUTPUT  
AS  
BEGIN  
    SELECT @TotalCount = COUNT(*) FROM Employees;  
END;
```

Executing and retrieving the output:

```
DECLARE @EmpCount INT;  
EXEC GetTotalEmployees @EmpCount OUTPUT;  
PRINT @EmpCount;
```

Modifying a Stored Procedure

```
ALTER PROCEDURE procedure_name  
AS  
BEGIN  
    -- Updated SQL statements  
END;
```

Example:

```
ALTER PROCEDURE GetHighSalaryEmployees
```

```
    @MinSalary DECIMAL(10,2),
```

```
    @DepartmentID INT
```

```
AS
```

```
BEGIN
```

```
    SELECT EmployeeID, FirstName, LastName, Salary
```

```
    FROM Employees
```

```
    WHERE Salary > @MinSalary AND DepartmentID = @DepartmentID;
```

```
END;
```

Dropping a Stored Procedure

```
DROP PROCEDURE procedure_name;
```

Example:

```
DROP PROCEDURE GetHighSalaryEmployees;
```

Comparison: Views vs. Stored Procedures

Feature	Views	Stored Procedures
Purpose	Provides a virtual table for querying data	Contains SQL logic and can perform complex operations
Data Storage	Does not store data; retrieves it dynamically	Stores precompiled SQL logic but not actual data

Can Accept Parameters	 No	 Yes
Can Modify Data	 No (unless an updateable view)	 Yes
Performance	Faster for read-only operations	Faster for complex queries and business logic execution
Security	Hides underlying table structure	Restricts direct table access