

Практическая работа 5

Разработка интерактивной карты

Для начала посмотрим код map.gd:

```
extends CharacterBody2D
```

```
@onready var card_scene = preload('res://other.tscn')
```

```
@onready var camera_2d: Camera2D = $Camera2D
```

```
@onready var speed = 5
```

```
var _27016 = load("res://россия.jpg")
```

```
var usa = load("res://сша.jpg")
```

```
func _process(delta: float) -> void:
```

```
    camera_2d.global_position += Vector2(Input.get_axis('ui_left', 'ui_right'),  
Input.get_axis('ui_up', 'ui_down') * speed)
```

```
    if Input.is_action_just_pressed('left_click'):
```

```
        pass
```

```
    elif camera_2d.zoom > Vector2(1, 1) &&
```

```
Input.is_action_just_pressed('scale_down'):
```

```
        camera_2d.zoom -= Vector2(0.1, 0.1)
```

```
    elif Input.is_action_just_pressed('scale_up'):
```

```
        camera_2d.zoom += Vector2(0.1, 0.1)
```

```
    move_and_slide()
```

```
func _on_russia_pressed() -> void:
```

```
    var card_scene_ = card_scene.instantiate()
```

```
    card_scene_.open('Россия', _27016, 100000, 'P')
```

```
    add_child(card_scene_)
```

```
func _on_usa_pressed() -> void:
```

```
    var card_scene_ = card_scene.instantiate()
```

```
    card_scene_.open('Америка', usa, 360000, '$')
```

```
    add_child(card_scene_)
```

Теперь посмотрим код файла other.gd:

```
extends CanvasLayer
```

```

var boom = preload("res://animated_sprite_2d.tscn")
@onready var node_2d: Node2D = $Node2D

func open(title: String, texture: Texture2D, value: int, valut:String) -> void:
    %Label.text = title
    %Sprite2D.texture = texture
    %Label3.text = str(value)
    %Label5.text = valut
    visible = true

func _on_button_pressed() -> void:
    $Timer.start()
    node_2d.visible = false

func _on_timer_timeout() -> void:
    var boom_ = boom.instantiate()

    if %Label.text == 'Россия':
        var pos = Vector2(732, 92)
        boom_.global_position = pos

        add_child(boom_)
    elif %Label.text == 'Америка':
        var pos = Vector2(168, 200)
        boom_.global_position = pos

        add_child(boom_)

```

Работа системы показана на рисунке 1:

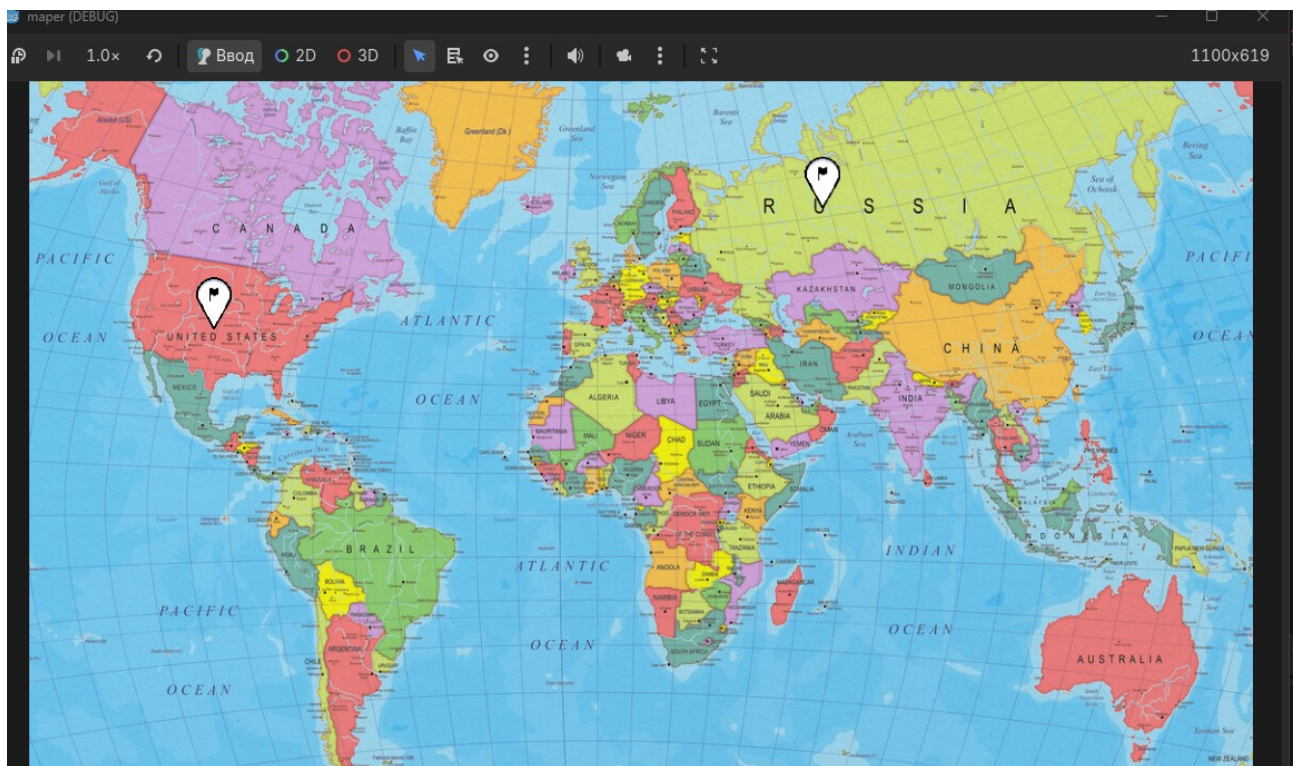


Рисунок 1 — Работа приложения