

CSS Reference

- CSS Reference
- CSS Selectors
- CSS Functions
- CSS Reference Aural
- CSS Web Safe Fonts
- CSS Animatable
- CSS Units
- CSS PX-EM Converter
- CSS Colors
- CSS Color Values
- CSS Default Values
- CSS3 Browser Support

CSS Properties

- align-content
- align-items
- align-self
- all
- animation

Toll Brothers New Homes

Find the home of your dreams with Toll Brothers luxury home builders Go to tollbrothers.com



CSS Reference

< Home

Next >

★ W3Schools' CSS reference is tested regularly with all major browsers.

CSS Properties

CSS Property Groups

- [Color](#)
 - [Background and Borders](#)
 - [Basic Box](#)
 - [Flexible Box](#)
 - [Text](#)
 - [Text Decoration](#)
 - [Fonts](#)
 - [Writing Modes](#)
- [Table](#)
 - [Lists and Counters](#)
 - [Animation](#)
 - [Transform](#)
 - [Transition](#)
 - [Basic User Interface](#)
 - [Multi-column](#)
- [Paged Media](#)
 - [Generated Content](#)
 - [Filter Effects](#)
 - [Image/Replaced Content](#)
 - [Masking](#)
 - [Speech](#)
 - [Marquee](#)

The "CSS" column indicates in which CSS version the property is defined (CSS1, CSS2, or CSS3).

Color Properties

Property	Description	CSS
color	Sets the color of text	1
opacity	Sets the opacity level for an element	3

Background and Border Properties

Property	Description	CSS
background	A shorthand property for setting all the background properties in one declaration	1
background-attachment	Sets whether a background image is fixed or scrolls with the rest of the page	1
background-blend-mode	Specifies the blending mode of each background layer (color/image)	3
background-color	Specifies the background color of an element	1
background-image	Specifies one or more background images for an element	1
background-position	Specifies the position of a background image	1
background-repeat	Sets how a background image will be repeated	1
background-clip	Specifies the painting area of the background	3
background-origin	Specifies where the background image(s) is/are positioned	3
background-size	Specifies the size of the background image(s)	3
border	Sets all the border properties in one declaration	1
border-bottom	Sets all the bottom border properties in one declaration	1
border-bottom-color	Sets the color of the bottom border	1
border-bottom-left-radius	Defines the shape of the border of the bottom-left corner	3
border-bottom-right-radius	Defines the shape of the border of the bottom-right corner	3
border-bottom-style	Sets the style of the bottom border	1
border-bottom-width	Sets the width of the bottom border	1
border-color	Sets the color of the four borders	1
border-image	A shorthand property for setting all the border-image-* properties	3

Rely on a trusted cloud service.

Get a free account now

Microsoft Azure

COLOR PICKER



LEARN MORE

- HTML Cards
- Google Maps
- Animated Buttons
- Modal Boxes
- Modal Images
- Tooltips
- Loaders
- Filter List
- JS Animations
- Progress Bars
- Dropdowns
- Slideshow
- Accordions
- Side Navigation
- Top Navigation
- HTML Includes
- Tabs

SHARE



CERTIFICATES

HTML, CSS, JavaScript, PHP, jQuery, Bootstrap and XML.

Read More >>

Templates

by

W3.CSS

<u>border-image-outset</u>	Specifies the amount by which the border image area extends beyond the border box	3
<u>border-image-repeat</u>	Specifies whether the border image should be repeated, rounded or stretched	3
<u>border-image-slice</u>	Specifies how to slice the border image	3
<u>border-image-source</u>	Specifies the path to the image to be used as a border	3
<u>border-image-width</u>	Specifies the widths of the image-border	3
<u>border-left</u>	Sets all the left border properties in one declaration	1
<u>border-left-color</u>	Sets the color of the left border	1
<u>border-left-style</u>	Sets the style of the left border	1
<u>border-left-width</u>	Sets the width of the left border	1
<u>border-radius</u>	A shorthand property for setting all the four border-*-radius properties	3
<u>border-right</u>	Sets all the right border properties in one declaration	1
<u>border-right-color</u>	Sets the color of the right border	1
<u>border-right-style</u>	Sets the style of the right border	1
<u>border-right-width</u>	Sets the width of the right border	1
<u>border-style</u>	Sets the style of the four borders	1
<u>border-top</u>	Sets all the top border properties in one declaration	1
<u>border-top-color</u>	Sets the color of the top border	1
<u>border-top-left-radius</u>	Defines the shape of the border of the top-left corner	3
<u>border-top-right-radius</u>	Defines the shape of the border of the top-right corner	3
<u>border-top-style</u>	Sets the style of the top border	1
<u>border-top-width</u>	Sets the width of the top border	1
<u>border-width</u>	Sets the width of the four borders	1
<u>box-decoration-break</u>	Sets the behaviour of the background and border of an element at page-break, or, for in-line elements, at line-break.	3
<u>box-shadow</u>	Attaches one or more drop-shadows to the box	3



Basic Box Properties

Property	Description	CSS
<u>bottom</u>	Specifies the bottom position of a positioned element	2
<u>clear</u>	Specifies which sides of an element where other floating elements are not allowed	1
<u>clip</u>	Clips an absolutely positioned element	2
<u>display</u>	Specifies how a certain HTML element should be displayed	1
<u>float</u>	Specifies whether or not a box should float	1
<u>height</u>	Sets the height of an element	1
<u>left</u>	Specifies the left position of a positioned element	2
<u>margin</u>	Sets all the margin properties in one declaration	1
<u>margin-bottom</u>	Sets the bottom margin of an element	1
<u>margin-left</u>	Sets the left margin of an element	1
<u>margin-right</u>	Sets the right margin of an element	1
<u>margin-top</u>	Sets the top margin of an element	1
<u>max-height</u>	Sets the maximum height of an element	2
<u>max-width</u>	Sets the maximum width of an element	2
<u>min-height</u>	Sets the minimum height of an element	2
<u>min-width</u>	Sets the minimum width of an element	2
<u>overflow</u>	Specifies what happens if content overflows an element's box	2
<u>overflow-x</u>	Specifies whether or not to clip the left/right edges of the content, if it overflows the element's content area	3
<u>overflow-y</u>	Specifies whether or not to clip the top/bottom edges of the content, if it	3

	overflows the element's content area	
<u>padding</u>	Sets all the padding properties in one declaration	1
<u>padding-bottom</u>	Sets the bottom padding of an element	1
<u>padding-left</u>	Sets the left padding of an element	1
<u>padding-right</u>	Sets the right padding of an element	1
<u>padding-top</u>	Sets the top padding of an element	1
<u>position</u>	Specifies the type of positioning method used for an element (static, relative, absolute or fixed)	2
<u>right</u>	Specifies the right position of a positioned element	2
<u>top</u>	Specifies the top position of a positioned element	2
<u>visibility</u>	Specifies whether or not an element is visible	2
<u>width</u>	Sets the width of an element	1
<u>vertical-align</u>	Sets the vertical alignment of an element	1
<u>z-index</u>	Sets the stack order of a positioned element	2

Flexible Box Layout

Property	Description	CSS
<u>align-content</u>	Specifies the alignment between the lines inside a flexible container when the items do not use all available space	3
<u>align-items</u>	Specifies the alignment for items inside a flexible container	3
<u>align-self</u>	Specifies the alignment for selected items inside a flexible container	3
<u>flex</u>	Specifies the length of the item, relative to the rest	3
<u>flex-basis</u>	Specifies the initial length of a flexible item	3
<u>flex-direction</u>	Specifies the direction of the flexible items	3
<u>flex-flow</u>	A shorthand property for the flex-direction and the flex-wrap properties	3
<u>flex-grow</u>	Specifies how much the item will grow relative to the rest	3
<u>flex-shrink</u>	Specifies how the item will shrink relative to the rest	3
<u>flex-wrap</u>	Specifies whether the flexible items should wrap or not	3
<u>justify-content</u>	Specifies the alignment between the items inside a flexible container when the items do not use all available space	3
<u>order</u>	Sets the order of the flexible item, relative to the rest	3

Text Properties

Property	Description	CSS
<u>hanging-punctuation</u>	Specifies whether a punctuation character may be placed outside the line box	3
hyphens	Sets how to split words to improve the layout of paragraphs	3
<u>letter-spacing</u>	Increases or decreases the space between characters in a text	1
line-break	Specifies how/if to break lines	3
<u>line-height</u>	Sets the line height	1
overflow-wrap	Specifies whether or not the browser may break lines within words in order to prevent overflow (when a string is too long to fit its containing box)	3
<u>tab-size</u>	Specifies the length of the tab-character	3
<u>text-align</u>	Specifies the horizontal alignment of text	1
<u>text-align-last</u>	Describes how the last line of a block or a line right before a forced line break is aligned when text-align is "justify"	3
text-combine-upright	Specifies the combination of multiple characters into the space of a single character	3
<u>text-indent</u>	Specifies the indentation of the first line in a text-block	1
<u>text-justify</u>	Specifies the justification method used when text-align is "justify"	3
<u>text-transform</u>	Controls the capitalization of text	1
white-space	Specifies how white space inside an element is handled	1

<u>white-space</u>	Specifies how white-space inside an element is handled	1
<u>word-break</u>	Specifies line breaking rules for non-CJK scripts	3
<u>word-spacing</u>	Increases or decreases the space between words in a text	1
<u>word-wrap</u>	Allows long, unbreakable words to be broken and wrap to the next line	3

Text Decoration Properties

Property	Description	CSS
<u>text-decoration</u>	Specifies the decoration added to text	1
<u>text-decoration-color</u>	Specifies the color of the text-decoration	3
<u>text-decoration-line</u>	Specifies the type of line in a text-decoration	3
<u>text-decoration-style</u>	Specifies the style of the line in a text decoration	3
<u>text-shadow</u>	Adds shadow to text	3
text-underline-position	Specifies the position of the underline which is set using the text-decoration property	3

Font Properties

Property	Description	CSS
<u>@font-face</u>	A rule that allows websites to download and use fonts other than the "web-safe" fonts	3
@font-feature-values	Allows authors to use a common name in font-variant-alternate for feature activated differently in OpenType	3
<u>font</u>	Sets all the font properties in one declaration	1
<u>font-family</u>	Specifies the font family for text	1
font-feature-settings	Allows control over advanced typographic features in OpenType fonts	3
font-kerning	Controls the usage of the kerning information (how letters are spaced)	3
font-language-override	Controls the usage of language-specific glyphs in a typeface	3
<u>font-size</u>	Specifies the font size of text	1
<u>font-size-adjust</u>	Preserves the readability of text when font fallback occurs	3
<u>font-stretch</u>	Selects a normal, condensed, or expanded face from a font family	3
<u>font-style</u>	Specifies the font style for text	1
font-synthesis	Controls which missing typefaces (bold or italic) may be synthesized by the browser	3
<u>font-variant</u>	Specifies whether or not a text should be displayed in a small-caps font	1
font-variant-alternates	Controls the usage of alternate glyphs associated to alternative names defined in @font-feature-values	3
font-variant-caps	Controls the usage of alternate glyphs for capital letters	3
font-variant-east-asian	Controls the usage of alternate glyphs for East Asian scripts (e.g Japanese and Chinese)	3
font-variant-ligatures	Controls which ligatures and contextual forms are used in textual content of the elements it applies to	3
font-variant-numeric	Controls the usage of alternate glyphs for numbers, fractions, and ordinal markers	3
font-variant-position	Controls the usage of alternate glyphs of smaller size positioned as superscript or subscript regarding the baseline of the font	3
<u>font-weight</u>	Specifies the weight of a font	1

Writing Modes Properties

Property	Description	CSS
<u>direction</u>	Specifies the text direction/writing direction	2
text-orientation	Defines the orientation of the text in a line	3
text-combine-upright	Specifies the combination of multiple characters into the space of a single character	3
writing-mode	Used together with the direction property to control both the text direction and the text orientation	3

unicode-bidi	Used together with the direction property to set or return whether the text should be overridden to support multiple languages in the same document	2
writing-mode		3

Table Properties

Property	Description	CSS
border-collapse	Specifies whether or not table borders should be collapsed	2
border-spacing	Specifies the distance between the borders of adjacent cells	2
caption-side	Specifies the placement of a table caption	2
empty-cells	Specifies whether or not to display borders and background on empty cells in a table	2
table-layout	Sets the layout algorithm to be used for a table	2

Lists and Counters Properties

Property	Description	CSS
counter-increment	Increments one or more counters	2
counter-reset	Creates or resets one or more counters	2
list-style	Sets all the properties for a list in one declaration	1
list-style-image	Specifies an image as the list-item marker	1
list-style-position	Specifies if the list-item markers should appear inside or outside the content flow	1
list-style-type	Specifies the type of list-item marker	1

Animation Properties

Property	Description	CSS
@keyframes	Specifies the animation code	3
animation	A shorthand property for all the animation properties (except animation-play-state and animation-fill-mode)	3
animation-delay	Specifies a delay for the start of an animation	3
animation-direction	Specifies whether or not the animation should play in reverse on alternate cycles	3
animation-duration	Specifies how many seconds or milliseconds an animation takes to complete one cycle	3
animation-fill-mode	Specifies a style for the element when the animation is not playing (when it is finished, or when it has a delay)	3
animation-iteration-count	Specifies the number of times an animation should be played	3
animation-name	Specifies the name of the @keyframes animation	3
animation-play-state	Specifies whether the animation is running or paused	3
animation-timing-function	Specifies the speed curve of an animation	3

Transform Properties

Property	Description	CSS
backface-visibility	Defines whether or not an element should be visible when not facing the screen	3
perspective	Specifies the perspective on how 3D elements are viewed	3
perspective-origin	Specifies the bottom position of 3D elements	3
transform	Applies a 2D or 3D transformation to an element	3
transform-origin	Allows you to change the position on transformed elements	3
transform-style	Specifies how nested elements are rendered in 3D space	3

Transitions Properties

Property	Description	CSS
----------	-------------	-----

<u>transition</u>	A shorthand property for setting the four transition properties	3
<u>transition-property</u>	Specifies the name of the CSS property the transition effect is for	3
<u>transition-duration</u>	Specifies how many seconds or milliseconds a transition effect takes to complete	3
<u>transition-timing-function</u>	Specifies the speed curve of the transition effect	3
<u>transition-delay</u>	Specifies when the transition effect will start	3

Basic User Interface Properties

Property	Description	CSS
<u>box-sizing</u>	Tells the browser what the sizing properties (width and height) should include	3
<u>content</u>	Used with the :before and :after pseudo-elements, to insert generated content	2
<u>cursor</u>	Specifies the type of cursor to be displayed	2
<u>ime-mode</u>	Controls the state of the input method editor for text fields	3
<u>nav-down</u>	Specifies where to navigate when using the arrow-down navigation key	3
<u>nav-index</u>	Specifies the tabbing order for an element	3
<u>nav-left</u>	Specifies where to navigate when using the arrow-left navigation key	3
<u>nav-right</u>	Specifies where to navigate when using the arrow-right navigation key	3
<u>nav-up</u>	Specifies where to navigate when using the arrow-up navigation key	3
<u>outline</u>	Sets all the outline properties in one declaration	2
<u>outline-color</u>	Sets the color of an outline	2
<u>outline-offset</u>	Offsets an outline, and draws it beyond the border edge	3
<u>outline-style</u>	Sets the style of an outline	2
<u>outline-width</u>	Sets the width of an outline	2
<u>resize</u>	Specifies whether or not an element is resizable by the user	3
<u>text-overflow</u>	Specifies what should happen when text overflows the containing element	3

Multi-column Layout Properties

Property	Description	CSS
<u>break-after</u>	Specifies the page-, column-, or region-break behavior after the generated box	3
<u>break-before</u>	Specifies the page-, column-, or region-break behavior before the generated box	3
<u>break-inside</u>	Specifies the page-, column-, or region-break behavior inside the generated box	3
<u>column-count</u>	Specifies the number of columns an element should be divided into	3
<u>column-fill</u>	Specifies how to fill columns	3
<u>column-gap</u>	Specifies the gap between the columns	3
<u>column-rule</u>	A shorthand property for setting all the column-rule-* properties	3
<u>column-rule-color</u>	Specifies the color of the rule between columns	3
<u>column-rule-style</u>	Specifies the style of the rule between columns	3
<u>column-rule-width</u>	Specifies the width of the rule between columns	3
<u>column-span</u>	Specifies how many columns an element should span across	3
<u>column-width</u>	Specifies the width of the columns	3
<u>columns</u>	A shorthand property for setting column-width and column-count	3
<u>widows</u>	Sets the minimum number of lines that must be left at the top of a page when a page break occurs inside an element	2

Paged Media

Property	Description	CSS
<u>orphans</u>	Sets the minimum number of lines that must be left at the bottom of a page	2

	when a page break occurs inside an element	
page-break-after	Sets the page-breaking behavior after an element	2
page-break-before	Sets the page-breaking behavior before an element	2
page-break-inside	Sets the page-breaking behavior inside an element	2

Generated Content for Paged Media

Property	Description	CSS
marks	Adds crop and/or cross marks to the document	3
quotes	Sets the type of quotation marks for embedded quotations	2

Filter Effects Properties

Property	Description	CSS
filter	Defines effects (e.g. blurring or color shifting) on an element before the element is displayed	3

Image Values and Replaced Content

Property	Description	CSS
image-orientation	Specifies a rotation in the right or clockwise direction that a user agent applies to an image (This property is likely going to be deprecated and its functionality moved to HTML)	3
image-rendering	Gives a hint to the browser about what aspects of an image are most important to preserve when the image is scaled	3
image-resolution	Specifies the intrinsic resolution of all raster images used in/on the element	3
object-fit	Specifies how the contents of a replaced element should be fitted to the box established by its used height and width	3
object-position	Specifies the alignment of the replaced element inside its box	3

Masking Properties

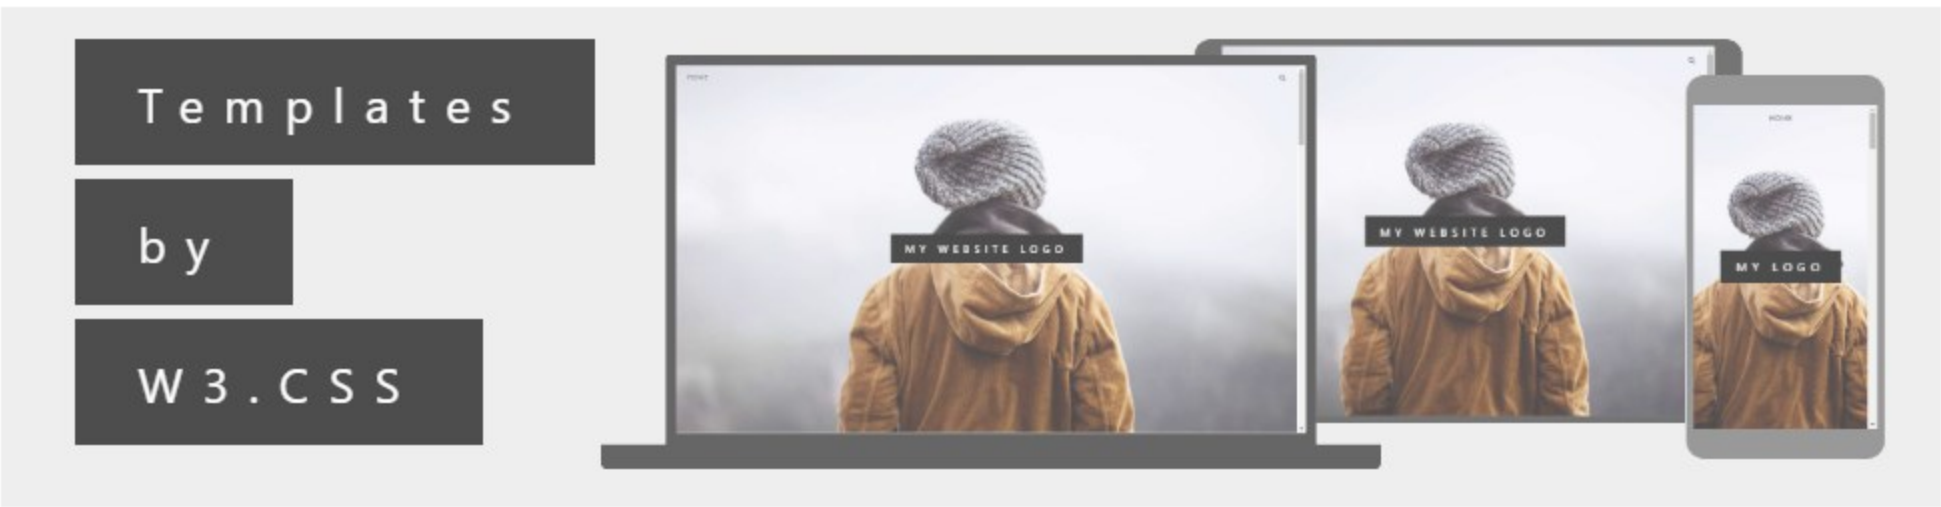
Property	Description	CSS
mask		3
mask-type		3

Speech Properties

Property	Description	CSS
mark	A shorthand property for setting the mark-before and mark-after properties	3
mark-after	Allows named markers to be attached to the audio stream	3
mark-before	Allows named markers to be attached to the audio stream	3
phonemes	Specifies a phonetic pronunciation for the text contained by the corresponding element	3
rest	A shorthand property for setting the rest-before and rest-after properties	3
rest-after	Specifies a rest or prosodic boundary to be observed after speaking an element's content	3
rest-before	Specifies a rest or prosodic boundary to be observed before speaking an element's content	3
voice-balance	Specifies the balance between left and right channels	3
voice-duration	Specifies how long it should take to render the selected element's content	3
voice-pitch	Specifies the average pitch (a frequency) of the speaking voice	3
voice-pitch-range	Specifies variation in average pitch	3
voice-rate	Controls the speaking rate	3
voice-stress	Indicates the strength of emphasis to be applied	3
voice-volume	Refers to the amplitude of the waveform output by the speech synthesises	3

Marquee Properties

Property	Description	CSS
marquee-direction	Sets the direction of the moving content	3
marquee-play-count	Sets how many times the content move	3
marquee-speed	Sets how fast the content scrolls	3
marquee-style	Sets the style of the moving content	3

[◀ Home](#)[Next ▶](#)[REPORT ERROR](#)[PRINT PAGE](#)[FORUM](#)[ABOUT](#)

Top 10 Tutorials

[HTML Tutorial](#)
[CSS Tutorial](#)
[JavaScript Tutorial](#)
[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[SQL Tutorial](#)
[PHP Tutorial](#)
[jQuery Tutorial](#)
[Angular Tutorial](#)
[XML Tutorial](#)

Top 10 References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[W3.CSS Reference](#)
[Browser Statistics](#)
[PHP Reference](#)
[HTML Colors](#)
[HTML Character Sets](#)
[jQuery Reference](#)
[AngularJS Reference](#)

Top 10 Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[W3.CSS Examples](#)
[HTML DOM Examples](#)
[PHP Examples](#)
[ASP Examples](#)
[jQuery Examples](#)
[Angular Examples](#)
[XML Examples](#)

Web Certificates

[HTML Certificate](#)
[HTML5 Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[jQuery Certificate](#)
[PHP Certificate](#)
[Bootstrap Certificate](#)
[XML Certificate](#)

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy. Copyright 1999-2016 by Refsnes Data. All Rights Reserved.

Powered by W3.CSS.

