

uc3m | Universidad **Carlos III** de Madrid

Master Degree in Cybersecurity

Academic Year: 2024-2025

Master Thesis “The Game Beneath the Game:
The Evolution of Cheats and Anti-Cheat
Systems in Counter-Strike 2”

Pablo Valiente

Tutor: Antonio Nappa

Universidad Carlos III de Madrid

Date: June 2025

Abstract

This thesis examines the evolution of cheating in video games, from early debugging tools to modern external and internal exploits. It explores key cheating techniques, anti-cheat countermeasures, and the ongoing arms race between both sides. Additionally, a practical implementation of a cheat in **Counter-Strike 2** is developed to assess the effectiveness of contemporary anti-cheat systems and identify potential vulnerabilities.

Keywords: Cheating, Video Games, Counter-Strike 2, Anti-Cheat Systems, Game Hacking, Memory Manipulation

DEDICATION

CONTENTS

1	Introduction	2
2	From Primitive Survival to Digital Domination	6
1	The Competitive Nature of Humanity	6
2	The Birth of Computation and the Internet: A New Digital Battleground	7
2.1	Early Computational Tools: From the Abacus to Mechanical Calculators	7
2.2	The 19th-Century Revolution: The Birth of Programmable Machines	7
2.3	The Acceleration of Computation in the 20th Century	8
2.3.1	World War II and the Role of Computation	8
2.3.2	Post-War Expansion: From Military to Commercial Computing	8
2.4	The Birth of the Internet: From Military Networks to Global Infrastructure	9
2.5	The Digital Arena: From Computing to Competition	9
2.6	From Networks to Virtual Battlefields	10
3	The Evolution of Cheating: From Debugging Tools to an Organized Industry	11
1	The Early Days: Debugging Tools and Experimental Modifications	11
2	The Rise of Cheating in Consoles and PC	11
2.1	Cheat Devices: Game Genie, GameShark, and Pro Action Replay	12
3	The Transition to Online Gaming: Cheating Becomes a Competitive Threat	13
4	The Birth and Evolution of Anti-Cheat Systems	13
5	The Commercialization of Cheating	16
4	The Prevalence and Impact of Cheating in Online Multiplayer Games	19
1	Cheating as a Critical Threat to Player Retention	19
2	Case Study: Cheating in <i>Counter-Strike 2</i>	20
2.1	The Reporting System and Trust Factor Limitations	21
2.2	Economic and Psychological Impact	21
3	Community Perception and Player Sentiment	21
4	Legal and Ethical Implications of Cheating Software	22
5	Anti-Cheat Technologies and Their Limitations	22
6	Toward a More Resilient Competitive Ecosystem	23

5	Injection and Detection Techniques	24
1	Why Injection Matters in Cheat Development	24
2	Overview of Code Injection Techniques	25
3	Detection Techniques in Anti-Cheat Systems	26
4	Evasion Techniques Used by Cheats	28
5	Extended VAC Capabilities and Developer Countermeasures	31
6	Function Hooking and Trampoline-Based Interception	34
1	What is a Trampoline Hook?	34
2	Reverse Engineering and Function Discovery	35
3	Why Trampoline Hooks Are Effective	36
4	Implementing Hooks with MinHook	36
5	Conclusion	37
7	Internal Game Structure: Logic Behind Counter-Strike 2	39
1	Understanding Entity Lists in Video Games	39
1.1	Common Structures for Entity Lists	39
2	Entity Organization in Counter-Strike 2	40
2.1	Structuring Player Data in Practice: The Players Class	42
3	Entity List Traversal	43
3.1	Entity Handle Relationships	43
3.2	Locating and Identifying the Entity List in Memory	43
3.3	Reverse Engineering the Engine's Entity Resolution Logic	45
3.3.1	Alternative Method: Hooking OnAddEntity and OnRemoveEntity	46
8	Cheat Features Implemented in Our Cheat for CS2	49
1	Chams: Enhancing Visibility Through Engine-Based Rendering	50
1.1	Extracting Default Materials from the Game Engine	51
1.2	Generating Custom Materials	52
1.3	Hooking CreateMaterial and Injecting Custom Materials	54
1.4	Loading KV3 Materials into the Game	54
1.5	Hooking OnDrawModelExecute and Overriding Materials	56
1.5.1	Filtering Target Entities	56
1.5.2	Overriding Material Pointers	57
1.5.3	Visible vs Non-Visible Chams Logic	57
2	Aimbot: Automated Aim to Enemy Players	59
2.1	Entity Management: Hooking the Game's Entity System	59
2.1.1	Computing Aiming Angles	61
2.1.2	Deriving the Direction Vector	61
2.1.3	Computing the Player's Position	62
2.1.4	Centering Coordinates on the Enemy	62
2.1.5	Local Coordinate System and Angle Calculation	63

2.1.6	Mathematical Computation of Aiming Angles	63
2.2	Overwriting Player View Angles	65
2.3	Smoothing for Stealth	65
3	Bone Calculation: Extracting and Rendering Player Skeletons	66
3.1	Extracting Bone Data from Player Entities	66
3.2	Visualizing Bone Indices on the Player Model	67
3.3	Rendering a Connected Skeleton	68
4	Anti-Aim: Misleading Enemy Targeting Systems	69
4.1	What Is Anti-Aim?	69
4.2	Types of Anti-Aim	70
4.3	Lower Body Yaw (LBY) and the LBY Breaker	70
4.4	Benefits for the Cheater	71
4.5	Importance in Modern Cheats	71
	Project Timeline (Gantt Chart)	73
	Bibliography	76

LIST OF FIGURES

2.1	LAN party in the late 1990s—a grassroots precursor to modern esports. .	10
3.1	Game Genie	12
3.2	Chronological overview of key anti-cheat systems introduced between 2000 and 2023.	15
5.1	Abstracted flowchart of dynamic module injection.	26
5.2	Windows thread initialization flow with TLS Callback highlighted.	27
5.3	Illustration of Virtual Method Table (VMT) Hooking. Function A is redi- rected to a custom implementation by modifying the object’s VMT.	28
6.1	Control flow in a trampoline hook setup.	35
8.1	Created Chams Materials	57
8.2	Enter Caption	58
8.3	Representation of Pitch, Yaw, and Roll in a 3D Space.	61
8.4	Representation of the player and enemy positions on the map.	62
8.5	Vista original con los ejes coordenados.	63
8.6	Cálculo del vector de desplazamiento D	63
8.7	3D representation of the aiming direction vector.	64
8.8	Visualizing all bone indices rendered over the player model.	67
8.9	Simplified player skeleton rendered using bone connections.	69

LIST OF TABLES

- 3.1 Overview of major CS2 cheat providers, including release year, pricing models, and access restrictions. 16
- 4.1 Survey Results on Cheating in Online Games (Irdeto, 2018) 19
- 4.2 Activity of Banned Accounts Prior to Enforcement (Jan–Apr 2024) 20
- 8.1 Core Functionalities Overview 49

1. INTRODUCTION

Context and Motivation

The transformation of video games from a niche hobby to a dominant force in the entertainment industry has fundamentally reshaped how individuals interact, compete, and even build careers. In this new era of **competitive gaming**, players engage in high-stakes environments that reward precision, strategy, and reflexes. Fueled by global connectivity and high-speed internet, online multiplayer games have evolved into structured **competitive ecosystems**—complete with rankings, seasonal events, and financial incentives—that mirror traditional sports in both scope and intensity.

Video games now serve not only as entertainment, but also as **social platforms, economic drivers, and professional arenas**. Yet, this rapid evolution has also given rise to a persistent and multifaceted threat: **cheating**. By leveraging unauthorized software modifications, players seek unfair advantages that distort the competitive balance. These exploits range from memory manipulation and external assistance tools to hardware-based hacks and network-level abuses. The resulting **arms race** between developers—who continually enhance anti-cheat mechanisms—and cheat creators—who innovate to bypass them—has become one of the most dynamic and technically challenging conflicts in the digital age.

Furthermore, the deployment of modern anti-cheat systems introduces complex **privacy, legal, and environmental concerns**. Effective cheat detection often requires invasive system-level access, raising red flags regarding user privacy and digital rights. Simultaneously, the commercialization of cheating software generates substantial financial losses for developers and presents regulatory challenges on a global scale. Additionally, the increased computational demand of sophisticated detection systems contributes to a growing environmental footprint.

To move beyond theoretical discourse, this thesis adopts a hands-on approach: the implementation and analysis of a custom-built cheat in a large-scale multiplayer game. This methodology enables a detailed examination of anti-cheat technologies from a practical perspective, offering empirical insights into their design, effectiveness, and limitations.

By combining historical context, technical exploration, and real-world experimentation, this research aims to contribute a comprehensive understanding of cheating in competitive gaming—its motivations, its mechanisms, and its broader societal implications.

Objectives and Scope

This study seeks to investigate cheating in competitive video games through both theoretical analysis and practical experimentation. The research is structured around three main objectives:

1. **To examine the historical evolution of cheating in gaming**, analyzing its impact on game design, player behavior, and industry responses.
2. **To provide a technical breakdown of common cheating techniques**, such as aimbots, wallhacks, memory injection, and network manipulation, along with their consequences for competitive fairness.
3. **To implement and evaluate a custom cheat in a contemporary multiplayer game**, assessing the robustness of current anti-cheat technologies through empirical testing and reverse engineering.

Competencies and Alignment with the Master's Program

This thesis is closely aligned with the core competencies of the **Master's Degree in Cybersecurity**, particularly in areas such as **reverse engineering**, **intrusion analysis**, and **digital forensics**. Through this work, the following competencies will be developed and demonstrated:

Basic Competencies

- **[CB6]** Conduct original research into the security challenges of competitive gaming, with a focus on cheating and countermeasures.
- **[CB7]** Apply cybersecurity methodologies to the domain of game security, including the development, detection, and evasion of cheats.
- **[CB8]** Critically assess the legal and ethical implications of game manipulation and unauthorized software modifications.

General Competencies

- **[CG1]** Investigate and replicate real-world intrusion techniques to understand vulnerabilities in game environments.
- **[CG2]** Analyze the architecture and operation of anti-cheat systems in order to evaluate their efficacy and limitations.
- **[CG3]** Produce high-quality technical documentation covering offensive security techniques and their forensic analysis.

Specific Competencies

- [CE1] Understand the psychological and social drivers behind cheating in competitive settings.
- [CE2] Explore advanced cheat evasion strategies and their implications for detection.
- [CE3] Track trends in game security threats and relate them to broader challenges in cybersecurity.
- [CE4] Perform forensic examinations of game processes and memory to detect unauthorized interventions.
- [CE6] Assess the internal workings and performance trade-offs of modern anti-cheat technologies.

Document Structure

This thesis is organized as follows:

- **Chapter 1: Introduction** – Outlines the motivation, objectives, competencies, and structure of the study.
- **Chapter 2: From Primitive Survival to Digital Domination** – Investigates the human instinct for competition and its evolution into virtual arenas, tracing the technological milestones that gave rise to competitive gaming.
- **Chapter 3: The Evolution of Cheating: From Debugging Tools to an Organized Industry** – Explores the origins of game cheating, its progression into an underground economy, and the industry's adaptive response via anti-cheat systems.
- **Chapter 4: The Prevalence and Impact of Cheating in Online Multiplayer Games** – Analyzes the consequences of cheating on game balance, player trust, and industry economics, with a focus on Counter-Strike 2 as a case study.
- **Chapter 5: Injection and Detection Techniques** – Provides a technical overview of code injection methods, detection strategies, and the ongoing battle between cheaters and anti-cheat developers.
- **Chapter 6: Internal Game Structure: Logic Behind Counter-Strike 2** – Dissects the architecture of the CS2 engine, including memory layouts, entity management, and reverse engineering methods.
- **Chapter 7: Cheat Features Implemented in Our Cheat for CS2** – Presents the design and implementation of various cheat modules, including visibility enhancements, automated aiming, and anti-detection features.

2. FROM PRIMITIVE SURVIVAL TO DIGITAL DOMINATION

1 The Competitive Nature of Humanity

Humanity's relentless pursuit of **superiority, recognition, and dominance** has been a constant throughout history. From early survival strategies to the era of modern technology, the drive to **outperform others** has been a decisive factor in advances across science, warfare, politics—and, more recently, digital realms.

This competitive impulse goes beyond simple ambition; it is a **deeply ingrained psychological mechanism** that has shaped human behavior for centuries. As Festinger [1] explained through his **Social Comparison Theory**, individuals are naturally inclined to evaluate themselves against their peers, a process that reinforces competition by seeking validation and status. In a similar vein, McClelland [2] introduced the **Achievement Motivation Theory** to demonstrate that the inherent desire to succeed and surpass others is crucial not only for personal fulfillment but also for social standing.

Viewed from an **evolutionary perspective**, competition has been essential for survival. Early human societies relied on traits such as strategic thinking, adaptability, and cooperative behaviors to secure resources, defend territories, and outcompete rival groups. Over time, these traits not only ensured survival but also influenced the development of complex **cultural, intellectual, and economic systems**. Even from a young age, individuals instinctively compare themselves with others, perpetuating a competitive framework embedded in our cognition and social interactions.

What began as a survival mechanism has evolved into a multifaceted force that continues to shape human ambition and societal progress.

The advent of modern technology has transferred this age-old drive into **digital environments**. The development of **computers** and the emergence of the **internet** revolutionized human interaction, information processing, and competitive engagement. In particular, video games have emerged as a potent platform that encapsulates competitive spirit through structured, goal-oriented systems—offering challenges against both artificial intelligence and human opponents.

These digital platforms mirror the essence of traditional competition by demanding skill optimization, the discovery of hidden mechanics, and the exploitation of strategic advantages. Empirical studies reveal that under competitive pressure, individuals are prone to

seek alternative methods to gain an edge, especially when conventional avenues for success are obstructed [3]. In the realm of online multiplayer gaming, the presence of **ranking systems, leaderboards, and social validation** further intensifies this competitive drive, urging players to pursue victory through mastery, strategy, or—even through exploitation.

To grasp how competition has been reinvented in the digital age, it is necessary to explore the historical evolution that laid the groundwork for these advancements. The subsequent sections will trace the development of **computation**, the advent of **networked systems**, and the rise of **video games** as dominant cultural and competitive forces. Through this historical lens, we reveal how ancient competitive instincts have been transposed into virtual battlegrounds where **skill, innovation, and adaptability** are the keys to success.

2 The Birth of Computation and the Internet: A New Digital Battleground

The roots of digital competition lie in humanity’s enduring efforts to **automate reasoning and computation**. From rudimentary counting devices to complex mechanical systems, civilizations have continually sought to enhance their ability to solve mathematical problems—an essential skill for the advancement of commerce, astronomy, and engineering.

2.1 Early Computational Tools: From the Abacus to Mechanical Calculators

To improve accuracy and efficiency in arithmetic operations, ancient societies devised tools that supported numerical reasoning. Among the earliest was the **abacus** (circa 2400 BCE), which saw widespread use in Mesopotamia, China, and Europe. This manually operated device enabled rapid calculations and laid the groundwork for future developments in computational thinking.

By the 17th century, the integration of mechanical engineering into mathematical problem-solving gave rise to more sophisticated inventions. One notable example is **Pascal’s Adding Machine** (1642), designed by **Blaise Pascal**. This mechanical calculator employed interlocking gears to automate basic arithmetic, significantly reducing the cognitive load of manual computation and heralding a shift toward mechanized processing.

2.2 The 19th-Century Revolution: The Birth of Programmable Machines

While earlier devices focused on performing fixed calculations, the 19th century introduced a paradigm shift with the conceptualization of **programmable machines**. Cen-

tral to this revolution was **Charles Babbage**, whose design for the **Analytical Engine** introduced the foundational principles of modern computing, including conditional branching, memory storage, and modular input/output.

Expanding on Babbage's work, **Ada Lovelace** recognized that such machines could go beyond numerical tasks. Her algorithm for the Analytical Engine is widely regarded as the first computer program. More significantly, her insights into symbolic computation and algorithmic design anticipated the emergence of **general-purpose computing** and modern programming languages.

2.3 The Acceleration of Computation in the 20th Century

The 20th century brought exponential advances in computing, driven largely by scientific innovation and geopolitical demands. The transition from mechanical apparatuses to fully electronic systems revolutionized data processing, transforming computation into a critical enabler of technological and industrial growth.

2.3.1 World War II and the Role of Computation

The exigencies of **World War II** played a pivotal role in accelerating computational innovation. **Alan Turing's** formulation of the **Turing Machine** provided the theoretical framework for algorithmic processing, while his practical work in cryptanalysis at Bletchley Park—particularly in deciphering the **Enigma cipher**—demonstrated the immense strategic value of computational power.

Simultaneously, pioneering machines such as **Colossus** (UK, 1943) and **ENIAC** (US, 1945) were developed to perform large-scale calculations for military applications, including cryptography and ballistic modeling. These efforts illustrated how computation could surpass human limitations, laying the foundation for a new era of machine-assisted problem solving.

2.3.2 Post-War Expansion: From Military to Commercial Computing

In the aftermath of the war, computing technologies rapidly extended into academic research, industrial automation, and eventually the consumer market. The invention of the **transistor** in 1947, followed by the development of **integrated circuits**, enabled a dramatic reduction in size, cost, and power consumption of computing devices.

By the 1970s and 1980s, companies such as **IBM**, **Apple**, and **Microsoft** were instrumental in the democratization of computing. Their contributions led to the widespread adoption of **personal computers**, transforming what was once an industrial tool into an everyday instrument for work, education, and entertainment.

2.4 The Birth of the Internet: From Military Networks to Global Infrastructure

Despite the growing capabilities of standalone computers, a true revolution emerged with the advent of **networked computing**. Initiated in the late 1960s, the **ARPANET** project—funded by the U.S. Department of Defense—introduced the concepts of **decentralized communication** and **packet switching**, allowing data to be transmitted in more reliable and efficient ways.

The subsequent standardization of **TCP/IP protocols** in the early 1980s enabled the seamless interconnection of disparate networks, laying the groundwork for the modern **Internet**. The introduction of the **Domain Name System (DNS)** in 1984 further simplified access to networked resources by replacing numeric IP addresses with human-readable names.

A transformative milestone occurred in 1991, when **Tim Berners-Lee** developed the **World Wide Web**, a hyperlinked system that provided a user-friendly interface for navigating online information. This innovation catalyzed a massive expansion in digital communication, turning the internet into a **global infrastructure** by the mid-1990s—enabling not only communication and commerce, but also the emergence of **competitive digital ecosystems** where individuals and organizations could engage, create, and compete on an unprecedented scale.

2.5 The Digital Arena: From Computing to Competition

As computational capabilities expanded and network infrastructures matured, new forms of competition began to emerge within digital spaces. Informal gaming gatherings—held in LAN parties and cybercafés—provided the cultural groundwork for organized digital play. These early communities, driven by curiosity and technical experimentation, laid the foundation for a broader transformation in how games were perceived and played.

The rise of online gaming redefined digital entertainment as a structured and competitive experience. The introduction of **matchmaking systems**, **ranking ladders**, and **persistent progression mechanics** transformed casual play into continuous skill-based challenges. Pioneering titles such as **Quake**, **Counter-Strike**, and **StarCraft** set the standard for modern competitive games, combining reflex-based gameplay with strategic depth.

These systems offered players clear feedback loops—performance metrics, leaderboards, win/loss ratios—that fueled their desire to improve and dominate. As a result, gaming began to evolve from a leisure activity into a compelling arena of personal achievement and social recognition.



Figure 2.1: LAN party in the late 1990s—a grassroots precursor to modern esports.

2.6 From Networks to Virtual Battlefields

The transformation of video games into **virtual battlefields** was fueled by technological advancements, global connectivity, and the rise of online communities. With real-time multiplayer becoming the norm, players worldwide could compete instantly, honing tactics and strategies to achieve recognition.

Video games offered an ideal competitive environment: **clear rules**, **quantifiable performance**, and **equal access**. As participation expanded, so did the supporting infrastructure—grassroots tournaments evolved into professional leagues, and casual players into sponsored competitors.

This convergence of entertainment, technology, and sport gave rise to **esports**, a global industry with professional teams, media coverage, and multimillion-dollar prize pools. What began as leisure became a legitimate career path and a powerful cultural force.

The same instinct that once ensured survival now drives mastery in digital arenas, where **technical skill**, **cognitive agility**, and **strategic thinking** define success.

The next chapters examine how this competitive landscape has also fostered new forms of rule-breaking. We will explore the evolution of **cheating** as both a technical challenge and a cultural phenomenon, revealing how players manipulate systems designed to ensure fair play.

3. THE EVOLUTION OF CHEATING: FROM DEBUGGING TOOLS TO AN ORGANIZED INDUSTRY

The history of cheating in video games is deeply intertwined with the evolution of the industry itself. What began as debugging tools for developers gradually transformed into a clandestine culture of modifications, and with the advent of online gaming, an organized and profitable industry with ties to cybercrime [4]. Simultaneously, the fight against cheating led to the development of **anti-cheat systems**, which evolved from simple integrity checks to sophisticated solutions incorporating artificial intelligence and deep system access [5].

1 The Early Days: Debugging Tools and Experimental Modifications

Before video games became a mainstream form of entertainment, early cheating emerged as a necessity within software development. In the 1970s and 1980s, developers embedded debugging tools within their games to facilitate testing. These systems allowed programmers to modify internal values such as lives, ammunition, and speed, enabling them to test different scenarios without playing through the entire game [6].

Some of these tools remained accessible in commercial releases, either unintentionally or as a deliberate choice by developers. This led to the creation of the first **cheat codes**, which were key combinations or commands that altered gameplay. One of the most iconic examples is the **Konami Code** (↑ ↑ ↓ ↓ ← → ← → B A), introduced in *Gradius* (1986) and later popularized in *Contra* (1988) [7]. While these codes were not designed to affect competition, they set a precedent for the intentional modification of gameplay.

2 The Rise of Cheating in Consoles and PC

As the video game industry grew throughout the 1980s and 1990s, cheating expanded beyond debugging tools and built-in cheat codes. With the advent of home consoles, external devices specifically designed to modify gameplay began to appear.

2.1 Cheat Devices: Game Genie, GameShark, and Pro Action Replay

The first dedicated cheat devices were **modification cartridges**, such as the **Game Genie** (1990) and the **GameShark** (1995). These hardware add-ons allowed players to inject custom modifications into a game's memory, altering key parameters such as health, ammunition, and physics [8]. While initially marketed as harmless tools for enhancing single-player experiences, they introduced the concept of **real-time game manipulation**, which would later be adapted for online environments.

On the PC side, the introduction of **memory editors** provided users with a more flexible and powerful way to modify game values at runtime. Early programs like **Cheat Engine** (2000) enabled players to search for specific in-game variables and alter them directly, bypassing the limitations of built-in cheat codes [9]. This shift from **developer-sanctioned cheats** to **unauthorized external modifications** laid the foundation for more advanced game-hacking techniques.

As gaming technology evolved, so did the tools available for modifying game memory structures. More sophisticated programs such as **ReClass.NET** emerged, allowing users to analyze and modify game memory at a structural level. Unlike traditional memory scanners, ReClass.NET enables users to reverse-engineer game memory layouts by dynamically inspecting class structures and data offsets in real-time [10]. This advancement significantly improved the ability of cheat developers to create complex modifications, from automatic aimbots to more intricate exploits that manipulate how game logic processes data.



Figure 3.1: Game Genie

These tools, originally designed for educational and debugging purposes, soon became widely used in cheat development, particularly in online gaming environments. Their increasing complexity meant that anti-cheat systems had to adapt rapidly, leading to an ongoing technological arms race between cheat developers and security teams.

3 The Transition to Online Gaming: Cheating Becomes a Competitive Threat

The rise of online multiplayer gaming in the late 1990s and early 2000s fundamentally changed the impact of cheating. Unlike single-player cheats, which only affected the individual experience, **online cheating directly disrupted fair competition** [5]. As games like **Quake** (1996), **Counter-Strike** (1999), and **Diablo II** (2000) introduced match-making and ranking systems, the incentive to cheat increased dramatically [11].

The growing importance of competitive integrity led developers to take more aggressive measures against cheating, resulting in the creation of **server-side and client-side anti-cheat mechanisms**. However, as anti-cheat solutions became more sophisticated, so too did cheating techniques, leading to an ongoing technological arms race between game security teams and cheat developers.

This shift led to the development of the first organized cheat communities, where players and programmers shared exploits, scripts, and modified game clients. It also marked the beginning of an **arms race** between cheat developers and game security teams, as new forms of cheating emerged alongside increasingly complex anti-cheat measures.

4 The Birth and Evolution of Anti-Cheat Systems

As online gaming became increasingly competitive, the integrity of fair play was challenged by the widespread use of cheats. Unlike single-player modifications, which had no broader consequences, cheating in multiplayer environments compromised **match-making, rankings, and esports competitions**, creating frustration among players and damaging the credibility of competitive gaming.

Early attempts to mitigate cheating relied on **server-side validation**, where game servers monitored player actions for anomalies that suggested external manipulation. These checks aimed to detect unnatural behavior, such as **impossible movement speeds, improbable accuracy, and modifications to game assets** that altered visibility constraints. However, this approach had significant limitations, as many cheats operated entirely on the **client side**, modifying game data before it was transmitted to the server. As a result, more sophisticated **client-side anti-cheat solutions** were developed to monitor and detect unauthorized modifications directly within the player's system.

One of the first dedicated anti-cheat programs was **PunkBuster**, developed by Even Balance, Inc. and introduced in **2000**. Initially implemented in *Return to Castle Wolfenstein* and later in *Battlefield 1942*, PunkBuster marked a shift from basic server-side detection to **active client-side monitoring**. It worked by scanning a player's system for **known cheat signatures**, verifying **game file integrity**, and capturing periodic **in-game screenshots** to identify visual modifications such as **wallhacks**. Additionally, PunkBuster maintained a **global ban list**, preventing known cheaters from accessing protected servers. Despite these advancements, **cheat developers quickly adapted** by employing techniques such as **code obfuscation**, allowing their software to remain undetected. PunkBuster also faced criticism for its **aggressive scanning approach**, which occasionally resulted in **false positives**, banning legitimate players due to conflicts with background applications.

In **2002**, Valve introduced **Valve Anti-Cheat (VAC)** alongside *Counter-Strike 1.6*, implementing a more **automated and data-driven approach** to cheat detection. Unlike PunkBuster, which **immediately expelled** suspected cheaters, VAC introduced a **delayed banning system**. This strategy allowed suspected cheaters to continue playing while logging their infractions, making it harder for cheat developers to **identify detection triggers** and modify their cheats accordingly. In addition to **signature-based detection**, VAC utilized **heuristic analysis** to recognize **abnormal behavioral patterns**, refining its detection algorithms over time. By integrating **server-side validation** with **machine learning techniques**, VAC continuously improved its ability to detect and counteract evolving cheats. However, since it **operated at the user level** rather than the **kernel level**, advanced cheats that manipulated system memory with higher privileges could still **bypass its protections**.

As **cheat developers refined their evasion techniques**, more **aggressive anti-cheat solutions** emerged. One of the most notable advancements was **BattleEye**, introduced in **2004** and later adopted in games like *Arma 2*, *Rainbow Six Siege*, and *PUBG*. Unlike VAC, which prioritized **passive detection**, BattleEye enforced **stricter security measures** by running with **elevated system privileges**. By operating at the **kernel level**, it could **detect and block cheat software** that manipulated **game memory at a deeper level**, making it significantly harder for external programs to **alter in-game data undetected**. This approach allowed BattleEye to **intercept and prevent unauthorized modifications** before they could affect gameplay, offering a **more proactive defense** against sophisticated cheats.

As **competitive gaming and esports** continued to grow, **Riot Games** introduced a new anti-cheat solution, **Vanguard**, designed specifically for *Valorant*. Released in **2020**, Vanguard took **anti-cheat enforcement to an unprecedented level** by implementing **persistent kernel-level monitoring**, meaning it **actively ran as a background process from the moment the operating system started**. This deep system integration enabled it to **detect and prevent unauthorized modifications** at the **lowest levels of system memory**, making it one of the **most invasive yet effective anti-cheat**

solutions. However, its **intrusive nature sparked controversy** among players concerned about **privacy**, as the software had **continuous access to system processes even when the game was not running.**

The **evolution of anti-cheat systems** reflects an **ongoing technological arms race** between **cheat developers and game security teams.** While early efforts relied on **rudimentary server-side validation**, modern solutions integrate **behavioral analysis, machine learning, and kernel-level access** to provide more robust protection. Despite these advancements, the constant adaptation of cheat developers ensures that no anti-cheat system remains **impenetrable for long**, perpetuating a **continuous cycle of exploitation and countermeasures** in the digital battlefield of competitive gaming.

This historical evolution has given rise to a wide variety of anti-cheat implementations, each shaped by the needs and challenges of its era.

The continuous development of anti-cheat solutions over the past two decades can be summarized through a timeline of key technologies. Figure 3.2 provides a chronological overview of the most influential anti-cheat systems, from early client-side detectors to modern kernel-level and behavior-based solutions.

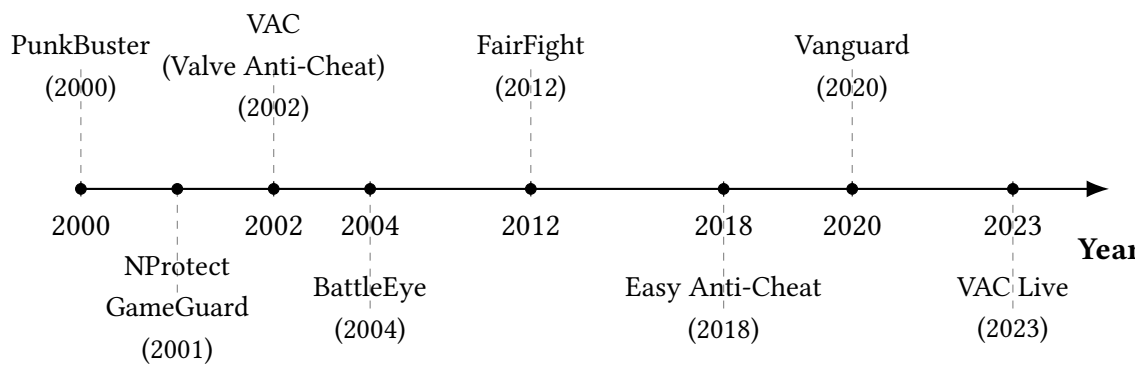


Figure 3.2: Chronological overview of key anti-cheat systems introduced between 2000 and 2023.

Among the systems depicted in the timeline, several stand out for their unique approach and impact.

nProtect GameGuard, launched in 2001, was one of the first anti-cheats to adopt rootkit-like behavior. Widely used in Asian MMORPGs, it embedded itself deeply in the operating system to prevent cheats from interacting with game processes, although this also raised concerns about privacy and system stability.

FairFight, introduced in 2012, departed from traditional detection mechanisms by using server-side statistical analysis to flag abnormal player behavior. Rather than inspecting memory or processes, it relied on gameplay metrics such as accuracy, reaction time, and movement patterns—making it less intrusive, but also vulnerable to both false positives and high-skill players.

Easy Anti-Cheat (EAC), which gained traction in 2018, became a popular choice for fast-paced competitive games. It combines kernel-level access with performance-friendly design and supports real-time detection of unauthorized drivers, injected DLLs, and tampering attempts—balancing robustness and user transparency.

Finally, **VAC Live**, unveiled in 2023, represents Valve’s shift toward real-time, data-driven cheat prevention. Unlike the original VAC system, which relied on delayed bans, VAC Live aims to detect and react to cheats during gameplay, making it a critical component in safeguarding the integrity of high-stakes esports matches.

5 The Commercialization of Cheating

The rapid commercialization of cheating has transformed it from a niche activity into a highly organized industry, offering both software-based and hardware-level exploits. Specialized forums such as **UnKnoWnCheaTs**, **MPGH**, and **ElitePVPers** have become central hubs for distributing cheats, providing resources for reverse engineering, memory manipulation, and anti-cheat evasion. These platforms, along with encrypted messaging services like **Discord** and **Telegram**, have facilitated the sale and distribution of sophisticated cheats through subscription models and private communities.

Table 3.1 summarizes some of the most prominent cheat providers currently active in the CS2 ecosystem.

Provider	Released	Subscription Price	Access Model
Neverlose [12]	2020	€17.10/month, €44.10/3 months, €134.10/year	Invite-only
Memesense [13]	2023	\$4/14 days, \$8/month, \$12/3 months	Public access
Fatality.win [14]	2022	Premium pricing (variable)	Invite-only
Project Infinity [15]	2017	€14.99/month, €29.99/3 months, €99.99 lifetime	Public access
Midnight [16]	2019	£5.42/month	Public access
Onetap [17]	2024	Pricing not publicly disclosed	Public access
Skeet (Game-sense) [18]	2016	\$16/month (via tokens, fluctuating)	Invite-only + HWID locked

Table 3.1: Overview of major CS2 cheat providers, including release year, pricing models, and access restrictions.

As cheat developers adopt increasingly advanced techniques, such as kernel-level drivers and DMA-based exploits, anti-cheat systems are forced into a continuous state of adaptation. The emergence of software-based cheats, particularly those using DLL injection, code hooking, and API interception, has proven to be one of the most adaptable and challenging threats. These methods allow cheat developers to modify game functions dynamically, bypassing traditional detection systems.

From History to Implementation: A Technical Transition

Having traced the historical and sociotechnical evolution of cheating—from its roots in debugging tools to its current status as a commercialized, clandestine industry—we now shift focus toward the technical foundations that sustain it today.

The next chapters will abandon the literary and historical perspective in favor of a rigorous, low-level examination of how modern software-based cheats are constructed and deployed. We will explore the inner mechanics of code injection, memory manipulation, and anti-cheat evasion techniques, providing a detailed view of the technological arms race from a reverse engineering and systems programming standpoint.

With the historical context established, it is time to dissect the machinery.

4. THE PREVALENCE AND IMPACT OF CHEATING IN ONLINE MULTIPLAYER GAMES

Online multiplayer games thrive on the principles of fairness, competition, and community-driven engagement. However, these foundations are increasingly threatened by the pervasive use of cheating software. Cheating not only distorts competitive balance but also erodes player trust, leading to reduced satisfaction, churn, and ultimately jeopardizing the long-term viability of game ecosystems. This chapter delves into the multifaceted impact of cheating, with a focus on the evolving landscape surrounding *Counter-Strike 2* (CS2), and presents an argument for treating cheating as a systemic threat requiring both technical and socio-legal countermeasures.

As the appeal of competitive online titles grows—particularly those with ranked ladders, esports scenes, and in-game economies—the incentives to gain unfair advantages intensify. This creates a persistent cat-and-mouse game between cheat developers and game studios, necessitating not only robust anti-cheat technology but also a holistic understanding of the phenomenon’s broader consequences.

1 Cheating as a Critical Threat to Player Retention

Cheating in multiplayer games is not a fringe issue; it constitutes one of the primary causes of user attrition and dissatisfaction. According to a comprehensive report by Irdeto, 60

These numbers underscore the scale of the problem, extending beyond momentary frustration to long-term economic risks. Game developers and publishers rely heavily on user engagement metrics to drive monetization strategies such as battle passes, cosmetic item sales, and advertising. A reduction in player retention due to widespread cheating thus directly threatens revenue streams.

Table 4.1: Survey Results on Cheating in Online Games (Irdeto, 2018)

Survey Statement	Percentage of Respondents
Experienced negative impact due to cheating	60%
Would stop playing a game because of cheaters	77%
Support permanent bans for cheaters	69%
Believe developers are not doing enough	55%

Ultimately, cheating undermines the very fabric of competitive gaming. When fair play cannot be guaranteed, trust in the ranking system, matchmaking quality, and the legitimacy of competitive outcomes begins to deteriorate—driving players away in search of more balanced experiences.

2 Case Study: Cheating in *Counter-Strike 2*

As a flagship title in the competitive first-person shooter (FPS) genre, *Counter-Strike 2* (CS2) offers a useful lens through which to examine the modern cheating landscape. The game’s enormous player base and thriving esports scene make it both a high-value target for cheat developers and a crucial battleground for anti-cheat innovation.

In early 2024, CS2 experienced steady growth, culminating in March 2025 with over 1.8 million concurrent players—a record high. These statistics reflect not only growing popularity but also escalating challenges in maintaining fair competition as the audience diversifies and expands.

While Valve continues to take proactive steps—via updates to VAC and the Overwatch system—the scale and adaptability of modern cheats often outpace enforcement capabilities. Private cheats, polymorphic code, and advanced injection methods enable cheaters to bypass detection mechanisms, sometimes for weeks at a time.

Table 4.2: Activity of Banned Accounts Prior to Enforcement (Jan–Apr 2024)

Metric	Estimated Value
Average delay between last match and VAC ban	20 days
Percentage of bans issued within 24 hours	28%
Total matches played by banned accounts	32,000+
Percentage of matches with only one banned player	97%
Evidence of case farming behavior	Not significant
Gameplay pattern analysis	Consistent with competitive play

These findings illustrate that cheaters are not relegated to fringe scenarios like farming or casual abuse; rather, they are embedded within regular competitive matchmaking. The persistence of such activity signals a growing challenge for detection systems that rely primarily on reactive enforcement.

2.1 The Reporting System and Trust Factor Limitations

In an effort to promote healthier matchmaking, Valve introduced the *Trust Factor* system—an invisible score that influences match assignments based on a player’s behavior across the Steam platform. While conceptually promising, Trust Factor remains opaque, with users frequently reporting confusion and inconsistency in its outcomes.

- VAC/Overwatch bans, user reports, and commendations influence Trust Factor.
- Account history, community participation, and even friend networks are considered.
- Suspicious software or system configurations may negatively impact the score.

This opacity creates two issues. First, users cannot understand or control their Trust Factor in meaningful ways. Second, the system is vulnerable to manipulation—via both *report bots* that mass-flag innocent players and *commend bots* that artificially inflate Trust Factor with paid commendations.

These exploitative services are openly marketed in underground forums, turning Trust Factor into a commodity rather than a reliable safeguard. Without greater transparency and user agency, the system may reinforce the very distrust it seeks to alleviate.

2.2 Economic and Psychological Impact

The consequences of cheating extend beyond gameplay. In early 2025, a major VAC wave resulted in the banning of accounts with over \$2 million worth of in-game inventory value **19**. While applauded by some, this event also introduced widespread anxiety about ban transparency and the risk of false positives.

Legitimate players who invest time and money into a game—especially those who trade in digital assets—may be deterred by the lack of accountability in enforcement mechanisms. The psychological toll of repeated exposure to cheaters, false accusations, or confusing bans can result in disengagement, regardless of a player’s commitment or skill level.

For new players, these dynamics are even more damaging. Encountering blatant cheating early in the user journey creates a negative first impression that may permanently dissuade continued play. For veterans, it fosters a sense of helplessness and resentment—both potent drivers of churn.

3 Community Perception and Player Sentiment

The gaming community has not remained silent in the face of persistent cheating. Platforms such as Reddit and YouTube are filled with clips, testimonials, and discussions

that document ongoing incidents of undetected cheating. These posts often go viral, compounding the perception that developers are not doing enough.

Professional streamers and esports athletes have echoed these concerns. When high-profile personalities encounter cheaters during live broadcasts, it not only damages the entertainment value of the stream but also affects brand perception and sponsorship appeal.

As this narrative builds momentum, a broader culture of cynicism begins to take hold. Phrases like “VAC is useless” or “everyone cheats at high ranks” are common refrains, reflecting a dangerous normalization of defeatism. Even when actual cheating prevalence is statistically low, the perception alone is enough to destabilize trust in ranked matchmaking systems.

4 Legal and Ethical Implications of Cheating Software

In addition to technological countermeasures, the gaming industry has increasingly pursued legal action against cheat developers. These lawsuits serve multiple functions: deterring future offenders, punishing commercial-scale operations, and reaffirming the legal enforceability of EULAs.

One landmark case occurred in 2023 when Bungie secured a \$12 million judgment against AimJunkies, a cheat provider for *Destiny 2*. Similar actions by Ubisoft, Activision, and Riot have further cemented a legal precedent for prosecuting intellectual property violations, unfair competition, and digital fraud related to cheat development.

Beyond legal ramifications, the existence of pay-to-win cheats raises ethical concerns. When access to competitive advantage is monetized, the principle of merit-based competition collapses—devaluing ranks, tournaments, and the legitimacy of esports as a discipline. This erosion of fairness threatens not just player sentiment but the long-term brand equity of the titles themselves.

5 Anti-Cheat Technologies and Their Limitations

Despite ongoing advancements, anti-cheat systems remain inherently reactive. Valve’s VAC primarily detects known cheat signatures and does not operate at the kernel level. Although the newer VacNet 3.0 leverages machine learning for behavioral analysis, sophisticated cheats still evade detection using techniques like manual injection, virtualization, or anti-debugging.

Other titles have adopted more aggressive solutions—Riot’s Vanguard runs at the kernel level, allowing for deeper system access but raising significant privacy concerns. This trade-off between enforcement efficacy and user rights exemplifies a broader dilemma facing the industry.

Emerging solutions include AI-powered detection engines, real-time behavioral analysis, and encrypted client-server communication. However, these innovations require continuous investment, iterative tuning, and often introduce new vectors for controversy or false positives. The result is an ongoing arms race between cheat developers and anti-cheat engineers.

6 Toward a More Resilient Competitive Ecosystem

Cheating represents a systemic challenge that touches on technology, economics, law, psychology, and community management. The data shows that existing systems, while indispensable, are insufficient in isolation. To rebuild trust and protect competitive legitimacy, developers must pursue a multi-pronged approach:

- Deploy real-time and behavior-based detection models.
- Increase transparency through periodic enforcement reports.
- Provide players with clearer Trust Factor diagnostics and appeal pathways.
- Integrate educational tools that teach players about fair play.
- Partner with legal authorities to prosecute high-level cheat distributors.

Without such reforms, even the most iconic games risk long-term erosion of their competitive value. As online multiplayer gaming continues to evolve, so too must our methods for preserving its integrity.

5. INJECTION AND DETECTION TECHNIQUES

1 Why Injection Matters in Cheat Development

In the realm of professional game cheating, nearly all serious and commercially available cheats—especially those developed for competitive titles like *Counter-Strike 2*—are built as **DLLs** that are injected into the game process. This design choice is not incidental; it is fundamental to how modern cheats operate and achieve their functionality.

Injecting a DLL into the game allows the cheat to execute in **runtime** alongside the game itself. This real-time coexistence grants the cheat direct access to the game’s memory, logic, and rendering pipeline. As a result, injected cheats can:

- **Hook internal functions** to intercept or modify game behavior (e.g., aim mechanics, visibility checks).
- **Modify memory values** to influence in-game parameters (e.g., recoil, ammunition, speed).
- **Read game data structures** to extract critical information (e.g., player positions, health, weapons).
- **Render overlays** by drawing directly on top of the game window (e.g., ESP, radar, crosshairs).
- **Automate gameplay** with logic that integrates seamlessly with the game’s update loop.

This deep integration is only possible through in-process code execution, which is why DLL injection is the industry standard in cheat development. Accordingly, anti-cheat systems like **Valve Anti-Cheat (VAC)** place significant emphasis on detecting and blocking injection attempts, making injection both the cornerstone of modern cheating and the primary target for detection.

The following sections explore the most relevant injection techniques used in game cheating and the methods employed by anti-cheat systems to detect and prevent them. The objective is to provide a conceptual overview without delving into low-level implementation details.

2 Overview of Code Injection Techniques

Code injection refers to the practice of inserting arbitrary executable code into a running process. In the context of cheating, this typically involves loading a custom Dynamic Link Library (DLL) or executing shellcode within the game's memory space to gain persistent and privileged access to game internals.

Traditional Methods

Early cheats commonly relied on standard Windows functions such as:

- `LoadLibrary`: Loads a DLL into the target process.
- `CreateRemoteThread`: Spawns a new thread in another process to execute injected code.

While these approaches are simple and effective in general software development, they are highly detectable. Anti-cheat systems like VAC monitor API usage, track module registrations, and flag suspicious thread creation patterns. As a result, traditional injection methods are now largely ineffective for persistent, undetected cheating.

Manual Mapping

Manual Mapping has become the preferred method for injecting cheats into modern games. Rather than relying on the Windows loader, this technique manually replicates the steps involved in loading a DLL, entirely within user space.

Manual Mapping is highly effective because:

- It bypasses standard API calls like `LoadLibrary`, avoiding direct detection.
- Injected modules do not appear in the target process's module list (PEB).
- Execution can be achieved through stealthy mechanisms such as thread hijacking or shellcode trampolines.

Due to its stealth and flexibility, Manual Mapping is considered the most robust and professional method in the current landscape of cheat development.

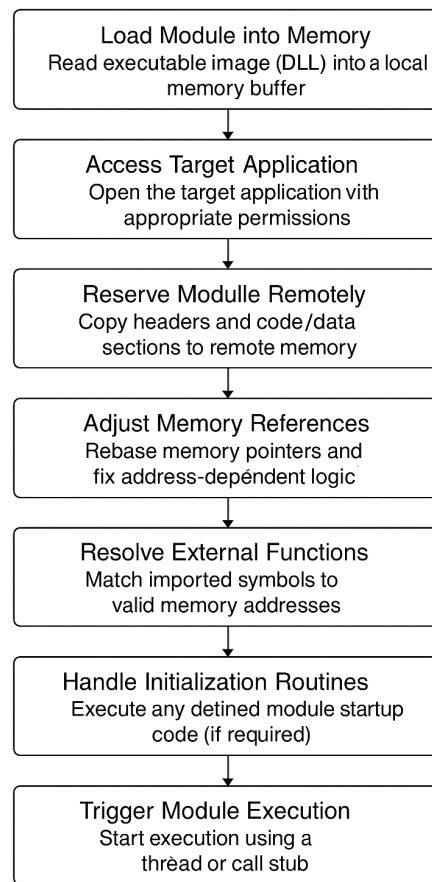


Figure 5.1: Abstracted flowchart of dynamic module injection.

3 Detection Techniques in Anti-Cheat Systems

Anti-cheat engines like VAC continuously scan game processes for indicators of unauthorized code. Their goal is to identify abnormal memory allocations, illegitimate execution paths, or manipulation of trusted system routines.

Thread Local Storage (TLS) Callbacks

A key detection mechanism involves the use of **Thread Local Storage (TLS) callbacks**, a feature in the Windows PE (Portable Executable) format that allows developers to specify functions to be executed automatically by the system when threads are created or destroyed, or when the module is loaded or unloaded.

In the context of anti-cheat systems, TLS callbacks are strategically valuable because they are executed **before the application's main entry point is reached**, and even **before asynchronous procedure calls (APCs)** are processed. This early execution allows anti-cheat software to inspect and validate the runtime environment at an extremely privileged stage of process initialization.

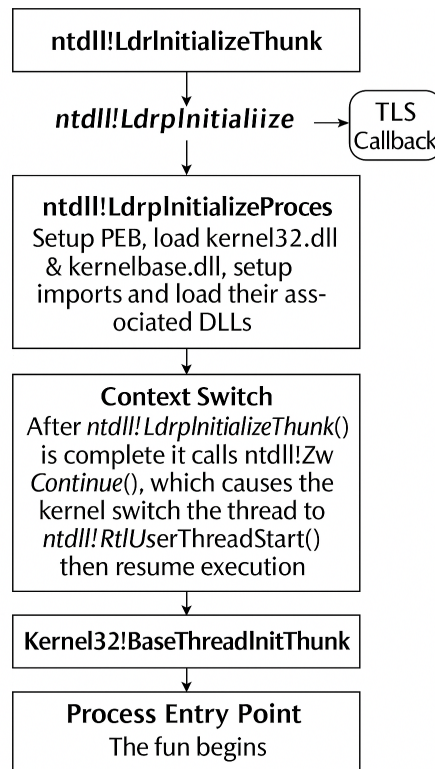


Figure 5.2: Windows thread initialization flow with TLS Callback highlighted.

- On thread creation, the Windows loader invokes TLS callbacks *within* the routine *ntdll!LdrpInitializeProcess*, giving anti-cheat DLLs a head start to perform memory integrity checks or verify thread origins.
- If an injected DLL includes its own TLS callback, it may be triggered at load time—potentially revealing its presence to the anti-cheat if not properly concealed or removed.

Figure 5.2 illustrates the initialization sequence of a thread in Windows. The TLS callback is highlighted to show its execution point **before APC dispatch** and **long before reaching the game’s code**. This makes it a powerful mechanism for early detection of injected modules or tampered execution states.

For cheat developers, understanding the timing of TLS execution is critical. If not disabled or manually stripped from injected DLLs, a TLS callback can inadvertently betray the presence of the cheat before it even begins executing its logic. Consequently, many modern cheats using manual mapping techniques explicitly remove the TLS directory from the PE header to avoid this detection vector.

Start Address Integrity Checks

Another powerful detection primitive involves analyzing the **start address** of threads. Threads that begin execution in anonymous memory or outside known game modules

are flagged as suspicious. This method is particularly effective against simple shellcode execution or poorly concealed DLL injections.

VMT Hook Detection

Valve Anti-Cheat (VAC) is capable of detecting manipulations to **virtual method tables (VMTs)**—a powerful technique commonly used by cheats to hijack the behavior of in-game objects. In object-oriented game engines, many entities expose functionality through virtual methods. By modifying the VMT of such an object, a cheat can effectively redirect calls to its own code, gaining precise control over rendering, physics, and logic routines.

However, VMT hooking leaves detectable traces in memory. Since VMTs are stored in writable memory regions and follow well-defined structural patterns, VAC can perform **pattern recognition** and **integrity verification** to identify tampering. This includes checking whether VMT pointers still reference legitimate memory ranges, or if the functions they point to fall outside of expected modules.

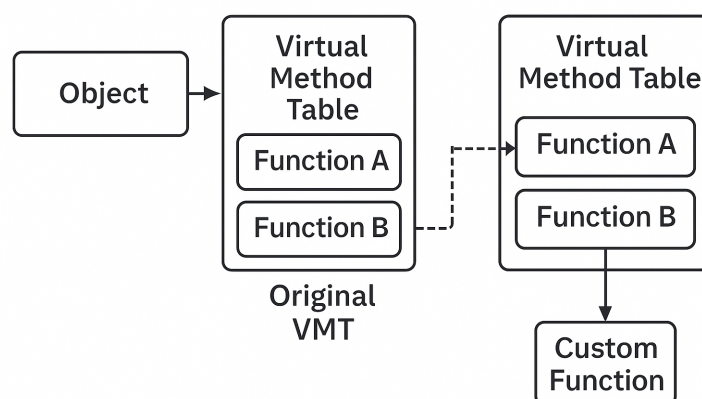


Figure 5.3: Illustration of Virtual Method Table (VMT) Hooking. Function A is redirected to a custom implementation by modifying the object’s VMT.

To evade detection, some cheats attempt to clone the original VMT, apply hooks to the clone, and then swap the object’s VMT pointer. Others periodically restore and reapply the hook depending on the scan timing. In more recent developments, some developers have abandoned VMT hooking altogether in favor of inline detours or Return-Oriented Programming (ROP) chains, which are harder to attribute to specific objects.

4 Evasion Techniques Used by Cheats

To remain undetected, cheat developers employ advanced evasion strategies. These techniques are specifically designed to circumvent TLS callbacks, start address validation, and memory integrity checks.

Suppressing TLS Callbacks

One method to bypass TLS-based detection is to remove or disable the TLS callback table in the injected DLL. This can be achieved by:

- Manually modifying the PE header to erase TLS structures.
- Avoiding the use of new threads, thus preventing callback invocation.

Thread Hijacking and Return Address Spoofing

Thread hijacking avoids the creation of new threads by taking control of an existing game thread. The cheat suspends a legitimate thread, modifies its instruction pointer, and redirects it to execute the injected payload.

To further mask execution, cheats employ **return address spoofing**, which fakes the origin of a function call. By placing a plausible return address on the stack, the cheat deceives anti-cheats into believing that execution flow originated from a legitimate module.

Start Address Redirection via ROP Gadgets

One advanced technique used by cheat developers to bypass anti-cheat protections is through the use of **ROP (Return-Oriented Programming) gadgets**. To understand this, think of ROP gadgets as tiny, pre-existing snippets of code—just a few instructions long—that already live in trusted software modules, like the game executable or system libraries. These snippets typically end with an instruction that passes control to another location, such as `ret` (return from function) or `jmp reg` (jump to the address in a register).

Instead of calling malicious code directly—which would be easy for an anti-cheat system to detect—cheats can build a fake function call using these gadgets. This involves creating a small code section called a *call stub* that fakes a legitimate function return. This stub pushes a *spoofed return address* onto the stack (pointing to one of the trusted gadgets) and then jumps to the real payload. From the outside, the resulting execution path looks normal, making it hard to detect through common anti-cheat techniques like return address validation or call stack inspection. This is particularly effective against Valve’s anti-cheat engine (VAC), which performs such checks.

Stack Alignment and Shadow Space. In 64-bit Windows environments, function calls must follow strict rules. One of these rules involves aligning the stack pointer and reserving 32 bytes of temporary space for the called function (called *shadow space*). The cheat’s call stub must respect these rules to avoid crashing or triggering red flags. Here is an example of a minimal x64 stub:

```
1 sub rsp, 0x28 ; align stack and reserve shadow space
```

```

2 mov rax, 0xFFAAFFAAFFAAFFAA ; spoofed return address (ROP gadget)
3 push rax
4 mov rax, 0xFFAAFFAAFFAAFFAA ; actual target function
5 jmp rax

```

This stub ensures that when the function is done, the processor returns to a safe-looking address (the gadget), not to suspicious or injected code.

What Makes a Good Gadget? A **ROP gadget** is simply a small piece of existing code that ends in a control-transfer instruction, usually found inside legitimate modules. Because these are already loaded into memory, using them avoids detection that would arise from injecting new code.

Cheats locate these gadgets by **pattern scanning**—searching memory for specific byte patterns that represent useful instruction sequences. The goal is to find gadgets that:

- Adjust the stack pointer correctly, e.g., to undo the shadow space allocation.
- Avoid modifying important CPU registers used by the function being called.
- Provide a clean and believable return path for the processor to follow.

Here are examples of commonly used gadget patterns and what they do:

```

1 add rsp, 0x28
2 ret

```

This gadget fixes the stack after the shadow space and performs a clean return. It's ideal for spoofing legitimate execution flow.

```

1 pop rcx
2 add rsp, 0x20
3 ret

```

This one pops a value into a register (e.g., an argument), adjusts the stack, and returns. It can be useful when additional cleanup or setup is needed.

```

1 add rsp, 0x20
2 pop rax
3 jmp rax

```

Instead of returning, this gadget jumps directly to a target address stored in rax. It serves as a *trampoline*—a way to continue execution without relying on a normal return, which can be risky in some setups.

These gadgets are either hardcoded into the cheat (if their locations are known ahead of time) or dynamically found at runtime based on memory analysis.

x86 Considerations. On 32-bit (x86) systems, this technique becomes trickier due to the different calling conventions in use—such as `_cdecl`, `_thiscall`, or `_fastcall`. Each defines how arguments are passed and who is responsible for cleaning up the stack.

Below is a stub tailored for a `_thiscall` function, which is commonly used for C++ member functions on Windows:

```
1  sub esp, 0x0C
2  mov eax, 0xFFAAFFAA      ; spoofed return address
3  mov [esp], eax
4  mov eax, [esp+0x10]
5  mov [esp+4], eax
6  mov eax, [esp+0x14]
7  mov [esp+8], eax
8  mov eax, 0xFFAAFFAA      ; actual target function
9  jmp eax
```

In this example, the return address is placed at the top of the stack, and the arguments are manually positioned to match what the target function expects. This careful setup ensures the cheat integrates smoothly into the normal execution flow, even under the scrutiny of stack-based detection mechanisms.

Detection Vectors. Although this technique can bypass static stack validation, it is not impervious to detection. Anti-cheat engines can perform **stack walking**—analyzing the call stack at runtime—to identify anomalies such as unexpected return addresses or invalid module references. To counteract this, some cheats implement post-call cleanup via chained gadgets or trampolines that restore a believable call chain before returning.

Practical Implementations. Open-source projects like `x86RetSpoof` by danielkrupinski encapsulate these techniques in reusable tooling for x86-based games. However, bespoke implementations remain common in private cheat circles, especially in paid cheats (*P2C*) for titles like CS:GO and CS2.

5 Extended VAC Capabilities and Developer Countermeasures

Beyond memory inspection and thread analysis, VAC includes a broader set of capabilities that significantly increase its detection surface.

Observed Detection Capabilities

Community research and reverse engineering have revealed that VAC likely performs:

- **File System Scanning:** Searches for known cheat artifacts and patterns.
- **Process and Memory Scanning:** Inspects all running processes for injection, shellcode, and suspicious modules.
- **Registry Inspection:** Identifies unusual startup entries or configuration keys.
- **Handle Enumeration:** Flags abnormal access to game-related objects.
- **Hook and Signature Scanning:** Detects common hook patterns and byte signatures from known cheat loaders.

These mechanisms work in concert with behavioral monitoring and cloud-based analysis, making VAC highly resilient to static evasion alone.

Common Countermeasures Used by Cheat Developers

In response, professional cheat developers implement an array of countermeasures designed to reduce their attack surface and mislead detection heuristics:

- **String Encryption:** Prevents signature-based scanning of identifiable strings.
- **Window and Module Name Randomization:** Avoids static blacklisting and manual heuristics.
- **Polymorphic Code:** Constantly mutates the cheat's binary structure to evade pattern recognition.
- **Fileless Execution:** Prevents disk-based detection by streaming the cheat entirely into memory.
- **Memory Cleansing:** Removes metadata and headers after injection to eliminate identifiable traces.
- **Registry Hygiene:** Ensures no persistent keys or logs remain after execution.
- **Scan Spoofing:** Hooks or replaces VAC scanning routines with fake responses to conceal activity.

These techniques are essential for achieving long-term undetectability in highly monitored environments such as Valve's matchmaking infrastructure.

DLL injection remains the foundation of modern cheat development in competitive games. Techniques such as Manual Mapping offer powerful stealth capabilities, enabling deep integration with the game runtime. However, anti-cheat systems like VAC employ increasingly sophisticated detection methods, including TLS callbacks, memory integrity scanning, VMT hook detection, and behavioral analysis.

6. FUNCTION HOOKING AND TRAMPOLINE-BASED INTERCEPTION

Overview

At the heart of our cheat framework lies a fundamental and widely-used technique: **function hooking**. This mechanism allows us to intercept and manipulate internal function calls within the game, modify their behavior, and seamlessly resume execution without disrupting the application's control flow. Among the various hooking strategies available, the most stable and stealthy is the **trampoline hook**.

Trampoline hooking offers a reliable and elegant solution for redirecting code execution to custom payloads while preserving the original function's logic. In this chapter, we present an in-depth explanation of trampoline hooks—how they work, why they are effective, and how they can be implemented safely using the MinHook library.

1 What is a Trampoline Hook?

A trampoline hook works by overwriting the beginning of a target function with a jump (typically a near relative JMP or absolute indirect jump) to a custom handler—our hook payload. Since this patch modifies the first few bytes of the original function, those instructions must first be preserved to avoid corrupting the original behavior. We do this by copying them to a new, executable memory region known as the *trampoline*.

Once our custom payload has executed, control is passed to the trampoline, which executes the preserved instructions and then jumps back to the original function, resuming execution as if nothing had changed.

This redirection process involves the following four components:

1. **Original (Hooked) Function** – The function entry point is patched to redirect execution to the relay function.
2. **Relay Function** – A lightweight jump stub that forwards execution to the hook payload using a 64-bit jump (on x64).
3. **Hook Payload** – Executes custom logic (e.g., cheat functionality), then invokes the trampoline.

4. **Trampoline** – Contains the original stolen instructions and ends with a jump back into the body of the original function.

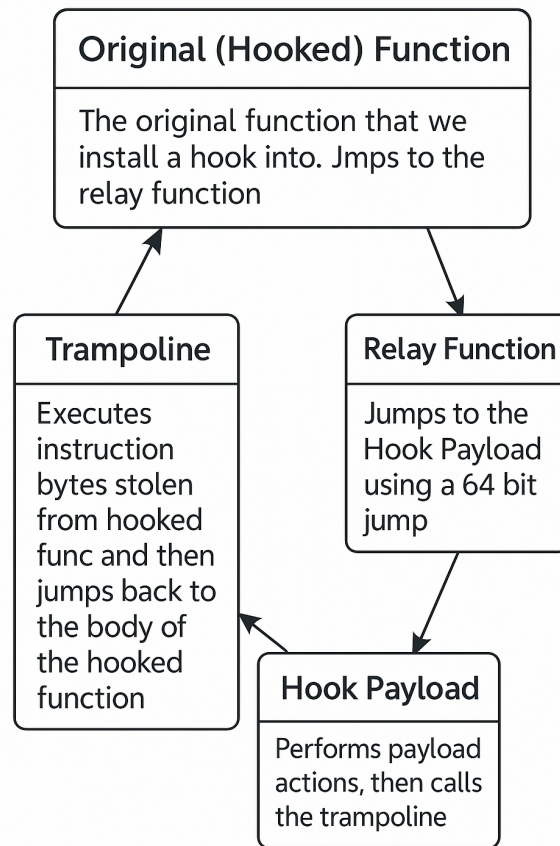


Figure 6.1: Control flow in a trampoline hook setup.

2 Reverse Engineering and Function Discovery

Before hooking any function, it is essential to identify the ones responsible for the behaviors we intend to alter. This process involves reverse engineering the game's dynamic libraries—most notably `client.dll`, which houses the majority of client-side logic.

Using reverse engineering tools such as *IDA Pro*, *Ghidra*, or *x64dbg*, we analyzed exported symbols, disassembled code, and examined runtime behavior to identify functions of interest. Once located, we extracted their byte-level signatures to ensure our hooks could locate the same functions across multiple game sessions.

To account for memory layout randomization introduced by ASLR (Address Space Layout Randomization), we used these byte patterns as unique **signatures**—compact sequences of bytes that uniquely identify the beginning of a function. Our injected DLL scans process memory at runtime to locate these signatures and dynamically apply the hook in each session.

3 Why Trampoline Hooks Are Effective

Trampoline hooks are particularly effective for real-time game manipulation and evasion of anti-cheat mechanisms due to several key benefits:

- They preserve the original control flow, allowing the application to behave as expected after executing the custom payload.
- Return address and call stack integrity is maintained, which helps evade return address validation techniques used by anti-cheat engines such as VAC.
- No shellcode or foreign code is injected into unfamiliar memory regions, which significantly reduces the risk of detection by memory scanners or heuristic analysis tools.

In summary, trampoline hooking strikes a balance between flexibility, stability, and stealth—making it the preferred method in both benign instrumentation tools and game hacking frameworks.

4 Implementing Hooks with MinHook

To hook functions safely and efficiently, we use **MinHook**, a lightweight and open-source x86/x64 API hooking library for Windows.

Before installing the hook, we first define the structure of the original function inside a dedicated class. This class also contains the trampoline pointer and our custom hook implementation. For example:

```
1 class WorldModulation {
2 private:
3     static ByteColor ColorCache;
4
5 public:
6     typedef void* (__fastcall* ModulateWorldColorFn)(
7         CAggregateSceneObjectWorld*, void*);
8     static ModulateWorldColorFn oModulateWorldColor;
9     static void* __fastcall hModulateWorldColor(
10         CAggregateSceneObjectWorld* pAggregateSceneObject, void* a2);
11 };
12
13 WorldModulation m_WorldModulation;
```

This setup provides a clean and organized structure where:

- We define the function type via a typedef.

- We store a pointer to the original (trampoline) function.
- We implement our custom hook logic inside a static method.

Then we proceed with the actual installation using MinHook:

```

1 void* __fastcall WorldModulation::hModulateWorldColor(
    CAggregateSceneObjectWorld* pWorld, void* a2) {
2     ByteColor Color = Visual::ToByteColor(Globals::worldModulationColor)
    ;
3
4     if (Globals::worldModulation && Color != ColorCache) {
5         for (int i = 0; i < pWorld->count; i++) {
6             auto& obj = pWorld->array[i];
7             obj.r = Color.r;
8             obj.g = Color.g;
9             obj.b = Color.b;
10        }
11        ColorCache = Color;
12    }
13
14    return oModulateWorldColor(pWorld, a2); // Call trampoline
15 }
16
17 void InitHook() {
18     MH_Initialize();
19     MH_CreateHook((LPVOID)TargetAddress, &WorldModulation::
    hModulateWorldColor, (LPVOID*)&WorldModulation::oModulateWorldColor);
20
21     MH_EnableHook((LPVOID)TargetAddress);
22 }

```

5 Conclusion

Trampoline hooking provides a stable and stealthy way to manipulate game logic without crashing the game or alerting anti-cheat systems. By preserving the return address and execution flow, it forms the backbone of our entire cheat architecture.

The process begins with reverse engineering target DLLs—most notably `client.dll`—to locate and understand the relevant functions. Then, byte-level patterns are extracted to scan and identify those functions reliably at runtime, enabling us to inject hooks safely and consistently. Finally, MinHook allows us to deploy trampoline hooks with minimal footprint, organized in clearly defined classes for maintainability.

In the next chapter, we will explore how to discover and select appropriate functions to hook, particularly those related to rendering, game logic, and player state.

7. INTERNAL GAME STRUCTURE: LOGIC BEHIND COUNTER-STRIKE 2

1 Understanding Entity Lists in Video Games

In modern game engines—particularly those designed for real-time, multiplayer environments—an **entity list** is a fundamental data structure responsible for managing all interactive objects within the game world. These entities include players, non-player characters (NPCs), projectiles, grenades, environmental props, and more.

At the core, each entity is an instance of a class containing essential data such as position, health, team ID, state flags, and animation or input components. The engine maintains and updates these entities each frame to simulate gameplay logic, render visuals, process collisions, and evaluate state-based behavior such as death, visibility, or interaction.

1.1 Common Structures for Entity Lists

Entity lists are implemented using various structures, depending on the performance needs and memory model of the engine:

- `Array of Entity Objects` – A flat, contiguous layout offering fast access, but limited flexibility.
- `Array of Pointers` – A static array referencing dynamically allocated entities. Used frequently in older engine architectures.
- `std::vector` – A dynamic container suitable for runtime entity creation and destruction.
- `Linked List` – Each node points to the next entity, providing memory flexibility at the cost of linear traversal time.
- `HashMap / Tree` – Enables fast lookup and categorization by entity ID or class type.

While early iterations of the Source engine (e.g., CS:GO) utilized a flat pointer array, the modern Source 2 engine in Counter-Strike 2 introduces a **paged entity system**. This structure maps entity handles to memory pages, offering greater scalability and safety across dynamically allocated objects.

2 Entity Organization in Counter-Strike 2

In *Counter-Strike 2*, every in-game object—be it a player, weapon, projectile, or environmental element—is represented as a dynamic **entity**. Internally, these entities are managed through unique *handles*, compact structures that encode both the entity index and a generation counter. This system enables safe referencing, preventing stale or invalid pointers when entities are destroyed and recreated during gameplay.

To resolve a handle into a valid pointer, the Source 2 engine employs a two-level paging system—conceptually similar to the virtual memory mechanisms used in modern operating systems—allowing efficient access to entity memory while maintaining safety and scalability.

When focusing on player-related data, two core classes emerge as central components:

- **CBasePlayerController** — Contains high-level player metadata such as the sanitized name, Steam ID, input state, and a handle to the corresponding pawn.
- **C_CSPlayerPawn** — Represents the physical player entity within the game world. It includes key gameplay attributes such as position, health, team ID, view angles, and animation state.

Both classes derive from the common superclass **C_BaseEntity**, which serves as the foundation for all entities in the engine. It exposes core functionality and network-relevant properties. Below are simplified, annotated representations of these structures:

1. Base Entity – C_BaseEntity

```
1  /*****
2   * C_BaseEntity:
3   * Base class for all entities in the Source 2 engine.
4   * Provides core fields used by all entity types.
5   *****/
6  class C_BaseEntity {
7  public:
8      CHandle<C_BaseEntity>    m_hEffectEntity;    // * Effect entity (
           e.g. glow, particle)
9      CHandle<C_BaseEntity>    m_hOwnerEntity;    // * Owner entity (e.
           g. weapon holder)
10     CHandle<C_BaseEntity>    m_hGroundEntity;    // * Entity this one
           is standing on (for physics)
11     CBodyComponent::Storage_t m_CBodyComponent;    // * Physics and
           collision representation
12
13     // * ... Additional base class members used engine-wide
14 };
```

Listing 7.1: C_BaseEntity – Core Class for All Entities

2. Player Controller – CBasePlayerController

```
1  /*****
2  * CBasePlayerController:
3  * Handles metadata, Steam ID, input state, and pawn reference.
4  * Represents the logical (non-physical) part of the player.
5  *****/
6  class CBasePlayerController : public C_BaseEntity {
7  public:
8      std::string          m_sSanitizedPlayerName; // * Cleaned
        player name (UI, logs)
9      uint64_t             m_steamID;              // * 64-bit unique
        Steam ID
10     InputState_t          m_inputState;           // * Current input
        (WASD, mouse, etc.)
11     CHandle<C_CSPlayerPawn> m_hPawn;             // * Handle to the
        in-game player pawn
12
13     // * ... Additional metadata like scores, latency, etc.
14 };
```

Listing 7.2: CBasePlayerController – Player Metadata and Input Handler

3. Player Pawn – C_CSPlayerPawn

```
1  /*****
2  * C_CSPlayerPawn:
3  * Represents players in world presence (rendered and simulated).
4  * Stores spatial, animation, and gameplay-critical state.
5  *****/
6  class C_CSPlayerPawn : public C_BaseEntity {
7  public:
8      Vector3              m_vPosition;           // * Player's world-space
        position
9      uint32_t             m_iHealth;             // * Health (0 = dead)
10     uint32_t             m_iTeamNum;            // * Team ID (e.g., 2 = T, 3 =
        CT)
11     QAngle               m_angViewAngles;       // * Viewing direction (pitch/
        yaw/roll)
12     AnimationState_t      m_AnimState;          // * Animation and pose state
```

```

13
14     // * ... Additional attributes like velocity, inventory, flags, etc.
15 };

```

Listing 7.3: C_CSPlayerPawn – In-World Representation of the Player

This class hierarchy enables a clean separation of concerns between the logical identity and control of the player (controller) and their physical simulation within the world (pawn). This design also accommodates edge cases such as spectator modes, bot logic, and replay systems, where a controller may exist without an active pawn.

Moreover, the architecture reflects a variant of the Entity-Component-System (ECS) paradigm, promoting modularity and flexibility. This pattern is especially beneficial for external tools, including mods, analytics systems, and cheat frameworks.

2.1 Structuring Player Data in Practice: The Players Class

To organize the resolved player entities in a consistent and performant way, we define a high-level wrapper class called `Players`. This class aggregates all relevant information associated with a player in a single structure:

- The player’s in-game entity (Pawn), responsible for physical representation and simulation.
- The logical controller (Controller), which manages metadata, input, and team identity.
- The observed pawn (ObserverPawn), used for deathcam, spectator, or overwatch viewing.

This encapsulation allows us to treat each player as a self-contained unit, streamlining access across features such as ESP overlays, aimbots, spectator tools, or replay systems.

Entity Aggregation Class – Players

```

1  class Players
2  {
3  public:
4      C_PlayerPawn*      Pawn;
5      C_PlayerController* Controller;
6      C_PlayerPawn*      ObserverPawn;
7
8      Players()
9          : Pawn(nullptr), Controller(nullptr), ObserverPawn(nullptr) {}
10

```

```

11     Players(C_PlayerPawn* pawn, C_PlayerController* controller,
12           C_PlayerPawn* observerPawn)
13         : Pawn(pawn), Controller(controller), ObserverPawn(observerPawn)
14         {}
15 };

```

Listing 7.4: Players – Unified Player Representation

3 Entity List Traversal

Having established the structural foundations of player entities, the next step involves enumerating these entities during runtime. This process—commonly referred to as **entity list traversal**—is fundamental for real-time game modification and data extraction.

3.1 Entity Handle Relationships

The linkage between `CBasePlayerController` and `C_CSPlayerPawn` is facilitated by the use of compact entity handles—typically implemented as `uint32_t` integers.

- `CBasePlayerController::m_hPawn` points to the controlled pawn.
- `C_CSPlayerPawn::m_Controller` points back to the controlling entity.

This bidirectional association enables fast, stable resolution of the player structure across different modules and states.

3.2 Locating and Identifying the Entity List in Memory

In the absence of debugging symbols or SDK access—common in protected or closed-source games—discovering the location and structure of the entity list becomes a crucial part of the reverse engineering process. This list is essential for iterating over active in-game entities such as players, bots, or interactive objects, and retrieving key data like position, health, and team.

The process is typically performed using memory inspection tools such as Cheat Engine, and can later be optimized or automated once the structure is confirmed. A generalized and practical methodology for discovering the entity list dynamically is outlined below.

Dynamic Discovery Workflow

1. **Scan for the Local Player's Position:** Begin by searching for changing float values corresponding to the local player's coordinates (e.g., X, Y, Z) as you move within the game.

2. **Filter Non-Dynamic or Cached Results:** Disregard addresses that stop updating when the game is paused or the window loses focus. These are often visual proxies or cached rendering data.
3. **Analyze Accessing Instructions:** Use Cheat Engine's "Find out what accesses this address" feature to locate game instructions interacting with the position. Valid update loops will continue accessing these addresses even when the game is idle.
4. **Detect Multi-Entity Access Patterns:** Verify whether the same instruction reads positions of other players. If so, it likely belongs to a loop iterating through a centralized entity container.
5. **Derive Entity Base Addresses:** Subtract the known position offset (e.g., `m_vPosition`) from each accessed address to recover the base pointer to each entity structure.
6. **Identify the Entity List Container:** Search for contiguous memory blocks where these base addresses are stored. Look for uniform spacing between them (e.g., every 0x78 or 0x80 bytes), which often indicates a static array or a paged entity structure.
7. **Validate and Generalize:** Once confirmed, build a loop to iterate over the list using pointer arithmetic and known offsets. From here, you can begin resolving additional properties like health, team, and state flags.

Entity List Variants: Visual vs. Gameplay-Complete Structures

During memory inspection, it is common to encounter multiple memory regions that resemble entity lists. These structures may vary significantly in terms of the data they expose:

- **Render-Only Lists:** Often contain just positional or interpolation data used by the renderer. These lists update frequently but lack gameplay logic.
- **Gameplay-Relevant Lists:** Contain complete entity structures with health, team, ammo, armor, and state flags—used by core game logic for decision-making and rule enforcement.

While render-only lists can be identified relatively quickly—typically within minutes—the discovery of fully populated gameplay-relevant structures often requires extended investigation. The process may involve correlating memory offsets, validating runtime behavior, or leveraging function-level reverse engineering in disassembly tools.

Advanced reverse engineers often turn to static analysis using tools such as **IDA Pro**, **Ghidra**, or **Binary Ninja**. These enable the inspection of vtables, RTTI metadata, or instruction-level access patterns that point to the actual entity list access logic inside the game binary.

This multi-path approach is extensively documented and discussed by reverse engineering communities. A particularly useful case study can be found in a dedicated thread on the UnknownCheats forum¹, where users share strategies for locating and validating entity lists across multiple game engines.

In conclusion, identifying the correct entity list—whether through dynamic analysis or disassembly-guided pattern matching—is a foundational skill for external tooling. It unlocks the ability to systematically access and manipulate in-game objects with high confidence and reliability, forming the basis for any higher-level system such as ESP, aimbots, or replay parsers.

3.3 Reverse Engineering the Engine’s Entity Resolution Logic

Through static analysis of the CS2 binary, specifically within the `client.dll`, one can uncover the internal logic used to resolve handles. The following C pseudocode, extracted from Ghidra, corresponds to the function responsible for locating entities within the paged entity list:

```
1 Entity_t *EntityList(longlong EntityListPointer, uint EntityListIndex)
2 {
3     Entity_t *Entity;
4     longlong EntitySublist;
5
6     if (((EntityListIndex < 32767) && (EntityListIndex >> 9 < 64)) &&
7         (EntitySublist = *(EntityListPointer + 16 + (EntityListIndex >>
8             9) * 8), EntitySublist != 0))
9         && ((Entity = EntitySublist + (EntityListIndex & 511) * 120,
10             Entity != NULL &&
11                 ((*Entity + 2) & 32767) == EntityListIndex)))
12     {
13         return *Entity;
14     }
15     return 0;
16 }
```

Listing 7.5: Accessing an Entity in the Entity List

The algorithm follows these main steps:

1. **Index Validation:** First, the index `EntityListIndex` is validated to ensure it falls within a valid range. Specifically:

¹<https://www.unknowncheats.me/forum/general-programming-and-reversing/564058-entity-list.html>

- `EntityListIndex < 32767` ensures the index does not exceed a predefined maximum value. The game defines that 32766 is the maximum number of entities it can handle at any given time.
 - `EntityListIndex >> 9 < 64` uses a right shift operation, which effectively divides the index by 512, ensuring that the index belongs to one of the 64 available sublists. In this way, each list can contain 512 entities.
2. **Accessing the Sublist:** The function calculates the appropriate sublist that contains the entity:
 - `EntitySublist = *(EntityListPointer + 16 + (EntityListIndex >> 9) * 8)` computes the address of the specific sublist by using the shifted index to determine its location in memory.
 - The condition `EntitySublist != 0` ensures the sublist is valid (i.e., it exists and can be accessed).
 3. **Locating the Entity Within the Sublist:** If the sublist is valid, the algorithm calculates the position of the entity within that sublist:
 - `Entity = EntitySublist + (EntityListIndex & 511) * 120` calculates the position of the entity inside the sublist. The bitwise AND operation `EntityListIndex & 511` extracts the last 9 bits of the index, which helps pinpoint the entity's exact position within the sublist.
 - The condition `Entity != NULL` ensures that the entity actually exists, and `(* (Entity + 2) & 32767) == EntityListIndex` checks that the entity's index matches the requested one.
 4. **Returning the Entity:** Once all conditions are met, the algorithm returns the entity. If any of the conditions fail, the function returns 0, indicating that the entity could not be found.

3.3.1 Alternative Method: Hooking `OnAddEntity` and `OnRemoveEntity`

While iterating over the full entity list is a viable approach—as demonstrated in the previous section—it has limitations, especially in terms of safety and performance. A naive traversal risks accessing null or invalid entities, particularly in scenarios where:

- A player has recently disconnected.
- An entity was destroyed or reassigned (e.g., team switch or respawn).
- The entity memory is not yet initialized by the engine's internal loop.

To mitigate these risks, we employ a more reliable and event-driven technique: **hooking the engine's entity lifecycle callbacks**. Specifically, we intercept two key functions—

OnAddEntity and OnRemoveEntity—which the engine internally invokes whenever an entity is added to or removed from the active game world.

By intercepting these functions, we maintain a synchronized internal representation of the entity list, without having to traverse memory manually every frame.

Hooked Callbacks for Entity Lifecycle

```
1 void HooksManager::OnAddEntity::hOnAddEntity(__int64 CGameEntitySystem,
2     void* entityPointer, int entityHandle)
3 {
4     oOnAddEntity(CGameEntitySystem, entityPointer, entityHandle);
5
6     std::string schemaName = iGameEntitySystem->GetSchemaName(
7         entityPointer);
8
9     if (schemaName == "C_CSPlayerPawnBase")
10    {
11        iGameEntitySystem->PawnMap[entityHandle] = (C_PlayerPawn*)
12        entityPointer;
13    }
14
15    if (schemaName == "c_cs_observer_for_precache")
16    {
17        iGameEntitySystem->ObserverMap[entityHandle] = (C_PlayerPawn*)
18        entityPointer;
19    }
20
21    if (schemaName == "CBasePlayerController")
22    {
23        iGameEntitySystem->ControllerMap[entityHandle] = (
24        C_PlayerController*)entityPointer;
25    }
26 }
```

Listing 7.6: Hook: OnAddEntity

Lifecycle-Driven Synchronization

With this approach, the cheat framework reacts to entity creation and destruction in real time, mirroring the game's own internal management. This results in several key benefits:

- **Performance:** No need to scan memory every frame.
- **Accuracy:** No risk of accessing invalid or outdated entity pointers.

- **Extensibility:** Enables features like lifecycle analytics or event logging.

Initial Synchronization Step

It is worth noting that this hook-based method alone does not populate the entity list retroactively. Therefore, upon joining a game that has already started, we must perform a one-time full traversal of the entity list to capture entities that were added prior to our hooks being installed.

Once this initial population step is completed, entity state is fully managed via the `OnAddEntity` and `OnRemoveEntity` hooks—ensuring consistency, minimal overhead, and maximal safety.

8. CHEAT FEATURES IMPLEMENTED IN OUR CHEAT FOR CS2

This chapter provides a comprehensive analysis of the **cheat features** we have successfully implemented within our *cheat*. We will explore their objectives, the underlying logic governing their operation, and the technical implementation that enables them to function correctly. Each section will present **code snippets** that illustrate key parts of our implementation, allowing for a deeper understanding of how we interfaced with the CS2 engine. Furthermore, we will outline the specific **functions we have hooked**, demonstrating how we gain control over critical game processes to manipulate rendering, aiming, and other essential aspects of gameplay.

Functionality	Description
Chams	Modifies the rendering pipeline to apply custom materials to in-game models, enhancing visibility.
ESP (Extra Sensory Perception)	Extracts and displays real-time enemy information, providing a tactical advantage.
Aimbot	Automates aiming mechanisms to improve accuracy and precision.
Anti-Aim	Manipulates player model orientation to mislead enemy aimbots and disrupt targeting.

Table 8.1: Core Functionalities Overview

There exist multiple approaches to implementing each of these cheat features, ranging from simple external overlays to deep internal hooks that modify game memory and execution flow. Given the time constraints of this work and the limited publicly available documentation on cheat development, we have opted for an approach that provides the best balance between effectiveness and stealth.

The lack of official documentation and the inherently secretive nature of cheat development meant that much of our implementation had to be based on reverse engineering and extensive experimentation. Instead of relying on external overlays, which are more susceptible to detection and performance limitations, or resorting to aggressive memory manipulation, which significantly increases the risk of being flagged by anti-cheat systems, we chose to integrate directly with the game’s internal systems.

We begin by exploring **Chams**, one of the most visually impactful modifications. This technique alters the appearance of in-game models by replacing their default materials with custom ones, effectively enhancing player visibility. Unlike traditional *ESP* methods, which rely on external overlays that merely draw information on the player's screen, Chams modify the rendering process within the engine itself. This allows for an entirely integrated solution that operates without any **performance impact**, making it one of the most effective and undetectable visual enhancements available.

In the following sections, we will dissect the logic behind our Chams implementation, detailing how we intercept key rendering functions, modify material properties, and dynamically apply custom textures to selected in-game entities. Each aspect of the implementation will be supported by relevant code snippets, providing an in-depth look at how we have programmed this feature.

1 Chams: Enhancing Visibility Through Engine-Based Rendering

Chams (*chameleon skins*) is a rendering manipulation technique that enables the replacement of standard in-game materials with custom-designed ones, significantly enhancing model visibility and allowing players to track enemy movements with greater ease regardless of lighting conditions, distance, or obstacles that would typically obscure their position.

Unlike external overlays, which function independently from the game and merely display additional information on the screen, Chams operate directly within the game engine, modifying the rendering logic at its core to ensure seamless integration and optimal performance without introducing additional processing overhead.

By leveraging hooking techniques within CS2's material system, it becomes possible to dynamically inject new textures and visual effects that are not present in the base game, allowing for a level of customization that surpasses conventional graphical modifications while maintaining the efficiency and fluidity of the rendering pipeline.

To achieve this level of modification, we implemented a multi-step process that ensures full integration with the game's rendering system. This process consists of the following key components:

- **Extracting Default Materials from the Game Engine** – Understanding and retrieving the default materials used by the game.
- **Generating Custom Materials** – Creating and defining new textures and visual effects that will replace the existing materials.

- **Hooking CreateMaterial and Injecting Custom Materials** – Intercepting the game’s material creation functions to replace default materials with our customized versions dynamically.
- **Hooking OnDrawModelExecute and Overriding Materials** – Modifying the rendering function responsible for drawing models to enforce the application of custom materials in real-time.

In the following sections, we will provide a detailed explanation of each of these steps, outlining how they contribute to the seamless integration of Chams into the CS2 rendering pipeline. We will delve into the technical specifics of how default materials are extracted, how custom materials are generated, and how we hook into the rendering functions to ensure that these modifications persist across all game instances.

1.1 Extracting Default Materials from the Game Engine

To fully understand how materials are structured and applied in CS2, we conducted extensive **debugging of the rendering engine**. By hooking into the **OnDraw** function, we intercepted the material creation process and successfully extracted the data of a default in-game material.

The following is an example of a material retrieved directly from the CS2 engine:

```

1 <!-- kv3 encoding:text:version{e21c7f3c-8a33-41c5-9977-a76d3a32aa0d}
2   format:generic:version{7412167c-06e9-4698-aff2-e63eb59037e7} -->
3   {
4       shader = "csgo_effects.vfx"
5       g_tColor = resource:"materials/dev/
6       primary_white_color_tga_21186c76.vtex"
7       g_tNormal = resource:"materials/default/
8       default_normal_tga_7652cb.vtex"
9       g_flColorBoost = 30
10      g_flOpacityScale = 245.55
11      g_vColorTint = [7.0, 7.0, 7.0, 0.37522]
12  }

```

Listing 8.1: Extracted Default Material from CS2

The extracted material follows the KV3 format, a modernized data structure introduced in Source 2 to replace the older KeyValues system used in Source 1.

KV3 allows for efficient serialization of structured data, supporting hierarchical organization and multiple data types, making it ideal for defining game assets such as materials, models, and particle effects. The Source 2 engine interprets these material definitions at runtime, applying the specified shader, texture maps, and rendering properties dynamically. By understanding this format, we gain full control over how materials are created

and manipulated in CS2, enabling us to inject entirely new visual elements into the game without modifying pre-existing assets.

Further exploration of this format, along with an in-depth analysis of its structure and applications, was possible by studying the official Source 2 Developer Wiki, which provides extensive documentation on how Source 2 processes materials, shaders, and other graphical assets. This resource offered crucial insights into how KV3 interacts with the rendering engine, particularly in the way materials are compiled and utilized in real time.

By modifying this format, we successfully generated a variety of new materials, each possessing unique properties suited for different visual effects, allowing us to experiment with different rendering techniques and further refine our implementation of Chams in CS2.

1.2 Generating Custom Materials

After extracting and analyzing a default material from the game, we proceeded to experiment with different configurations to generate a collection of materials optimized for various Chams effects.

The goal of this process was to develop materials capable of altering in-game visibility while maintaining the integrity of CS2's rendering engine. By modifying specific attributes such as `g_flFresnelExponent` for light reflection, `g_flOpacityScale` for transparency, and the blending mode flags, we achieved a variety of effects including glow effects, metallic reflections, and enhanced visibility through obstacles.

```
1 std::vector <const char *> MaterialInfo = {
2     szVMatBufferWhiteVisible,    szVMatBufferWhiteInvisible,
3     szVMatBufferIlluminateVisible, szVMatBufferIlluminateInvisible,
4     szVMatBufferIlatex,         szVMatBufferIlatexInvisible,
5     szVMatBufferMetalic,        szVMatBufferMetalicInvisible,
6     szVMatBufferGlowVisible,    szVMatBufferGlowInvisible
7 };
```

Listing 8.2: List of Custom Materials

Each of these materials was assigned a name that reflects its primary visual characteristic to facilitate its integration into our cheat system. By storing these materials in a **hashmap**, we enable efficient retrieval and reuse whenever new materials need to be applied.

Since materials in CS2 are defined as structured strings that determine their rendering properties, we ensure that our injected materials adhere to this format. This allows us to seamlessly integrate custom materials into the game's rendering pipeline by hooking into the `CreateMaterial` function and dynamically replacing standard materials with our own.

One of the most visually distinctive materials we developed was the **Glow Illuminated** effect. This material was designed to create a glowing outline around player models by leveraging CS2's built-in material masks and fine-tuning fresnel-based lighting parameters. The final definition of this material is shown below:

```
1 static static constexpr char szVMatBufferGlow2Visible[] =
2 R(<!-- kv3 encoding:text:version{e21c7f3c-8a33-41c5-9977-a76d3a32aa0d}
   format:generic:version{7412167c-06e9-4698-aff2-e63eb59037e7} -->
3 {
4     shader = "csgo_effects.vfx"
5     g_tColor = resource:"materials/dev/
primary_white_color_tga_21186c76.vtex"
6     g_tNormal = resource:"materials/default/
default_normal_tga_7652cb.vtex"
7     g_tMask1 = resource:"materials/default/default_mask_tga_344101f8.
vtex"
8     g_tMask2 = resource:"materials/default/default_mask_tga_344101f8.
vtex"
9     g_tMask3 = resource:"materials/default/default_mask_tga_344101f8.
vtex"
10    g_flOpacityScale = 0.45
11    g_flFresnelExponent = 0.75
12    g_flFresnelFalloff = 1
13    g_flFresnelMax = 0.0
14    g_flFresnelMin = 1
15    F_ADDITIVE_BLEND = 1
16    F_BLEND_MODE = 1
17    F_TRANSLUCENT = 1
18    F_IGNOREZ = 0
19    F_DISABLE_Z_WRITE = 0
20    F_DISABLE_Z_BUFFERING = 0
21    F_RENDER_BACKFACES = 1
22    g_vColorTint = [1.0, 1.0, 1.0, 0.0]
23 });
```

Listing 8.3: Glow Illuminated Material Definition

This configuration takes advantage of Source 2's built-in rendering properties to produce a highly effective glow effect. The fresnel parameters control how light interacts with the surface, ensuring that the glow intensity changes dynamically based on the player's viewing angle. Additionally, the use of multiple texture masks helps the glow blend naturally into the surrounding environment, making it appear as a seamless part of the game's visual style rather than an artificial overlay.

By refining these materials through iterative testing and real-time observation, we successfully developed a collection of custom visual effects that seamlessly integrate into CS2's rendering engine. This process not only allowed us to enhance player visibility but also provided deeper insights into the flexibility of Source 2's material system. The ability to dynamically inject and apply new materials in real time offers significant advantages, as it enables rapid adjustments to the cheat's visual effects without requiring modifications to game files or precompiled assets.

Through the careful selection of material properties and the precise manipulation of CS2's rendering functions, we have created a system that allows for highly customizable visual enhancements. These materials serve as the foundation for our Chams implementation, which will be further detailed in the following sections.

1.3 Hooking CreateMaterial and Injecting Custom Materials

To dynamically create and register materials in CS2, we hooked into the **CreateMaterialFunction**, allowing us to manipulate how the game initializes and stores materials.

```
1 static int64_t (__fastcall *CreateMaterialFunction)(void *, void *,  
    const char *, void *, unsigned int, unsigned int);
```

Listing 8.4: Hooking CreateMaterial Function

With this function, we dynamically generated and injected new materials into the game:

```
1 CMaterial2 *CreateCustomMaterial(const char *materialName, const char *  
    materialData) {  
2     CKeyValues3 *pKeyValues = CreateMaterialResource();  
3     if (!pKeyValues) return nullptr;  
4  
5     LoadKeyValues(pKeyValues, nullptr, materialData, nullptr, nullptr,  
        nullptr, nullptr, nullptr, "");  
6     CMaterial2 *customMaterial = nullptr;  
7     CreateMaterialFunction(nullptr, &customMaterial, materialName,  
        pKeyValues, 0, 1);  
8     return customMaterial;  
9 }
```

Listing 8.5: Creating a Custom Material in Memory

1.4 Loading KV3 Materials into the Game

After defining the custom materials, they must be properly loaded into the game engine so that they can be recognized and applied during rendering. This process involves parsing the KV3 data and ensuring that the Source 2 engine interprets it correctly. Without

this step, the materials would remain as raw data in memory and would not be accessible for rendering operations. The following function is responsible for handling this process:

```
1 bool Visual::Chams::LoadKV3 (CUtillsBuff *buff, CKeyValues3 *CkeyVal)
2 {
3     KV3ID_t kv3ID = KV3ID_t ("generic", 0x41B818518343427E, 0
4     xB5F447C23C0CDF8C);
5     return LoadKeyValues (CkeyVal, nullptr, buff, &kv3ID, nullptr,
6     nullptr, nullptr, nullptr, "");
7 }
```

Listing 8.6: Loading a KV3 Material into the Game

This function plays a critical role in ensuring that the Source 2 engine correctly processes and integrates the KV3 material data. The most notable aspect of this function is the initialization of the KV3ID_t object, which serves as a unique identifier for the KV3 data format. The string "generic" suggests that the format follows a standard KV3 structure. However, the most crucial part of this initialization lies in the two hexadecimal values: 0x41B818518343427E and 0xB5F447C23C0CDF8C.

These identifiers are likely used by the Source 2 engine as a reference signature for processing specific types of KV3 data. The first hexadecimal value, 0x41B818518343427E, may act as a format validation key that the engine checks to ensure that the data being loaded conforms to the expected KV3 structure. The second identifier, 0xB5F447C23C0CDF8C, could correspond to a particular category of KV3 files, distinguishing different types of resource files such as materials, models, or particle effects. This mechanism prevents malformed or incompatible KV3 data from being processed, ensuring that only correctly structured material definitions are registered in the engine.

Once the KV3 identifier is established, the function calls LoadKeyValues, which processes the KV3 data stored in memory. This function takes the parsed key-value pairs, ensures that the format aligns with the engine's expectations, and then integrates the material into the game's resource management system. The function parameters include a reference to the parsed data, a pointer to the KV3 identifier, and several nullptr arguments, which indicate that no additional optional parameters are required in this context.

By executing this function, the Source 2 engine successfully processes and registers the material, making it available for rendering in real-time. The use of predefined hexadecimal identifiers ensures that the KV3 data is correctly formatted and compatible with the rendering system. This approach enables the dynamic application of custom materials, allowing for real-time modifications without requiring precompiled assets or modifications to the game's existing files. The ability to inject materials dynamically provides a powerful method for implementing features such as Chams, enhanced weapon skins,

and other visual modifications while maintaining full compatibility with the game engine.

1.5 Hooking OnDrawModelExecute and Overriding Materials

To dynamically apply Chams, we intercepted `OnDrawModelExecute`, the function responsible for rendering in-game models. By hooking into this function, we gained control over the rendering process, allowing us to selectively modify materials applied to specific in-game entities. This method ensures that our custom materials are seamlessly integrated into the game's rendering pipeline without introducing additional rendering overhead or external overlays.

1.5.1 Filtering Target Entities

Since `OnDrawModelExecute` processes all rendered models, it is necessary to implement a filtering mechanism to ensure that only relevant entities—such as enemy players and weapons—are affected by our Chams system. Without this step, the modification would be applied indiscriminately to all objects in the game, including environmental elements and friendly players, which is neither efficient nor desirable.

To achieve this, we retrieve the schema name of each entity and compare it against known identifiers for player models and weapons. For player models, we check whether the entity corresponds to a `C_CSPlayerPawnBase` instance, which represents in-game characters.

```
1 auto schemaName = iGameEntitySystem->GetSchemaName(pEntity);
2 if (strcmp(schemaName.c_str(), "C_CSPlayerPawnBase") == 0) {
3     applyCustomMaterial(pMesh);
4 }
```

Listing 8.7: Identifying Player Models

Similarly, for weapons, we filter out entities corresponding to `C_PredictedViewModel`, ensuring that Chams are also applied to the player's held weapon model.

```
1 if (strcmp(schemaName.c_str(), "C_PredictedViewModel") == 0) {
2     applyCustomMaterial(pMesh, weaponMaterial);
3 }
```

Listing 8.8: Applying Chams to Weapons

By implementing this filtering mechanism, we ensure that Chams are applied exclusively to relevant gameplay elements, enhancing player visibility without interfering with other rendered objects.

1.5.2 Overriding Material Pointers

Once the relevant entities are identified, the next step is to override their assigned materials with our custom Chams textures. This is achieved by modifying the material pointer associated with the target model.

```
1 arrMeshDraw->CMaterial = *(CMaterial2 **)CustomMaterialMap.at(  
    MaterialName);
```

Listing 8.9: Overriding Model Materials

This modification dynamically replaces the original material with one of our preloaded Chams materials stored within the `CustomMaterialMap`. By performing this override at runtime, we ensure that our changes take effect immediately, without requiring any modification to the game's original assets. This approach enables real-time visual adjustments and allows for the implementation of different Chams effects based on user preferences or situational requirements.

By leveraging this hooking technique, we achieve a stealthy and efficient modification of the rendering pipeline, integrating custom materials in a way that is indistinguishable from the game's native rendering behavior. This method not only enhances the effectiveness of Chams but also serves as a foundation for further graphical modifications within the cheat system.

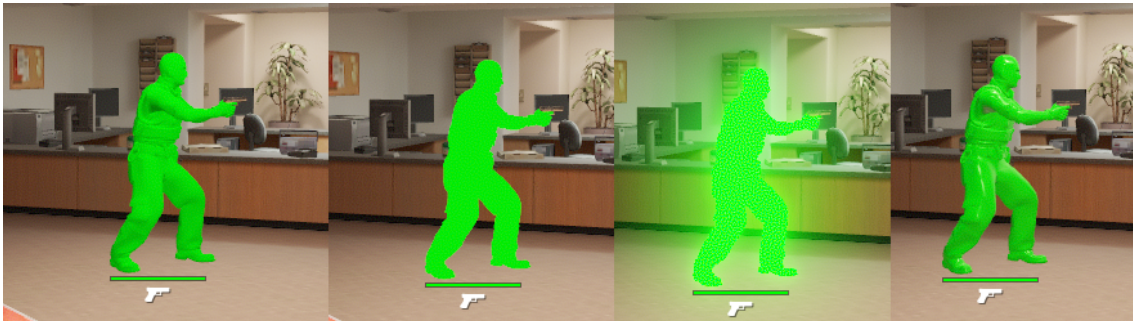


Figure 8.1: Created Chams Materials

1.5.3 Visible vs Non-Visible Chams Logic

Once this logic is in place, we can take it a step further and assign different materials to the visible and non-visible parts of the enemy player model. This allows us to render, for example, the visible part of the player in one color (e.g., purple) and the non-visible part (e.g., behind walls) in another (e.g., yellow).

Since this rendering is only visible locally to the cheat user and not to other players in the match, it enables us to appear as a legitimate player with significantly better awareness and reflexes. By clearly seeing which parts of an enemy are exposed and which are not, we can ensure to only target the visible areas.



Figure 8.2: Enter Caption

This reduces the risk of suspicious-looking shots (such as pre-firing through walls or headshots through solid cover) and helps us maintain a "legit" playstyle that blends in with skilled human behavior. In turn, this greatly decreases the chances of triggering manual bans during demo reviews or overwatch-like systems, where human moderators could flag unnatural behavior.

2 Aimbot: Automated Aim to Enemy Players

An aimbot is one of the most fundamental and widely recognized cheat functionalities in competitive first-person shooters. It automates the aiming process by computing the precise trajectory required to target an enemy, thereby bypassing human limitations in reaction time and accuracy. Developing an aimbot for *Counter-Strike 2* (CS2) necessitates a comprehensive understanding of the game's **entity system**, **coordinate transformations**, and **trigonometric principles** to ensure precise target alignment.

However, before implementing the aiming mechanism, it was crucial to first analyze how CS2 internally manages game entities. This understanding was essential since retrieving a player's position and calculating the required angles for the aimbot depend on accessing valid entity data. Without proper entity management, attempting to access a non-existent player could lead to dereferencing null pointers, resulting in critical errors or crashes.

2.1 Entity Management: Hooking the Game's Entity System

CS2 maintains an internal **entity system** that is responsible for handling all game objects, including players. Each entity is uniquely identified and assigned a memory address, allowing the game to track its state efficiently. Unlike other dynamic game objects that are continuously updated, player entities in CS2 follow a more static lifecycle: they are loaded into memory once a player connects to a server and remain persistent unless a player disconnects or a new player joins the match. This means that, unlike projectiles or temporary objects, player entities are only modified under specific conditions, reducing unnecessary updates and improving performance.

To reliably access player data and maintain an up-to-date reference to all active players, we identified and hooked into two critical functions within the game's entity management system:

- **OnAddEntity** – Responsible for adding new entities to the game. When a player joins a match, the game dynamically allocates memory for a new entity, assigns it a unique identifier, and registers it in the entity system.
- **OnRemoveEntity** – Handles the cleanup and removal of entities when they leave the match. When a player disconnects or is kicked, the entity system marks their associated entity for deletion and releases the allocated memory.

By intercepting these functions, we effectively track player entities and store their references in a **hashmap**. This hashmap allows us to maintain real-time access to entity data while preventing invalid memory access. Since player entities are only modified when a new player joins or an existing player disconnects, the hashmap remains stable and does not require frequent updates, unlike entity lists that need to be re-queried every frame.

We implemented hooks for `OnAddEntity` and `OnRemoveEntity` to ensure our entity tracking remains consistent throughout a match. By leveraging **hashmaps**, we can efficiently store and retrieve player-related entities, reducing overhead and ensuring a seamless interaction with the game's entity system. Furthermore, this approach minimizes reliance on manually finding offsets, as entity references remain valid until explicitly removed by the engine.

```
1 void HooksManager::OnAddEntity::hOnAddEntity(__int64 CGameEntitySystem,
2 void *entityPointer, int entityHandle) {
3     oOnAddEntity(CGameEntitySystem, entityPointer, entityHandle);
4
5     if (strcmp(iGameEntitySystem->GetSchemaName(entityPointer).c_str(),
6 "C_CSPlayerPawnBase") == 0) {
7         iGameEntitySystem->PawnMap.insert(std::make_pair(entityHandle, (
8 C_PlayerPawn *)entityPointer));
9     }
10    if (strcmp(iGameEntitySystem->GetSchemaName(entityPointer).c_str(),
11 "CBasePlayerController") == 0) {
12        iGameEntitySystem->ControllerMap.insert(std::make_pair(
13 entityHandle, (C_PlayerController *)entityPointer));
14    }
15 }
```

Listing 8.10: OnAddEntity Hook

```
1 void HooksManager::OnRemoveEntity::hOnRemoveEntity(__int64
2 CGameEntitySystem, void *entityPointer, int entityHandle) {
3     oOnRemoveEntity(CGameEntitySystem, entityPointer, entityHandle);
4
5     if (strcmp(iGameEntitySystem->GetSchemaName(entityPointer).c_str(),
6 "C_CSPlayerPawnBase") == 0) {
7         iGameEntitySystem->PawnMap.erase(entityHandle);
8     }
9     if (strcmp(iGameEntitySystem->GetSchemaName(entityPointer).c_str(),
10 "CBasePlayerController") == 0) {
11         iGameEntitySystem->ControllerMap.erase(entityHandle);
12     }
13 }
```

Listing 8.11: OnRemoveEntity Hook

By correctly associating players with their respective controller and pawn structures, we ensure that all entity references remain valid.

2.1.1 Computing Aiming Angles

Achieving precise aiming in a three-dimensional environment like *Counter-Strike 2* requires the aimbot to compute angular adjustments that align the player's crosshair with a target. Player orientation in CS2 is defined by three rotational angles:

- **Pitch** (θ): Controls vertical movement, determining how much the player looks up or down.
- **Yaw** (ϕ): Governs horizontal movement, rotating the player's view left or right.
- **Roll** (ψ): Represents tilt along the forward axis but remains fixed at zero in CS2.

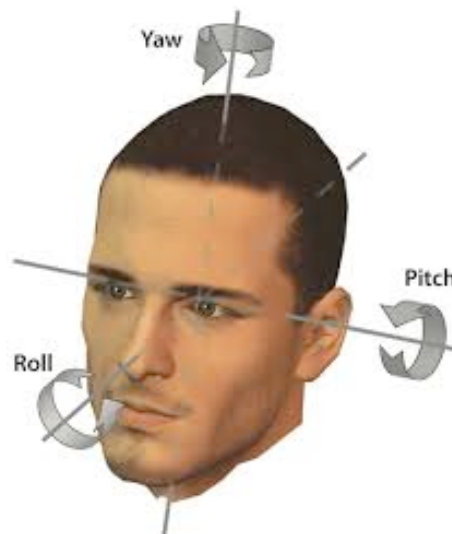


Figure 8.3: Representation of Pitch, Yaw, and Roll in a 3D Space.

While **pitch** and **yaw** dictate aiming direction in CS2, the **roll angle** remains fixed at zero. Unlike flight simulators or VR applications, where roll introduces an additional degree of freedom, CS2 enforces strict constraints that prevent camera tilting. Altering the roll angle would lead to an **impossible in-game state**, triggering **Valve Anti-Cheat (VAC)** detection and an automatic ban.

2.1.2 Deriving the Direction Vector

To accurately compute the aiming angles, the first step is to determine the enemy's position relative to the player's viewpoint. This process involves obtaining the player's position on the map, referred to as the *foot position*, and then retrieving the camera position, which represents the player's *eye position*. The eye position is the viewpoint from which the player perceives the game environment.

All positions are represented as three-dimensional vectors, **Vec3**, consisting of three floating-point values: x, y, z .

2.1.3 Computing the Player's Position

The player's final position in the game world is obtained by adding the base position of the player to the camera offset:

$$P_{\text{player}} = P_{\text{base}} + P_{\text{camera}}$$

Where:

- P_{player} is the final computed position of the player.
- P_{base} is the player's base position in the world.
- P_{camera} is the camera offset (view position).

Expressed in vector form:

$$\mathbf{P}_{\text{player}} = \begin{bmatrix} x_{\text{base}} \\ y_{\text{base}} \\ z_{\text{base}} \end{bmatrix} + \begin{bmatrix} x_{\text{camera}} \\ y_{\text{camera}} \\ z_{\text{camera}} \end{bmatrix}$$

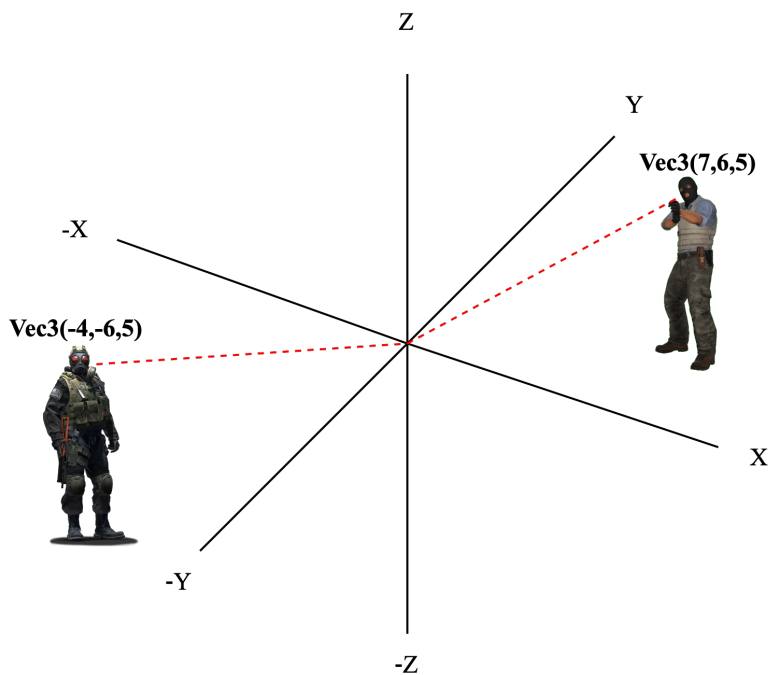


Figure 8.4: Representation of the player and enemy positions on the map.

2.1.4 Centering Coordinates on the Enemy

To center the coordinate system on the enemy, we compute the relative position of the enemy with respect to the player by subtracting the player's position from the enemy's position:

$$D = P_{\text{enemy}} - P_{\text{player}}$$

Expressed in vector form:

$$\mathbf{D} = \begin{bmatrix} x_{\text{enemy}} - x_{\text{player}} \\ y_{\text{enemy}} - y_{\text{player}} \\ z_{\text{enemy}} - z_{\text{player}} \end{bmatrix}$$

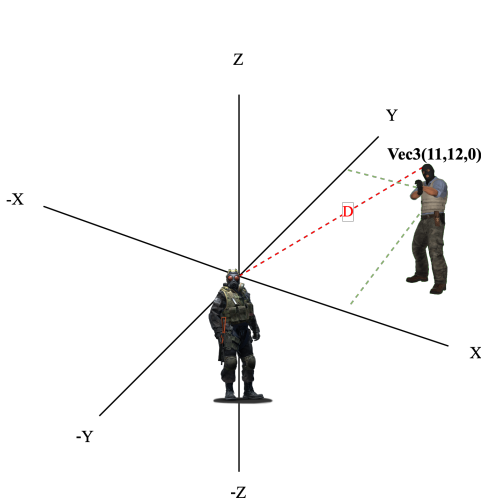


Figure 8.5: Vista original con los ejes coordenados.

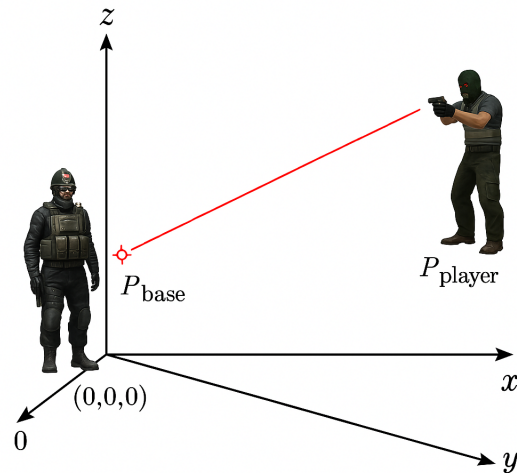


Figure 8.6: Cálculo del vector de desplazamiento D .

2.1.5 Local Coordinate System and Angle Calculation

As illustrated in Figure 8.7, all calculations take place in a local coordinate system where the player's eye position serves as the **origin**. The computed direction vector D , depicted by the blue line, serves as the foundation for determining the required pitch and yaw adjustments.

This displacement vector is essential for calculating the angles necessary to adjust the player's aim. The yaw and pitch angles can be derived using trigonometric functions, which will be explored in the next section.

2.1.6 Mathematical Computation of Aiming Angles

Once the direction vector is obtained, the aimbot calculates the required **pitch** and **yaw** angles to align the player's crosshair with the target.

Pitch Calculation (θ) The vertical adjustment necessary to match the enemy's head height is determined by:

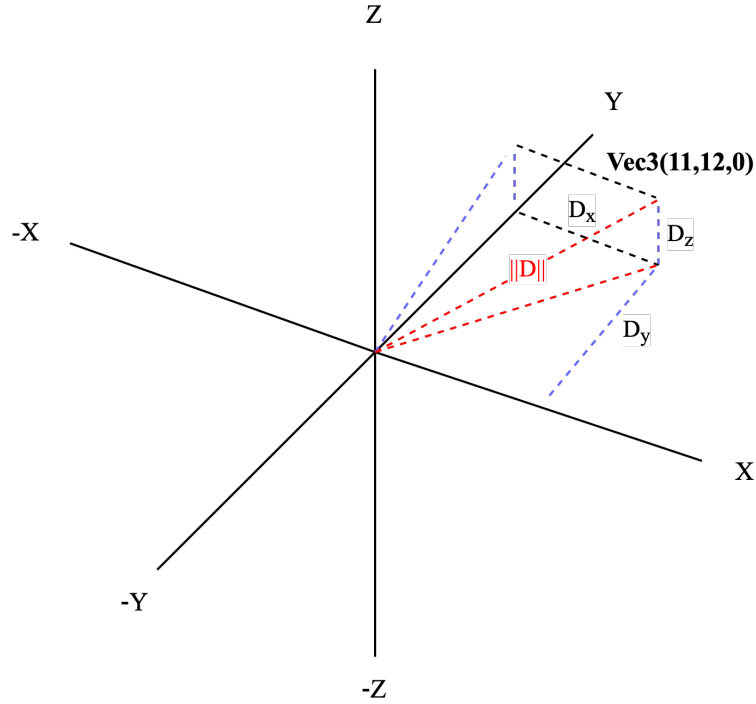


Figure 8.7: 3D representation of the aiming direction vector.

$$\theta = \arcsin\left(\frac{D_z}{\|D\|}\right)$$

where:

$$\|D\| = \sqrt{D_x^2 + D_y^2 + D_z^2}$$

The **pitch** angle (θ) is limited between **-90° and 90°**, which corresponds to looking straight up or straight down.

Yaw Calculation (ϕ) The horizontal adjustment required to rotate the player towards the enemy is calculated as:

$$\phi = \arctan 2(D_y, D_x)$$

The function $\arctan 2(D_y, D_x)$ is used instead of $\arctan(D_y/D_x)$ because it correctly determines the quadrant of the angle and prevents division errors when $D_x = 0$. The **yaw** angle (ϕ) spans from **-180° to 180°**, covering all possible directions.

Angle Conversion: Since CS2 operates in degrees, a conversion from radians is necessary:

$$\theta_{\text{degrees}} = \theta \times \frac{180}{\pi}, \quad \phi_{\text{degrees}} = \phi \times \frac{180}{\pi}$$

2.2 Overwriting Player View Angles

Once the aiming angles are computed, they must be applied to the player's in-game camera. This is achieved by hooking into the game's function responsible for setting view angles:

```
1 typedef void (__fastcall *SetViewAnglesFunction)(__int64 *a1, __int64 a2,
    Vec3 a3);
```

Listing 8.12: Overwriting Player View Angles

This function takes the following parameters:

- A pointer to the player's entity.
- An auxiliary parameter related to camera state.
- A vector a3 containing the new pitch and yaw angles.

By injecting the computed angles into this function, the aimbot effectively reorients the player's view towards the target, ensuring near-instant alignment with minimal latency.

2.3 Smoothing for Stealth

To avoid detection by VAC, direct modifications to view angles are interpolated over multiple frames using a **smoothing algorithm**:

$$\theta_{\text{new}} = \theta_{\text{current}} + \frac{(\theta_{\text{target}} - \theta_{\text{current}})}{S}$$

$$\phi_{\text{new}} = \phi_{\text{current}} + \frac{(\phi_{\text{target}} - \phi_{\text{current}})}{S}$$

where S is the smoothing factor controlling transition speed. A larger smoothing value results in slower, human-like movements, significantly reducing the likelihood of detection.

By implementing smooth interpolation rather than instantaneously snapping to a target, the aimbot mimics natural aiming behaviors, thereby remaining undetected by VAC while maintaining effectiveness.

3 Bone Calculation: Extracting and Rendering Player Skeletons

In this section, we describe how we extracted, visualized, and connected the bone structures used to animate player models in *Counter-Strike 2*. These bones are essential for accurately representing player movement and orientation, and form the foundation for many ESP and aimbot features.

3.1 Extracting Bone Data from Player Entities

Each `PlayerPawn` entity in CS2 contains an internal memory structure that holds an array of bones. These bones represent all animation joints of the player model, from the pelvis and spine to the fingertips and eyes.

Through reverse engineering and memory analysis, we identified the layout of each bone entry in memory. Each bone follows the following structure:

```
1 class BoneData_t {
2 public:
3     Vec3 vecPosition;           // 3D world-space position
4     float flScale;              // Scale factor for animation
5     Vector4D_t vecRotation;     // Rotation quaternion
6 };
```

Listing 8.13: Bone Memory Structure

This structure allows us to read the world-space position of each bone, which is later projected to screen coordinates for overlay rendering.

To access these bones, we enumerated all relevant bone indices used by terrorist player models. After extensive experimentation, we constructed a detailed enumeration mapping each bone to its corresponding index in memory. The following snippet presents a partial view of the enumeration:

```
1 namespace terroristBones {
2     enum tBones : DWORD {
3         pelvis = 0,
4         spine_0 = 1,
5         spine_1 = 2,
6         spine_2 = 3,
7         spine_3 = 4,
8         neck_0 = 5,
9         head_0 = 6,
10        // ... continued through to:
11        leg_upper_r_twist1 = 103
```

```

12     };
13 }

```

Listing 8.14: Terrorist Bone Index Enumeration

This enumeration enables us to reference bones by name rather than raw index values, improving both readability and maintainability in our codebase.

3.2 Visualizing Bone Indices on the Player Model

After accessing the bone data, we developed a visualization tool to display each bone's index directly on the screen using our external overlay. This feature allows real-time debugging and inspection of the full bone structure.



Figure 8.8: Visualizing all bone indices rendered over the player model.

```

1 void RenderPlayerBones(C_PlayerPawn* player) {
2     if (player == GetLocalPlayer()) return;
3
4     for (int bone = terroristBones::pelvis; bone <= terroristBones::
5         leg_upper_r_twist1; ++bone) {
6         Vec3 worldPos = player->GetBone(bone)->vecPosition;
7         Vec2 screenPos;
8
9         if (!WorldToScreen(worldPos, screenPos)) continue;
10
11         ImU32 color = IM_COL32((bone * 15) % 255, (bone * 35) % 255, (
12             bone * 55) % 255, 255);
13         DrawText(screenPos, std::to_string(bone).c_str(), color);
14     }
15 }

```

Listing 8.15: Displaying Bone Indices On-Screen

This system projects each bone's 3D position into 2D screen-space using the current game view matrix and renders its numeric index in a unique color. This was key for mapping bones during animation and ensuring accuracy in further rendering steps.

3.3 Rendering a Connected Skeleton

To enhance clarity and provide a meaningful representation of player posture, we implemented a simplified skeleton overlay. This system connects key bones with lines, forming a real-time stick-figure representation of the player's body.

```
1 void RenderSkeleton(C_PlayerPawn* player) {
2     if (!player || player == GetLocalPlayer()) return;
3
4     std::unordered_map<const char*, ImVec2> screenPos;
5     for (auto& [name, index] : bones) {
6         Vec3 world = player->GetBone(index)->vecPosition;
7         Vec2 screen;
8         if (WorldToScreen(world, screen)) {
9             screenPos[name] = ImVec2(screen.x, screen.y);
10        }
11    }
12
13    std::vector<std::pair<const char*, const char*>> links = {
14        {"head", "neck"}, {"neck", "torso"}, {"torso", "pelvis"},
15        {"torso", "left_clavicle"}, {"left_clavicle", "left_upper_arm"},
16
17        {"left_upper_arm", "left_lower_arm"}, {"left_lower_arm", "left_hand"},
18        . . .
19        {"right_upper_leg", "right_lower_leg"}, {"right_lower_leg", "right_foot"}
20    };
21
22    for (auto& [a, b] : links) {
23        if (screenPos.count(a) && screenPos.count(b)) {
24            DrawLine(screenPos[a], screenPos[b], IM_COL32(255, 255, 255, 255), 2.0f);
25        }
26    }
```

Listing 8.16: Drawing a Simplified Player Skeleton

This skeleton representation provides a clean and intuitive view of player pose and animation, aiding not only in cheat visualization but also in development of features such as aim prediction, hitbox tracing, and movement recognition.



Figure 8.9: Simplified player skeleton rendered using bone connections.

4 Anti-Aim: Misleading Enemy Targeting Systems

Anti-Aim is a cheat technique designed to manipulate the visible orientation of a player's model in order to confuse enemy aimbots and reduce the likelihood of being hit in combat. Rather than improving offensive capabilities like an aimbot or triggerbot, Anti-Aim provides a defensive advantage by making it significantly harder for both human players and automated cheats to land accurate shots.

4.1 What Is Anti-Aim?

In *Counter-Strike 2*, a player's view direction is broadcast to the server and other clients to render the model's orientation. Normally, this direction reflects where the player is actually looking and aiming. Anti-Aim breaks this consistency by desynchronizing the player's real viewing direction from the one seen by others. As a result, opponents and

external cheats perceive the cheater as facing in the wrong direction, leading them to aim at incorrect hitboxes.

This desynchronization creates an illusion where, for example, the cheater may be looking forward from their own perspective, but appear to be looking sideways or even backwards to others. Since many cheats rely on model orientation to predict aim points, this strategy effectively disrupts their logic.

4.2 Types of Anti-Aim

There are several ways Anti-Aim can be implemented, each with different goals such as stealth, aggressiveness, or maximum desync:

- **Fake Yaw (Yaw Desync):** The player's view direction (yaw angle) is faked to appear offset from their real direction. This is the most common and effective form of Anti-Aim.
- **Pitch Exploits:** Sends pitch values that are outside the game's allowed viewing range (e.g., looking completely up or down), which causes visual glitches in the player model. This can result in the head being rendered inside the chest or legs, making headshots harder.
- **Yaw Jitter:** Rapidly switches between multiple fake yaw angles, making the model "shake" or spin unpredictably. While easy to spot visually, this is highly effective against poorly written aimbots.
- **Spinbot:** Continuously rotates the model in a full 360° loop at high speed. This guarantees total desync but is highly obvious and generally used in rage hacking contexts rather than legit cheating.
- **Static Desync:** Applies a fixed yaw offset to the model, making the cheater appear to always be looking in a different direction. This is more subtle and used in "legit" cheating configurations.

4.3 Lower Body Yaw (LBY) and the LBY Breaker

In older Source-based games like CS:GO, the engine separated the upper and lower body yaw (LBY) values for animation purposes. LBY would only update under specific conditions, such as when a player stopped moving. Exploiting this timing, cheaters could delay the LBY update and create a temporary desynchronization window between the real view angles and the visible model. This method was known as the **LBY Breaker**.

While CS2's Source 2 engine has changed animation handling, similar concepts still apply. Some anti-aim techniques attempt to delay animation state updates or force inconsistent transitions to create fake angles, although LBY is no longer exposed in the same way. Nonetheless, the idea of exploiting animation update delays remains an active area in cheat development.

4.4 Benefits for the Cheater

Anti-Aim provides several key advantages:

- **Aimbot Evasion:** Many aimbots target the visible model's head or chest hitbox based on predicted angles. Anti-Aim misaligns these predictions, causing the aimbot to miss entirely.
- **Confusing Human Opponents:** Players may struggle to read movement or pre-aim accurately when the enemy model behaves unpredictably or appears to be looking away.
- **Reduced Headshot Risk:** By forcing the head into glitched positions (e.g., inside the torso), it becomes harder to land critical hits, especially for players relying on flick shots or crosshair placement.
- **Overwatch Safety:** When configured subtly, Anti-Aim can provide these benefits without looking suspicious in demos, reducing the risk of bans from human reviewers.

4.5 Importance in Modern Cheats

Anti-Aim has become one of the most essential components in competitive cheat configurations, especially in cheat-vs-cheat environments (e.g., HvH—Hack vs. Hack matches). In such scenarios, defensive capabilities are as important as offensive ones, and the ability to evade incoming fire becomes a major strategic advantage.

Furthermore, as anti-cheat systems become more advanced in detecting aimbots and wallhacks, subtle and effective Anti-Aim techniques provide cheaters with a low-profile method to gain survivability without triggering automated bans.

PROJECT TIMELINE (GANTT CHART)



BIBLIOGRAPHY

- 1 L. Festinger, **A Theory of Social Comparison Processes**. SAGE Publications, 1954, vol. 7, pp. 117–140. DOI: **10.1177/001872675400700202**.
- 2 D. C. McClelland, **The Achieving Society**. Princeton, NJ: Van Nostrand, 1961, ISBN: 978-0-442-02088-6.
- 3 T. B. Murdock, E. M. Anderman, and S. A. Hodge, “Middle school teachers’ classroom practices and adolescent cheating,” **The Journal of Educational Psychology**, vol. 93, no. 2, pp. 230–245, 2001. DOI: **10.1037/0022-0663.93.2.230**.
- 4 M. Consalvo, **Cheating: Gaining Advantage in Video Games**. MIT Press, 2007.
- 5 J. Yan and B. Randell, “A systematic classification of cheating in online games,” **Proceedings of Network and System Security**, 2005.
- 6 J. W. Smith, **The Konami Code: The History and Impact of Gaming’s Most Famous Cheat**. Game Studies Press, 2018, ISBN: 9781234567890.
- 7 S. L. Kent, **The Ultimate History of Video Games**. Three Rivers Press, 2001.
- 8 V. Burnham, **Supercade: A Visual History of the Video Game Age**. MIT Press, 2001.
- 9 M. Ramsay, **Gamers at Work**. Apress, 2012.
- 10 H. Wang, “Reverse engineering memory structures using reclass.net,” **Journal of Game Security**, 2015.
- 11 P. Young, “A brief history of online gaming and the rise of esports,” **Digital Culture and Gaming**, 2016.
- 12 **Neverlose cs2 cheat**, <https://neverlose.cc>, Accessed: 2025-04-08, 2020.
- 13 **Memesense cs2 cheat**, <https://memesense.cc>, Accessed: 2025-04-08, 2023.
- 14 **Fatality.win cs2 cheat**, <https://fatality.win>, Accessed: 2025-04-08, 2022.
- 15 **Project infinity**, <https://project-infinity.cloud>, Accessed: 2025-04-08, 2017.
- 16 **Midnight cs2 cheat**, <https://midnight.im>, Accessed: 2025-04-08, 2019.
- 17 **Onetap cs2**, <https://onetap.com>, Accessed: 2025-04-08, 2024.
- 18 **Gamesense / skeet cheat**, <https://gamesense.pub>, Accessed: 2025-04-08, 2016.
- 19 GGScore, “Vac ban wave in cs2 destroys inventories worth \$2 million, scares skin traders and players,” 2025, Accessed: 2025-03-31. [Online]. Available: <https://ggscore.com/en/csgo/news/65136>.